

I-229 Exit 7 (Rice Street) Crossroad Corridor Study

I-229 Major Investment Corridor Study
Project PL 0100(87) 3616 P, PCN 044K

Sioux Falls, South Dakota
June 2017

Table of Contents

EXECUTIVE SUMMARY **1**

CHAPTER 1 - INTRODUCTION **2**

SECTION 1.1 - INTRODUCTION 2
SECTION 1.2 - PROJECT DESCRIPTION / STUDY AREA 3
SECTION 1.3 - PURPOSE 5
SECTION 1.4 - METHODS AND ASSUMPTIONS 6

CHAPTER 2 - EXISTING AND YEAR 2035 NO-BUILD CONDITIONS **7**

SECTION 2.1 - TRAFFIC CAPACITY AND ANALYSIS METHODOLOGIES 7
SECTION 2.2 - EXISTING CONDITIONS OPERATIONAL RESULTS 7
SECTION 2.3 - YEAR 2035 NO-BUILD OPERATIONAL RESULTS 9

CHAPTER 3 - CONCEPT DEVELOPMENT AND ANALYSIS **11**

SECTION 3.1 - PRELIMINARY CONCEPT DEVELOPMENT 11
SECTION 3.2 - PRELIMINARY CONCEPT COMPARISONS 12
SECTION 3.3 - DETERMINATION OF ALTERNATIVE SCENARIOS 15
SECTION 3.4 - ANALYSIS OF ALTERNATIVE SCENARIOS 20
SECTION 3.5 - RECOMMENDATION OF ALTERNATIVES FOR FUTURE CONSIDERATION 23

CHAPTER 4 - SUMMARY AND NEXT STEPS **25**

APPENDICES **26**

The South Dakota Department of Transportation provides services without regard to race, color, gender, religion, national origin, age or disability, according to the provisions contained in SDCL 20-13, Title VI of the Civil Rights Act of 1964, the Rehabilitation Act of 1973, as amended, the Americans With Disabilities Act of 1990 and Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low Income Populations, 1994. To request additional information on the SDDOT's Title VI/Nondiscrimination policy or to file a discrimination complaint, please contact the Department's Civil Rights Office at 605-773-3540.

The preparation of this report has been financed in part through grant(s) from the Federal Highway Administration and Federal Transit Administration, U.S. Department of Transportation, under the State Planning and Research Program, Section 505 [or Metropolitan Planning Program, Section 104(f)] of Title 23, U.S. Code. The contents of this report do not necessarily reflect the official views or policy of the U.S. Department of Transportation.

APPENDICES

APPENDIX A. METHODS AND ASSUMPTIONS FOR SUB-STUDY

APPENDIX B1. TRAFFIC CAPACITY ANALYSIS METHODOLOGIES

APPENDIX B2. EXISTING HCS 2010 REPORTS

APPENDIX C. 2035 NO-BUILD AND BUILD OPERATIONAL ANALYSIS TECHNICAL MEMORANDUM

APPENDIX D1. PRELIMINARY CONCEPT FIGURES

APPENDIX D2. PRELIMINARY CONCEPTS TECH MEMO

APPENDIX D3. ENVIRONMENTAL CONSTRAINTS MAPS

APPENDIX E. PREDICTIVE SAFETY ANALYSIS

APPENDIX F. YEAR OF FAILURE ANALYSIS

APPENDIX G. SUB-STUDY 5 NOISE STUDY TECHNICAL REPORT

APPENDIX H. PUBLIC INVOLVEMENT

APPENDIX I. EXISTING ACCESS CONTROL FIGURES

LIST OF FIGURES

Figure 1. I-229 MIS Study Area Map *4*
Figure 2. Exit 7 (Rice Street) Study Area *5*
Figure 3. Existing Conditions Traffic Operations Analysis *8*
Figure 4. 2035 No-Build Conditions Traffic Operations Analysis *10*
Figure 5. Alternative Scenario Rice-2 ..... *16*
Figure 6. Alternative Scenario Rice-2A *17*
Figure 7. Alternative Scenario Rice-3C *18*
Figure 8. Alternative Scenario Rice-C2 ..... *19*

LIST OF TABLES

Table 1. Existing Conditions Deficient Locations based on Operational Analysis 7
Table 2. 2035 No-Build Conditions Deficient Locations based on Operational Analysis 9
Table 3. Preliminary Concepts Composite Comparative Assessment 14
Table 4. Rice Street Corridor 2012-2035 Predicted Build and No-Build Annual Crashes 20
Table 5. Rice Street Corridor Planning Horizon Crash Cost Savings 21
Table 6. Rice Street Corridor Year of Failure 21
Table 7. Noise Impact Summary 22
Table 8. Constructability Analysis 23
Table 9. Alternative Scenarios Evaluation Matrix 24

EXECUTIVE SUMMARY

The Interstate 229 (I-229) Corridor through the City of Sioux Falls is a critical traffic corridor that provides access to the expanding east side and allows access to downtown. The I-229 Major Investment Study (MIS) allows the City of Sioux Falls, the Sioux Falls Metropolitan Planning Organization, the South Dakota Department of Transportation, adjacent landowners, and area users to help determine the vision of the corridor. The I-229 Exit 7 (Rice Street) Crossroad Corridor Study is a subset of the I-229 MIS.

This study assesses existing and future conditions at the I-229 interchange at Exit 7 (Rice Street) and along Rice Street from Cliff Avenue to Bahnson Avenue. The purpose of this study is to address the traffic operations and safety concerns for this corridor. Both the Rice Street/I-229 northbound ramp terminal/Cleveland Avenue and the Rice Street/Cliff Avenue intersections experience congestion in the peak traffic hours. By year 2035, congestion is anticipated to increase at these intersections.

Preliminary concepts for both the Rice Street interchange and corridor to address the existing and year 2035 transportation deficiencies have been developed. The preliminary concepts were screened to determine which interchange and corridor concepts should be selected for further development and assessment. The remaining interchange options and corridor options were combined to develop alternative scenarios. There were three (3) alternative scenarios identified for further development. Each of the alternative scenarios was analyzed using established evaluation criteria. The analysis of the alternative scenarios was used to determine which alternative scenarios should be recommended to advance for future studies. The following are the recommended alternative scenarios to advance:

- ***Rice-2.*** 6-Lane Divided
- ***Rice-2A.*** 6-Lane Divided, Shifted North to Avoid Railroad ROW
- ***Rice-3C.*** 4-Lane Divided, Cleveland Realigned

The public was involved throughout the study through public open houses, landowner meetings, and a project website. Public comments, provided in person, in writing, or electronically, were used in the development and refinement of improvement alternatives. The project's Study Advisory Team consisted of representatives from the Federal Highway Administration (FHWA), South Dakota Department of Transportation (SDDOT), Sioux Falls Metropolitan Planning Organization (MPO), City of Sioux Falls, and HDR.

CHAPTER 1 - INTRODUCTION

Section 1.1 - Introduction

The Interstate 229 (I-229) Corridor through the City of Sioux Falls carries commuters and tourism traffic, provides access to the expanding east side of this thriving community, and allows access to downtown. The I-229 Major Investment Study (MIS) allows the City of Sioux Falls, the Sioux Falls Metropolitan Planning Organization (MPO), the South Dakota Department of Transportation (SDDOT), adjacent landowners, and area users to help determine the vision of the corridor. The I-229 Exit 7 (Rice Street) Corridor Study is a subset of the I-229 MIS.

An MIS provides a focused evaluation of transportation needs and issues within a corridor or sub-region. An MIS is designed to provide decision makers with information on the options available for addressing transportation challenges before making investment decisions. An MIS can lead to decisions on design concepts and scope of the investment.

The I-229 Major Investment Corridor Study (MIS) fulfills the following objectives:

1. Complete a traffic level of service analysis for both existing and future (2035) no-build conditions on the I-229 mainline, select interchanges and crossroads.
2. Complete a safety analysis of I-229 mainline, interchanges and crossroads.
3. Identify locations on I-229 not in compliance with current design standards under both the current and forecasted future traffic conditions.
4. Determine the effects of incidents on traffic operations within the I-229 corridor's area of influence.
5. Develop a long range plan consisting of feasible solutions to address the portions of the Interstate System that fail to meet current design standards, traffic level of service expectations, and/or have identifiable safety concerns under both the current and forecasted future traffic conditions.
6. Create final products for use by the SDDOT, the City of Sioux Falls and the Sioux Falls Metropolitan Planning Organization, which will guide the Department in the implementation of recommended improvements that will maximize the efficiency of the system.

The I-229 MIS has been separated into six individual sub-studies. The sub-studies include:

- *I-229 Corridor Study*
- *I-229 Exit 3 (Minnesota Avenue) Crossroad Corridor Study*
- *I-229 Exit 4 (Cliff Avenue) Crossroad Corridor Study*
- *I-229 Exit 6 (10th Street) Crossroad Corridor Study*
- *I-229 Exit 7 (Rice Street) Crossroad Corridor Study*
- *I-229 Exit 9 (Benson Road) Crossroad Corridor Study*

A map illustrating the study areas for each of the corridor studies is shown in ***FIGURE 1***.

The remainder of this document details the transportation efforts entailed in the I-229 Exit 7 (Rice Street) Crossroad Corridor Study.

Section 1.2 - Project Description / Study Area

This study assesses existing and future conditions at the I-229 interchange at Exit 7 (Rice Street) and along Rice Street from Cliff Avenue to Bahnson Avenue. The I-229 Exit 7 interchange and adjacent Rice Street corridor is located in the eastern portion of the Sioux Falls metropolitan area, approximately 3 miles south of the I-229/I-90 system interchange. The I-229 mainline study limits include Exit 6 (10th Street) through Exit 9 (Benson Road). The Rice Street study limits include Cliff Avenue through Bahnson Avenue.

An illustration of the study area is shown in ***FIGURE 2***. There are 6 study area intersections located on Rice Street, including:

- Cliff Avenue
- Wayland Avenue
- Lowell Avenue
- I-229 Southbound Ramp Terminal
- I-229 Northbound Ramp Terminal/Cleveland Avenue
- Bahnson Avenue

Figure 1. I-229 MIS Study Area Map


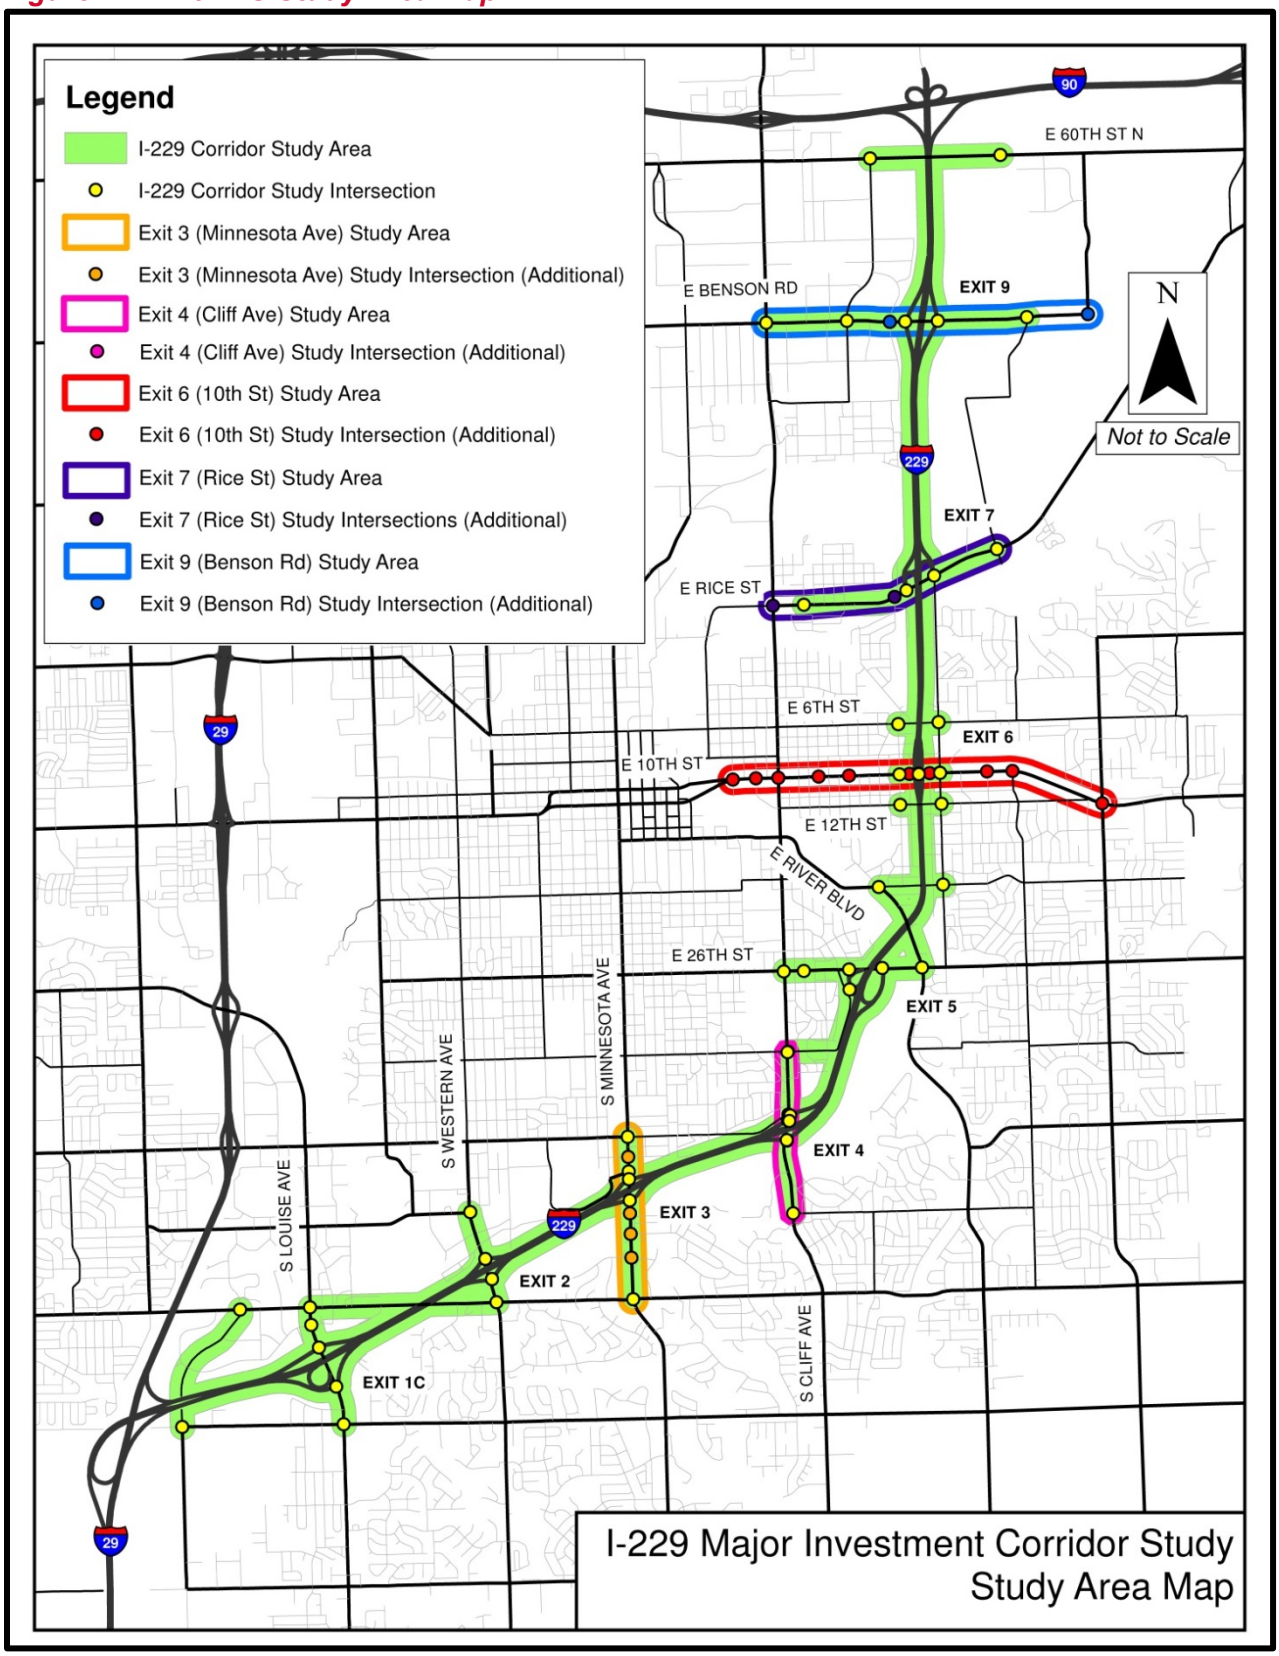


Figure 2. Exit 7 (Rice Street) Study Area

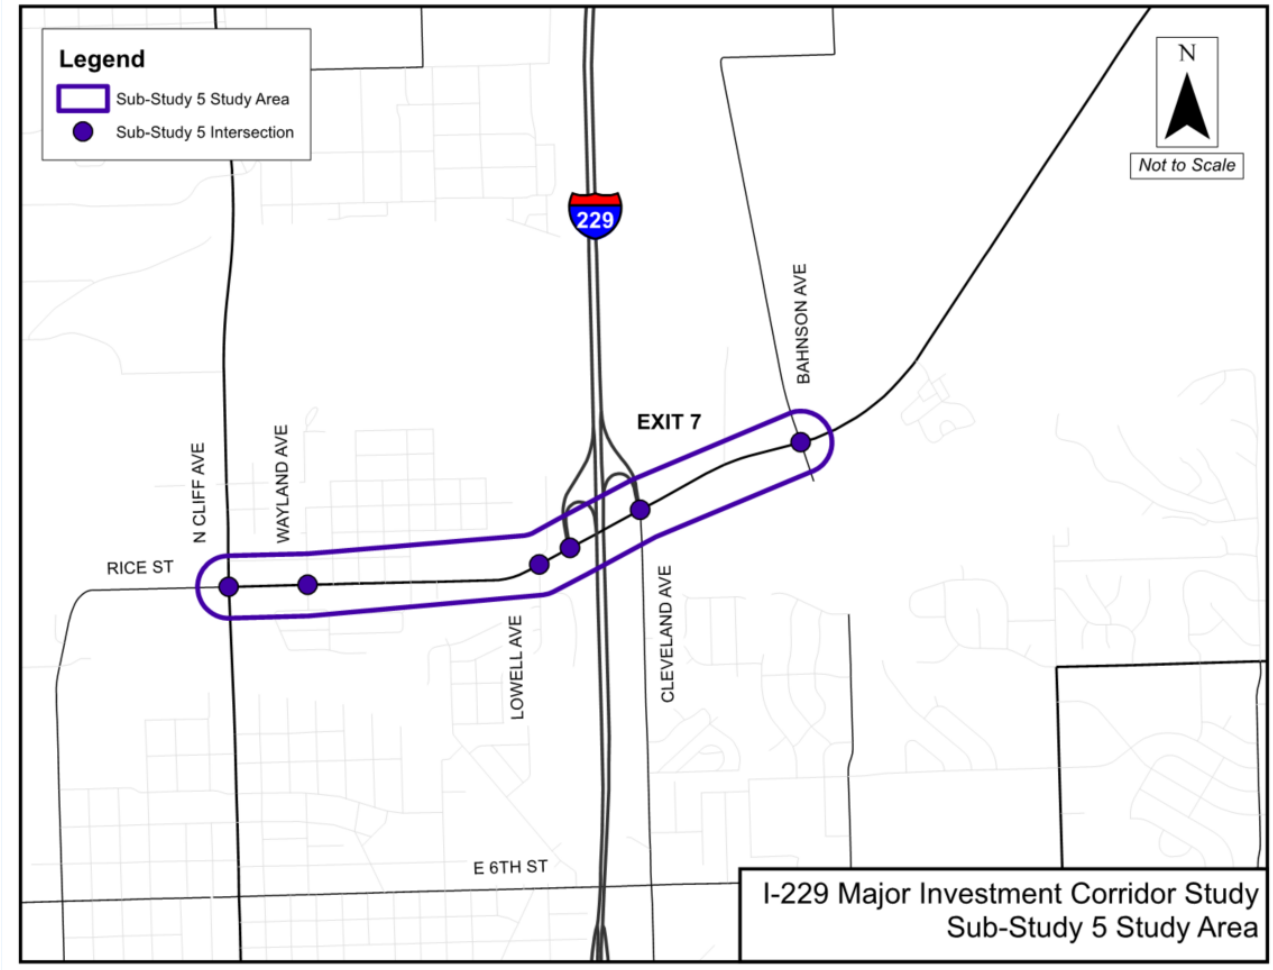

Section 1.3 - Purpose

The purpose of this study is to address the traffic operations and safety concerns at the I-229/Exit 7 (Rice Street) interchange and along the Rice Street corridor which serves the growing east side of Sioux Falls, South Dakota. The following is a list of specific issues/needs that were identified for this study:

- Congestion at the Rice Street / I-229 interchange
- Improved East-West connectivity along Rice Street
- Anticipated development impacts due to the opening of Veterans Memorial Parkway
- Geographic constraints on corridor performance, including the Big Sioux River and Burlington Northern Santa Fe (BNSF) rail line

The primary goal of this study is to develop feasible solutions to address the identified issues and needs. The solutions will follow current design standards and provide acceptable traffic level of service (LOS) and operations under both current and future traffic conditions.

Section 1.4 - Methods and Assumptions

The SDDOT provides a ***Methods and Assumptions*** template for SDDOT planning studies. This template guided the development of a specific document for the I-229 Exit 7 (Rice Street) Crossroad Corridor Study. This Methods and Assumptions document is used to outline technical methodologies and key assumptions used in the course of the study. The Methods and Assumptions document can be found in ***APPENDIX A. METHODS AND ASSUMPTIONS FOR SUB-STUDY*** .

CHAPTER 2 - EXISTING AND YEAR 2035 NO-BUILD CONDITIONS

Assessment of existing conditions and 2035 no-build conditions is based on traffic data collected and developed as part of the overall I-229 MIS. Traffic data applicable to Exit 7 (Rice Street) includes base mapping, existing and 2035 no-build traffic volume data and crash data. The existing conditions analysis is representative of year 2012. Content in this chapter focuses on analysis of the Exit 7 (Rice Street) interchange and corridor study area.

Section 2.1 - Traffic Capacity and Analysis Methodologies

Existing (year 2012) conditions operational analysis included the analysis of 4 signalized intersections, 2 unsignalized intersections, 2 basic freeway segments, and 4 weave segments. All locations were analyzed for the AM peak hour (7:15 – 8:15 AM) and PM peak hour (4:30 – 5:30 PM).

The unsignalized intersection of Rice Street/Bahnson Avenue was analyzed as a signalized intersection in the 2035 no-build condition. The intersection is anticipated to require a signal by 2035 or earlier due to increased volumes. Everything else remained the same between existing and no-build conditions. The operational analysis results include:

- Signalized ramp terminal intersections
- Arterial intersections
- Basic Freeway and Weave Areas

Analysis methodologies utilized for determining traffic capacities are outlined in ***APPENDIX B1. TRAFFIC CAPACITY ANALYSIS METHODOLOGIES***. Level of service (LOS) is based on procedures from the ***Highway Capacity Manual*** (***HCM 2010***).

Section 2.2 - Existing Conditions Operational Results


The existing conditions LOS results for all locations are depicted in ***FIGURE 3***.

This existing conditions analysis found that the freeway, ramps, and ramp terminal intersections are operating at a desirable LOS of C or better throughout the study area. In context of the arterials intersections, LOS at two key intersections has degraded beyond the acceptable threshold of LOS D. ***TABLE 1*** highlights intersections that do not meet the project specific LOS thresholds. The existing traffic analysis reports can be found in ***APPENDIX B2. EXISTING HCS 2010 REPORTS***.

Table 1. Existing Conditions Deficient Locations Based on Operational Analysis

LOCATION	AM	PM
Rice Street & Cliff Avenue	LOS E	
Rice Street & Bahnson Avenue – Worst stop-controlled approach LOS	LOS E	

Note: Acceptable threshold is LOS D for arterial intersections and LOS C for freeway, ramps, and ramp terminal intersections.

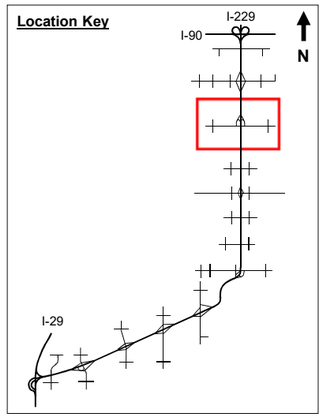

N
Not to Scale

LEGEND

XXX (XXX)	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Existing Intersection Lane Geometrics
X	2012 Average Daily Traffic (ADT)
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Operational analysis is based on volumes supplied by stakeholder agencies in the data collection phase of Sub-Study 1 and supplemented with additional counts in the spring of 2013. Lane geometrics are based on aerial photography present at the time of data collection.
2. 7:15 - 8:15 AM Peak Hour; 4:30 - 5:30 PM Peak Hour
3. 2012 ADT's are based on traffic counts taken by the Sioux Falls Public Works Department and the South Dakota Department of Transportation
4. Worst case stop controlled approach Level of Service reported

Existing Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 5
Sioux Falls, South Dakota

Date
June 2017

Figure
3

Section 2.3 - Year 2035 No-Build Operational Results

Traffic forecasts for year 2035 for the No-Build condition were established as part of the overall I-229 MIS.

The balanced set of year 2035 No-Build volumes is included with the results of the Future No-Build analysis.

A detailed report of the future No-Build operations can be found in ***APPENDIX C. 2035 NO-BUILD AND BUILD OPERATIONAL ANALYSIS TECHNICAL MEMORANDUM***.

The year 2035 conditions analysis found that one of the ramp terminal intersections will degrade beyond the threshold of LOS C and two arterial intersections will degrade beyond the threshold of LOS D.


TABLE 2 highlights intersections that will not meet the project specific LOS thresholds.

Final operational analysis LOS results for year 2035 No-Build AM and PM peak hour can be found in graphical format in ***FIGURE 4*** for study intersections, as well as basic freeway and weaving segments.

Table 2. 2035 No-Build Conditions Deficient Locations Based on Operational Analysis

LOCATION	AM	PM
Rice Street & Cliff Avenue		LOS F
Rice Street & Lowell Avenue – Worst stop-controlled approach LOS	LOS F	LOS F
Rice Street & I-229 NB Ramp Terminal/Cleveland Avenue	LOS E	LOS F

Note: Acceptable threshold is LOS D for arterial intersections and LOS C for freeway, ramps, and ramp terminal intersections.

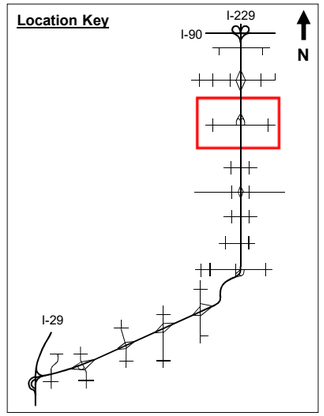

N

Not to Scale

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Existing Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Worst case stop controlled approach Level of Service reported

2035 No-Build Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 5
Sioux Falls, South Dakota

Date
June 2017

Figure
4

CHAPTER 3 - CONCEPT DEVELOPMENT AND ANALYSIS

The transportation deficiencies identified in the Existing Conditions and 2035 No-Build Conditions analysis were taken into consideration along with input from the Study Advisory Team (SAT) in order to develop potential roadway improvement projects. A multi-step process was used to develop, analyze and refine potential concepts in order to identify the recommended concepts for future consideration.

Section 3.1 - Preliminary Concept Development

Prior to development of the preliminary concepts, a Public Open House was held October 30th, 2013 to introduce and receive feedback regarding the I-229 MIS. The Public Open House discussed the needs and goals for each individual corridor study and received feedback from the public. A summary of the public involvement process and meeting notes can be found in ***APPENDIX H. PUBLIC INVOLVEMENT***.

The first step in the concept development phase was to identify preliminary concepts to potentially address the deficiencies identified in the Existing Conditions and 2035 No-Build Conditions analysis.

These concepts were developed with SAT input during concept workshops in January and March of 2016. Separate concepts were developed for the Exit 7 (Rice Street) interchange area and the Rice Street corridor. Preliminary concepts included:

Rice Street Interchange

- ***Rice-1.*** 4-Lane Divided
- ***Rice-2.*** 6-Lane Divided
- ***Rice-3.*** 4-Lane Divided, Cleveland Realigned
- ***Rice-3B.*** 4-Lane Divided, Cleveland Realigned to Bahnson
- ***Rice-3C.*** 4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps
- ***Rice-4.*** Restricted Crossing U-Turns (RCUT)
- ***Rice-5.*** Offset Interchange - SPUI
- ***Rice-7.*** I-229 Ramps Realigned

Rice Street Corridor

- ***Rice-C2.*** 4-Lane Divided

Preliminary Concept figures are shown in ***APPENDIX D1. PRELIMINARY CONCEPT FIGURES***.

Section 3.2 - Preliminary Concept Comparisons

The preliminary concepts were evaluated through a screening process in order to identify concepts to be carried forward in the study and further refined and analyzed. Each of the preliminary concepts was evaluated using criteria in four categories. The four category types evaluated for each preliminary concept identified for further consideration included Property Impacts, Traffic Operations, Environmental Review and Construction Costs as described in the next sections. Additional detail may be found in ***APPENDIX D2. PRELIMINARY CONCEPTS TECH MEMO***.

PROPERTY IMPACTS

An approximate footprint for each preliminary concept was developed by setting impact limits. The portion of each property parcel intersected by the impact limits that was inside of the impact limit was assumed to be an acquisition. If an acquisition impacted a structure, or rendered a parcel unusable in the opinion of the consultant (e.g. a large part of a parking lot was acquired), the entire structure or parcel was assumed to be an acquisition.

A unit price of $5 per square foot of acquisition area was applied to estimate the cost of property impacts. The total estimated cost of property impacts for a concept is the total impacted area multiplied by $5 per square foot plus the assessed value of structures impacted (from the Minnehaha County Assessor's website) multiplied by 1.5 (to estimate the fair market value of impacts).

Although not included in the assessment of property impacts for the concepts, the existing access control limits along I-229 at each of the corridor sub-study interchanges were researched at the request of the SAT and are depicted in a set of figures in ***APPENDIX I. EXISTING ACCESS CONTROL FIGURES***.

TRAFFIC OPERATIONS

The traffic operations assessment for each preliminary concept was developed using output from ***Highway Capacity Software 2010 (HCS 2010) version 6.50***. The 2035 No-Build condition was used as a baseline model to which output from each preliminary concept was compared.

For each concept, the Measures of Effectiveness (MOEs) were pulled for both AM and PM peaks and then averaged. The averaged MOEs from each concept run were compared to the No-Build MOEs and a percent change calculated between each concept and No-Build. The following MOEs were used to compare the concepts:

- Queues
- Delay
- Travel Time

The traffic operations results can be found in ***APPENDIX D2. PRELIMINARY CONCEPTS TECH MEMO***.

Environmental Review

A desktop review of available data was analyzed against the preliminary concepts. Items that could require further analysis at the time of future project initiation were identified for issues that separate project concepts. Later phases in potential project corridor planning will require environmental documentation if federal funds are used, and would require analysis of additional resources such as environmental justice and noise.

The environmental review included the following elements:

- Archaeological and Historical Resources
- Wetlands and Waters
- Threatened and Endangered Species
- Section 4(f) and Section 6(f) Properties
- Floodplain
- Regulated Materials

Appendix D3. Environmental Constraints Maps identify constraints in the study area such as schools, bike trails, rivers, wetlands, parks, and floodplain.

Construction Costs

Pavement area costs are assumed to include curb, shoulder, median, sidewalk, and drainage items. For cost estimating purposes, all retaining walls were assumed to have a constant height of 12 feet over their entire estimated length. Relocation costs are not included in the ROW cost estimates.

The comparative assessment of the preliminary concepts is summarized in ***Table 3***.

Table 3. Preliminary Concepts Composite Comparative Assessment

Preliminary Concept		Traffic Assessment			Environmental Impacts	Cost	ROW (acre)
		Queues	Delay	Travel Time			
Rice-1	4-Lane Divided	**Good**	**Very Good**	**Very Good**	**Low**	$15,330,000	6.5
Rice-2	6-Lane Divided	**Very Good**	**Very Good**	**Very Good**	**Low**	$21,750,000	6.6
Rice-3	4-Lane Divided, Cleveland Realigned	**Good**	**Very Good**	**Good**	Medium (Property Impacts)	$21,170,000	21.1
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	**Very Good**	**Very Good**	**Very Good**	**High (Potential 4(f) and property impacts)**	$37,363,600	26.6
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	**Very Good**	**Very Good**	**Very Good**	**High (Potential 4(f) and property impacts)**	$53,563,600	64.1
Rice-4	Restricted Crossing U-Turns	Neutral	**Very Good**	**Very Good**	Medium	$21,890,000	6.1
Rice-5	Offset Interchange - SPUI	**Very Good**	**Very Good**	**Good**	Medium (Potential to be high if cultural resources are found)	$38,900,000	29.8
Rice-7	I-229 Ramps Realigned	**Very Good**	**Very Good**	**Good**	**High (Floodplain, wetland, property impacts)**	$45,570,000	59.3
Rice-C2	Rice Street 4-Lane Divided Corridor	n/a	n/a	n/a	Medium (Potential to be high if buildings are eligible)	$11,506,800	6.7

PRELIMINARY CONCEPT COMPARISON

The preliminary concepts and the concept evaluation were presented to the business/land owners and public through a Stakeholders Meeting and Public Open House on June 22nd, 2016. A summary of the public involvement process and meeting notes can be found in ***APPENDIX H. PUBLIC INVOLVEMENT***.

Based on the preliminary concept comparison and public feedback, the concepts were screened through a workshop with the SAT in June 2016 to determine which concepts should be selected for further development. The concepts selected for further development are as follows:

Rice Street Interchange

- ***Rice-2.*** 6-Lane Divided
- ***Rice-2A.*** 6-Lane Divided, Shifted North to Avoid Railroad ROW
- ***Rice-3C.*** 4-Lane Divided, Cleveland Realigned

Rice Street Corridor

- ***Rice-C2.*** 4-Lane Divided

Section 3.3 - Determination of Alternative Scenarios

The next step in the concept development and analysis process was to identify alternative scenarios by combining interchange options with corridor options.

Three (3) alternative scenarios were identified as part of Exit 7 (Rice Street) Corridor.

- ***Rice-2.*** 4-Lane Divided Corridor with 6-Lane Divided through Interchange
  - Interchange Option: Rice-2
  - Corridor Option: Rice-C2
- ***Rice-2A.*** 4-Lane Divided Corridor with 6-Lane Divided through Interchange and Shifted North to Avoid Railroad ROW
  - Interchange Option: Rice-2A
  - Corridor Option: Rice-C2
- ***Rice-3C.*** 4-Lane Divided Corridor with Cleveland Avenue Realigned
  - Interchange Option: Rice-3C
  - Corridor Option: Rice-C2

Alternative scenario figures are shown in ***FIGURES 5 THROUGH 8***.

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Pedestrian Access
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition

See Figure 8

Concept Features

- Perpetuates Folded Diamond Interchange configuration.
- Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
- Rebuilds Cleveland Avenue with a median and two lanes in each direction.
- Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
- Maintains existing traffic signal locations.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

Sub-Study 5: Alternative Scenario Rice-2 6-Lane Divided

I-229 Major Investment Corridor Study — Sioux Falls, South Dakota

Figure 5

June 2017

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Pedestrian Access
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition

Concept Features


- Perpetuates Folded Diamond Interchange configuration.
- Shifts and rebuilds Rice Street north of its current alignment with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
- Rebuilds Cleveland Avenue with a median and two lanes in each direction.
- Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
- Builds a retaining wall on the south side of Rice Street to avoid impacts to BNSF Railroad Right-of-Way.
- Maintains existing traffic signal locations.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

Sub-Study 5: Alternative Scenario Rice-2A
6-Lane Divided, Shifted North to Avoid Railroad Right-of-Way

I-229 Major Investment Corridor Study — Sioux Falls, South Dakota

Figure 6

June 2017

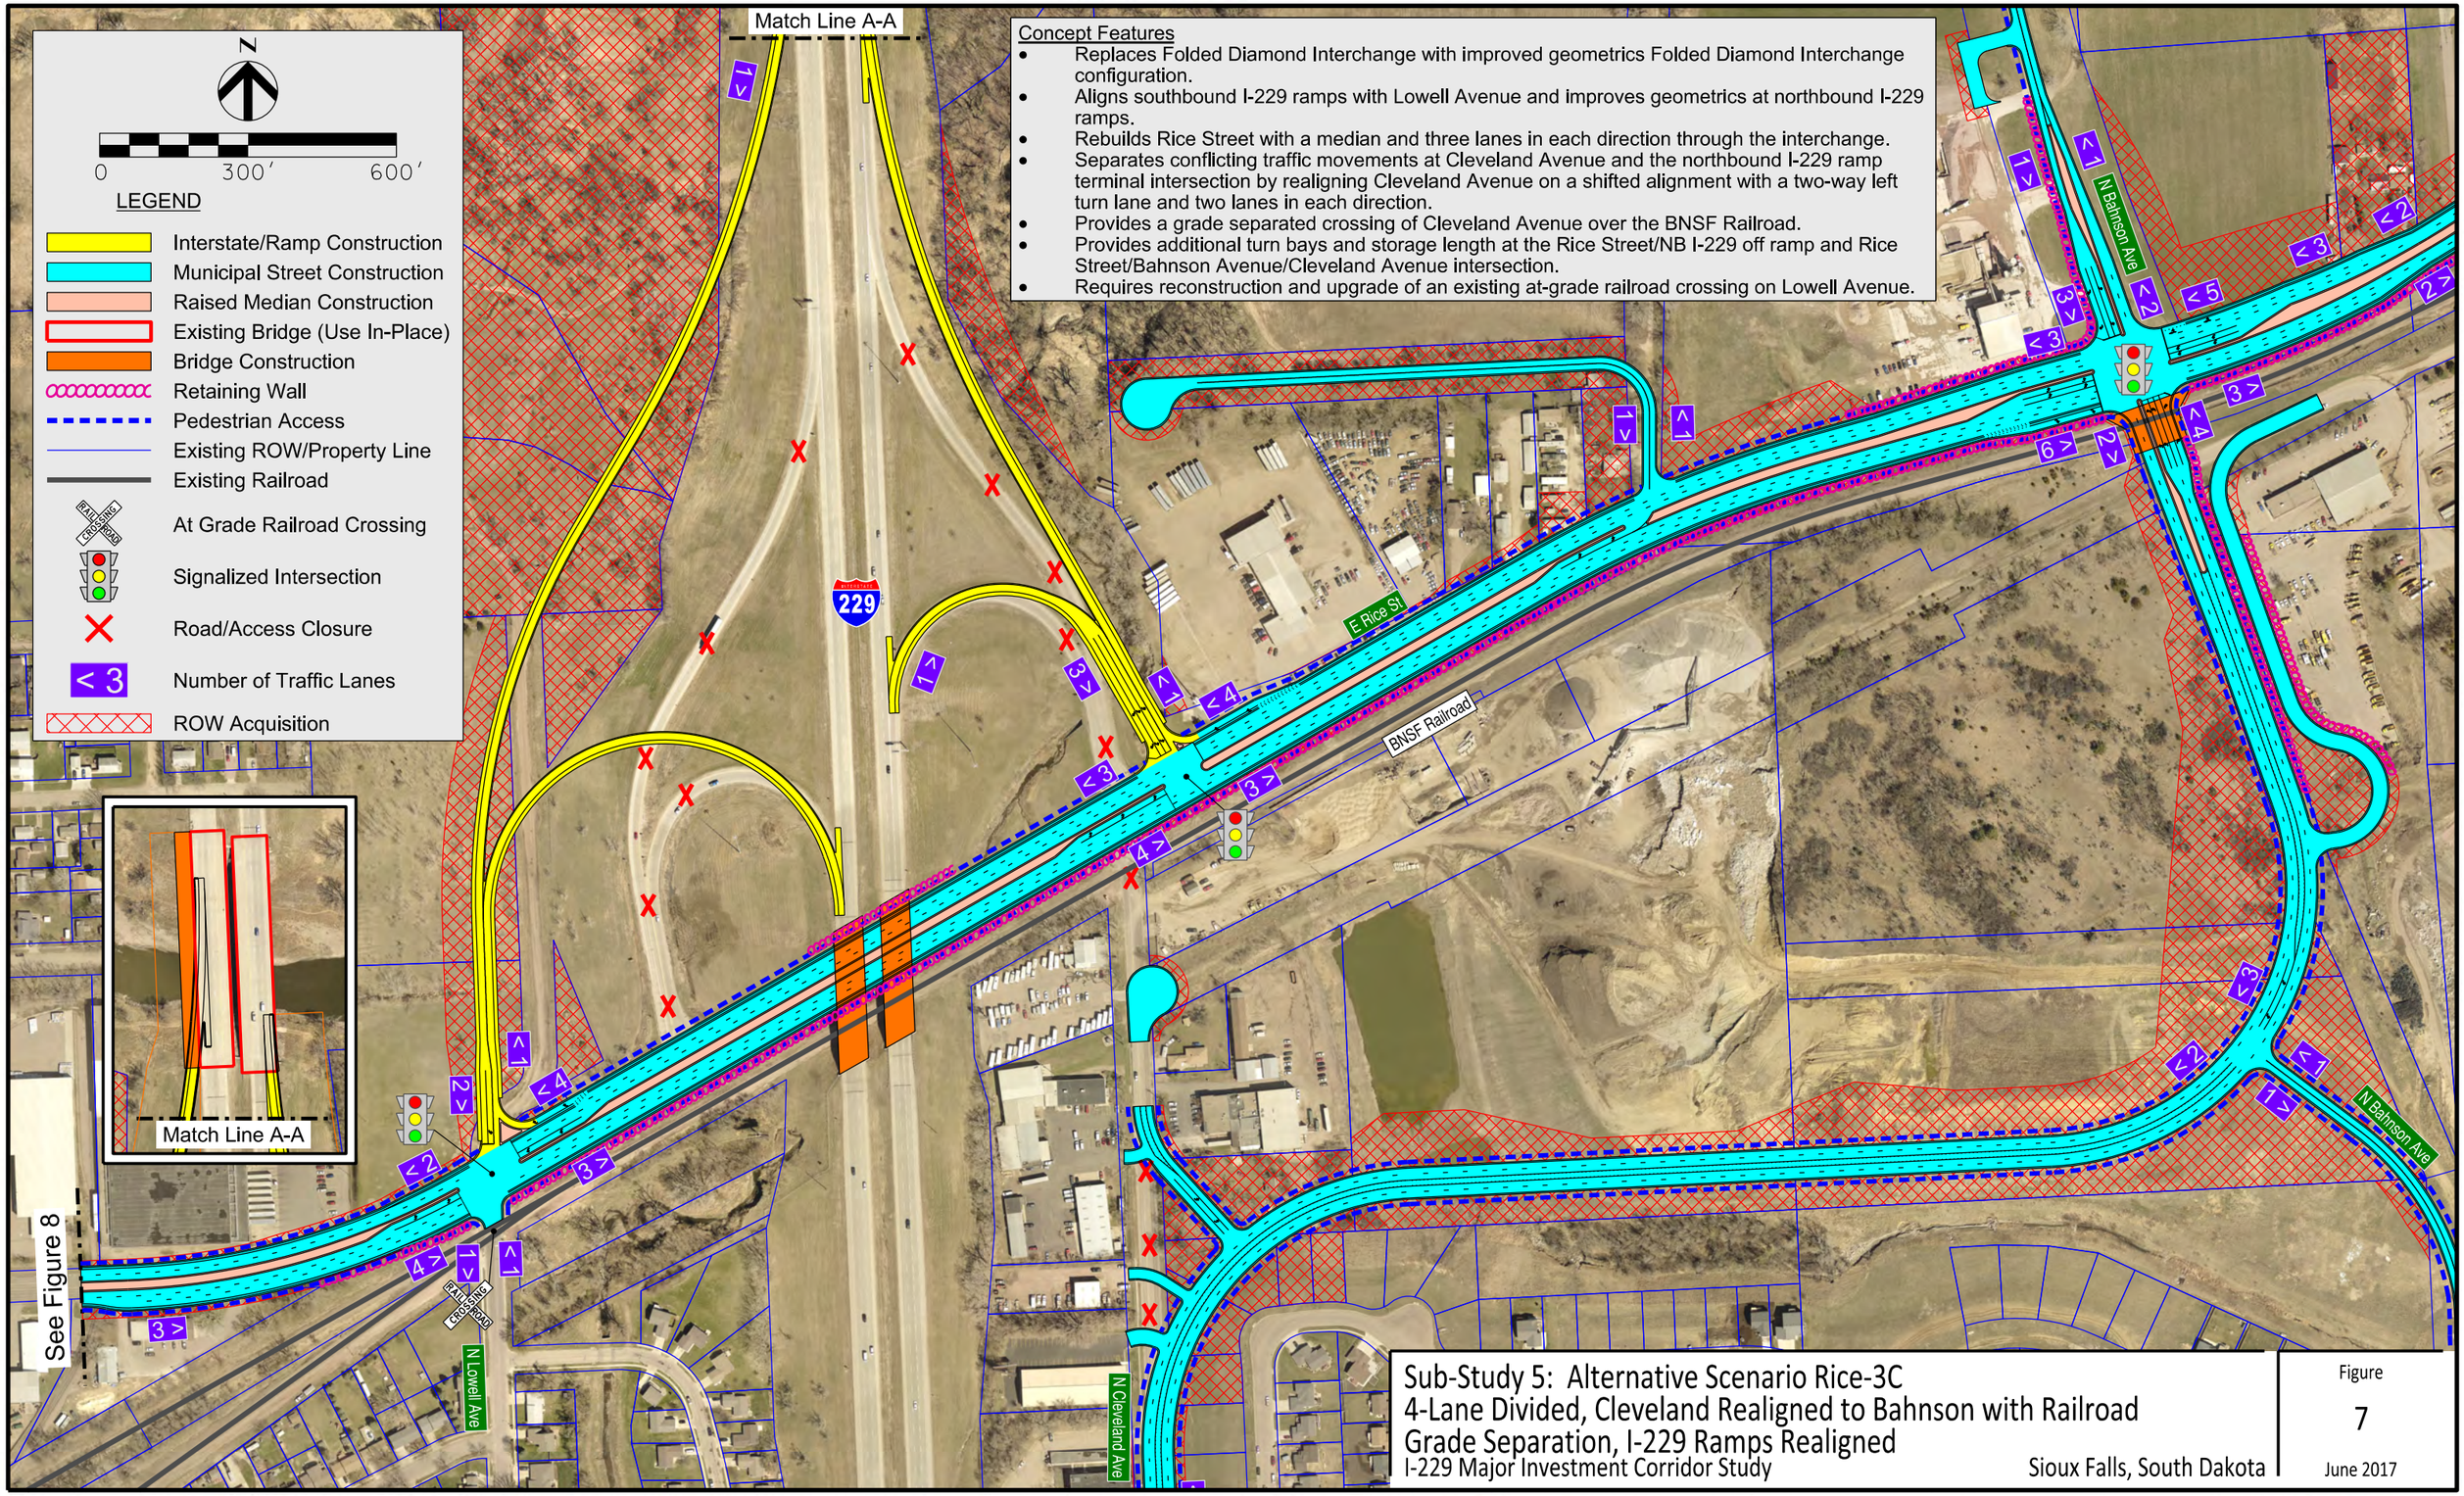

Sub-Study 5: Alternative Scenario Rice-3C
4-Lane Divided, Cleveland Realigned to Bahnson with Railroad Grade Separation, I-229 Ramps Realigned

I-229 Major Investment Corridor Study — Sioux Falls, South Dakota

Figure 7

June 2017

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Pedestrian Access
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition



N Cliff Ave
N Wayland Pl
N Jessica Ave
E Rice St
BNSF Railroad
See Interchange Options

Concept Features

- All on street parking will be removed.
- Rebuilds Rice Street with a median and two lanes in each direction.
- Maintains existing traffic signal locations.
- Requires land acquisition for widened roadway.
- Impacts adjacent properties by limiting driveway access to and from Rice Street to right turns in and out only.

Sub-Study 5: Alternative Scenario Rice-C2
Rice Street 4-Lane Divided Corridor

I-229 Major Investment Corridor Study — Sioux Falls, South Dakota

Figure 8

June 2017

Section 3.4 - Analysis of Alternative Scenarios

The alternative scenarios were evaluated through a screening process in order to identify alternatives recommended to be considered in future studies. Each of the alternative scenarios were evaluated using additional evaluation criteria including:

- Predictive Crash
- Traffic Operations
- Year of Failure
- Noise
- Constructability

PREDICTIVE CRASH ANALYSIS


Predictive crash analysis was conducted for freeway ramps and the ramp terminal intersections. The predictive safety analysis was based on principles and methods of the ***Highway Safety Manual (HSM)***.

A comparative analysis of the predicted crashes anticipated between the Existing (Year 2012) condition and the Future No-Build (Year 2035) condition, as well as a comparative analysis between No-Build and Build alternatives for each sub-study was developed.

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***TABLE 4*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

Rice-2 and Rice-2A are treated the same for the predictive safety analysis because they comprise the same cross section. The only difference between the two alternatives is that Rice-2A is shifted to the north.

Table 4. Rice Street Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

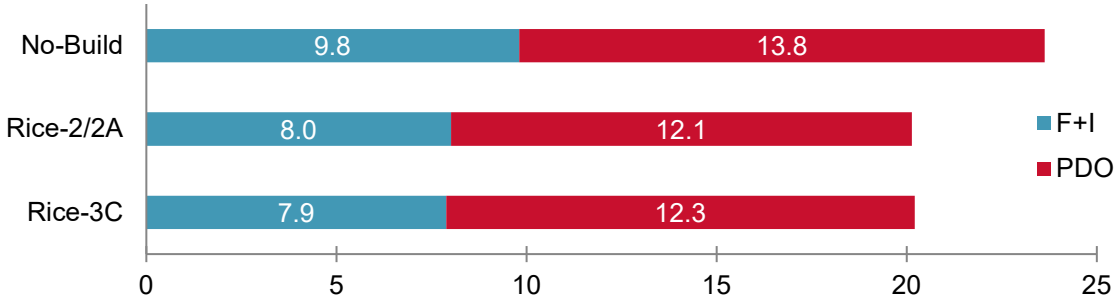

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***TABLE 5***.

Table 5. Rice Street Corridor Planning Horizon Crash Cost Savings

ALTERNATIVE	TOTAL USER COST[1]	USER COST SAVINGS[2]
No-Build	$ 58,700,000	$ -
Rice-2/2A	$ 48,300,000	$ 10,400,000
Rice-3C	$ 47,900,000	$ 10,800,000

[1]Total User Cost – The discounted, monetized safety cost from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

Additional detail from the Predictive Crash Analysis can be found in ***APPENDIX E. PREDICTIVE SAFETY ANALYSIS***.

TRAFFIC OPERATIONS ANALYSIS

Traffic operations were analyzed for each alternative scenario using HCS 2010. A detailed report of the alternative scenario operations can be found in ***APPENDIX C. 2035 NO-BUILD AND BUILD OPERATIONAL ANALYSIS TECHNICAL MEMORANDUM***.

For all alternative scenarios, the ramp terminals operate at an acceptable LOS of C or better and the signalized arterial intersections operate at an acceptable threshold of LOS of D or better.

YEAR OF FAILURE ANALYSIS

A year of failure analysis was conducted for the alternative scenarios' interchanges in order to identify the year beyond the Future / Design year (2035) when traffic operations fail to meet acceptable criteria. Projected traffic volumes beyond year 2035 were developed using straight line extrapolation between year 2012 adjusted peak hour volumes and year 2035 adjusted peak hour volumes. Potential years of failure were evaluated in 5-year increments up to the identified year of failure.

Rice-2 and Rice-2A are treated the same for the year of failure analysis because they comprise the same cross section. The only difference between the two alternatives is that Rice-2A is shifted to the north.

The resulting year of failure for the No-Build and Build alternatives is shown in ***TABLE 6***.

Table 6. Rice Street Corridor Year of Failure

ALTERNATIVE	YEAR OF FAILURE
No-Build	Earlier than 2035
Rice-2/2A	2045
Rice-3C	2045

Additional detail from the Year of Failure Analysis can be found in ***APPENDIX F. YEAR OF FAILURE ANALYSIS***.

NOISE ANALYSIS

A traffic noise analysis was conducted along the Rice Street corridor's area of influence for the three alternative scenarios. The analysis included traffic noise monitoring and modeling. HDR used the ***FHWA Traffic Noise Model (TNM), Version 2.5***, to evaluate projected traffic noise levels under both existing conditions and "Build" alternatives. Basic model inputs are:

- Existing and Preliminary project concept and geometry
- 2012 and 2035 traffic volumes in the study area
- The operational speed for I-229: 65 miles per hour (mph); arterial streets: 30-45 mph

Traffic noise impacts were identified in accordance with SDDOT Noise Analysis and Abatement Guidance (July 13, 2011), which is intended to supplement FHWA traffic noise and abatement regulations and guidance. The Guidance provides procedures for noise studies and noise abatement measures to help protect the public health and welfare, to supply noise abatement criteria, and to establish requirements for traffic noise information to be given to those officials who have planning and zoning authority.

Noise abatement measures are considered when predicted traffic noise levels approach or exceed the Noise Abatement Criteria (NAC), or when the predicted traffic noise levels substantially exceed existing noise levels.

TABLE 7 shows the number of traffic noise impacts predicted under each alternative.

Table 7. Noise Impact Summary

ALTERNATIVE	APPROACH/ EXCEED NAC	SUBSTANTIALLY EXCEED	TOTAL RECEPTORS AFFECTED
Existing	15	0	15
Rice-2	42	0	42
Rice-2A	42	0	42
Rice-3C	29	0	29

Potential noise abatement measures could be considered for all alternative scenarios. Further investigation into the feasibility and reasonability (noise reduction goal, cost-effectiveness, viewpoints of benefited receptors) would need to occur once a preferred alternative is selected.

A detailed technical memorandum describing the noise analysis can be found in *APPENDIX G. SUB-STUDY 5 NOISE STUDY TECHNICAL REPORT*. This memo includes a discussion of the conceptual feasibility of noise mitigation options in areas where future noise levels exceed state and federal criteria.

CONSTRUCTABILITY

A constructability analysis was conducted for the alternative scenarios in order to assess potential construction phasing, maintenance of traffic and general timeframe.

TABLE 8 shows construction analysis results predicted for each alternative.

Table 8. Constructability Analysis

ALTERNATIVE	MAINTENANCE OF TRAFFIC COMPLEXITY	ALLOWS FOR PHASED CONSTRUCTION	ESTIMATED CONSTRUCTION TIME FRAME (MONTHS)
Rice-2	High	Yes	12
Rice-2A	Medium	Yes	12
Rice-3C	Highest	No	18

It is anticipated that the Rice-2 and Rice-2A alternatives will allow for phased construction, but Rice-3C will not. Further construction analysis would need to occur during future studies and continue through the design process.

Section 3.5 - Recommendation of Alternatives for Future Consideration

The analysis of alternative scenarios along with other evaluation criteria were used to develop an evaluation matrix to compare the alternative scenarios. The alternative scenarios were compared using the following criteria categories:

- Driver/Public Perception
- Construction Impacts
- Traffic Operations & Safety
- Property Impacts
- Environmental
- Pedestrians
- Cost

The alternative scenarios evaluation matrix was reviewed with the SAT during a workshop in September 2016 to determine which alternative scenarios should be recommended to advance for future studies.

The evaluation matrix for the alternative scenarios is summarized in *TABLE 9*.

Based on the evaluation, all three (3) alternative scenarios are recommended to advance for future studies along with No-Build. The alternative scenarios are as follows:

- ***Rice-2.*** 6-Lane Divided
- ***Rice-2A.*** 6-Lane Divided, Shifted North to Avoid Railroad ROW
- ***Rice-3C.*** 4-Lane Divided, Cleveland Realigned

Table 9. Alternative Scenarios Evaluation Matrix
I-229/Rice Street Interchange/Corridor Construction

Sub-Study 5

Option	Description	Driver/ Public Perception	Construction Impacts		Traffic Operations & Safety										Property Impacts				Environmental	Pedestrians	Cost	Recommendation
		Driver familiarity/ expectancy	Maintenance of Traffic Complexity During Construction	Allows for phased construction	2035 Total interchange delay (Average AM/PM Peak)	Year of Failure[1]	2035 Traffic operations at northbound ramp terminal intersection		2035 Traffic operations at southbound ramp terminal intersection		2035 Traffic operations at Rice St. / Cliff Ave.		2035 Traffic operations at Rice St. / Bahnson Ave.		Planning Horizon Crash Cost Savings[1,2]	Number of closed access points	Total residential acquisitions	Total business acquisitions	Total ROW Required (Acres)	Environmental Impacts	Pedestrian accomodations on both sides	Total cost (including ROW)	
					Sec/Veh	*Year*	*LOS AM / PM*	*Intersection Delay AM / PM (sec)*	*LOS AM / PM*	*Intersection Delay AM / PM (sec)*	*LOS AM / PM*	*Intersection Delay AM / PM (sec)*	*LOS AM / PM*	*Intersection Delay AM / PM (sec)*	*M $*							*M $*	
No-Build		Good	N/A	N/A	136.8	< 2035	E / F	65.4 / 185.6	C / C	27.8 / 27.2	D / F	53.3 / 101.8	D / C	50.2 / 28.6	-	N/A	N/A	N/A	N/A	Low	Yes	N/A	
Rice-2	6-Lane Divided	Good	High	Yes	34.9	2045	C / C	31.2 / 31.4	A / A	5.8 / 9.1	C / D	33.8 / 47.3	B / B	19.4 / 19.0	$10.4	0	11	4	14.7	Medium	Yes	$37.0	Advance
Rice-2a	6-Lane Divided, Shifted North	Good	Medium	Yes	34.9	2045	C / C	31.2 / 31.4	A / A	5.8 / 9.1	C / D	33.8 / 47.3	B / B	19.4 / 19.0	$10.4	0	12	4	15.5	Medium	Yes	$38.5	Advance
Rice-3c	4-Lane Divided, Cleveland Realigned	Poor	Highest	No	34.0	2045	B / B	18.1 / 13.4	B / C	16.7 / 26.9	C / D	33.8 / 47.2	C / D	31.4 / 41.0	$10.8	2	11	6	76.5	High	Yes	$70.7	Advance

[1]Year of Failure and Predictive Safety analysis include ramp terminal intersections and in general do not include non-ramp terminal intersections.

[2]Planning Horizon Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035.

CHAPTER 4 - SUMMARY AND NEXT STEPS

The I-229 Exit 7 (Rice Street) Crossroad Corridor Study:

- Identified existing and future traffic and safety issues and needs on the Study Area roadways.
- Developed reasonable improvement concept options and alternative scenarios to address the traffic and safety needs.
- Evaluated the benefits and drawbacks of each of the concept options and alternative scenarios.
- Identified alternative scenarios for further consideration in future studies. The alternative scenarios are as follows:
    - ***Rice-2.*** 6-Lane Divided
    - ***Rice-2A.*** 6-Lane Divided, Shifted North to Avoid Railroad ROW
    - ***Rice-3C.*** 4-Lane Divided, Cleveland Realigned

These are the anticipated next steps for the projects associated with the I-229 Exit 7 (Rice Street) Crossroad Corridor Study:

- Refine the implementation timeframe and funding responsibility. Recommendations from the Exit 7 (Rice Street) Crossroads Corridor Study were rated in both the medium and low priority categories. Specifically, the alternative to realign Cleveland Avenue was recommended to be a medium priority improvement. Improvements to widen Rice Street in the vicinity of the I-229 interchange and/or realign the I-229 ramps were identified as a low priority.
- Add projects, as necessary, to the MPO fiscally constrained Long Range Transportation Plan.
- Fund individual projects in the State 8-year Improvement Program or City 5-year Improvement Program.
- Prepare an Interchange Modification Report for the I-229/Rice Street interchange.
- Prepare an environmental document for each project in accordance with National Environmental Policy Act and other applicable federal and state regulations. This step includes further design refinement and in-depth analysis of each option. The No-Build option will be considered as well as all of the options identified in this Corridor Study.
- Select a preferred option for each project.
- Acquire right-of-way (where necessary).
- Complete final design plans.
- Construct project.

APPENDICES

APPENDIX A. METHODS AND ASSUMPTIONS FOR SUB-STUDY 5

APPENDIX B1. TRAFFIC CAPACITY ANALYSIS METHODOLOGIES

APPENDIX B2. EXISTING HCS 2010 REPORTS

APPENDIX C. 2035 NO-BUILD AND BUILD OPERATIONAL ANALYSIS TECHNICAL MEMORANDUM

APPENDIX D1. PRELIMINARY CONCEPT FIGURES

APPENDIX D2. PRELIMINARY CONCEPTS TECH MEMO

APPENDIX D3. ENVIRONMENTAL CONSTRAINTS MAPS

APPENDIX E. PREDICTIVE SAFETY ANALYSIS

APPENDIX F. YEAR OF FAILURE ANALYSIS

APPENDIX G. SUB-STUDY 5 NOISE STUDY TECHNICAL REPORT

APPENDIX H. PUBLIC INVOLVEMENT

APPENDIX I. EXISTING ACCESS CONTROL FIGURES

APPENDIX A -

METHODS AND ASSUMPTIONS DOCUMENT

- ORIGINAL M&A
- APPENDICES
  - MEETING MINUTES
  - HIGHWAY CAPACITY SOFTWARE ANALYSIS PROCEDURES FOR A DIVERGING DIAMOND INTERCHANGE (DDI)
  - CRASH PREDICTION ANALYSIS PROCEDURES FOR DIVERGING DIAMOND INTERCHANGE (DDI), SINGLE-POINT URBAN INTERCHANGE (SPUI), AND TWO-LANE LOOP RAMP

Methods & Assumptions Meeting Documentation

1. Methods and Assumptions Cover Page

I-229 Major Investment Corridor Study: Sub-Study #5 - Original

To:	Study Advisory Team (SDDOT, FHWA, City of Sioux Falls)		
From:	Dave Meier, HDR Courtney Sokol, HDR Jon Markt, HDR	Project:	I-229 Major Investment Corridor Study
CC:	File		
Date:	November 4, 2015	Job No:	207030

Methods and Assumptions Document

This Methods and Assumptions document was developed as a summation of the Methods and Assumptions Meeting held on November 2, 2015 with representatives from the South Dakota Department of Transportation (SDDOT), Federal Highway Administration (FHWA), City of Sioux Falls, Sioux Falls MPO, and HDR. This document is intended to serve as a historical record of the process, dates, and decisions made by the study team representatives for the ***I-229 Major Investment Corridor Study: Sub-Study #5***.

2. Stakeholder Acceptance Page

The undersigned parties concur with the Methods and Assumptions for the **I-229 Major Investment Corridor Study: Sub-Study #5** as presented in this document.

SDDOT:	FHWA:
Signature	Signature
Planning Engineer	Planning/Civil Rights Specialist
Title	Title
11-10-2015	11/9/15
Date	Date

Notes:

(1) Participation on the Study Advisory Team and/or signing of this document does not constitute approval of the ***I-229 Major Investment Corridor Study: Sub-Study #5*** Final Report or conclusions.

(2) All members of the Study Advisory Team will accept this document as a guide and reference as the study progresses through the various stages of development. If there are any agreed upon changes to the assumptions in this document a revision will be created, endorsed and signed by all the signatories.

3. Introduction and Project Description

Project Background and Understanding

Sub-Study 5 will analyze existing and future conditions at the I-229 interchange at Exit 7 (Rice Street) and along Rice Street from Cliff Avenue to Bahnson Avenue. The study will conduct an interchange options study for the I-229 Exit 7 interchange.

Location

The I-229 Exit 7 interchange and adjacent Rice Street corridor is located in the northeastern portion of the Sioux Falls metropolitan area, approximately 3 miles south of the I-229/I-90 systems interchange. The mainline interstate study limits include Exit 6 (10th Street) through Exit 9 (Benson Road). The Rice Street study limits include Cliff Avenue through Bahnson Avenue.

An illustration of the Sub-Study 5 study area is shown in Section 4 (Study Area) of this report.

Need for Study

The study team has determined the following needs for this specific study:

- Congestion at the Rice Street / I-229 interchange.
- Improved East-West connectivity along Rice Street.
- Anticipated development impacts due to the opening of Veterans Memorial Parkway.
- Geographic constraints on corridor performance, including the Big Sioux River and Burlington Northern Santa Fe (BNSF) rail line.

The alternatives analysis will incorporate work done on previous studies, including the Cleveland Avenue Corridor Study, as well as introduce additional concepts.

Study Schedule

Date	Task/Event
September 2015	Notice to Proceed
November 2015	Methods & Assumptions Documentation Existing Traffic and Operations Analysis Project Future Conditions (No Build)
December 2015 – February 2016	Conceptual Design of Reconfiguration Options for the I-229 Exit 7 Interchange Conceptual Design of Rice Street Corridor Improvements
March 2016 – June 2016	**Public Meeting #2 (Scenario Building Stage) (Mar 2016)** **Stakeholder Meeting #2 (Scenario Building Stage) (Mar 2016)** **MPO Meeting (Scenario Building Presentation)** Determination of Interchange and Corridor Build Scenarios Traffic and Operations Analysis of Build Scenarios Predictive Crash Analysis of Build Scenarios Noise Analysis of Build Scenarios Constructability Analysis of Build Scenarios Recommendations
August 2016 – November 2016	Sub-Study 5 Report Documentation **Public Meeting #3 (Draft Report Stage)** **MPO Meeting (Final Recommendations Presentation)**

Facilities Affected by the Study

Modifications to the I-229 Exit 7 (Rice Street) interchange and adjacent Rice Street corridor would have the potential to affect:

- The intersections on Rice Street near I-229.
- The adjacent parallel corridor providing access to I-229 at Exit 6 (10th Street)
- The adjacent parallel corridor providing access to I-229 at Exit 9 (Benson Road).
- The adjacent perpendicular corridors of Cleveland Avenue and Cliff Avenue
- The adjacent perpendicular corridor of Bahnson Avenue (extension of Bahnson Avenue is planned from Broken Arrow Street to Rice Street).

Previous Studies

The following previous studies will be reviewed during the course of this study:

- Direction 2035, Sioux Falls MPO Long-Range Transportation Plan (LRTP)
  - http://www.siouxfalls.org/~/media/Documents/planning/long-range/lrtp/2035_lrtp/adopted_lrtp_rev120210.pdf
- Sioux Falls Comprehensive Development Plan
  - http://www.siouxfalls.org/~/media/Documents/planning/shape_sf/chapters-maps/Chapter_1_r112111.pdf
- Sioux Falls Transit Development Plan 2011- 2015
  - http://www.siouxfalls.org/~/media/Documents/planning/long-range/2011_2015_Transit_Development_Plan.pdf
- 2007 Sioux Falls Bicycle Plan
  - http://www.siouxfalls.org/~/media/Documents/planning/transportation/bicycle/Bicycle_Plan_Final.pdf
- The Sioux Falls MPO Multi-Use Trail Study
  - http://www.siouxfallsmpo.org/documents/MPO/Planning_Documents/SiouxFallsMUTCS.pdf
- Sioux Falls Major Street and Access Management Plan
  - http://www.siouxfalls.org/~/media/Documents/planning/transportation/long-range/majorstreetplanmediumfinal%20pdf.pdf
- Northeast Transportation Network Feasibility Study
- Cleveland Avenue Corridor Study
- 2010 Decennial Interstate Corridor Study and 2000 Decennial Interstate Study
- N. Bahnson Avenue Feasibility Study
- Benson Road Feasibility Study
- ITS Studies from City of Sioux Falls and SDDOT

Study Advisory Team Members

A Study Advisory Team has been formed to guide the study through completion. The Study Advisory Team is comprised of representative parties of the SDDOT, FHWA and City of Sioux Falls. Members of the Study Advisory Team are:


Shannon Ausen	City of Sioux Falls – Public Works
Mike Behm	SDDOT – Project Development
Christina Bennett	SDDOT – Operations Support
Jeff Brosz	SDDOT – Transportation Inventory Management
Andy Vandel	SDDOT – Project Development (Safety)
Joel Gengler	SDDOT – Right of Way
Amber Gibson	Sioux Falls MPO
Kevin Goeden	SDDOT – Bridge Design
Steve Gramm	SDDOT – Project Development (Planning)
Heath Hoftiezer	City of Sioux Falls – Public Works
Mark Hoines	FHWA
Dave Huft	SDDOT – Research
Bruce Hunt	FHWA
Scott Jansen	SDDOT – Mitchell Region
Captain Alan Welsh	South Dakota Highway Patrol
Ryan Kerkvliet	Sioux Falls MPO – Citizens Advisory Committee
Tom Lehmkuhl	SDDOT – Project Development (Environmental)
Pete Longman	SDDOT – Road Design
Ron McMahon	FHWA
Paul Nikolas	SDDOT – Road Design
Brad Remmich	SDDOT – Project Development (Planning)
Craig Smith	SDDOT – Mitchell Region

Additional team members may be added as the study progresses.

4. Study Area

The study area for Sub-Study 5 was defined by the Study Advisory Team and is illustrated in this report for documentation. The study area contains Rice Street from Cliff Avenue to Bahnson Avenue. Freeway operations will be conducted during Sub-Study 1 and will also be reported in Sub-Study 5 for freeway locations from Exit 6 (10th Street) to Exit 9 (Benson Road). The following graphic shows the study area and identifies each of the study intersections.

Sub-Study 5 Study Area

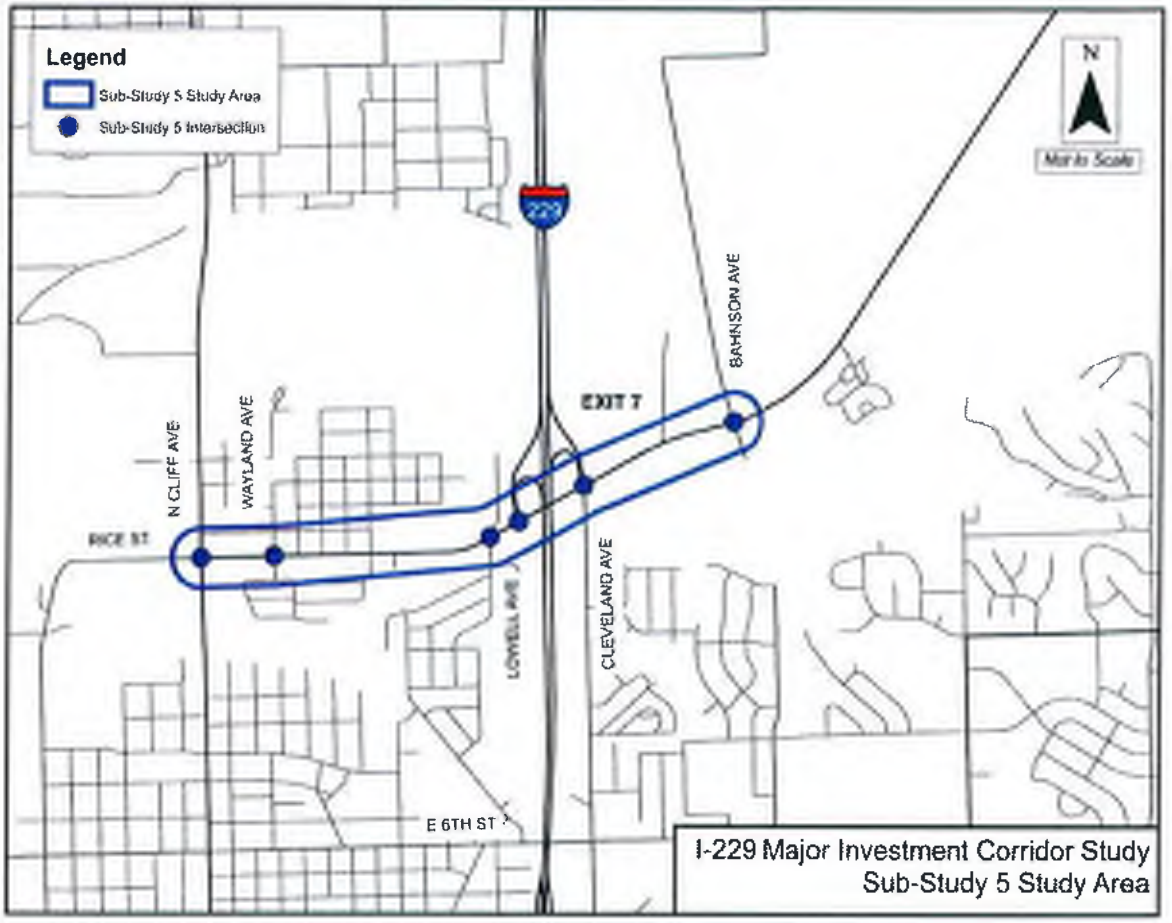

Rice Street Study Intersections:

- Cliff Avenue
- Wayland Avenue*
- Lowell Avenue
- I-229 Southbound Ramp Terminal*
- I-229 Northbound Ramp Terminal / Cleveland Avenue*
- Bahnson Avenue*

* Intersections denoted with an asterisk will be included in year of failure analysis.

Study Basic Freeway Areas (*See also Note 1 below for designated analysis areas as potential Freeway Weave Areas for segments including auxiliary lanes*):

- I-229 Northbound between 10th Street (Exit 6) and Rice Street (Exit 7) [1]
- I-229 Northbound between Rice Street (Exit 7) and Benson Road (Exit 9)
- I-229 Southbound between Benson Road (Exit 9) and Rice Street (Exit 7)
- I-229 Southbound between Rice Street (Exit 7) and 10th Street (Exit 6) [1]

[1] *Segment will be evaluated using Highway Capacity Manual (HCM) 2010 procedures to determine if the segment meets the criteria for a weave*

segment. If the segment meets the weave segment criteria the segment will be analyzed as a Freeway Weave Area and not a Basic Freeway Area

Study Mainline Freeway Areas (Crash Prediction)

- I-229 Northbound & Southbound
  - Between mile marker 6 and mile marker 9

Study Service Interchange Areas (Crash Prediction)

- Exit 7: Rice Street

Study Intersections (Crash Prediction)

- Rice Street & I-229 Southbound Ramps
- Rice Street & I-229 Northbound Ramps / Cleveland Avenue*

*Intersection is combined with adjacent intersections or split from a single intersection to form multiple intersections in some build alternatives

5. Analysis Years/Periods

This study will evaluate traffic during and for the following time periods:

Existing Conditions – Existing conditions analyses will be conducted for year 2012 volume conditions. Turning movement counts were collected at several study area intersections in 2012. Intersections that do not already have recent count data from 2012 will be counted by the City of Sioux Falls as part of this study as described in Section 6. For existing conditions the following time periods will be evaluated:

- Existing Conditions (Year 2012) – AM Peak Hour
- Existing Conditions (Year 2012) – PM Peak Hour

Future/ Design Conditions – Future/ Design conditions analyses will be conducted for year 2035 conditions. This horizon year matches the planning horizon of the current Sioux Falls LRTP. The Travel Demand Model was calibrated and updated in year 2009 for a base year 2008 and planning horizon of year 2035. Projected traffic volumes from the Sioux Falls MPO Travel Demand Model will be utilized to establish year 2035 volumes. For the design conditions the following time periods will be evaluated:

- Future/Design Conditions (Year 2035) – AM Peak Hour
- Future/Design Conditions (Year 2035) – PM Peak Hour

Interim Conditions – No interim conditions will be evaluated as part of this study.

Year of Failure Conditions Analysis

Year of failure analysis will be conducted (for denoted study area intersections) to identify the year beyond the Future / Design year (2035) when traffic operations fail to meet acceptable criteria. Projected traffic volumes beyond year 2035 will be developed using straight line extrapolation between year 2012 adjusted peak hour volumes and year 2035 adjusted peak hour volumes. Potential years of failure will be evaluated in 5-year increments up to the identified year of failure. Should traffic operations still meet acceptable criteria 30 years beyond the Future / Design year (2065), the year of failure

will be identified as beyond 2065, but no additional traffic analysis will be conducted for years beyond 2065.

- Year of Failure Conditions (Year determined by analysis) – AM Peak Hour
- Year of Failure Conditions (Year determined by analysis) – PM Peak Hour

Volume data will be smoothed/balanced for the Existing and Future/Design Conditions using the Cube Voyager macroscopic model, with adjustments to raw model output based on post-processing techniques.

6. Data Collection

Data Collection is one of the most important items during any transportation planning study. The data collection efforts are documented below:

Existing Arterial Intersection Turning Movement Count Data

Turning movement counts define actual traffic at the study intersections during the course of a typical weekday. The most recent turning movement counts available by the City of Sioux Falls at Rice Street study intersections were mostly conducted in year 2012. To capture existing conditions on an average weekday, new traffic counts were collected at the Rice Street/Cliff Avenue study intersection and the Rice Street/Lowell Avenue study intersection by the City of Sioux Falls in year 2015. These counts include volume data in 15-minute intervals.

Existing Freeway Data

Automated Traffic Recorded (ATR) data was provided for SDDOT Station #610, which is located between Exit 2 (Western Avenue) and Exit 3 (Minnesota Avenue). The ATR included hourly directional mainline I-229 freeway volumes from Sept 2012 to February 2013. In addition, ATR at Station #610 was provided in 15-minute increments from March 6 to April 21, 2013.

SDDOT supplied hourly ramp volume data from year 2012. Study intersection turning movement counts will be used to determine existing AM and PM peak hour ramp volumes and then smoothed/balanced along the I-229 corridor.

Additional Data Supplied by SDDOT and/or City of Sioux Falls

- Vehicle Classification Samples on I-229 Interstate
  - Supplied by SDDOT
- Crash History Geodatabase
  - Supplied by SDDOT
  - Includes crash records dated January 2008 to December 2012 (5 years)
- Roadway Design Standards
  - available online at: http://www.sddot.com/business/design/forms/roaddesign/Default.aspx
- Construction Plans for I-229
  - Supplied by SDDOT
- GIS Base Mapping Data (parcels, parks, streets, rail, plats)
  - Supplied by City of Sioux Falls
- 2012 Aerial SID files

- Supplied by City of Sioux Falls
- MPO Travel Demand Model Files in Cube Voyager (Existing and Future)
  - Supplied by City of Sioux Falls
- Average daily traffic counts
  - Supplied by City of Sioux Falls

Data Collection Techniques

All data was collected and will be collected using standard field practices which consist of using cameras, digital count boards or tube counters.

7. Traffic Operations Analysis

Traffic Operations Analysis (Existing and Future No-Build)

1. Software
   a. Signalized Intersections
      i. Highway Capacity Software (HCS) Release 6.7 (2010 HCM Methodology) Streets Module
         1. Ramp terminal intersections meeting the interchange types defined in HCM Chapter 22 (Interchange Ramp Terminals) will be analyzed with the Interchanges section of the Streets Module.
         2. Analysis of a Diverging Diamond Interchange will follow the methodology outlined in the 'Highway Capacity Software Analysis Procedures for a Diverging Diamond Interchange (DDI)' memorandum, found in the Appendix.
   b. Basic Freeway, Ramp Junctions and Weave Areas
      i. HCS Release 6.7 (2010 HCM Methodology)
2. Operational Analysis Results
   a. Level of Service (LOS)
      i. Signalized Ramp Terminal Intersections (SDDOT's System)
         1. Intersections where geometry is modified because of project improvements
            a. Minimum allowable LOS – LOS 'C'
               i. Individual movements will be allowed to operate at LOS 'D' but the overall intersection LOS shall be 'C' or better
         2. Other intersections (intersections within the study area that are not modified by project improvements)
            a. Minimum allowable LOS – LOS 'D'
               i. Individual movements will be allowed to operate at LOS 'E' but the overall intersection LOS shall be 'D' or better
      ii. Signalized Non-Ramp Terminal Intersections (City of Sioux Fall's System)
         1. Minimum allowable LOS – LOS 'D'
      iii. Basic Freeway, Ramp Junctions and Weave Areas
         1. Minimum allowable LOS – LOS 'C'
3. Variables
   a. Peak Hour Factor (PHF)

i. Existing (year 2012) conditions analysis will use calculated PHFs from existing counts with a maximum value of 0.93.
ii. Design year (year 2035) conditions analysis will use existing PHFs rounded up to the nearest 0.05 with a maximum value of 0.93.
1. The increase in the PHF is to account for traffic growth that is likely to be spread throughout the peak periods.

b. Saturation Flow Rate
i. SDDOT Design Manual (Page 24, Chapter 15) requires the use of 1,800 vph in Sioux Falls. This value will be used for the signalized intersections and freeway locations within the study area.

c. Traffic Signal Controllers
i. Operational analysis will allow for both actuated and coordinated controllers.

d. Left-Turn Phasing
i. Protected, Permitted / Protected or Split Phasing will be allowed at intersections.

e. Heaviest Lane Volume (Lane Utilization)
i. Default HCS Streets Values used for ramp terminal / arterial intersections.

f. Heavy Vehicle Percentage
i. Study Intersections
1. Use existing turning movement counts that included truck counts to determine arterial truck percentages.
ii. Ramp Junctions and Weave Areas
1. Use existing freeway counts that included truck counts to determine freeway truck percentages.

g. Phase Change Intervals
i. Existing (Year 2012) Conditions
1. Existing signal timings will be used for phase change intervals during existing conditions.
ii. Future No-Build (Year 2035) Conditions
1. Existing signal timings will be used for phase change intervals of phases that exist at intersections that have no geometric change from existing conditions.
2. Phase change intervals will be calculated for the following locations:
a. New phases added at an intersection where geometry is unchanged from existing conditions
b. All phases at an intersection where geometry is changed from existing conditions

The calculated values will be based on methodologies presented in the *Institution of Transportation Engineers (ITE) Traffic Engineering Handbook*. The methodologies presented in the handbook use vehicle length and speed and the distance needed to track through the intersection to calculate phase change intervals.

h. Speeds
i. Arterials – Use posted speeds
ii. Freeway – Use 85th percentile of collected spot speed data

i. Right Turn on Red Volume
i. Existing (Year 2012) Conditions

1. The number of vehicles turning right on red will be assumed to be zero for all locations initially based on the guidance in the 2010 Highway Capacity Manual.
2. Intersections reporting LOS E or worse potentially related to right turn on red volume will be identified and presented to the SAT to decide if a right turn on red count is necessary.
3. If a right turn on red count is deemed necessary, video recordings of existing peak hour traffic at the locations of interest will be used to count the number of vehicles turning right on red and incorporated into the HCS analysis at these locations.

ii. Future No-Build (Year 2035) Conditions
1. The number of vehicles turning right on red will be assumed to be zero for all locations that were not counted for right turn on red movements.
2. For locations that were counted for right turn on red movements, the percentage of right turn on red volume of the total volume for the right turn movement in the existing condition will be multiplied by the future forecast right turn movement for each approach and incorporated into the HCS analysis at these locations.
3. Intersections reporting LOS E or worse potentially related to right turn on red volume will be identified and presented to the SAT to decide if a right turn on red count is necessary.
4. If a right turn on red count is deemed necessary, video recordings of existing peak hour traffic at the locations of interest will be used to count the number of vehicles turning right on red.
5. Step 2 will be repeated for all locations where a right turn on red count was added by the SAT based on a projected future operating condition of LOS E or worse.

iii. Future Build (Year 2035) Conditions
1. The number of vehicles turning right on red will be assumed to be zero for all locations that were not counted for right turn on red movements
2. For locations that were counted for right turn on red movements, the same projected right turn on red volume for Future No-Build (Year 2035) Conditions will be used, assuming the Future Build (Year 2035) Condition geometry remain similar to the Future No-Build (Year 2035) Condition geometry.

8. Travel Forecast

1. The 2035 Sioux Falls MPO Travel Demand Model (Macro/Static Model) will be utilized for the basis of future year no-build volume development. The 2035 model will match the model specifications used in the Sub-Study 1 projections, but including the following network modifications per direction from the City of Sioux Falls:
   - Remove the segment of Maple between Rice and Veterans Memorial Parkway.
   - Add link for Sycamore extension between Madison and Rice (4 lanes).
   - Remove link for Benson connection between Rice and Veterans Memorial Parkway.
   - Remove Benson/Holly connection at Veterans Memorial Parkway.
     - Replace with Rice Street connection to Veterans Memorial Parkway on existing Rice Street alignment.

9. Safety Issues

Crash data will be reviewed for the study area based on the Crash Geodatabase which includes crashes between January 2008 and December 2012. SDDOT's database will be the only database used in the calculation of crash rates and critical crash rates. The following information will be provided as a result of the crash analysis:

- Segment and Intersection Crash Rates
- Segment and Intersection Critical Crash Rates (per Highway Safety Manual)
- Crash Trends
- Potential Mitigation Measures to Improve Locations Above Critical Crash Rates

Predictive crash analysis will be conducted for freeway segments, freeway ramps, ramp terminal intersections, and some arterial intersections with the limits described in the Sub-Study 1 & Sub-Study 5 Methods and Assumptions documents. Predictive crash analysis will be conducted using the following standard procedures / tools:

- All analysis types
  - For existing conditions:
    - Geometric information will be estimated from aerial photography using tools built in to Google Earth.
    - Average daily traffic counts, described in the data collection section of this document, will be utilized.
  - For build conditions:
    - Geometric information available from design files will be utilized. Geometric information not available at this level of design will be assumed to match existing conditions where practical.
    - Projected future daily volumes, described in the travel forecasting section of this document, will be utilized.
  - Calibration factors or South Dakota-specific Safety Performance Functions will not be used in place of default equations from the Enhanced Interchange Safety Analysis Tool (ISATe).
  - Existing crash data (2008 – 2012) will be used when forecasting expected crash frequency for the Existing and the Future No-Build Conditions using the Empirical Bayes method.
  - Existing crash data will not be used as a factor when predicting crash frequency for Future No-Build and Build Alternative Conditions for comparing these scenarios.
  - Computed crash prediction frequencies will be reported by crash type using default distributions included in the Highway Safety Manual where applicable.
- Freeway segments, freeway ramps, and traditional ramp terminal intersections
  - ISATe Build 06.10 will be used.
- Non-traditional ramps and ramp terminal intersections
  - Analysis will follow the methodology outlined in the 'Crash Prediction Analysis Procedures for Diverging Diamond Interchange (DDI), Single-Point Urban Interchange (SPUI), and Two-Lane Loop Ramp'

memorandum, found in the Appendix of this document.

- Arterial intersections
  - Methods from Chapter 12 of the Highway Safety Manual will be used.

Predictive crash analysis will forecast crash frequencies for Existing (Year 2012, for comparison to actual crashes), Future No-Build (Year 2035) and Future Build Alternative (Year 2035) conditions.

10. Selection of Measures of Effectiveness (MOE)

The main goals of this study are as follows:

1. Conduct an interchange options study for Exit 7 (Rice Street).
   a. Complete a traffic level of service analysis for both existing and future (2035) conditions along Rice Street from Cliff Avenue to Bahnson Avenue.
   b. Complete a safety analysis of Rice Street from Cliff Avenue to Bahnson Avenue.
   c. Complete a predictive safety analysis of interchange Exit 7 (Rice Street) for both existing and future (2035) conditions.
   d. Determine and recommend improvement options that will improve mobility and safety along the Rice Street corridor, including the I-229 Exit 7 interchange.
2. Create final products for use by the SDDOT and City of Sioux Falls which will guide them in the implementation of recommended improvements that will maximize the efficiency of the system.

To satisfy the study objectives, the following MOEs will be used to evaluate and compare the concepts:

- Rice Street Intersections: **LEVEL OF SERVICE (LOS)** and **INDIVIDUAL MOVEMENT DELAY**
- Rice Street Corridor: **LOS** and **TRAVEL SPEED**
- Ramp Terminal Intersections: **LOS** and **INDIVIDUAL MOVEMENT DELAY**
- Freeway Segments, Ramp Junctions and Weave Areas: **LOS** and **DENSITY**

These statements are made assuming that the geometric improvements identified meet all AASHTO, SDDOT, and City of Sioux Falls guidelines. It is understood that all traffic analysis reporting will be completed using HCM 2010 Methodology.

11. FHWA Interstate Access Modification Policy Points

An Interchange Modification Justification Report (IMJR) will not be developed for the I-229 Exit 7 (Rice Street) interchange as part of this project.

12. Deviations/Justifications

No deviations from standards are currently known. If it is determined during the study that deviations are required, the methods and assumptions document will be amended prior to proceeding.

13. Conclusion

All sections contained in this document will guide the traffic data collection and traffic assessment for this study.

14. Appendices

The appendix includes the following:

- Methods and Assumptions Study Team Meeting Minutes (November 2, 2015)
- Analysis Procedures for Diverging Diamond Interchange (DDI)
- Crash Prediction Analysis Procedures for Diverging Diamond Interchange (DDI), Single-Point Urban Interchange (SPUI), and Two-Lane Loop Ramp

APPENDIX

Meeting Minutes

Project: I-229 Major Investment Study (MIS)

Subject: Study Advisory Team (SAT) Meeting # 13

Date: Monday, November 2, 2015

Location: Online Meeting

Attendees

Mike Behm – SDDOT	Travis Dressen, SDDOT
Craig Smith – SDDOT	Joel Gengler, SDDOT
Scott Jansen - SDDOT	Shannon Ausen – City of Sioux Falls
Jeff Brosz – SDDOT	Heath Hoftiezer – City of Sioux Falls
Kevin Goeden – SDDOT	Amber Gibson – SECOG/Sioux Falls MPO
Pete Longman - SDDOT	Jason Kjenstad - HDR
Andy Vandel – SDDOT	Jon Markt - HDR
Paul Nikolas – SDDOT	Dave Meier - HDR
Steve Gramm – SDDOT	Courtney Sokol- HDR
Brad Remmich – SDDOT	Brian Ray - HDR
Christina Bennett – SDDOT	
Ron McMahon - FHWA	
Mark Holnes, FHWA	

Online Meeting

SAT meeting #13 served the primary purpose of reviewing SAT comments on Methods and Assumptions updates pertaining to the Highway Safety Analysis and to review comments on a draft M&A document for Sub-Study 5 (Rice Street Corridor Study). The consultant team provided the M&A documents (Updates to Sub-studies 1-4, original for Sub-study 5) for SAT review on October 26th.

The four existing M&A documents (Sub-Studies 1-4) were primarily updated to reflect:

- An updated project schedule
- Addition of Sub-Study 5 (Exit 7: Rice Street)
- Addition of year of failure analysis
- Addition of crash prediction (safety) analysis

The original M&A for Sub-Study 5 addresses the Exit 7: Rice Street area in a similar manner as the Sub-Study 3 M&A addresses 10th Street and the Sub-Study 4 M&A addresses Benson Road, including the above bullet list of updates. The Sub-Study 5 M&A varies slightly from the Sub Study 3 & 4 M&A documents in section 8. Travel Forecast, which outlines changes that will be made in the Sub-Study 1-4 model based on direction from the City of Sioux Falls to support volume development along Rice Street.

Portions of the five M&A documents were highlighted in green to signify changes.

	Action Items	Responsibility
1	Submit SS1-5 Methods and Assumptions documents for signature	HDR
2	Update project website to include Sub-Study 5 and to identify study concepts eliminated from further consideration by SAT	HDR
3	Email blast to public meeting participants/stakeholders calling attention to updated website	HDR
4	Press Release	SDDOT
5	Add Year of Failure for No-Build at Louise and Cliff to Sub-Study 1 M&A	HDR
6	Update Sub-Study maps to improve street labeling and background local road legibility	HDR
7	Modify M&A documents to change reference to SD 100 to Veterans Memorial Parkway	HDR
8	Provide estimated staff-hours to correspond with supplemental scope previously provided to SDDOT	HDR/HR Green

1. Introductions
2. Review of Sub-Study 1, Amendment 2 M&A
    - HDR provided overview of Amendment 2 updates to the project schedule
    - City of Sioux Falls inquired about how to address the public, who is expecting updates from the study in late 2015 / early 2016.
        i. HDR noted that the public is not yet formally aware of the new Rice Street Sub-Study #5. Need to communicate to the public SAT desire to focus on Sub-Study #5 to "catch up" to status of other sub-studies, to conclude all sub-studies together.
        ii. SDDOT requested that the project website be updated to address this and an email blast to those in the project contact database.
        iii. City of Sioux Falls requested that SDDOT also send out a formal press release.
    - SDDOT requested the map on page 9 to be modified to include a label for Solberg Avenue.
    - Crash Prediction / Highway Safety Analysis
        i. FHWA inquired about the gap in mile markers.
            1. HDR clarified it excludes portion of I-229 between 26th Street ramps. This analysis applies to locations where there are proposed improvements. Similar rationale for why only Cliff southbound is identified - since there are no improvements recommended for northbound direction.
    - Data collection - no comments
    - Traffic operations - no comments
    - Travel forecasts - no comments

- Safety
    i. SDDOT asked about breakdown of crash type and severity.
        1. HDR will add bullet for defaults from HSM for crash type prediction. Defaults are not applicable to DDI and SPUI - these configurations will only have qualitative review.
    ii. No other comments from the SAT.
- SDDOT requested that the Year of Failure Analysis be added for No-Build at Louise and Cliff in the Sub-Study #1 M&A document.

3. Review of Sub-Study 2-4, Amendment 2 M&A
    - SDDOT requested that intersections that are to be analyzed in the individual sub-studies are labeled on the maps provided in the M&A documents.
    - SDDOT noted that reference to SD 100 is no longer valid and needs to be changed to Veterans Memorial Parkway. HDR will update in the M&A document(s).
4. Review of Sub-Study 5 M&A
    - Original Methods and Assumptions document.
    - SDDOT noted the error on page 7 – change "Benson" to "Rice".
    - FHWA requested the Sub-Study 5 map be adjusted to darken the local street line weights.
    - Need for the study:
        i. City of Sioux Falls advised that the need for the study should include noting the geographical constraints, including the rail line and its proximity to Rice Street improvements.
        ii. SDDOT added that the need for the study should include that pressure on this interchange will increase as development continues to the northeast related to construction of Veterans Memorial Parkway.
    - City of Sioux Falls asked if the DTA model has the Russell to Rice connection. HDR to confirm this connection is included. (Note: the 2035 DTA model will not be used in Sub-Study 5, but the question remains valid for confirmation of this connection in the 2035 macro model). – ***HDR confirmed that this connection is included in the DTA model.***
    - SDDOT noted that reference to SD 100 is no longer valid and needs to be changed to Veterans Memorial Parkway. HDR will update in the M&A document(s).
5. Other
    - SDDOT requested an estimate of staff-hours for review with the supplemental scope of services previously submitted by the consultant team.
    - City of Sioux Falls requested that the study website be updated before Thanksgiving. Website will identify concepts that were eliminated from further consideration by the SAT.

6. Next Steps:
    - Submit SS1-5 Methods and Assumptions documents for signature. Items addressed include:
        i. Add Year of Failure for No-Build at Louise and Cliff to Sub-Study 1 M&A.
        ii. Update Sub-Study maps to add more street labels and improve the legibility of background local roads.
        iii. Modify M&A documents to change reference to SD 100 to Veterans Memorial Parkway.
        iv. Add bullet for defaults from HSM for crash type prediction.
        v. Sub-Study #5: Error on page 7 – changed "Benson" to "Rice".
        vi. Fix double-period errors in documents
    - Update project website to include Sub-Study 5 (HDR).
    - Email blast to public meeting participants/stakeholders (HDR).
    - Press Release (SDDOT).
    - HDR to provide estimated staff-hours associated with supplemental scope to SDDOT.

HDR | ONE COMPANY *Many Solutions*℠

To: File	
From: Mike Forsberg, P.E.	Project: None
cc:	
Date: July 18, 2013	Job No:

RE: Highway Capacity Software Analysis Procedures for a Diverging Diamond Interchange (DDI)

Introduction


This document presents a proposed methodology for analyzing a Diverging Diamond Interchange (DDI) using Highway Capacity Software (HCS) 2010 Streets module. The Federal Highway Agency (FHWA) has indicated that HCS 2010 is the preferred traffic analysis tool for various projects within certain agencies. The procedures documented in this memorandum were developed in response to known challenges of analyzing DDIs in HCS 2010 based on discussions with the software developer, McTrans. HCS 2010 version 6.50 was utilized to develop this methodology.

Proposed DDI Analysis Methodology

The proposed analysis methodology for DDIs includes manipulation of the intersection movements at a DDI to analyze the ramp terminal intersections as standard four-leg intersections in HCS 2010. The proposed methodology involves manipulating the movements at the DDI ramp terminal intersections of the proposed DDI concept to conform to the analysis methodology of HCS 2010 while mimicking similar operational elements of the DDI ramp terminal intersection.

For simplification purposes, the methodology is presented for an arterial oriented north/south and freeway oriented east/west. The methodology for different orientations would be the same, but rotated accordingly. **Figure 1** expresses the proposed manipulation of the DDI ramp terminal movements into a format with standard four-leg intersections. The modified standard four-leg configuration shown in **Figure 1** would have split-phase operations for northbound and southbound traffic and allow for coordination of the ramp terminal intersections with signals north and south of the interchange.

Figure 1. Manipulation of DDI Movements into Standard Four-Leg Intersections

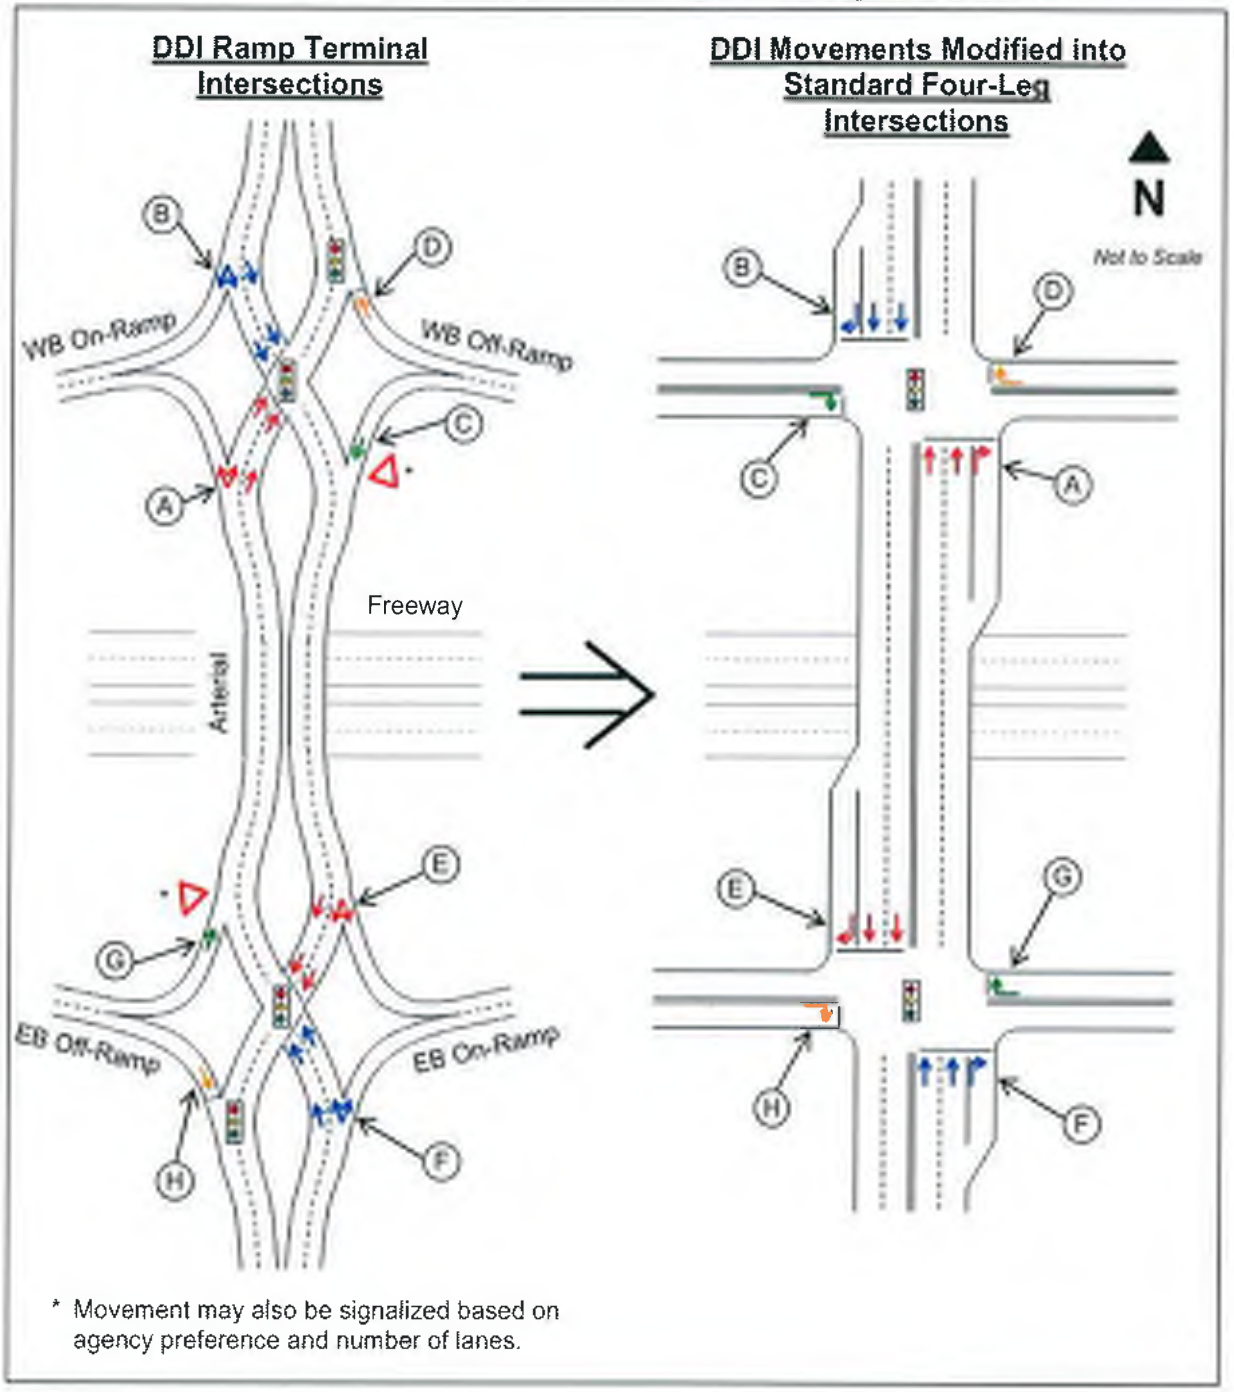

The following presents details of the proposed manipulation of intersection movements for the westbound ramp terminal intersection shown in **Figure 1** from the DDI configuration to a standard four-leg intersection configuration. Manipulation of intersection movements for the eastbound ramp terminal intersection would follow similar methodology.

- The DDI westbound ramp terminal intersection would operate as a two-phase signal. The northbound crossover movement (A) and westbound off-ramp left-turn movement (C) would

travel through the intersection during the first phase (e.g., phase 2). The southbound crossover movement (B) and westbound off-ramp right-turn movement (D) would travel through the intersection during the second phase (e.g., phase 6).

- The two-phase operations of the DDI would be modified to two-phase operations with a four-leg intersection configuration. For example, at the westbound ramp terminal intersection:
    - The northbound crossover movement (A) of the DDI would be treated as a northbound through movement in the four-leg intersection configuration.
    - The northbound left-turn movement of the DDI in advance of the crossover would be treated as a northbound right-turn movement in the four-leg intersection configuration.
        - The value for right-turn-on-red (RTOR) for the northbound right turns would be set to zero. This assumes that all northbound right turns would only be able to turn during the northbound green signal indication. This assumption is conservative since these vehicles would be able to complete this turning maneuver during a northbound red signal indication in the DDI configuration, while the northbound queue of the crossover movement does not extend to the turning movement location. However, due to the unknown percentage of time that the northbound through movement would extend beyond the turning movement location, it is assumed that no vehicles would be able to turn right on red.
    - The southbound crossover movement (B) of the DDI would be treated as a southbound through movement in the four-leg intersection configuration.
    - The southbound right-turn movement of the DDI in advance of the crossover would be treated as a southbound right-turn movement in the four-leg intersection configuration.
        - The value for right-turn-on-red (RTOR) for the southbound right turns would be set to zero. This assumes that all southbound right turns would only be able to turn during the southbound green signal indication. This assumption is conservative since these vehicles would be able to complete this turning maneuver during a southbound red signal indication in the DDI configuration, while the southbound queue of the crossover movement does not extend to the turning movement location. However, due to the unknown percentage of time that the southbound through movement would extend beyond the turning movement location, it was assumed that no vehicles would be able to turn right on red.
    - The westbound off-ramp left-turn movement (C) of the DDI would be treated as an eastbound right-turn movement in the four-leg intersection configuration.
        - This movement would be treated as an eastbound right-turn movement at a signal with RTOR allowed. The value of RTOR would be based on the 'RTOR Reduction' factor shown in the HCM 2000 report obtained from Synchro traffic analysis software (Synchro would be used to code the modified four-leg configuration and obtain the RTOR value for this movement).
    - The westbound off-ramp right-turn movement (D) of the DDI would be treated as a westbound right-turn movement in the four-leg intersection configuration.

- RTOR for the westbound right-turn movement would likely be restricted in the DDI configuration for safety purposes; therefore, the RTOR of the westbound right-turn movement four-leg configuration would be set to '0'. For locations where the controlling agency would operate the westbound off-ramp right-turn movement (D) of the DDI with RTOR allowed, the value of RTOR would be based on the 'RTOR Reduction' factor shown in the HCM 2000 report obtained from Synchro.

- In the modified version of the four-leg intersection the northbound (A) and eastbound (C) movements would travel through the intersection during the same phase (e.g., phase 2). This would be consistent with the overlapping northbound crossover movement (A) and westbound off-ramp left-turn movement (C) of the DDI.
- In the modified version of the four-leg intersection the southbound (B) and westbound (D) movements would travel through the intersection during the same phase (e.g., phase 6). This would be consistent with the overlapping southbound crossover movement (B) and westbound off-ramp right-turn movement (D) of the DDI.


The following presents specific details of coding elements in HCS 2010 Streets to model the westbound ramp terminal intersection shown in **Figure 1** as a standard four-leg intersection of the DDI intersection. Manipulation of intersection movements for the eastbound ramp terminal intersection would follow similar methodology.

- To model split-phase operations for the arterial street (northbound and southbound movements) in HCS 2010 Streets, the following coding elements would be needed. Additionally, the diagrams shown in **Figure 2** supplement the coding elements listed below.
  - Artificial ("dummy") northbound and southbound left-turn movements would be added with protected phasing. These movements would not serve any of the DDI traffic. The added left-turn phases would be phase 5 for the northbound left-turn movement and phase 1 for the southbound left-turn movement (based on the previously mentioned example phasing of phases 2 and 6 for the northbound and southbound through movements, respectively).
  - The eastbound and westbound right-turn movements would be overlapped with the northbound and southbound left-turn movements.
  - The southbound left-turn movement would be set to a lagging left-turn phase so that the northbound and southbound left-turn movements would not need to have a green signal indication simultaneously.
  - The Recall Mode for the northbound and southbound left-turn movements would be set to 'Max'.
  - Eastbound and westbound phases (phases 8 and 4, respectively) would be required to be included to meet the criteria for signal timings in HCS 2010 Streets. This would include eastbound and westbound through movements with zero volume. These phases would have a green signal indication simultaneously for 1 second (the minimum time allowed for a phase). This effectively serves as the Red time for the previous split that serves southbound traffic. This 1 second phase for the eastbound and westbound approaches is labeled as "Dummy" All Red Phase in **Figure 2**. To counter the additional 1 second of green time given to the eastbound and westbound right-turn movements, each of these movements would be given an additional 0.5

seconds of "Start-Up Lost Time". Each of these right-turn movements would experience the extra 0.5 seconds of "Start-Up Lost Time" during the "Dummy" All Red Phase and during their normal phase of operation (Phase 1 or 5), totaling 1 second of additional "Start-Up Lost Time" over the course of 1 signal cycle for the eastbound and westbound right-turn movements.

- The Demand for the northbound and southbound left-turn movements would be set to '1' in order for phases 1 and 5 to be given a green signal indication (otherwise, all of the time would be given to the phase where northbound and southbound traffic travel through the intersection simultaneously).

Figure 2. Sample HCS 2010 Streets Phasing for the Westbound Ramp Terminal Intersection

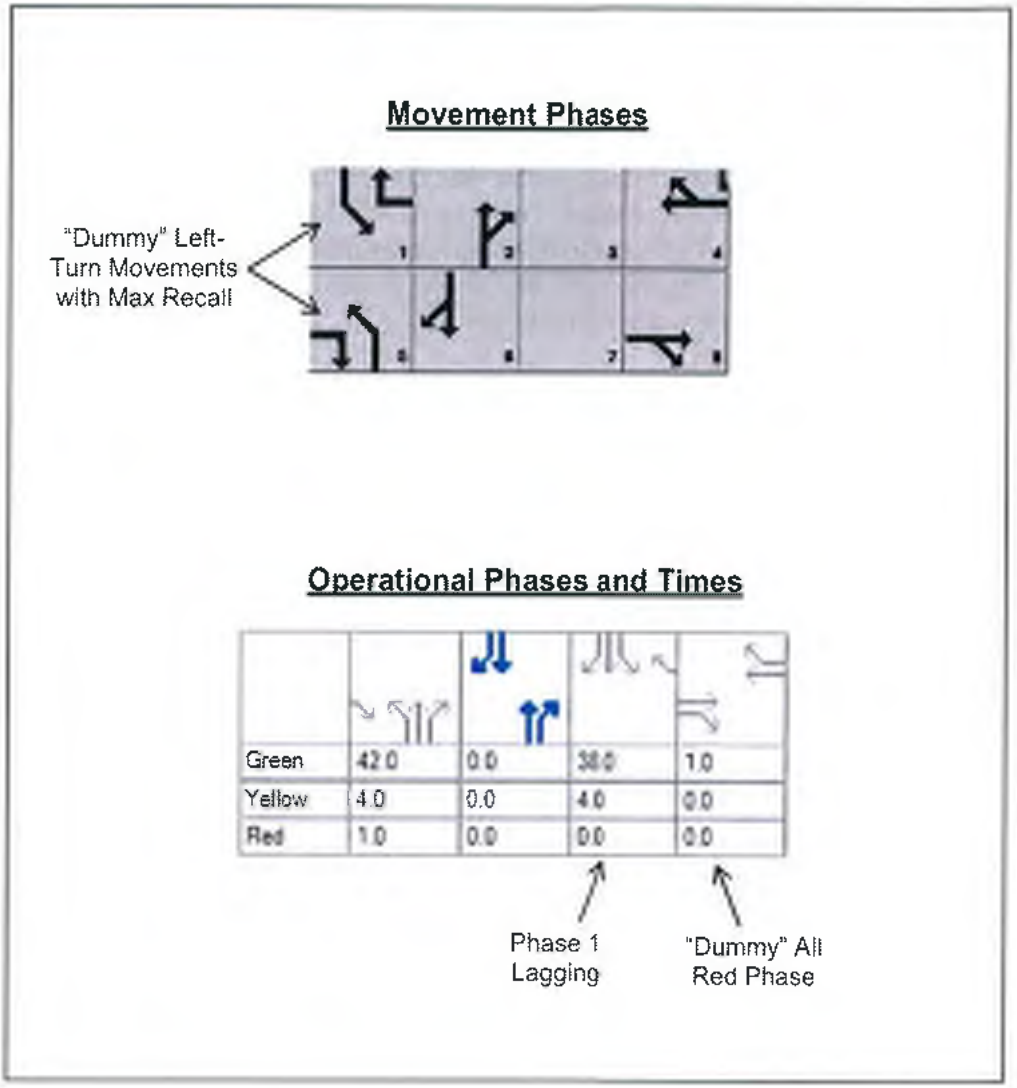

- The following coding elements would also be included in HCS 2010 Streets to mimic the movements of the DDI.
  - The Arrival Type for the eastbound and westbound right-turn movements would be '3', representing random arrivals from the freeway. The Arrival Type for the

northbound and southbound approaches would be '4', representing coordination of signals. However, the arrival patterns of the northbound and southbound movements would be dictated by the signal timings at upstream intersections and the coded Arrival Type for the northbound and southbound approaches would not have any impact on the operations at these intersections.

- Phase 5 would operate with 4 seconds of yellow and 1 second of all red.
- Phase 1 would operate with 4 seconds of yellow and 0 seconds of all red (the all red time would be effectively given by the "Dummy" All Red Phase shown in **Figure 2**).
- The Phase Split time for the northbound left-turn movement (phases 5) would be set to the optimum phase split time for the northbound movement. The Phase Split time for the southbound left-turn movement (phases 5) would be set to the optimum phase split time for the northbound movement minus 1 second (to account for the 1 second "Dummy" All Red Phase). The combined split times for the northbound left-turn movement (phase 5), southbound left-turn movement (phase 1) and eastbound/westbound movements (phases 8/4) would equal the cycle length of the signal, leaving no remaining time for the overlapping phase where northbound and southbound through traffic would travel through the intersection simultaneously.
- The speed limit would be set to 25 mph to account for lower speeds through the crossover and channelized turn movements. The exception to this would be for the southbound approach that arrives from outside of the DDI and would be set to the speed limit of the Arterial Street.

As mentioned previously, the modified standard four-leg configuration would have split-phase operations at the ramp terminal intersections for northbound and southbound traffic and allow for coordination of the ramp terminal intersections with signals north and south of the interchange. The signal offset values at the ramp terminals would be based on the turn patterns at each intersection to maximize platooning of traffic through the two signals. Signal offsets at intersections adjacent to the ramp terminals would be based on the offsets established at the ramp terminal intersections.

Memo

Date: Wednesday, November 04, 2015

Project:

To: File

From: Rob Frazier, P.E.
Jon Markt, EIT

Subject: **RE: Crash Prediction Analysis Procedures for Diverging Diamond Interchange (DDI), Single-Point Urban Interchange (SPUI), and Two-Lane Loop Ramp**

Introduction

This document presents proposed methodologies for performing crash prediction for a Diverging Diamond Interchange (DDI), a Single-Point Urban Interchange (SPUI), and a two-lane loop ramp. The American Association of State Highway and Transportation Officials (AASHTO) Highway Safety Manual (HSM) provides a standard practice for safety analysis over a project's full life-cycle. The HSM can be faithfully implemented by a variety of tools including the Federal Highway Administration's (FHWA) Enhanced Interchange Safety Analysis Tool (ISATe). However, neither the HSM nor ISATe currently address the DDI, SPUI, or two-lane loop ramp configurations. In response to these shortcomings, a synthesis of recent and on-going research yielded these proposed methodologies to address crash prediction for the DDI, SPUI, and two-lane loop ramp.

Crash Prediction

Crash prediction is a method of assessing safety by applying a combination of Safety Performance Functions (SPFs) and Crash Modification Factors (CMFs) to a roadway facility to predict the number of crashes that are statistically likely to occur in an average year. Crash prediction relies on roadway and roadside geometry, traffic volumes, traffic control, and other safety related factors to forecast crash frequency. Crash prediction can be performed at the site level or at the project level. Site level crash prediction involves the use of SPFs or CMFs to predict crash frequency for an individual roadway segment or intersection. Project level crash prediction involves the use of a CMF to estimate the change in crash frequency for a group of sites that make up the project area. For example, consider the conversion of an at-grade intersection to a grade-separated interchange. The site level analysis would involve calculating crash frequency for the existing intersection and adjacent roadway segments and the calculation of crash frequency for the proposed roadway segments, ramps, and ramp terminal intersections related to the interchange. For a project level analysis of the same example, a single project level CMF would be used to estimate predicted crash frequency at the interchange, based on the existing crash frequency at the intersection.

In general, a project level assessment is more simple and easier to implement. Site level analyses provide greater detail and flexibility in both the analysis and presentation of the results.

The proposed methodology applies site level analysis where possible, using project level analysis only when necessary.

Diverging Diamond Interchange (DDI)

DDIs have only been in operation in North America since 2009. Considering that HSM methods rely on observed crash data for the development of SPFs and CMFs, the newness of the DDI has been a major factor in its absence from the HSM and consequently ISATe. Recently however, researchers have completed several in-depth safety evaluations of DDIs in Missouri. As an early adopter of DDIs, Missouri provides a good source for DDI crash data. The research has addressed both project level and site level analyses. Based on these studies, the proposed methodology is as follows:

1. Develop crash predictions for the freeway mainline for the No-Build and Build (DDI) conditions
2. Develop crash predictions for theoretical traditional diamond interchanges for the locations of the proposed DDI interchanges (predicted crashes for ramps and ramp terminals).
3. Develop site level crash predictions for the ramp and ramp terminals for the proposed DDI designs.
    a. Ramps – The ramp crash predictions will be based on the ramp geometry and will only be adjusted if specifically indicated by the research.
    b. Ramp Terminal Intersections – The ramp terminal crash predictions will be developed by applying CMFs from the research to the diamond ramp terminal predictions. Preliminary CMFs are:
        i. $CMF_{Fatal\&Injury} = 0.63$
        ii. $CMF_{PropertyDamageOnly} = 0.51$
4. As a check on the site level predictions, a project level analysis will also be prepared. This will use the project level research CMFs to modify the entire diamond interchange crash prediction to estimate the entire DDI interchange crash frequency. This value will be compared with the site level results before finalizing the crash predictions.

Crash type frequency will not be quantitatively predicted for the DDI ramp terminal intersections. A qualitative assessment will be provided for the trends in crash type associated with the DDI.

Single-Point Urban Interchange (SPUI)

The SPUI has a much longer history compared to the DDI, but a similarly limited research base pertaining to predictive safety. Research has begun on NCHRP Project 17-68 to develop SPFs and CMFs directly applicable to SPUIs, but the project is still on-going. The NCHRP Project 17-68 will have a significant crash data set (~100 intersections) to develop SPFs and CMFs. Investigations into other research concerning SPUIs and crash prediction have not produced any additional studies. However, some data concerning SPUIs has been made available by SDDOT (before and after study data for conversion from a traditional diamond interchange to a SPUI). Based on these studies, the proposed methodology is as follows:

1. Should NCHRP Project 17-68 results become available prior to March 2016

a. Analyze the SPUI ramp terminal intersection based on methods / equations from NCHRP Project 17-68.

2. Should NCHRP Project 17-68 results not be available
    a. Perform crash prediction for a traditional diamond interchange with similar freeway mainline segment, freeway ramp segment, and ramp terminal interchange characteristics as the proposed SPUI.
    b. Combine site predicted crashes for the traditional diamond interchange to develop a project level estimate of crashes.
    c. Multiply the project level estimate of crashes for the traditional diamond by a project level CMF based on the available SDDOT data. The preliminary CMF is 0.63 for conversion of a traditional diamond interchange to a SPUI.

Should NCHRP Project 17-68 results not be available, crash type frequency will not be quantitatively predicted for the SPUI ramp terminal intersection. A qualitative assessment will be provided for the trends in crash type associated with the SPUI. Should NCHRP Project 17-68 results be available, recommendations from that project will be utilized to determine how to provide crash type frequency information.

Two-Lane Loop Ramp

Single-lane loop ramp safety is addressed at both the ramp segment and ramp terminal intersection level by the Highway Safety Manual, and most loop ramps are single-lane loop ramps. The previous reasoning may explain why developing SPFs and / or CMFs for two-lane loop ramps has not been a primary research direction based on our literature review. However, NCHRP Project 03-105 is on-going research and will attempt to improved roadway design guidance for single-lane and two-lane loop ramps. The project research plan was to collect safety data for single-lane and two-lane loop ramps, there may be an opportunity to use results of this project to address crash prediction for two-lane loop ramps. Based on this review of available research, the proposed methodology is as follows:

1. Should NCHRP Project 03-105 results become available prior to March 2016
    a. Analyze the two-lane loop ramp terminal intersection based on data, methods, equations, and findings from NCHRP Project 03-105.
2. Should NCHRP Project 03-105 results not be available
    a. Perform crash prediction for a two-lane ramp segment with tight curvature.
    b. Confirm that the crash prediction for a two-lane ramp segment with tight curvature produces reasonable crash prediction results. This will involve comparing the predicted number of single-vehicle and multi-vehicle crashes for the tight curvature ramp with a standard one-lane loop ramp. If comparison crash data is available for two-lane loop ramps that will also be considered.

APPENDIX B1. TRAFFIC CAPACITY ANALYSIS METHODOLOGIES

Traffic operational analysis involves the development of input parameters, the use of traffic flow models to determine measures of effectiveness based on the inputs, and the evaluation of those measures of effectiveness. The input development requires information on levels of traffic, vehicle classification, facility geometry, signal timing data, and speed data. Many of these input parameters were identified and collected as described as part of the data collection efforts, while some required assumptions or processed data to develop the best input parameters for traffic analysis.

LEVEL OF SERVICE

After identifying the proper input data, level of service (LOS) analyses for the existing conditions were performed for the basic freeway segments, weave segments, freeway merge and diverge segments, and key intersections (including ramp terminal intersections) using procedures from the ***Highway Capacity Manual*** (***HCM***). Highway Capacity Software 2010 (HCS 2010) version 6.50, a computerized analytical tool based on the ***HCM***, was utilized for the freeway segment and intersection operational analysis. HCS 2010 is representative of macroscopic models that describe traffic flow in the aggregate and is based on deterministic relationships developed through past research on traffic flow.

The following sections further describe the methodologies used and the types of HCS analyses applied.

Basic Freeway Segment Level of Service

LOS analyses for the basic freeway elements were performed following Chapter 11 procedures (Basic Freeway Segments) of the ***HCM***. For freeway segments, LOS is defined in terms of traffic stream density, as shown in ***TABLE 1***. By definition, basic freeway segments are segments of the freeway that are outside of the influence area of ramps or weaving sections. Per ***HCM*** definition, freeway ramps have an influence distance of 1,500 feet upstream or downstream of ramp junctions. The influence distance of a weaving section between ramp junctions varies based on geometry and volume. Only freeway segments outside of the influence area of ramp junctions and weaving sections were evaluated as basic freeway segments, unless noted otherwise.

Table 1. Freeway LOS Definitions

LOS	Density Range (pc/mi/ln*)
A	0-11
B	>11-18
C	>18-26
D	>26-35
E	>35-45
F	Demand exceeds capacity >45

* *Passenger cars per mile per lane*

Weave Segment Level of Service

Weave segments were analyzed based on Chapter 12 procedures (Freeway Weaving Segments) of the ***HCM***. Weaving is defined as the crossing of two or more traffic streams traveling in the same direction. Weaving areas generally occur when a merge area is closely followed by a diverge area, or when an entrance ramp is closely followed by an exit ramp connected by an auxiliary lane. LOS for weaving operations is related to the average density of all vehicles in the section. For locations with weaving traffic, ramp-to-ramp flows were estimated based on the Sioux Falls travel demand model. Based on the assumed ramp-to-ramp flows, ramp-to-freeway, freeway-to-ramp, and freeway-to-freeway flows could be calculated using flow conservation from the balanced sub-area volume set. The density range for 'Freeway Weaving Segments' shown in ***TABLE 2*** was used when evaluating weaving segments bounded by entry/exit ramps.

Table 2. Weaving LOS Definitions

LOS	Density Range (pc/mi/ln*)	
	Freeway Weaving Segments	Weaving Segments on Multilane Highways or C-D Roadways
A	≤10	≤12
B	>10-20	>12-24
C	>20-28	>24-32
D	>28-35	>32-36
E	>35	>36
F	Demand Exceeds Capacity	Demand Exceeds Capacity

** Passenger cars per mile per lane*

Freeway Merge and Diverge Segment Level of Service

Freeway merge and diverge segments were analyzed based on ***HCM*** Chapter 13 procedures (Freeway Merge and Diverge Segments). Acceleration and deceleration length of a freeway merge or diverge segment is measured from the point at which the edges of the ramp and freeway lanes converge (gore) to the end of the taper segment connecting the ramp to the freeway. By definition, the LOS for a typical freeway merge or diverge segment is based on the average density of vehicles in the influence area (defined by the ***HCM*** as 1,500 feet upstream or downstream) of the ramp, as described in ***TABLE 3.***

Table 3. Freeway Merge and Diverge LOS Definitions

LOS	Density Range (pc/mi/ln*)
A	≤10
B	>10-20
C	>20-28
D	>28-35
E	>35
F	Demand Exceeds Capacity

** Passenger cars per mile per lane*

For this study, LOS C was determined to be the critical threshold for mainline and ramp locations.

Signalized Intersection Level of Service

Key signalized intersections were analyzed based on ***HCM*** Chapter 18 procedures (Signalized Intersections). LOS for signalized intersections is evaluated based on control delay per vehicle (in seconds per vehicle), shown in ***TABLE 4***. Control delay is the portion of the total delay attributed to traffic signal operation and includes initial deceleration delay, queue move-up time, stopped delay and final acceleration delay.

Table 4. Signalized Intersection LOS Definitions

Control Delay per Vehicle (s/veh*)	LOS by Volume-to-Capacity Ratio	
	v/c ≤ 1.0	v/c > 1.0
≤10	A	F
>10-20	B	F
>20-35	C	F
>35-55	D	F
>55-80	E	F
>80	F	F

** Seconds per vehicle*

Unsignalized Intersection Level of Service

Key unsignalized intersections were analyzed based on ***HCM*** Chapters 19 procedures (Two-Way Stop-Controlled Intersections). LOS for unsignalized intersections is evaluated based on control delay per vehicle (in seconds per vehicle), shown in ***TABLE 5***. For two-way stop-controlled intersections with stop control on the side-street, the LOS is measured separately for each individual movement. Results of the two-way stop controlled intersection analysis were reported as the worst-case stop-controlled approach.

Table 5. Unsignalized Intersection LOS Definitions

Control Delay per Vehicle (s/veh*)	LOS by Volume-to-Capacity Ratio	
	v/c ≤ 1.0	v/c > 1.0
≤10	A	F
>10-15	B	F
>15-25	C	F
>25-35	D	F
>35-50	E	F
>50	F	F

** Seconds per vehicle*

LOS 'C' is typically preferred for the average intersection operations during the peak period traffic conditions of a project horizon year (beyond 20 years from existing), though LOS 'D' has generally been considered acceptable. For this study, LOS 'D' was used as the worst allowable LOS for future year intersection operations when identifying proposed improvements.

APPENDIX B2 -

EXISTING HCS 2010 REPORTS

HCS+: Unsignalized Intersections Release 5.6

TWO-WAY STOP CONTROL SUMMARY

Analyst: JKM
Agency/Co.: HDR
Date Performed: 11/13/2013
Analysis Time Period: AM Peak
Intersection: E Rice St & Bahnson Ave
Jurisdiction: Sioux Falls, SD
Units: U. S. Customary
Analysis Year: Existing (2013)
Project ID: I-229 MIS
East/West Street: E Rice St
North/South Street: Bahnson Ave
Intersection Orientation: EW Study period (hrs): 0.25

Vehicle Volumes and Adjustments

Major Street: Approach	Eastbound			Westbound		
Movement	1	2	3	4	5	6
	L	T	R	L	T	R
Volume	31	188	19	6	678	6
Peak-Hour Factor, PHF	0.80	0.80	0.80	0.80	0.80	0.80
Hourly Flow Rate, HFR	38	234	23	7	847	7
Percent Heavy Vehicles	6	--	--	6	--	--
Median Type/Storage	Undivided /					
RT Channelized?		No			No	
Lanes	1	1	1	1	1	1
Configuration	L	T	R	L	T	R
Upstream Signal?		No			No	

Minor Street: Approach	Northbound			Southbound		
Movement	7	8	9	10	11	12
	L	T	R	L	T	R
Volume	25	6	6	6	6	31
Peak Hour Factor, PHF	0.80	0.80	0.80	0.80	0.80	0.80
Hourly Flow Rate, HFR	31	7	7	7	7	38
Percent Heavy Vehicles	2	2	2	2	2	2
Percent Grade (%)		0			0	
Flared Approach: Exists?/Storage		No /			No /	
Lanes	0	1	0	0	1	0
Configuration		LTR			LTR	

Delay, Queue Length, and Level of Service

Approach	EB	WB	Northbound			Southbound		
Movement	1	4	7	8	9	10	11	12
Lane Config	L	L		LTR			LTR	
v (vph)	38	7		45			52	
C(m) (vph)	769	1285		163			273	
v/c	0.05	0.01		0.28			0.19	
95% queue length	0.16	0.02		1.07			0.69	
Control Delay	9.9	7.8		35.3			21.3	
LOS	A	A		E			C	
Approach Delay				35.3			21.3	
Approach LOS				E			C	

HCS+: Unsignalized Intersections Release 5.6

Phone: Fax:
E-Mail:

TWO-WAY STOP CONTROL(TWSC) ANALYSIS

Analyst: JKM
Agency/Co.: HDR
Date Performed: 11/13/2013
Analysis Time Period: AM Peak
Intersection: E Rice St & Bahnson Ave
Jurisdiction: Sioux Falls, SD
Units: U. S. Customary
Analysis Year: Existing (2013)
Project ID: I-229 MIS
East/West Street: E Rice St
North/South Street: Bahnson Ave
Intersection Orientation: EW Study period (hrs): 0.25

Vehicle Volumes and Adjustments

Major Street Movements	1	2	3	4	5	6
	L	T	R	L	T	R
Volume	31	188	19	6	678	6
Peak-Hour Factor, PHF	0.80	0.80	0.80	0.80	0.80	0.80
Peak-15 Minute Volume	10	59	6	2	212	2
Hourly Flow Rate, HFR	38	234	23	7	847	7
Percent Heavy Vehicles	6	--	--	6	--	--
Median Type/Storage	Undivided /					
RT Channelized?			No			No
Lanes	1	1	1	1	1	1
Configuration	L	T	R	L	T	R
Upstream Signal?		No			No	

Minor Street Movements	7	8	9	10	11	12
	L	T	R	L	T	R
Volume	25	6	6	6	6	31
Peak Hour Factor, PHF	0.80	0.80	0.80	0.80	0.80	0.80
Peak-15 Minute Volume	8	2	2	2	2	10
Hourly Flow Rate, HFR	31	7	7	7	7	38
Percent Heavy Vehicles	2	2	2	2	2	2
Percent Grade (%)		0			0	
Flared Approach: Exists?/Storage			No /			No /
RT Channelized?						
Lanes	0	1	0	0	1	0
Configuration		LTR			LTR	

Pedestrian Volumes and Adjustments

Movements	13	14	15	16
Flow (ped/hr)	0	0	0	0

Lane Width (ft)	12.0	12.0	12.0	12.0
Walking Speed (ft/sec)	4.0	4.0	4.0	4.0
Percent Blockage	0	0	0	0

Upstream Signal Data

	Prog. Flow vph	Sat Flow vph	Arrival Type	Green Time sec	Cycle Length sec	Prog. Speed mph	Distance to Signal feet
S2 Left-Turn							
Through							
S5 Left-Turn							
Through							

Worksheet 3-Data for Computing Effect of Delay to Major Street Vehicles

	Movement 2	Movement 5
Shared ln volume, major th vehicles:		
Shared ln volume, major rt vehicles:		
Sat flow rate, major th vehicles:		
Sat flow rate, major rt vehicles:		
Number of major street through lanes:		

Worksheet 4-Critical Gap and Follow-up Time Calculation

Critical Gap Calculation

Movement	1 L	4 L	7 L	8 T	9 R	10 L	11 T	12 R
t(c,base)	4.1	4.1	7.1	6.5	6.2	7.1	6.5	6.2
t(c,hv)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
P(hv)	6	6	2	2	2	2	2	2
t(c,g)			0.20	0.20	0.10	0.20	0.20	0.10
Percent Grade			0.00	0.00	0.00	0.00	0.00	0.00
t(3,lt)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
t(c,T): 1-stage	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2-stage	0.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
t(c) 1-stage	4.2	4.2	7.1	6.5	6.2	7.1	6.5	6.2
2-stage								

Follow-Up Time Calculations

Movement	1 L	4 L	7 L	8 T	9 R	10 L	11 T	12 R
t(f,base)	2.20	2.20	3.50	4.00	3.30	3.50	4.00	3.30
t(f,HV)	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
P(HV)	6	6	2	2	2	2	2	2
t(f)	2.3	2.3	3.5	4.0	3.3	3.5	4.0	3.3

Worksheet 5-Effect of Upstream Signals

Computation 1-Queue Clearance Time at Upstream Signal

	Movement 2		Movement 5	
	V(t)	V(l,prot)	V(t)	V(l,prot)
V prog				

Total Saturation Flow Rate, s (vph)	
Arrival Type	
Effective Green, g (sec)	
Cycle Length, C (sec)	
Rp (from Exhibit 16-11)	
Proportion vehicles arriving on green P	
g(q1)	
g(q2)	
g(q)	

Computation 2-Proportion of TWSC Intersection Time blocked	Movement 2		Movement 5	
	V(t)	V(l,prot)	V(t)	V(l,prot)
alpha				
beta				
Travel time, t(a) (sec)				
Smoothing Factor, F				
Proportion of conflicting flow, f				
Max platooned flow, V(c,max)				
Min platooned flow, V(c,min)				
Duration of blocked period, t(p)				
Proportion time blocked, p	0.000		0.000	

Computation 3-Platoon Event Periods	Result
p(2)	0.000
p(5)	0.000
p(dom)	
p(subo)	
Constrained or unconstrained?	

Proportion unblocked for minor movements, p(x)	(1) Single-stage Process	(2) Two-Stage Process Stage I	(3) Stage II
p(1)			
p(4)			
p(7)			
p(8)			
p(9)			
p(10)			
p(11)			
p(12)			

Computation 4 and 5 Single-Stage Process								
Movement	1 L	4 L	7 L	8 T	9 R	10 L	11 T	12 R
V c,x	854	257	1197	1178	234	1189	1194	847
s								
Px								
V c,u,x								
C r,x								
C plat,x								

Two-Stage Process			
7	8	10	11

	Stage1	Stage2	Stage1	Stage2	Stage1	Stage2	Stage1	Stage2
V(c,x)								
s	1500		1500		1500		1500	
P(x)								
V(c,u,x)								
C(r,x)								
C(plat,x)								

Worksheet 6-Impedance and Capacity Equations

Step 1: RT from Minor St.	9	12
Conflicting Flows	234	847
Potential Capacity	805	362
Pedestrian Impedance Factor	1.00	1.00
Movement Capacity	805	362
Probability of Queue free St.	0.99	0.90
Step 2: LT from Major St.	**4**	**1**
Conflicting Flows	257	854
Potential Capacity	1285	769
Pedestrian Impedance Factor	1.00	1.00
Movement Capacity	1285	769
Probability of Queue free St.	0.99	0.95
Maj L-Shared Prob Q free St.		
Step 3: TH from Minor St.	**8**	**11**
Conflicting Flows	1178	1194
Potential Capacity	191	187
Pedestrian Impedance Factor	1.00	1.00
Cap. Adj. factor due to Impeding mvmnt	0.95	0.95
Movement Capacity	181	177
Probability of Queue free St.	0.96	0.96
Step 4: LT from Minor St.	**7**	**10**
Conflicting Flows	1197	1189
Potential Capacity	163	165
Pedestrian Impedance Factor	1.00	1.00
Maj. L, Min T Impedance factor	0.91	0.91
Maj. L, Min T Adj. Imp Factor.	0.93	0.93
Cap. Adj. factor due to Impeding mvmnt	0.83	0.92
Movement Capacity	136	152

Worksheet 7-Computation of the Effect of Two-stage Gap Acceptance

Step 3: TH from Minor St.	8	11
Part 1 - First Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Probability of Queue free St.		

Part 2 - Second Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Part 3 - Single Stage		
Conflicting Flows	1178	1194
Potential Capacity	191	187
Pedestrian Impedance Factor	1.00	1.00
Cap. Adj. factor due to Impeding mvmnt	0.95	0.95
Movement Capacity	181	177
Result for 2 stage process:		
a		
y		
C t	181	177
Probability of Queue free St.	0.96	0.96
Step 4: LT from Minor St.	7	10
Part 1 - First Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Part 2 - Second Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Part 3 - Single Stage		
Conflicting Flows	1197	1189
Potential Capacity	163	165
Pedestrian Impedance Factor	1.00	1.00
Maj. L, Min T Impedance factor	0.91	0.91
Maj. L, Min T Adj. Imp Factor.	0.93	0.93
Cap. Adj. factor due to Impeding mvmnt	0.83	0.92
Movement Capacity	136	152
Results for Two-stage process:		
a		
y		
C t	136	152

Worksheet 8-Shared Lane Calculations

Movement	7	8	9	10	11	12
	L	T	R	L	T	R
Volume (vph)	31	7	7	7	7	38
Movement Capacity (vph)	136	181	805	152	177	362
Shared Lane Capacity (vph)		163			273	

Worksheet 9-Computation of Effect of Flared Minor Street Approaches

Movement	7 L	8 T	9 R	10 L	11 T	12 R
C sep	136	181	805	152	177	362
Volume	31	7	7	7	7	38
Delay						
Q sep						
Q sep +1						
round (Qsep +1)						
n max						
C sh		163			273	
SUM C sep						
n						
C act						

Worksheet 10-Delay, Queue Length, and Level of Service

Movement	1	4	7	8	9	10	11	12
Lane Config	L	L		LTR			LTR	
v (vph)	38	7		45			52	
C(m) (vph)	769	1285		163			273	
v/c	0.05	0.01		0.28			0.19	
95% queue length	0.16	0.02		1.07			0.69	
Control Delay	9.9	7.8		35.3			21.3	
LOS	A	A		E			C	
Approach Delay				35.3			21.3	
Approach LOS				E			C	

Worksheet 11-Shared Major LT Impedance and Delay

	Movement 2	Movement 5
p(oj)	0.95	0.99
v(il), Volume for stream 2 or 5		
v(i2), Volume for stream 3 or 6		
s(il), Saturation flow rate for stream 2 or 5		
s(i2), Saturation flow rate for stream 3 or 6		
P*(oj)		
d(M,LT), Delay for stream 1 or 4	9.9	7.8
N, Number of major street through lanes		
d(rank,1) Delay for stream 2 or 5		

HCS+: Unsignalized Intersections Release 5.6

TWO-WAY STOP CONTROL SUMMARY

Analyst: JKM
Agency/Co.: HDR
Date Performed: 11/13/2013
Analysis Time Period: PM Peak
Intersection: E Rice St & Bahnson Ave
Jurisdiction: Sioux Falls, SD
Units: U. S. Customary
Analysis Year: Existing (2013)
Project ID: I-229 MIS
East/West Street: E Rice St
North/South Street: Bahnson Ave
Intersection Orientation: EW Study period (hrs): 0.25

Vehicle Volumes and Adjustments

Major Street: Approach	Eastbound			Westbound		
Movement	1	2	3	4	5	6
	L	T	R	L	T	R
Volume	5	575	13	4	364	4
Peak-Hour Factor, PHF	0.93	0.93	0.93	0.93	0.93	0.93
Hourly Flow Rate, HFR	5	618	13	4	391	4
Percent Heavy Vehicles	6	--	--	6	--	--
Median Type/Storage	Undivided /					
RT Channelized?		No			No	
Lanes	1	1	1	1	1	1
Configuration	L	T	R	L	T	R
Upstream Signal?		No			No	

Minor Street: Approach	Northbound			Southbound		
Movement	7	8	9	10	11	12
	L	T	R	L	T	R
Volume	27	4	4	4	4	26
Peak Hour Factor, PHF	0.93	0.93	0.93	0.93	0.93	0.93
Hourly Flow Rate, HFR	29	4	4	4	4	27
Percent Heavy Vehicles	2	2	2	2	2	2
Percent Grade (%)		0			0	
Flared Approach: Exists?/Storage		No /			No /	
Lanes	0	1	0	0	1	0
Configuration		LTR			LTR	

Delay, Queue Length, and Level of Service

Approach	EB	WB	Northbound			Southbound		
Movement	1	4	7	8	9	10	11	12
Lane Config	L	L		LTR			LTR	
v (vph)	5	4		37			35	
C(m) (vph)	1142	933		212			447	
v/c	0.00	0.00		0.17			0.08	
95% queue length	0.01	0.01		0.62			0.25	
Control Delay	8.2	8.9		25.5			13.7	
LOS	A	A		D			B	
Approach Delay				25.5			13.7	
Approach LOS				D			B	

HCS+: Unsignalized Intersections Release 5.6

Phone: Fax:
E-Mail:

TWO-WAY STOP CONTROL(TWSC) ANALYSIS

Analyst: JKM
Agency/Co.: HDR
Date Performed: 11/13/2013
Analysis Time Period: PM Peak
Intersection: E Rice St & Bahnson Ave
Jurisdiction: Sioux Falls, SD
Units: U. S. Customary
Analysis Year: Existing (2013)
Project ID: I-229 MIS
East/West Street: E Rice St
North/South Street: Bahnson Ave
Intersection Orientation: EW Study period (hrs): 0.25

Vehicle Volumes and Adjustments

Major Street Movements	1	2	3	4	5	6
	L	T	R	L	T	R
Volume	5	575	13	4	364	4
Peak-Hour Factor, PHF	0.93	0.93	0.93	0.93	0.93	0.93
Peak-15 Minute Volume	1	155	3	1	98	1
Hourly Flow Rate, HFR	5	618	13	4	391	4
Percent Heavy Vehicles	6	--	--	6	--	--
Median Type/Storage	Undivided /					
RT Channelized?			No			No
Lanes	1	1	1	1	1	1
Configuration	L	T	R	L	T	R
Upstream Signal?		No			No	

Minor Street Movements	7	8	9	10	11	12
	L	T	R	L	T	R
Volume	27	4	4	4	4	26
Peak Hour Factor, PHF	0.93	0.93	0.93	0.93	0.93	0.93
Peak-15 Minute Volume	7	1	1	1	1	7
Hourly Flow Rate, HFR	29	4	4	4	4	27
Percent Heavy Vehicles	2	2	2	2	2	2
Percent Grade (%)		0			0	
Flared Approach: Exists?/Storage		No /			No /	
RT Channelized?						
Lanes	0	1	0	0	1	0
Configuration		LTR			LTR	

Pedestrian Volumes and Adjustments

Movements	13	14	15	16
Flow (ped/hr)	0	0	0	0

Lane Width (ft)	12.0	12.0	12.0	12.0
Walking Speed (ft/sec)	4.0	4.0	4.0	4.0
Percent Blockage	0	0	0	0

Upstream Signal Data

	Prog. Flow vph	Sat Flow vph	Arrival Type	Green Time sec	Cycle Length sec	Prog. Speed mph	Distance to Signal feet
S2 Left-Turn							
Through							
S5 Left-Turn							
Through							

Worksheet 3-Data for Computing Effect of Delay to Major Street Vehicles

	Movement 2	Movement 5
Shared ln volume, major th vehicles:		
Shared ln volume, major rt vehicles:		
Sat flow rate, major th vehicles:		
Sat flow rate, major rt vehicles:		
Number of major street through lanes:		

Worksheet 4-Critical Gap and Follow-up Time Calculation

Critical Gap Calculation

Movement	1 L	4 L	7 L	8 T	9 R	10 L	11 T	12 R
t(c,base)	4.1	4.1	7.1	6.5	6.2	7.1	6.5	6.2
t(c,hv)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
P(hv)	6	6	2	2	2	2	2	2
t(c,g)			0.20	0.20	0.10	0.20	0.20	0.10
Percent Grade			0.00	0.00	0.00	0.00	0.00	0.00
t(3,lt)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
t(c,T): 1-stage	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2-stage	0.00	0.00	1.00	1.00	0.00	1.00	1.00	0.00
t(c) 1-stage	4.2	4.2	7.1	6.5	6.2	7.1	6.5	6.2
2-stage								

Follow-Up Time Calculations

Movement	1 L	4 L	7 L	8 T	9 R	10 L	11 T	12 R
t(f,base)	2.20	2.20	3.50	4.00	3.30	3.50	4.00	3.30
t(f,HV)	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
P(HV)	6	6	2	2	2	2	2	2
t(f)	2.3	2.3	3.5	4.0	3.3	3.5	4.0	3.3

Worksheet 5-Effect of Upstream Signals

Computation 1-Queue Clearance Time at Upstream Signal

	Movement 2		Movement 5	
	V(t)	V(l,prot)	V(t)	V(l,prot)
V prog				

Total Saturation Flow Rate, s (vph)	
Arrival Type	
Effective Green, g (sec)	
Cycle Length, C (sec)	
Rp (from Exhibit 16-11)	
Proportion vehicles arriving on green P	
g(q1)	
g(q2)	
g(q)	

Computation 2-Proportion of TWSC Intersection Time blocked	Movement 2		Movement 5	
	V(t)	V(l,prot)	V(t)	V(l,prot)
alpha				
beta				
Travel time, t(a) (sec)				
Smoothing Factor, F				
Proportion of conflicting flow, f				
Max platooned flow, V(c,max)				
Min platooned flow, V(c,min)				
Duration of blocked period, t(p)				
Proportion time blocked, p	0.000		0.000	

Computation 3-Platoon Event Periods	Result
p(2)	0.000
p(5)	0.000
p(dom)	
p(subo)	
Constrained or unconstrained?	

Proportion unblocked for minor movements, p(x)	(1) Single-stage Process	(2) Two-Stage Process Stage I	(3) Stage II
p(1)			
p(4)			
p(7)			
p(8)			
p(9)			
p(10)			
p(11)			
p(12)			

Computation 4 and 5 Single-Stage Process								
Movement	1 L	4 L	7 L	8 T	9 R	10 L	11 T	12 R
V c,x	395	631	1044	1031	618	1037	1040	391
s								
Px								
V c,u,x								
C r,x								
C plat,x								

Two-Stage Process			
7	8	10	11

	Stage1	Stage2	Stage1	Stage2	Stage1	Stage2	Stage1	Stage2
V(c,x)								
s	1500		1500		1500		1500	
P(x)								
V(c,u,x)								
C(r,x)								
C(plat,x)								

Worksheet 6-Impedance and Capacity Equations

Step 1: RT from Minor St.	9	12
Conflicting Flows	618	391
Potential Capacity	489	658
Pedestrian Impedance Factor	1.00	1.00
Movement Capacity	489	658
Probability of Queue free St.	0.99	0.96
Step 2: LT from Major St.	**4**	**1**
Conflicting Flows	631	395
Potential Capacity	933	1142
Pedestrian Impedance Factor	1.00	1.00
Movement Capacity	933	1142
Probability of Queue free St.	1.00	1.00
Maj L-Shared Prob Q free St.		
Step 3: TH from Minor St.	**8**	**11**
Conflicting Flows	1031	1040
Potential Capacity	233	230
Pedestrian Impedance Factor	1.00	1.00
Cap. Adj. factor due to Impeding mvmnt	0.99	0.99
Movement Capacity	231	228
Probability of Queue free St.	0.98	0.98
Step 4: LT from Minor St.	**7**	**10**
Conflicting Flows	1044	1037
Potential Capacity	207	209
Pedestrian Impedance Factor	1.00	1.00
Maj. L, Min T Impedance factor	0.97	0.97
Maj. L, Min T Adj. Imp Factor.	0.98	0.98
Cap. Adj. factor due to Impeding mvmnt	0.94	0.97
Movement Capacity	195	203

Worksheet 7-Computation of the Effect of Two-stage Gap Acceptance

Step 3: TH from Minor St.	8	11
Part 1 - First Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Probability of Queue free St.		

Part 2 - Second Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Part 3 - Single Stage		
Conflicting Flows	1031	1040
Potential Capacity	233	230
Pedestrian Impedance Factor	1.00	1.00
Cap. Adj. factor due to Impeding mvmnt	0.99	0.99
Movement Capacity	231	228
Result for 2 stage process:		
a		
y		
C t	231	228
Probability of Queue free St.	0.98	0.98
Step 4: LT from Minor St.	7	10
Part 1 - First Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Part 2 - Second Stage		
Conflicting Flows		
Potential Capacity		
Pedestrian Impedance Factor		
Cap. Adj. factor due to Impeding mvmnt		
Movement Capacity		
Part 3 - Single Stage		
Conflicting Flows	1044	1037
Potential Capacity	207	209
Pedestrian Impedance Factor	1.00	1.00
Maj. L, Min T Impedance factor	0.97	0.97
Maj. L, Min T Adj. Imp Factor.	0.98	0.98
Cap. Adj. factor due to Impeding mvmnt	0.94	0.97
Movement Capacity	195	203
Results for Two-stage process:		
a		
y		
C t	195	203

Worksheet 8-Shared Lane Calculations

Movement	7	8	9	10	11	12
	L	T	R	L	T	R
Volume (vph)	29	4	4	4	4	27
Movement Capacity (vph)	195	231	489	203	228	658
Shared Lane Capacity (vph)		212			447	

Worksheet 9-Computation of Effect of Flared Minor Street Approaches

Movement	7	8	9	10	11	12
	L	T	R	L	T	R
C sep	195	231	489	203	228	658
Volume	29	4	4	4	4	27
Delay						
Q sep						
Q sep +1						
round (Qsep +1)						
n max						
C sh		212			447	
SUM C sep						
n						
C act						

Worksheet 10-Delay, Queue Length, and Level of Service


Movement	1	4	7	8	9	10	11	12
Lane Config	L	L		LTR			LTR	
v (vph)	5	4		37			35	
C(m) (vph)	1142	933		212			447	
v/c	0.00	0.00		0.17			0.08	
95% queue length	0.01	0.01		0.62			0.25	
Control Delay	8.2	8.9		25.5			13.7	
LOS	A	A		D			B	
Approach Delay				25.5			13.7	
Approach LOS				D			B	

Worksheet 11-Shared Major LT Impedance and Delay

	Movement 2	Movement 5
p(oj)	1.00	1.00
v(il), Volume for stream 2 or 5		
v(i2), Volume for stream 3 or 6		
s(il), Saturation flow rate for stream 2 or 5		
s(i2), Saturation flow rate for stream 3 or 6		
P*(oj)		
d(M,LT), Delay for stream 1 or 4	8.2	8.9
N, Number of major street through lanes		
d(rank,1) Delay for stream 2 or 5		


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	JKM	Analysis Date	Nov 13, 2013	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.80
Intersection	Rice St & I-229 NB / Clevel	Analysis Year	2013	Analysis Period	1> 7:15
File Name	Existing_Rice_St_AM.xus				
Project Description	Existing AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	38	112	127	44	659	31	233	175	44	82	13	170

Signal Information			
Cycle, s	87.0	Reference Phase	2
Offset, s	0	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On



Green	40.7	4.0	23.3	0.0	0.0	0.0
Yellow	5.0	4.0	4.0	0.0	0.0	0.0
Red	2.0	2.0	2.0	0.0	0.0	0.0

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6		8	7	4
Case Number		7.0		6.0		6.3	1.0	4.0
Phase Duration, s		47.7		47.7		29.3	10.0	39.3
Change Period, ($Y+R_c$), s		7.0		7.0		6.0	6.0	6.0
Max Allow Headway (*MAH*), s		0.0		0.0		4.3	4.1	4.3
Queue Clearance Time (g_s), s						21.3	6.0	6.6
Green Extension Time (g_e), s		0.0		0.0		2.0	0.0	2.8
Phase Call Probability						1.00	0.92	1.00
Max Out Probability						0.22	1.00	0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h		188	93	55	251	605	291	260		103	110	
Adjusted Saturation Flow Rate (*s*), veh/h/ln		582	1390	1099	659	1585	1250	1679		1535	1398	
Queue Service Time (g_s), s		5.1	2.8	4.2	28.6	28.6	19.3	11.7		4.0	4.6	
Cycle Queue Clearance Time (g_c), s		33.4	2.8	37.7	28.6	28.6	19.3	11.7		4.0	4.6	
Green Ratio (*g/C*)		0.47	0.47	0.47	0.47	0.47	0.27	0.27		0.34	0.38	
Capacity (*c*), veh/h		324	650	174	308	741	418	450		290	535	
Volume-to-Capacity Ratio (*X*)		0.579	0.142	0.317	0.816	0.816	0.697	0.577		0.354	0.205	
Available Capacity (c_a), veh/h		324	650	174	308	741	528	598		290	659	
Back of Queue (*Q*), veh/ln (95th percentile)		4.6	1.6	2.4	9.7	17.1	9.9	8.3		2.6	2.5	
Queue Storage Ratio (*RQ*) (95th percentile)		0.11	0.04	0.06	0.25	0.45	1.26	0.21		0.55	0.08	
Uniform Delay (d_1), s/veh		16.7	11.1	38.5	19.9	19.9	30.4	27.6		22.0	18.0	
Incremental Delay (d_2), s/veh		7.2	0.4	4.7	20.7	9.7	2.9	1.2		0.7	0.2	
Initial Queue Delay (d_3), s/veh		0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Control Delay (*d*), s/veh		23.9	11.6	43.3	40.7	29.6	33.3	28.7		22.7	18.2	
Level of Service (LOS)		C	B	D	D	C	C	C		C	B	
Approach Delay, s/veh / LOS	19.8	B		33.5	C		31.1	C		20.4	C	
Intersection Delay, s/veh / LOS	29.4						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.3	B	2.4	B	2.4	B	2.8	C
Bicycle LOS Score / LOS	0.9	A	1.2	A	1.4	A	0.8	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	JKM	Analysis Date	Nov 13, 2013	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 NB / Clevel	Analysis Year	2013	Analysis Period	1> 4:30
File Name	Existing_Rice_St_PM.xus				
Project Description	Existing PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	50	300	456	65	314	38	152	76	59	234	16	126

Signal Information			
Cycle, s	76.0	Reference Phase	2
Offset, s	0	Reference Point	End
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

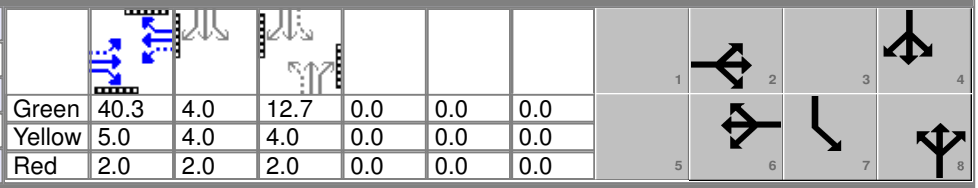

Green	40.3	4.0	12.7	0.0	0.0	0.0
Yellow	5.0	4.0	4.0	0.0	0.0	0.0
Red	2.0	2.0	2.0	0.0	0.0	0.0

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6		8	7	4
Case Number		7.0		6.0		6.3	1.0	4.0
Phase Duration, s		47.3		47.3		18.7	10.0	28.7
Change Period, ($Y+R_c$), s		7.0		7.0		6.0	6.0	6.0
Max Allow Headway (*MAH*), s		0.0		0.0		4.3	4.1	4.3
Queue Clearance Time (g_s), s						11.7	6.0	6.1
Green Extension Time (g_e), s		0.0		0.0		1.0	0.0	1.5
Phase Call Probability						1.00	1.00	1.00
Max Out Probability						0.18	1.00	0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h		376	333	70	127	239	163	126		252	99	
Adjusted Saturation Flow Rate (*s*), veh/h/ln		1563	1421	745	838	1570	1233	1588		1563	1400	
Queue Service Time (g_s), s		0.3	13.6	4.9	6.3	6.4	9.7	5.4		4.0	4.1	
Cycle Queue Clearance Time (g_c), s		11.5	13.6	16.3	6.3	6.4	9.7	5.4		4.0	4.1	
Green Ratio (*g/C*)		0.53	0.53	0.53	0.53	0.53	0.17	0.17		0.25	0.30	
Capacity (*c*), veh/h		884	754	378	445	833	300	265		288	417	
Volume-to-Capacity Ratio (*X*)		0.426	0.442	0.185	0.285	0.287	0.544	0.475		0.873	0.237	
Available Capacity (c_a), veh/h		884	754	378	445	833	419	418		288	552	
Back of Queue (*Q*), veh/ln (95th percentile)		7.7	8.4	1.6	2.2	3.8	5.2	3.8		8.2	2.3	
Queue Storage Ratio (*RQ*) (95th percentile)		0.19	0.21	0.04	0.06	0.10	0.66	0.10		1.72	0.07	
Uniform Delay (d_1), s/veh		13.1	15.8	16.1	9.9	9.9	30.4	28.7		31.0	20.1	
Incremental Delay (d_2), s/veh		1.4	1.7	1.1	1.6	0.9	1.5	1.3		24.1	0.3	
Initial Queue Delay (d_3), s/veh		0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Control Delay (*d*), s/veh		14.5	17.5	17.2	11.5	10.7	32.0	30.0		55.0	20.4	
Level of Service (LOS)		B	B	B	B	B	C	C		E	C	
Approach Delay, s/veh / LOS	15.9	B		12.0	B		31.1	C		45.3	D	
Intersection Delay, s/veh / LOS	23.2						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.3	B	2.3	B	2.5	B	2.9	C
Bicycle LOS Score / LOS	1.7	A	0.8	A	1.0	A	1.1	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	JKM	Analysis Date	Nov 13, 2013	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.80
Intersection	Rice St & I-229 SB	Analysis Year	2013	Analysis Period	1> 7:15
File Name	Existing_Rice_St_AM.xus				
Project Description	Existing AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	69	202			691	371				75		63

Signal Information			
Cycle, s	87.0	Reference Phase	2
Offset, s	75	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

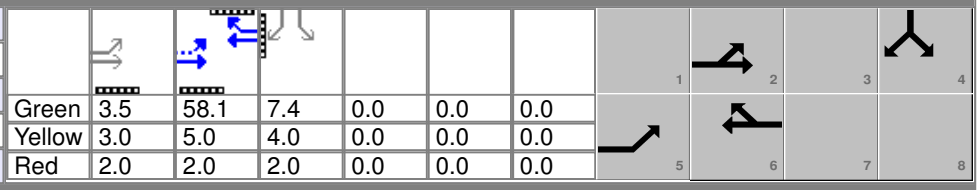

Green	3.5	58.1	7.4	0.0	0.0	0.0						
Yellow	3.0	5.0	4.0	0.0	0.0	0.0						
Red	2.0	2.0	2.0	0.0	0.0	0.0						

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	1.0	4.0		8.3				9.0
Phase Duration, s	8.5	73.6		65.1				13.4
Change Period, ($Y+R_c$), s	5.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.2
Queue Clearance Time (g_s), s	3.4							7.2
Green Extension Time (g_e), s	0.2	0.0		0.0				0.3
Phase Call Probability	0.88							0.98
Max Out Probability	0.00							0.03


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	86	253			699	628				94		79
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1531	1532			1719	1509				1533		1370
Queue Service Time (g_s), s	1.4	1.8			29.5	9.8				5.2		4.9
Cycle Queue Clearance Time (g_c), s	1.4	1.8			29.5	9.8				5.2		4.9
Green Ratio (*g/C*)	0.73	0.77			0.67	0.67				0.09		0.09
Capacity (*c*), veh/h	268	2345			1148	1008				131		117
Volume-to-Capacity Ratio (*X*)	0.322	0.108			0.609	0.624				0.718		0.675
Available Capacity (c_a), veh/h	533	2345			1148	1008				282		252
Back of Queue (*Q*), veh/ln (95th percentile)	1.2	0.7			4.5	3.3				3.8		3.2
Queue Storage Ratio (*RQ*) (95th percentile)	0.26	0.01			0.11	0.08				0.34		0.08
Uniform Delay (d_1), s/veh	10.7	2.6			3.3	2.4				38.8		38.6
Incremental Delay (d_2), s/veh	0.7	0.1			1.4	1.7				7.2		6.6
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	11.4	2.7			4.7	4.1				46.0		45.3
Level of Service (LOS)	B	A			A	A				D		D
Approach Delay, s/veh / LOS	4.9	A		4.4	A		0.0			45.6	D	
Intersection Delay, s/veh / LOS	8.4						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.6	A	2.2	B	2.7	B	2.9	C
Bicycle LOS Score / LOS	0.8	A	1.6	A				F

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	JKM	Analysis Date	Nov 13, 2013	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 SB	Analysis Year	2013	Analysis Period	1> 4:30
File Name	Existing_Rice_St_PM.xus				
Project Description	Existing PM				

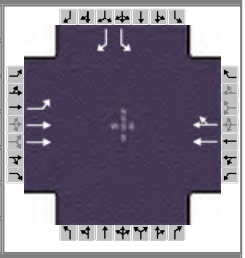

Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	135	616			386	206				190		50

Signal Information			
Cycle, s	76.0	Reference Phase	2
Offset, s	65	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

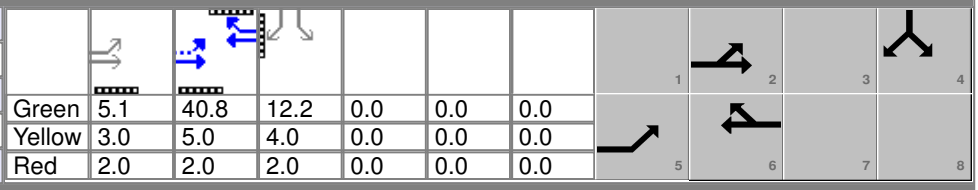

Green	5.1	40.8	12.2	0.0	0.0	0.0		
Yellow	3.0	5.0	4.0	0.0	0.0	0.0		
Red	2.0	2.0	2.0	0.0	0.0	0.0		

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	1.0	4.0		8.3				9.0
Phase Duration, s	10.1	57.8		47.8				18.2
Change Period, ($Y+R_c$), s	5.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.1
Queue Clearance Time (g_s), s	4.9							11.7
Green Extension Time (g_e), s	0.4	0.0		0.0				0.6
Phase Call Probability	0.95							1.00
Max Out Probability	0.00							0.08


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	145	662			335	301				204		54
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1541	1560			1640	1448				1553		1388
Queue Service Time (g_s), s	2.9	6.8			12.6	11.9				9.7		2.6
Cycle Queue Clearance Time (g_c), s	2.9	6.8			12.6	11.9				9.7		2.6
Green Ratio (*g/C*)	0.63	0.67			0.54	0.54				0.16		0.16
Capacity (*c*), veh/h	465	2087			879	776				249		222
Volume-to-Capacity Ratio (*X*)	0.312	0.317			0.381	0.388				0.822		0.242
Available Capacity (c_a), veh/h	825	2087			879	776				409		365
Back of Queue (*Q*), veh/ln (95th percentile)	1.4	3.1			8.4	7.6				6.9		1.5
Queue Storage Ratio (*RQ*) (95th percentile)	0.30	0.02			0.21	0.19				0.60		0.04
Uniform Delay (d_1), s/veh	7.5	5.3			15.7	15.3				30.9		27.9
Incremental Delay (d_2), s/veh	0.3	0.4			1.2	1.4				6.7		0.6
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	7.9	5.6			16.9	16.7				37.5		28.4
Level of Service (LOS)	A	A			B	B				D		C
Approach Delay, s/veh / LOS	6.0	A		16.8	B		0.0			35.6	D	
Intersection Delay, s/veh / LOS	14.5						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.7	A	2.2	B	2.7	B	2.9	C
Bicycle LOS Score / LOS	1.2	A	1.0	A				F

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	JKM	Analysis Date	Nov 13, 2013	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.80
Intersection	Rice St & Wayland Ave	Analysis Year	2013	Analysis Period	1> 7:15
File Name	Existing_Rice_St_AM.xus				
Project Description	Existing AM				

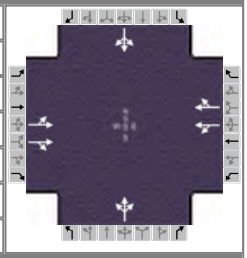


Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	6	245	6	6	741	7	19	6	13	13	6	6

Signal Information			
Cycle, s	44.0	Reference Phase	2
Offset, s	0	Reference Point	End
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On



Green	24.9	1.3	1.8	0.0	0.0	0.0						
Yellow	3.9	3.0	3.0	0.0	0.0	0.0						
Red	1.2	2.5	2.5	0.0	0.0	0.0						

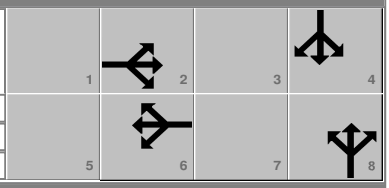

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6		8		4
Case Number		8.0		8.0		12.0		12.0
Phase Duration, s		30.0		30.0		7.3		6.8
Change Period, ($Y+R_c$), s		5.1		5.1		5.5		5.5
Max Allow Headway (*MAH*), s		4.1		4.1		4.3		4.2
Queue Clearance Time (g_s), s		4.1		9.9		3.3		2.8
Green Extension Time (g_e), s		4.9		4.4		0.0		0.0
Phase Call Probability		1.00		1.00		0.44		0.32
Max Out Probability		0.08		0.20		0.09		0.03


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	168		153	494		448		48			31	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1663		1532	1694		1540		1624			1650	
Queue Service Time (g_s), s	0.0		2.1	0.0		7.9		1.3			0.8	
Cycle Queue Clearance Time (g_c), s	2.1		2.1	7.9		7.9		1.3			0.8	
Green Ratio (*g/C*)	0.57		0.57	0.57		0.57		0.04			0.03	
Capacity (*c*), veh/h	1026		866	1041		871		65			48	
Volume-to-Capacity Ratio (*X*)	0.164		0.177	0.475		0.515		0.730			0.656	
Available Capacity (c_a), veh/h	1026		866	1041		871		350			356	
Back of Queue (*Q*), veh/ln (95th percentile)	0.9		0.9	3.4		3.3		1.2			0.9	
Queue Storage Ratio (*RQ*) (95th percentile)	0.03		0.03	0.03		0.02		0.13			0.09	
Uniform Delay (d_1), s/veh	4.6		4.6	5.9		5.9		20.9			21.2	
Incremental Delay (d_2), s/veh	0.3		0.4	1.2		1.7		14.5			14.2	
Initial Queue Delay (d_3), s/veh	0.0		0.0	0.0		0.0		0.0			0.0	
Control Delay (*d*), s/veh	5.0		5.1	7.1		7.6		35.4			35.4	
Level of Service (LOS)	A		A	A		A		D			D	
Approach Delay, s/veh / LOS	5.0	A		7.3	A		35.4	D		35.4	D	
Intersection Delay, s/veh / LOS	8.4						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.0	B	2.0	B	2.7	B	2.7	B
Bicycle LOS Score / LOS	0.8	A	1.3	A	0.6	A	0.5	A

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	JKM	Analysis Date	Nov 13, 2013	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Wayland Ave	Analysis Year	2013	Analysis Period	1> 4:30
File Name	Existing_Rice_St_PM.xus				
Project Description	Existing PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	12	713	26	16	398	22	22	4	5	33	4	16

Signal Information			
Cycle, s	44.4	Reference Phase	2
Offset, s	0	Reference Point	End
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On



							1	2	3	4		
Green	24.9	2.0	1.3	0.0	0.0	0.0	5	6	7	8		
Yellow	3.9	3.0	3.0	0.0	0.0	0.0						
Red	1.2	2.5	2.5	0.0	0.0	0.0						

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6		8		4
Case Number		8.0		8.0		12.0		12.0
Phase Duration, s		30.0		30.0		6.8		7.5
Change Period, ($Y+R_c$), s		5.1		5.1		5.5		5.5
Max Allow Headway (*MAH*), s		4.1		4.1		4.2		4.3
Queue Clearance Time (g_s), s		8.5		5.4		2.9		3.5
Green Extension Time (g_e), s		4.6		4.9		0.0		0.1
Phase Call Probability		1.00		1.00		0.34		0.50
Max Out Probability		0.17		0.11		0.04		0.14

Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	424		383	245		224		33			57	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1685		1525	1635		1516		1658			1626	
Queue Service Time (g_s), s	0.0		6.5	0.0		3.4		0.9			1.5	
Cycle Queue Clearance Time (g_c), s	6.5		6.5	3.3		3.4		0.9			1.5	
Green Ratio (*g/C*)	0.56		0.56	0.56		0.56		0.03			0.05	
Capacity (*c*), veh/h	1029		856	1005		851		50			74	
Volume-to-Capacity Ratio (*X*)	0.412		0.448	0.243		0.264		0.662			0.770	
Available Capacity (c_a), veh/h	1029		856	1005		851		355			348	
Back of Queue (*Q*), veh/ln (95th percentile)	3.0		2.8	1.4		1.4		0.9			1.5	
Queue Storage Ratio (*RQ*) (95th percentile)	0.09		0.08	0.01		0.01		0.09			0.15	
Uniform Delay (d_1), s/veh	5.7		5.7	5.0		5.0		21.3			20.9	
Incremental Delay (d_2), s/veh	1.2		1.7	0.5		0.7		13.8			15.3	
Initial Queue Delay (d_3), s/veh	0.0		0.0	0.0		0.0		0.0			0.0	
Control Delay (*d*), s/veh	6.9		7.4	5.5		5.7		35.1			36.3	
Level of Service (LOS)	A		A	A		A		D			D	
Approach Delay, s/veh / LOS	7.1		A	5.6		A	35.1		D	36.3		D
Intersection Delay, s/veh / LOS	8.5						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.0	B	2.0	B	2.7	B	2.7	B
Bicycle LOS Score / LOS	1.2	A	0.9	A	0.5	A	0.6	A

Copyright © 2016 University of Florida, All Rights Reserved.

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/4/2013
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	10th to Rice
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5110ft	Freeway maximum capacity, C_{IFL}	2350
Freeway free-flow speed, FFS	67 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1359	0.80	10	0	1.5	1.2	0.952	1.00	1784
V_{RF}	538	0.80	6	0	1.5	1.2	0.971	1.00	693
V_{FR}	238	0.80	6	0	1.5	1.2	0.971	1.00	306
V_{RR}	27	0.80	6	0	1.5	1.2	0.971	1.00	35
V_{NW}	1819							V =	2684
V_W	999								
VR	0.355								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	999 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1423 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2567 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	3990 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	930

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2684 veh/h	Weaving intensity factor, W	0.186
Weaving segment capacity, c_w	6448 veh/h	Weaving segment speed, S	56.5 mph
Weaving segment v/c ratio	0.416	Average weaving speed, S_W	58.8 mph
Weaving segment density, D	16.6 pc/mi/ln	Average non-weaving speed, S_{NW}	55.3 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	6176 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/4/2013
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	10th to Rice
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5110ft	Freeway maximum capacity, C_{IFL}	2350
Freeway free-flow speed, FFS	67 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	568	0.93	12	0	1.5	1.2	0.943	1.00	647
V_{RF}	427	0.93	6	0	1.5	1.2	0.971	1.00	473
V_{FR}	366	0.93	6	0	1.5	1.2	0.971	1.00	405
V_{RR}	10	0.93	6	0	1.5	1.2	0.971	1.00	11
V_{NW}	658							V =	1450
V_W	878								
VR	0.572								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	878 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1302 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2327 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	3629 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	336

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	1450 veh/h	Weaving intensity factor, W	0.173
Weaving segment capacity, c_w	3961 veh/h	Weaving segment speed, S	58.9 mph
Weaving segment v/c ratio	0.366	Average weaving speed, S_W	59.3 mph
Weaving segment density, D	8.7 pc/mi/ln	Average non-weaving speed, S_{NW}	58.2 mph
Level of Service, LOS	A	Maximum weaving length, L_{MAX}	8675 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*JKM*
Agency or Company	*HDR*
Date Performed	*11/19/2013*
Analysis Time Period	*AM Peak*

Site Information

Highway/Direction of Travel	*I-229 Northbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2013*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*1897*	veh/h	Peak-Hour Factor, PHF	*0.80*
AADT		veh/day	%Trucks and Buses, P_T	*9*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.957*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*67.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*67.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*1239*	pc/h/ln
S	*65.0*	mph
D = v_p / S	*19.1*	pc/mi/ln
LOS	*C*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*JKM*
Agency or Company	*HDR*
Date Performed	*11/19/2013*
Analysis Time Period	*PM Peak*

Site Information

Highway/Direction of Travel	*I-229 Northbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2013*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*995*	veh/h	Peak-Hour Factor, PHF	*0.93*
AADT		veh/day	%Trucks and Buses, P_T	*9*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.957*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*67.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*67.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*559*	pc/h/ln
S	*65.0*	mph
D = v_p / S	*8.6*	pc/mi/ln
LOS	*A*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/6/2013
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	Rice to Benson
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4510ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	72 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	441	0.80	9	0	1.5	1.2	0.957	1.00	576
V_{RF}	191	0.80	6	0	1.5	1.2	0.971	1.00	246
V_{FR}	1456	0.80	6	0	1.5	1.2	0.971	1.00	1875
V_{RR}	53	0.80	6	0	1.5	1.2	0.971	1.00	68
V_{NW}	644							V =	2646
V_W	2121								
VR	0.767								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	246 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	643 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	1999 lc/h
Minimum FR lane changes, LC_{FR}	0 lc/pc	Total lane changes, LC_{ALL}	2642 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	290

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2646 veh/h	Weaving intensity factor, W	0.148
Weaving segment capacity, c_w	2994 veh/h	Weaving segment speed, S	64.9 mph
Weaving segment v/c ratio	0.884	Average weaving speed, S_W	64.6 mph
Weaving segment density, D	14.2 pc/mi/ln	Average non-weaving speed, S_{NW}	65.8 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	11111 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/6/2013
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	Rice to Benson
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4510ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	72 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	684	0.93	7	0	1.5	1.2	0.966	1.00	761
V_{RF}	138	0.93	6	0	1.5	1.2	0.971	1.00	153
V_{FR}	311	0.93	6	0	1.5	1.2	0.971	1.00	344
V_{RR}	26	0.93	6	0	1.5	1.2	0.971	1.00	29
V_{NW}	790							V =	1244
V_W	497								
VR	0.386								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	153 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	550 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2029 lc/h
Minimum FR lane changes, LC_{FR}	0 lc/pc	Total lane changes, LC_{ALL}	2579 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	356

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	1244 veh/h	Weaving intensity factor, W	0.145
Weaving segment capacity, c_w	6005 veh/h	Weaving segment speed, S	67.2 mph
Weaving segment v/c ratio	0.207	Average weaving speed, S_W	64.8 mph
Weaving segment density, D	6.4 pc/mi/ln	Average non-weaving speed, S_{NW}	68.8 mph
Level of Service, LOS	A	Maximum weaving length, L_{MAX}	6526 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/10/2013
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Benson to Rice
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5670ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	68 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	799	0.80	7	0	1.5	1.2	0.966	1.00	1034
V_{RF}	298	0.80	6	0	1.5	1.2	0.971	1.00	384
V_{FR}	128	0.80	6	0	1.5	1.2	0.971	1.00	165
V_{RR}	10	0.80	6	0	1.5	1.2	0.971	1.00	13
V_{NW}	1047							V =	1543
V_W	549								
VR	0.344								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	549 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	997 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2711 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	3708 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	594

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	1543 veh/h	Weaving intensity factor, W	0.162
Weaving segment capacity, c_w	6741 veh/h	Weaving segment speed, S	61.2 mph
Weaving segment v/c ratio	0.229	Average weaving speed, S_W	60.6 mph
Weaving segment density, D	8.7 pc/mi/ln	Average non-weaving speed, S_{NW}	61.5 mph
Level of Service, LOS	A	Maximum weaving length, L_{MAX}	6061 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/10/2013
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Benson to Rice
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5670ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	68 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	583	0.93	9	0	1.5	1.2	0.957	1.00	655
V_{RF}	1231	0.93	6	0	1.5	1.2	0.971	1.00	1363
V_{FR}	230	0.93	6	0	1.5	1.2	0.971	1.00	255
V_{RR}	10	0.93	6	0	1.5	1.2	0.971	1.00	11
V_{NW}	666							V =	2186
V_W	1618								
VR	0.708								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1618 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	2066 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2633 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	4699 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	378

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2186 veh/h	Weaving intensity factor, W	0.195
Weaving segment capacity, c_w	3242 veh/h	Weaving segment speed, S	57.2 mph
Weaving segment v/c ratio	0.674	Average weaving speed, S_W	59.4 mph
Weaving segment density, D	13.3 pc/mi/ln	Average non-weaving speed, S_{NW}	52.7 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	10362 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*JKM*
Agency or Company	*HDR*
Date Performed	*11/19/2013*
Analysis Time Period	*AM Peak*

Site Information

Highway/Direction of Travel	*I-229 Southbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2013*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*1097*	veh/h	Peak-Hour Factor, PHF	*0.80*
AADT		veh/day	%Trucks and Buses, P_T	*7*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.966*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*69.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*69.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*710*	pc/h/ln
S	*70.0*	mph
D = v_p / S	*10.1*	pc/mi/ln
LOS	*A*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*JKM*
Agency or Company	*HDR*
Date Performed	*11/19/2013*
Analysis Time Period	*PM Peak*

Site Information

Highway/Direction of Travel	*I-229 Southbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2013*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*1814*	veh/h	Peak-Hour Factor, PHF	*0.93*
AADT		veh/day	%Trucks and Buses, P_T	*7*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.966*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*69.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*69.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*1009*	pc/h/ln
S	*70.0*	mph
D = v_p / S	*14.4*	pc/mi/ln
LOS	*B*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/10/2013
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Rice to 10th St
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4840ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	69 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	642	0.80	12	0	1.5	1.2	0.943	1.00	851
V_{RF}	430	0.80	6	0	1.5	1.2	0.971	1.00	554
V_{FR}	455	0.80	6	0	1.5	1.2	0.971	1.00	586
V_{RR}	10	0.80	6	0	1.5	1.2	0.971	1.00	13
V_{NW}	864							V =	1891
V_W	1140								
VR	0.569								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1140 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1552 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2223 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	3775 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	418

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	1891 veh/h	Weaving intensity factor, W	0.186
Weaving segment capacity, c_w	3980 veh/h	Weaving segment speed, S	59.2 mph
Weaving segment v/c ratio	0.475	Average weaving speed, S_W	60.5 mph
Weaving segment density, D	11.3 pc/mi/ln	Average non-weaving speed, S_{NW}	57.6 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	8642 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	JKM
Agency/Company	HDR
Date Performed	12/10/2013
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Rice to 10th St
Analysis Year	2013

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4840ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	69 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1252	0.93	10	0	1.5	1.2	0.952	1.00	1414
V_{RF}	331	0.93	6	0	1.5	1.2	0.971	1.00	367
V_{FR}	562	0.93	6	0	1.5	1.2	0.971	1.00	622
V_{RR}	10	0.93	6	0	1.5	1.2	0.971	1.00	11
V_{NW}	1425							V =	2300
V_W	989								
VR	0.410								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	989 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1401 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2339 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	3740 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	690

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2300 veh/h	Weaving intensity factor, W	0.184
Weaving segment capacity, c_w	5579 veh/h	Weaving segment speed, S	59.0 mph
Weaving segment v/c ratio	0.412	Average weaving speed, S_W	60.6 mph
Weaving segment density, D	13.6 pc/mi/ln	Average non-weaving speed, S_{NW}	58.0 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	6790 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

APPENDIX C. 2035 NO-BUILD AND BUILD OPERATIONAL ANALYSIS TECHNICAL MEMORANDUM

Year 2035 Sub-Study 5 No Build conditions operational analysis included the analysis of 5 signalized intersections, 1 unsignalized intersection, 2 basic freeway segments, and 4 weave segments. All locations were analyzed for the AM peak hour and PM peak hour, based on traffic forecasting procedures utilizing output from the Sioux Falls MPO Sioux Falls travel demand model in Cube Voyager.

The 2035 No-Build volumes are based on the MPO's future travel demand model, reflective of fiscally constrained planned projects included in the 2035 Long Range Transportation Plan (LRTP). The No-Build condition for this study also includes geometric modifications associated with the I-229 Exit 5 (26th Street) proposed improvements. The LRTP includes capacity-related roadway segment improvements at a high-level, and does not include intersection-level geometrics associated with the improvements. Thus, intersection-level geometrics were assumed for the No-Build condition where necessary in order to capture planned development in the study area.

No-Build Conditions Operational Results

This Year 2035 conditions analysis found that ramp terminal intersections and arterials show the LOS at a couple of key intersections has degraded beyond the acceptable threshold of LOS D.

TABLE 1 highlights intersections that do not meet the project specific LOS thresholds.

Table 1. 2035 No-Build Conditions Deficient Intersections based on Operational Analysis Results

LOCATION	AM	PM
Rice Street & Cliff Avenue		LOS F
Rice Street & Lowell Avenue – Worst stop-controlled approach LOS	LOS F	LOS F
I-229 NB & Rice Street Ramp Terminal & Cleveland Avenue	LOS E	LOS F


Note: Acceptable Threshold is LOS D for intersections, and LOS C for freeway and ramps.

The 2035 no-build lane geometrics and LOS results for all locations are shown in ***FIGURE 1***. The 2035 No-Build HCS 2010 Reports can be found in the ***APPENDIX***.

Build Conditions Analysis Results

The 2035 Build condition used the same volumes as the 2035 No-Build condition. The 2035 build alternative scenarios were analyzed using HCS 2010 for the AM and PM peak hours. The alternative scenarios analyzed are as follows:

- ***Rice-2.*** 6-Lane Divided
- ***Rice-2A.*** 6-Lane Divided, Shifted North to Avoid Railroad ROW
- ***Rice-3C.*** 4-Lane Divided, Cleveland Realigned to Bahnson

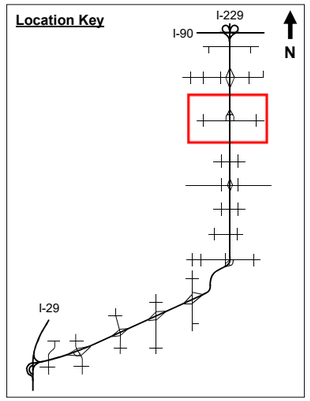

N

Not to Scale

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Existing Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Worst case stop controlled approach Level of Service reported

2035 No-Build Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 5
Sioux Falls, South Dakota

Date
12/22/2016

Figure
1

Rice-2 and Rice-2A were combined and analyzed together because the intersection lane configurations are the same. See ***TABLE 2*** for the 2035 Build LOS results for the alternative scenarios.

Table 2. 2035 Build LOS Results for Alternative Scenarios

Alternative Scenario	Intersection (AM LOS/PM LOS)				
	Rice & Cliff	Rice & Wayland	Rice & I-229 SB Ramps[1]	Rice & I-229 NB Ramps / Cleveland[2]	Rice & Bahnson[2]
Rice-2 / Rice-2A	C / D	A / A	A / A	C / C	B / B
Rice-3C	C / D	A / A	B / C	B / B	C / D

[1]*I-229 SB Ramp ties into Lowell Avenue for the Rice-3C scenario.*

[2]*Cleveland Avenue is relocated and tied into Bahnson Avenue for the Rice-3C scenario.*


For all alternative scenarios, the ramp terminals operate at an acceptable LOS of C or better and the signalized arterial intersections operate at an acceptable threshold of LOS of D or better. The 2035 Build HCS 2010 Reports can be found in the ***APPENDIX***.

APPENDIX -

2035 NO-BUILD HCS 2010 REPORTS


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Bahnson Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_NB_Rice_St_AM_BestCase.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	200	740	70	100	1540	50	60	100	50	10	20	80

Signal Information			
Cycle, s	145.0	Reference Phase	2
Offset, s	131	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

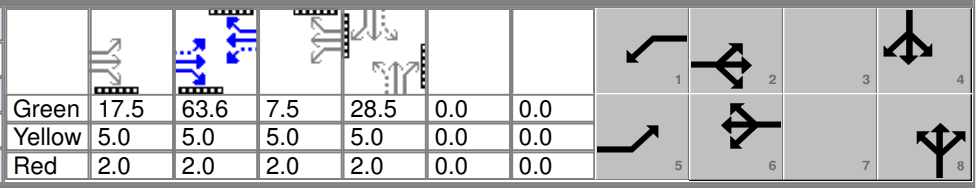

Green	17.5	63.6	7.5	28.5	0.0	0.0
Yellow	5.0	5.0	5.0	5.0	0.0	0.0
Red	2.0	2.0	2.0	2.0	0.0	0.0

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	1.2	4.0	1.3	4.0		8.0		8.0
Phase Duration, s	24.5	95.1	14.5	85.1		35.5		35.5
Change Period, ($Y+R_c$), s	7.0	7.0	7.0	7.0		7.0		7.0
Max Allow Headway (*MAH*), s	3.0	0.0	3.0	0.0		4.3		4.3
Queue Clearance Time (g_s), s	17.1		2.0			26.9		13.0
Green Extension Time (g_e), s	0.4	0.0	5.5	0.0		1.5		1.5
Phase Call Probability	1.00		0.99			1.00		1.00
Max Out Probability	0.00		0.01			0.00		0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	229	470	456	118	918	952		247			129	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1714	1698	1646	1714	1634	1679		1419			1476	
Queue Service Time (g_s), s	15.1	11.6	13.1	0.0	78.0	78.0		13.8			0.0	
Cycle Queue Clearance Time (g_c), s	15.1	11.6	13.1	0.0	78.0	78.0		24.9			11.0	
Green Ratio (*g/C*)	0.57	0.61	0.61	0.48	0.54	0.54		0.20			0.20	
Capacity (*c*), veh/h	256	1031	999	396	879	904		311			317	
Volume-to-Capacity Ratio (*X*)	0.892	0.456	0.456	0.297	1.044	1.054		0.795			0.408	
Available Capacity (c_a), veh/h	1491	1031	999	851	879	904		827			805	
Back of Queue (*Q*), veh/ln (95th percentile)	13.1	5.7	6.3	4.7	51.1	53.6		14.2			7.6	
Queue Storage Ratio (*RQ*) (95th percentile)	1.31	0.07	0.07	0.47	1.34	1.40		0.72			0.20	
Uniform Delay (d_1), s/veh	54.1	6.2	7.3	25.0	33.5	33.5		57.2			51.2	
Incremental Delay (d_2), s/veh	2.8	0.9	1.0	0.2	42.5	45.2		4.6			0.8	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0			0.0	
Control Delay (*d*), s/veh	56.9	7.2	8.2	25.1	76.0	78.7		61.8			52.1	
Level of Service (LOS)	E	A	A	C	F	F		E			D	
Approach Delay, s/veh / LOS	17.4	B		74.2	E		61.8	E		52.1	D	
Intersection Delay, s/veh / LOS	53.9						D					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.2	B	2.1	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	1.5	A	2.1	B	0.9	A	0.7	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Bahnson Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_NB_Rice_St_PM_BestCase.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	130	1060	150	80	1220	20	80	40	80	60	120	100

Signal Information			
Cycle, s	125.0	Reference Phase	2
Offset, s	68	Reference Point	End
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On



Green	5.2	53.5	4.9	33.3	0.0	0.0
Yellow	5.0	5.0	5.0	5.0	0.0	0.0
Red	2.0	2.0	2.0	2.0	0.0	0.0

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	1.3	4.0	1.2	4.0		8.0		8.0
Phase Duration, s	11.9	72.5	12.2	72.7		40.3		40.3
Change Period, ($Y+R_c$), s	7.0	7.0	7.0	7.0		7.0		7.0
Max Allow Headway (*MAH*), s	3.0	0.0	3.0	0.0		4.4		4.4
Queue Clearance Time (g_s), s	2.0		5.4			31.4		28.2
Green Extension Time (g_e), s	1.1	0.0	0.1	0.0		2.2		2.2
Phase Call Probability	0.99		0.95			1.00		1.00
Max Out Probability	1.00		0.00			0.00		0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	126	599	574	86	668	665		215			301	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1714	1698	1624	1714	1698	1688		940			1363	
Queue Service Time (g_s), s	0.0	29.9	29.3	3.4	38.3	38.3		2.3			0.0	
Cycle Queue Clearance Time (g_c), s	0.0	29.9	29.3	3.4	38.3	38.3		29.4			26.2	
Green Ratio (*g/C*)	0.45	0.52	0.52	0.49	0.53	0.53		0.27			0.27	
Capacity (*c*), veh/h	216	893	854	226	897	891		289			395	
Volume-to-Capacity Ratio (*X*)	0.583	0.671	0.672	0.381	0.745	0.746		0.745			0.761	
Available Capacity (c_a), veh/h	217	893	854	794	897	891		605			737	
Back of Queue (*Q*), veh/ln (95th percentile)	6.2	14.6	13.5	2.4	22.0	21.9		11.1			14.0	
Queue Storage Ratio (*RQ*) (95th percentile)	0.62	0.17	0.16	0.24	0.58	0.57		0.56			0.37	
Uniform Delay (d_1), s/veh	47.6	18.3	17.3	21.9	23.0	23.0		44.0			43.0	
Incremental Delay (d_2), s/veh	1.4	2.2	2.3	0.4	5.6	5.7		3.8			3.1	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0			0.0	
Control Delay (*d*), s/veh	49.0	20.4	19.6	22.3	28.6	28.6		47.8			46.0	
Level of Service (LOS)	D	C	B	C	C	C		D			D	
Approach Delay, s/veh / LOS	22.8	C		28.2	C		47.8	D		46.0	D	
Intersection Delay, s/veh / LOS	29.0						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.1	B	2.2	B	2.8	C	2.8	C
Bicycle LOS Score / LOS	1.7	A	1.7	A	0.8	A	1.0	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & I-229 NB / Clevel	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_NB_Rice_St_AM_BestCase.xus				
Project Description	2035 NB AM				

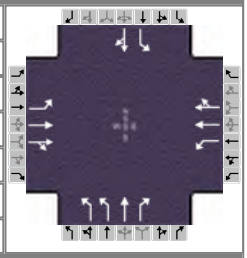

Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	100	410	200	240	1270	170	320	300	500	100	50	250

Signal Information			
Cycle, s	145.0	Reference Phase	2
Offset, s	126	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

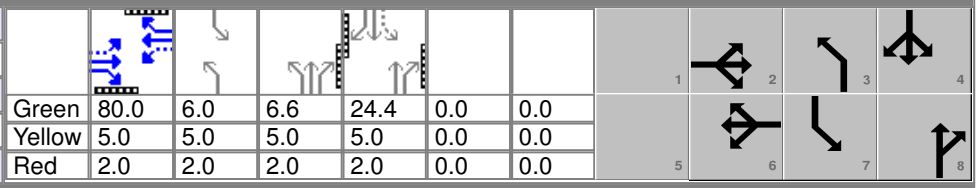

Green	80.0	6.0	6.6	24.4	0.0	0.0
Yellow	5.0	5.0	5.0	5.0	0.0	0.0
Red	2.0	2.0	2.0	2.0	0.0	0.0

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6	3	8	7	4
Case Number		6.0		6.0	2.0	3.0	1.1	4.0
Phase Duration, s		87.0		87.0	26.6	45.0	13.0	31.4
Change Period, ($Y+R_c$), s		7.0		7.0	7.0	7.0	7.0	7.0
Max Allow Headway (*MAH*), s		0.0		0.0	3.2	4.3	4.1	4.3
Queue Clearance Time (g_s), s					18.7	40.0	8.0	19.8
Green Extension Time (g_e), s		0.0		0.0	0.9	0.0	0.0	1.9
Phase Call Probability					1.00	1.00	0.99	1.00
Max Out Probability					0.00	1.00	1.00	0.94


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	118	320	300	270	711	879	376	353	441	118	188	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	314	1636	1514	819	1352	1650	1601	1763	1557	1558	1467	
Queue Service Time (g_s), s	30.9	12.8	13.8	4.9	46.1	50.5	16.7	26.8	38.0	6.0	17.8	
Cycle Queue Clearance Time (g_c), s	80.0	12.8	13.8	36.5	46.1	50.5	16.7	26.8	38.0	6.0	17.8	
Green Ratio (*g/C*)	0.55	0.55	0.55	0.55	0.55	0.55	0.14	0.26	0.26	0.21	0.17	
Capacity (*c*), veh/h	117	902	835	424	746	911	433	462	408	154	247	
Volume-to-Capacity Ratio (*X*)	1.009	0.355	0.359	0.637	0.953	0.965	0.869	0.764	1.081	0.763	0.763	
Available Capacity (c_a), veh/h	117	902	835	424	746	911	861	462	408	154	247	
Back of Queue (*Q*), veh/ln (95th percentile)	11.3	8.0	8.1	2.5	3.3	3.8	11.3	18.6	31.8	4.7	11.9	
Queue Storage Ratio (*RQ*) (95th percentile)	1.13	0.20	0.20	0.25	0.04	0.04	1.14	0.47	3.18	0.49	0.39	
Uniform Delay (d_1), s/veh	62.5	13.5	14.7	5.1	3.7	3.6	61.4	49.4	53.5	55.9	57.5	
Incremental Delay (d_2), s/veh	83.1	1.0	1.1	0.7	3.7	3.9	2.1	7.4	68.1	19.9	13.1	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Control Delay (*d*), s/veh	145.6	14.5	15.8	5.8	7.5	7.5	63.6	56.8	121.6	75.8	70.7	
Level of Service (LOS)	F	B	B	A	A	A	E	E	F	E	E	
Approach Delay, s/veh / LOS	36.0	D		7.2	A		83.4	F		72.7	E	
Intersection Delay, s/veh / LOS	39.2						D					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.7	B	2.5	B	2.9	C	3.0	C
Bicycle LOS Score / LOS	1.1	A	2.1	B	2.4	B	1.0	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 NB / Clevel	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_NB_Rice_St_PM_BestCase.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	140	950	500	330	1020	50	300	90	110	280	100	130

Signal Information			
Cycle, s	125.0	Reference Phase	2
Offset, s	75	Reference Point	End
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

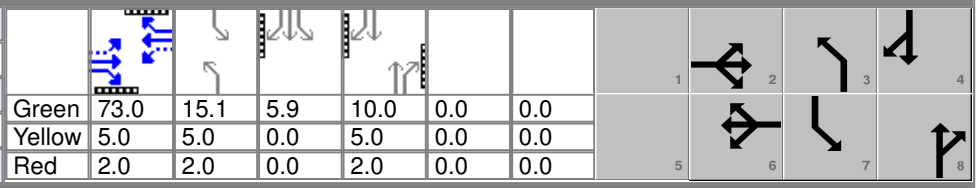

Green	73.0	15.1	5.9	10.0	0.0	0.0
Yellow	5.0	5.0	0.0	5.0	0.0	0.0
Red	2.0	2.0	0.0	2.0	0.0	0.0

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6	3	8	7	4
Case Number		6.0		6.0	2.0	3.0	2.0	4.0
Phase Duration, s		80.0		80.0	22.1	17.0	28.0	22.8
Change Period, ($Y+R_c$), s		7.0		7.0	7.0	7.0	7.0	7.0
Max Allow Headway (*MAH*), s		0.0		0.0	3.2	4.2	4.1	4.2
Queue Clearance Time (g_s), s					14.5	9.1	23.0	17.7
Green Extension Time (g_e), s		0.0		0.0	0.6	0.1	0.0	0.0
Phase Call Probability					1.00	1.00	1.00	1.00
Max Out Probability					0.00	1.00	1.00	1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	134	644	591	355	570	564	323	97	82	301	191	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	486	1635	1491	464	1720	1701	1581	1675	1450	1618	1520	
Queue Service Time (g_s), s	13.8	28.0	26.8	15.7	5.5	5.3	12.5	7.1	6.9	21.0	15.7	
Cycle Queue Clearance Time (g_c), s	20.8	28.0	26.8	73.1	5.5	5.3	12.5	7.1	6.9	21.0	15.7	
Green Ratio (*g/C*)	0.58	0.58	0.58	0.58	0.58	0.58	0.12	0.08	0.08	0.17	0.13	
Capacity (*c*), veh/h	321	956	872	226	1006	994	382	133	115	272	192	
Volume-to-Capacity Ratio (*X*)	0.417	0.674	0.678	1.572	0.567	0.567	0.843	0.728	0.710	1.108	0.997	
Available Capacity (c_a), veh/h	321	956	872	226	1006	994	658	134	116	272	193	
Back of Queue (*Q*), veh/ln (95th percentile)	2.7	13.5	11.5	38.7	2.5	2.4	8.8	6.6	5.6	22.3	14.3	
Queue Storage Ratio (*RQ*) (95th percentile)	0.27	0.34	0.29	3.87	0.03	0.03	0.89	0.17	0.56	2.34	0.47	
Uniform Delay (d_1), s/veh	9.6	12.0	10.8	21.8	1.8	1.7	53.8	56.2	56.1	52.0	54.6	
Incremental Delay (d_2), s/veh	3.2	3.1	3.5	269.8	1.4	1.4	2.0	17.9	18.1	86.7	63.7	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
Control Delay (*d*), s/veh	12.8	15.1	14.3	291.5	3.1	3.1	55.8	74.1	74.2	138.7	118.3	
Level of Service (LOS)	B	B	B	F	A	A	E	E	E	F	F	
Approach Delay, s/veh / LOS	14.5	B		71.9	E		62.3	E		130.8	F	
Intersection Delay, s/veh / LOS	57.8						E					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.6	B	2.3	B	2.9	C	3.1	C
Bicycle LOS Score / LOS	1.8	A	1.7	A	1.3	A	1.3	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & I-229 SB	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_NB_Rice_St_AM_BestCase.xus				
Project Description	2035 NB AM				

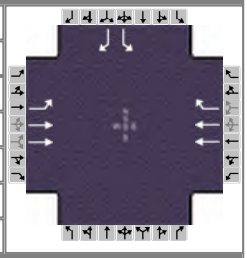

Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	110	580			1370	470				130		80

Signal Information			
Cycle, s	145.0	Reference Phase	2
Offset, s	11	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

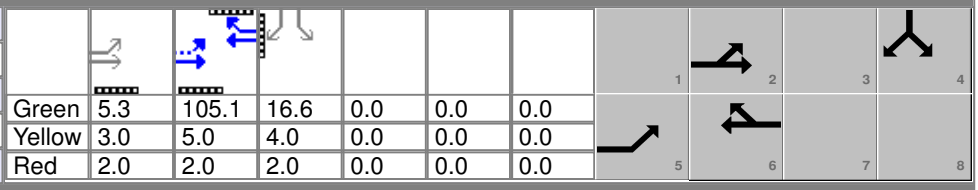

Green	5.3	105.1	16.6	0.0	0.0	0.0			
Yellow	3.0	5.0	4.0	0.0	0.0	0.0			
Red	2.0	2.0	2.0	0.0	0.0	0.0			

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	1.0	4.0		7.3				9.0
Phase Duration, s	10.3	122.4		112.1				22.6
Change Period, ($Y+R_c$), s	5.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.2
Queue Clearance Time (g_s), s	4.9							15.8
Green Extension Time (g_e), s	0.4	0.0		0.0				0.8
Phase Call Probability	0.99							1.00
Max Out Probability	0.00							0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	129	682			1563	536				153		94
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1562	1611			1749	1587				1572		1405
Queue Service Time (g_s), s	2.9	7.8			15.6	3.5				13.8		9.2
Cycle Queue Clearance Time (g_c), s	2.9	7.8			15.6	3.5				13.8		9.2
Green Ratio (*g/C*)	0.77	0.80			0.72	0.72				0.11		0.11
Capacity (*c*), veh/h	218	2564			2535	1150				180		161
Volume-to-Capacity Ratio (*X*)	0.594	0.266			0.617	0.466				0.848		0.584
Available Capacity (c_a), veh/h	423	2564			2535	1150				390		349
Back of Queue (*Q*), veh/ln (95th percentile)	1.8	4.0			4.5	1.3				10.0		6.1
Queue Storage Ratio (*RQ*) (95th percentile)	0.38	0.03			0.11	0.03				0.87		0.16
Uniform Delay (d_1), s/veh	7.9	3.7			3.0	0.9				62.9		60.9
Incremental Delay (d_2), s/veh	2.5	0.2			0.3	0.3				10.4		3.3
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	10.4	4.0			3.3	1.2				73.3		64.2
Level of Service (LOS)	B	A			A	A				E		E
Approach Delay, s/veh / LOS	5.0	A		2.8	A		0.0			69.9	E	
Intersection Delay, s/veh / LOS	8.6						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.6	A	2.2	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	1.2	A	2.3	B				F

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 SB	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_NB_Rice_St_PM_BestCase.xus				
Project Description	2035 NB PM				

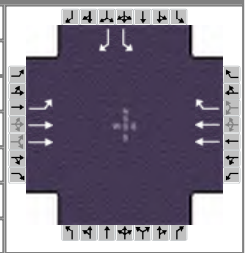

Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	110	580			1370	470				130		80

Signal Information			
Cycle, s	125.0	Reference Phase	2
Offset, s	111	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

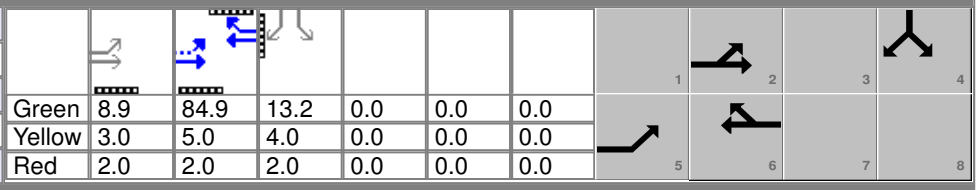

Green	8.9	84.9	13.2	0.0	0.0	0.0						
Yellow	3.0	5.0	4.0	0.0	0.0	0.0						
Red	2.0	2.0	2.0	0.0	0.0	0.0						

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	1.0	4.0		7.3				9.0
Phase Duration, s	13.9	105.8		91.9				19.2
Change Period, ($Y+R_c$), s	5.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.2
Queue Clearance Time (g_s), s	7.8							13.0
Green Extension Time (g_e), s	1.0	0.0		0.0				0.2
Phase Call Probability	1.00							1.00
Max Out Probability	0.00							1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	266	1401			1161	398				140		86
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1604	1698			1663	1527				1559		1393
Queue Service Time (g_s), s	5.8	22.4			23.4	12.7				11.0		7.4
Cycle Queue Clearance Time (g_c), s	5.8	22.4			23.4	12.7				11.0		7.4
Green Ratio (*g/C*)	0.77	0.79			0.68	0.68				0.11		0.11
Capacity (*c*), veh/h	325	2684			2259	1037				165		147
Volume-to-Capacity Ratio (*X*)	0.817	0.522			0.514	0.384				0.848		0.584
Available Capacity (c_a), veh/h	824	2684			2259	1037				200		178
Back of Queue (*Q*), veh/ln (95th percentile)	9.5	11.5			12.5	6.6				9.1		4.8
Queue Storage Ratio (*RQ*) (95th percentile)	1.99	0.09			0.31	0.16				0.80		0.13
Uniform Delay (d_1), s/veh	16.5	6.5			11.5	7.5				54.9		53.3
Incremental Delay (d_2), s/veh	4.0	0.6			0.6	0.8				23.9		3.6
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	20.5	7.1			12.0	8.2				78.8		56.9
Level of Service (LOS)	C	A			B	A				E		E
Approach Delay, s/veh / LOS	9.2	A		11.1	B		0.0			70.5	E	
Intersection Delay, s/veh / LOS	14.1						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.6	A	2.2	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	1.1	A	2.1	B				F

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Wayland Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_NB_Rice_St_AM_BestCase.xus				
Project Description	2035 NB AM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	10	600	10	20	1390	40	20	10	40	50	10	10

Signal Information			
Cycle, s	145.0	Reference Phase	2
Offset, s	0	Reference Point	End
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

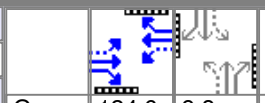

Green	124.6	9.8	0.0	0.0	0.0	0.0						
Yellow	3.9	3.0	0.0	0.0	0.0	0.0						
Red	1.2	2.5	0.0	0.0	0.0	0.0						



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6		8		4
Case Number		8.0		8.0		8.0		8.0
Phase Duration, s		129.7		129.7		15.3		15.3
Change Period, ($Y+R_c$), s		5.1		5.1		5.5		5.5
Max Allow Headway (*MAH*), s		0.0		0.0		4.2		4.2
Queue Clearance Time (g_s), s						5.8		9.6
Green Extension Time (g_e), s		0.0		0.0		0.4		0.4
Phase Call Probability						0.99		0.99
Max Out Probability						0.00		0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	369		360	866		792		45			76	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1569		1536	1663		1529		1559			1443	
Queue Service Time (g_s), s	0.0		6.2	0.0		25.6		0.0			4.2	
Cycle Queue Clearance Time (g_c), s	5.6		6.2	24.8		25.6		3.8			7.6	
Green Ratio (*g/C*)	0.86		0.86	0.86		0.86		0.07			0.07	
Capacity (*c*), veh/h	1375		1321	1455		1315		142			141	
Volume-to-Capacity Ratio (*X*)	0.269		0.273	0.595		0.602		0.314			0.544	
Available Capacity (c_a), veh/h	1375		1321	1455		1315		749			725	
Back of Queue (*Q*), veh/ln (95th percentile)	2.5		2.5	11.0		10.5		3.0			5.3	
Queue Storage Ratio (*RQ*) (95th percentile)	0.07		0.07	0.08		0.08		0.30			0.54	
Uniform Delay (d_1), s/veh	1.8		1.9	3.8		3.9		64.9			66.6	
Incremental Delay (d_2), s/veh	0.5		0.5	1.4		1.6		1.2			3.3	
Initial Queue Delay (d_3), s/veh	0.0		0.0	0.0		0.0		0.0			0.0	
Control Delay (*d*), s/veh	2.3		2.4	5.2		5.5		66.1			69.9	
Level of Service (LOS)	A		A	A		A		E			E	
Approach Delay, s/veh / LOS	2.3		A	5.4		A	66.1		E	69.9		E
Intersection Delay, s/veh / LOS	7.5						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.0	B	2.0	B	2.7	B	2.7	B
Bicycle LOS Score / LOS	1.1	A	1.9	A	0.6	A	0.6	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Oct 10, 2014	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Wayland Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_NB_Rice_St_PM_BestCase.xus				
Project Description	2035 NB PM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	30	1380	40	90	780	150	30	10	100	70	10	30

Signal Information			
Cycle, s	125.0	Reference Phase	2
Offset, s	0	Reference Point	End
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

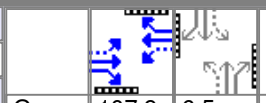

Green	107.9	6.5	0.0	0.0	0.0	0.0						
Yellow	3.9	3.0	0.0	0.0	0.0	0.0						
Red	1.2	2.5	0.0	0.0	0.0	0.0						

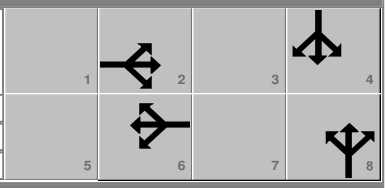

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase		2		6		8		4
Case Number		8.0		8.0		8.0		8.0
Phase Duration, s		113.0		113.0		12.0		12.0
Change Period, ($Y+R_c$), s		5.1		5.1		5.5		5.5
Max Allow Headway (*MAH*), s		0.0		0.0		4.1		4.1
Queue Clearance Time (g_s), s						5.5		8.5
Green Extension Time (g_e), s		0.0		0.0		0.0		0.0
Phase Call Probability						0.99		0.99
Max Out Probability						1.00		1.00

Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	801		754	454		793		43			99	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1597		1531	813		1484		1473			1482	
Queue Service Time (g_s), s	0.0		16.6	14.4		22.4		0.0			3.0	
Cycle Queue Clearance Time (g_c), s	15.3		16.6	31.0		22.4		3.5			6.5	
Green Ratio (*g/C*)	0.86		0.86	0.86		0.86		0.05			0.05	
Capacity (*c*), veh/h	1408		1322	738		1281		127			128	
Volume-to-Capacity Ratio (*X*)	0.569		0.570	0.616		0.619		0.339			0.774	
Available Capacity (c_a), veh/h	1408		1322	738		1281		127			128	
Back of Queue (*Q*), veh/ln (95th percentile)	5.6		5.6	3.5		8.1		2.5			7.3	
Queue Storage Ratio (*RQ*) (95th percentile)	0.16		0.16	0.03		0.06		0.25			0.74	
Uniform Delay (d_1), s/veh	2.2		2.3	3.3		3.2		57.8			59.9	
Incremental Delay (d_2), s/veh	1.7		1.8	3.3		1.9		1.6			25.0	
Initial Queue Delay (d_3), s/veh	0.0		0.0	0.0		0.0		0.0			0.0	
Control Delay (*d*), s/veh	3.9		4.1	6.6		5.1		59.3			85.0	
Level of Service (LOS)	A		A	A		A		E			F	
Approach Delay, s/veh / LOS	4.0		A	5.6		A	59.3		E	85.0		F
Intersection Delay, s/veh / LOS	8.2						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.1	B	2.0	B	2.7	B	2.7	B
Bicycle LOS Score / LOS	1.8	A	1.4	A	0.6	A	0.7	A

Copyright © 2016 University of Florida, All Rights Reserved.

APPENDIX -

2035 NO-BUILD FREEWAY HCS 2010 REPORTS

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	10th to Rice
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5110ft	Freeway maximum capacity, C_{IFL}	2350
Freeway free-flow speed, FFS	67 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1812	0.85	10	0	1.5	1.2	0.952	1.00	2238
V_{RF}	578	0.85	6	0	1.5	1.2	0.971	1.00	700
V_{FR}	368	0.85	6	0	1.5	1.2	0.971	1.00	446
V_{RR}	32	0.85	6	0	1.5	1.2	0.971	1.00	39
V_{NW}	2277							V =	3260
V_W	1146								
VR	0.335								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1146 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1570 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2661 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	4231 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	1164

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	3260 veh/h	Weaving intensity factor, W	0.195
Weaving segment capacity, c_w	6529 veh/h	Weaving segment speed, S	54.9 mph
Weaving segment v/c ratio	0.499	Average weaving speed, S_W	58.5 mph
Weaving segment density, D	20.8 pc/mi/ln	Average non-weaving speed, S_{NW}	53.3 mph
Level of Service, LOS	C	Maximum weaving length, L_{MAX}	5960 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	10th to Rice
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5110ft	Freeway maximum capacity, C_{IFL}	2350
Freeway free-flow speed, FFS	67 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1424	0.93	10	0	1.5	1.2	0.952	1.00	1608
V_{RF}	586	0.93	6	0	1.5	1.2	0.971	1.00	649
V_{FR}	496	0.93	6	0	1.5	1.2	0.971	1.00	549
V_{RR}	14	0.93	6	0	1.5	1.2	0.971	1.00	16
V_{NW}	1624							V =	2688
V_W	1198								
VR	0.425								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1198 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1622 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2526 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	4148 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	830

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2688 veh/h	Weaving intensity factor, W	0.192
Weaving segment capacity, c_w	5384 veh/h	Weaving segment speed, S	55.8 mph
Weaving segment v/c ratio	0.499	Average weaving speed, S_W	58.6 mph
Weaving segment density, D	16.9 pc/mi/ln	Average non-weaving speed, S_{NW}	53.9 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	6958 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*GHM*
Agency or Company	*HDR*
Date Performed	*11/3/2014*
Analysis Time Period	*AM Peak*

Site Information

Highway/Direction of Travel	*I-229 Northbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2035 No Build*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*2390*	veh/h	Peak-Hour Factor, PHF	*0.85*
AADT		veh/day	%Trucks and Buses, P_T	*9*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.957*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*67.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*67.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*1469*	pc/h/ln
S	*64.9*	mph
D = v_p / S	*22.6*	pc/mi/ln
LOS	*C*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*GHM*
Agency or Company	*HDR*
Date Performed	*11/3/2014*
Analysis Time Period	*PM Peak*

Site Information

Highway/Direction of Travel	*I-229 Northbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2035 No Build*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*2010*	veh/h	Peak-Hour Factor, PHF	*0.93*
AADT		veh/day	%Trucks and Buses, P_T	*9*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.957*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*67.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*67.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*1129*	pc/h/ln
S	*65.0*	mph
D = v_p / S	*17.4*	pc/mi/ln
LOS	*B*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	Rice to Benson
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4510ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	72 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	825	0.85	9	0	1.5	1.2	0.957	1.00	1014
V_{RF}	475	0.85	6	0	1.5	1.2	0.971	1.00	576
V_{FR}	1490	0.85	6	0	1.5	1.2	0.971	1.00	1806
V_{RR}	170	0.85	6	0	1.5	1.2	0.971	1.00	206
V_{NW}	1220							V =	3447
V_W	2382								
VR	0.661								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	576 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	973 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2118 lc/h
Minimum FR lane changes, LC_{FR}	0 lc/pc	Total lane changes, LC_{ALL}	3091 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	550

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	3447 veh/h	Weaving intensity factor, W	0.168
Weaving segment capacity, c_w	3473 veh/h	Weaving segment speed, S	63.2 mph
Weaving segment v/c ratio	0.992	Average weaving speed, S_W	63.8 mph
Weaving segment density, D	19.0 pc/mi/ln	Average non-weaving speed, S_{NW}	62.1 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	9772 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Northbound
Weaving Segment Location	Rice to Benson
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4510ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	72 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1348	0.93	7	0	1.5	1.2	0.966	1.00	1500
V_{RF}	232	0.93	6	0	1.5	1.2	0.971	1.00	257
V_{FR}	662	0.93	6	0	1.5	1.2	0.971	1.00	733
V_{RR}	48	0.93	6	0	1.5	1.2	0.971	1.00	53
V_{NW}	1553							V =	2458
V_W	990								
VR	0.389								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	257 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	654 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2187 lc/h
Minimum FR lane changes, LC_{FR}	0 lc/pc	Total lane changes, LC_{ALL}	2841 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	700

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2458 veh/h	Weaving intensity factor, W	0.157
Weaving segment capacity, c_w	5956 veh/h	Weaving segment speed, S	65.4 mph
Weaving segment v/c ratio	0.413	Average weaving speed, S_W	64.3 mph
Weaving segment density, D	13.0 pc/mi/ln	Average non-weaving speed, S_{NW}	66.1 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	6561 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Benson to Rice
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5670ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	68 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1390	0.85	7	0	1.5	1.2	0.966	1.00	1693
V_{RF}	640	0.85	6	0	1.5	1.2	0.971	1.00	776
V_{FR}	200	0.85	6	0	1.5	1.2	0.971	1.00	242
V_{RR}	10	0.85	6	0	1.5	1.2	0.971	1.00	12
V_{NW}	1705							V =	2631
V_W	1018								
VR	0.374								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1018 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1466 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2847 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	4313 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	967

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	2631 veh/h	Weaving intensity factor, W	0.182
Weaving segment capacity, c_w	6203 veh/h	Weaving segment speed, S	57.6 mph
Weaving segment v/c ratio	0.424	Average weaving speed, S_W	59.8 mph
Weaving segment density, D	15.8 pc/mi/ln	Average non-weaving speed, S_{NW}	56.3 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	6390 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Benson to Rice
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	5670ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	68 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1300	0.93	8	0	1.5	1.2	0.962	1.00	1454
V_{RF}	1320	0.93	6	0	1.5	1.2	0.971	1.00	1462
V_{FR}	270	0.93	6	0	1.5	1.2	0.971	1.00	299
V_{RR}	10	0.93	6	0	1.5	1.2	0.971	1.00	11
V_{NW}	1465							V =	3102
V_W	1761								
VR	0.546								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1761 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	2209 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2797 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	5006 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	831

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	3102 veh/h	Weaving intensity factor, W	0.205
Weaving segment capacity, c_w	4227 veh/h	Weaving segment speed, S	54.6 mph
Weaving segment v/c ratio	0.734	Average weaving speed, S_W	59.0 mph
Weaving segment density, D	19.7 pc/mi/ln	Average non-weaving speed, S_{NW}	50.2 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	8368 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	*GHM*
Agency or Company	*HDR*
Date Performed	*11/3/2014*
Analysis Time Period	*AM Peak*

Site Information

Highway/Direction of Travel	*I-229 Southbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2035 No Build*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*2030*	veh/h	Peak-Hour Factor, PHF	*0.85*
AADT		veh/day	%Trucks and Buses, P_T	*7*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.966*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*69.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*69.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*1236*	pc/h/ln
S	*70.0*	mph
D = v_p / S	*17.7*	pc/mi/ln
LOS	*B*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

BASIC FREEWAY SEGMENTS WORKSHEET

General Information

Analyst	
Agency or Company	*HDR*
Date Performed	*11/3/2014*
Analysis Time Period	*PM Peak*

Site Information

Highway/Direction of Travel	*I-229 Southbound*
From/To	*Rice Off-Ramp to On-Ramp*
Jurisdiction	*Sioux Falls*
Analysis Year	*2035 No Build*

Project Description *I-229 MIS*

☑ Oper.(LOS) ☐ Des.(N) ☐ Planning Data

Flow Inputs

Volume, V	*2620*	veh/h	Peak-Hour Factor, PHF	*0.93*
AADT		veh/day	%Trucks and Buses, P_T	*7*
Peak-Hr Prop. of AADT, K			%RVs, P_R	*0*
Peak-Hr Direction Prop, D			General Terrain:	*Level*
DDHV = AADT x K x D		veh/h	Grade % Length Up/Down %	*mi*

Calculate Flow Adjustments

f_p	*1.00*	E_R	*1.2*
E_T	*1.5*	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	*0.966*

Speed Inputs

Lane Width		ft
Rt-Side Lat. Clearance		ft
Number of Lanes, N	*2*	
Total Ramp Density, TRD		ramps/mi
FFS (measured)	*69.0*	mph
Base free-flow Speed, BFFS		mph

Calc Speed Adj and FFS

f_{LW}		mph
f_{LC}		mph
TRD Adjustment		mph
FFS	*69.0*	mph

LOS and Performance Measures

Operational (LOS)

v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	*1458*	pc/h/ln
S	*69.2*	mph
D = v_p / S	*21.1*	pc/mi/ln
LOS	*C*	

Design (N)

Design (N)

Design LOS	
v_p = (V or DDHV) / (PHF x N x f_{HV} x f_p)	pc/h/ln
S	mph
D = v_p / S	pc/mi/ln
Required Number of Lanes, N	

Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 11-10, 11-12	f_{LW} - Exhibit 11-8
E_T - Exhibits 11-10, 11-11, 11-13	f_{LC} - Exhibit 11-9
f_p - Page 11-18	TRD - Page 11-11
LOS, S, FFS, v_p - Exhibits 11-2, 11-3	

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	AM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Rice to 10th St
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4840ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	69 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	1520	0.85	10	0	1.5	1.2	0.952	1.00	1878
V_{RF}	570	0.85	6	0	1.5	1.2	0.971	1.00	691
V_{FR}	510	0.85	6	0	1.5	1.2	0.971	1.00	618
V_{RR}	10	0.85	6	0	1.5	1.2	0.971	1.00	12
V_{NW}	1890							V =	3047
V_W	1309								
VR	0.409								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1309 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1721 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2435 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	4156 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	915

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	3047 veh/h	Weaving intensity factor, W	0.200
Weaving segment capacity, c_w	5586 veh/h	Weaving segment speed, S	56.6 mph
Weaving segment v/c ratio	0.545	Average weaving speed, S_W	60.0 mph
Weaving segment density, D	18.8 pc/mi/ln	Average non-weaving speed, S_{NW}	54.5 mph
Level of Service, LOS	B	Maximum weaving length, L_{MAX}	6784 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".

Copyright © 2013 University of Florida, All Rights Reserved

FREEWAY WEAVING WORKSHEET

General Information

Analyst	GHM
Agency/Company	HDR
Date Performed	11/3/2014
Analysis Time Period	PM Peak

Site Information

Freeway/Dir of Travel	I-229 Southbound
Weaving Segment Location	Rice to 10th St
Analysis Year	2035 No Build

Project Description I-229 MIS

Inputs

Weaving configuration	One-Sided	Segment type	Freeway
Weaving number of lanes, N	3	Freeway minimum speed, S_{MIN}	15
Weaving segment length, L_S	4840ft	Freeway maximum capacity, C_{IFL}	2400
Freeway free-flow speed, FFS	69 mph	Terrain type	Level

Conversions to pc/h Under Base Conditions

	V (veh/h)	PHF	Truck (%)	RV (%)	E_T	E_R	f_{HV}	f_p	v (pc/h)
V_{FF}	2000	0.93	10	0	1.5	1.2	0.952	1.00	2258
V_{RF}	660	0.93	6	0	1.5	1.2	0.971	1.00	731
V_{FR}	620	0.93	6	0	1.5	1.2	0.971	1.00	687
V_{RR}	10	0.93	6	0	1.5	1.2	0.971	1.00	11
V_{NW}	2269							V =	3512
V_W	1418								
VR	0.385								

Configuration Characteristics

Minimum maneuver lanes, N_{WL}	2 lc	Minimum weaving lane changes, LC_{MIN}	1418 lc/h
Interchange density, ID	1.0 int/mi	Weaving lane changes, LC_W	1830 lc/h
Minimum RF lane changes, LC_{RF}	1 lc/pc	Non-weaving lane changes, LC_{NW}	2513 lc/h
Minimum FR lane changes, LC_{FR}	1 lc/pc	Total lane changes, LC_{ALL}	4343 lc/h
Minimum RR lane changes, LC_{RR}	lc/pc	Non-weaving vehicle index, I_{NW}	1098

Weaving Segment Speed, Density, Level of Service, and Capacity

Weaving segment flow rate, v	3512 veh/h	Weaving intensity factor, W	0.207
Weaving segment capacity, c_w	5943 veh/h	Weaving segment speed, S	55.3 mph
Weaving segment v/c ratio	0.591	Average weaving speed, S_W	59.7 mph
Weaving segment density, D	22.2 pc/mi/ln	Average non-weaving speed, S_{NW}	52.9 mph
Level of Service, LOS	C	Maximum weaving length, L_{MAX}	6509 ft

Notes

a. Weaving segments longer than the calculated maximum length should be treated as isolated merge and diverge areas using the procedures of Chapter 13, "Freeway Merge and Diverge Segments".
b. For volumes that exceed the weaving segment capacity, the level of service is "F".


Copyright © 2013 University of Florida, All Rights Reserved

APPENDIX -

YEAR 2035 BUILD HCS 2010 REPORTS

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Cliff Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice2_AM_6Lane.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	110	450	200	190	1190	250	340	300	70	80	240	150

Signal Information			
Cycle, s	110.0	Reference Phase	2
Offset, s	0	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	7.2	3.8	44.7	5.0	6.4	16.9
Yellow	4.0	0.0	3.6	4.0	4.0	3.6
Red	1.0	0.0	1.9	1.0	1.0	1.9

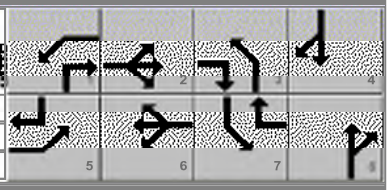

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8	7	4
Case Number	1.1	3.0	1.1	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	12.2	50.2	16.0	54.0	21.4	33.8	10.0	22.4
Change Period, ($Y+R_c$), s	5.0	5.5	5.0	5.5	5.0	5.5	5.0	5.5
Max Allow Headway (*MAH*), s	4.3	4.2	4.1	4.2	4.1	4.1	4.1	4.1
Queue Clearance Time (g_s), s	7.1	14.8	10.7	48.4	15.2	11.7	5.1	13.6
Green Extension Time (g_e), s	0.0	14.5	0.0	0.1	0.2	3.5	0.0	0.3
Phase Call Probability	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Max Out Probability	1.00	0.42	1.00	1.00	1.00	0.05	1.00	1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	129	529	235	224	1400	294	400	353	82	94	282	176
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1617	1439	1617	1617	1439	1616	1664	1311	1616	1664	1481
Queue Service Time (g_s), s	5.1	12.8	9.6	8.7	46.4	11.7	13.2	9.7	2.3	3.1	8.6	11.6
Cycle Queue Clearance Time (g_c), s	5.1	12.8	9.6	8.7	46.4	11.7	13.2	9.7	2.3	3.1	8.6	11.6
Green Ratio (*g/C*)	0.47	0.41	0.56	0.51	0.44	0.49	0.15	0.26	0.36	0.05	0.15	0.22
Capacity (*c*), veh/h	173	1314	799	470	1426	700	482	856	937	147	511	324
Volume-to-Capacity Ratio (*X*)	0.748	0.403	0.294	0.476	0.982	0.420	0.830	0.412	0.088	0.641	0.552	0.544
Available Capacity (c_a), veh/h	173	1314	799	470	1426	700	482	856	937	147	511	324
Back of Queue (*Q*), veh/ln (95th percentile)	4.9	8.7	5.7	5.2	22.1	5.6	10.0	7.0	1.3	2.6	6.5	7.7
Queue Storage Ratio (*RQ*) (95th percentile)	0.85	0.23	0.60	0.34	0.58	0.83	0.93	0.18	0.12	0.19	0.17	0.66
Uniform Delay (d_1), s/veh	25.8	23.2	13.0	15.7	22.2	12.9	45.4	33.9	23.5	51.6	43.1	38.1
Incremental Delay (d_2), s/veh	16.4	0.2	0.2	0.5	14.5	0.2	11.6	0.3	0.0	9.0	1.3	1.9
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	42.1	23.4	13.2	16.1	36.7	13.2	57.1	34.3	23.5	60.6	44.3	40.0
Level of Service (LOS)	D	C	B	B	D	B	E	C	C	E	D	D
Approach Delay, s/veh / LOS	23.4	C		30.7	C		44.1	D		45.7	D	
Intersection Delay, s/veh / LOS	33.8						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.2	C	3.0	C	3.0	C	3.0	C
Bicycle LOS Score / LOS	1.2	A	2.1	B	1.2	A	0.9	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Wayland Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice2_AM_6Lane.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	10	580	10	20	1600	40	20	10	40	50	10	10

Signal Information					EB			WB			NB			SB		
Cycle, s	110.0	Reference Phase	2													
Offset, s	65	Reference Point	Begin	Green	1.2	0.8		83.9	7.5	0.0	0.0					
Uncoordinated	Yes	Simult. Gap E/W	On	Yellow	4.0	0.0		3.9	3.0	0.0	0.0					
Force Mode	Fixed	Simult. Gap N/S	On	Red	2.0	0.0		1.2	2.5	0.0	0.0					

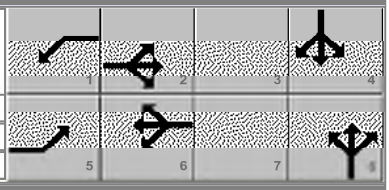

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	1.1	4.0	1.1	4.0		8.0		8.0
Phase Duration, s	7.2	89.0	8.0	89.8		13.0		13.0
Change Period, ($Y+R_c$), s	6.0	5.1	6.0	5.1		5.5		5.5
Max Allow Headway (*MAH*), s	4.1	4.0	4.1	4.0		4.2		4.2
Queue Clearance Time (g_s), s	2.2	2.0	2.4	2.0		4.9		7.5
Green Extension Time (g_e), s	0.0	22.9	0.0	22.9		0.1		0.0
Phase Call Probability	1.00	1.00	1.00	1.00		1.00		1.00
Max Out Probability	1.00	0.11	1.00	0.11		1.00		1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	12	348	346	24	965	965		45			76	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1698	1688	1617	1698	1683		1585			1477	
Queue Service Time (g_s), s	0.2	0.0	0.0	0.4	0.0	0.0		0.0			2.7	
Cycle Queue Clearance Time (g_c), s	0.2	0.0	0.0	0.4	0.0	0.0		2.9			5.5	
Green Ratio (*g/C*)	0.77	0.76	0.76	0.78	0.77	0.77		0.07			0.07	
Capacity (*c*), veh/h	249	1295	1287	643	1308	1296		158			159	
Volume-to-Capacity Ratio (*X*)	0.047	0.269	0.269	0.037	0.738	0.744		0.283			0.482	
Available Capacity (c_a), veh/h	249	1295	1287	643	1308	1296		158			159	
Back of Queue (*Q*), veh/ln (95th percentile)	0.1	0.3	0.3	0.2	1.1	1.2		2.2			3.9	
Queue Storage Ratio (*RQ*) (95th percentile)	0.00	0.01	0.01	0.00	0.01	0.01		0.22			0.40	
Uniform Delay (d_1), s/veh	2.8	0.0	0.0	2.7	0.0	0.0		49.1			50.3	
Incremental Delay (d_2), s/veh	0.1	0.5	0.5	0.0	1.7	1.8		1.0			2.3	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0			0.0	
Control Delay (*d*), s/veh	2.9	0.5	0.5	2.7	1.7	1.8		50.0			52.5	
Level of Service (LOS)	A	A	A	A	A	A		D			D	
Approach Delay, s/veh / LOS	0.5	A		1.8	A		50.0	D		52.5	D	
Intersection Delay, s/veh / LOS	3.6						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.1	B	2.0	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	1.1	A	2.1	B	0.6	A	0.6	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & I-229 SB	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice2_AM_6Lane.xus				
Project Description	2035 NB AM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	110	580			1580	470				130		80

Signal Information			
Cycle, s	105.0	Reference Phase	2
Offset, s	78	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

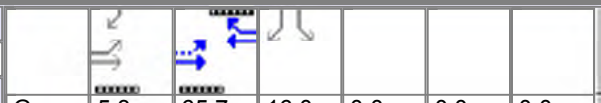

Green	5.3	65.7	16.0	0.0	0.0	0.0
Yellow	3.0	5.0	4.0	0.0	0.0	0.0
Red	2.0	2.0	2.0	0.0	0.0	0.0

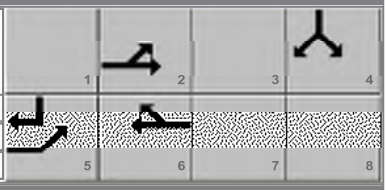

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	1.0	4.0		7.3				9.0
Phase Duration, s	10.3	83.0		72.7				22.0
Change Period, (*Y*+*Rc*), s	5.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.2
Queue Clearance Time (*gs*), s	5.0							11.7
Green Extension Time (*ge*), s	0.5	0.0		0.0				0.5
Phase Call Probability	0.98							1.00
Max Out Probability	0.00							0.14


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	129	682			1859	553				153		94
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1548	1486			1723	1457				1555		1389
Queue Service Time (*gs*), s	3.0	0.7			20.6	1.7				9.7		6.1
Cycle Queue Clearance Time (*gc*), s	3.0	0.7			20.6	1.7				9.7		6.1
Green Ratio (*g/C*)	0.69	0.72			0.63	0.63				0.15		0.20
Capacity (*c*), veh/h	240	3227			2154	911				237		283
Volume-to-Capacity Ratio (*X*)	0.539	0.211			0.863	0.607				0.646		0.333
Available Capacity (*ca*), veh/h	928	3227			2154	911				281		322
Back of Queue (*Q*), veh/ln (95th percentile)	2.2	0.3			3.3	0.8				7.0		3.7
Queue Storage Ratio (*RQ*) (95th percentile)	0.29	0.00			0.08	0.08				0.61		0.10
Uniform Delay (*d1*), s/veh	11.7	0.5			2.2	0.3				41.8		35.7
Incremental Delay (*d2*), s/veh	1.8	0.1			1.5	0.9				3.8		0.7
Initial Queue Delay (*d3*), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	13.6	0.7			3.7	1.3				45.7		36.4
Level of Service (LOS)	B	A			A	A				D		D
Approach Delay, s/veh / LOS	2.7	A		3.1	A		0.0			42.2	D	
Intersection Delay, s/veh / LOS	5.8						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.7	A	2.2	B	3.2	C	3.0	C
Bicycle LOS Score / LOS	0.9	A	2.5	B				F

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & I-229 NB / Clevel	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice2_AM_6Lane.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	100	390	220	220	1540	170	260	300	500	100	50	250

Signal Information										
Cycle, s	105.0	Reference Phase	2							
Offset, s	53	Reference Point	Begin							
Uncoordinated	No	Simult. Gap E/W	On							
Force Mode	Fixed	Simult. Gap N/S	On							
				Green	7.0	21.0	15.1	6.0	1.0	18.0
				Yellow	4.0	5.0	4.0	4.0	4.0	4.0
				Red	2.0	2.0	2.0	2.0	2.0	2.0



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8	7	4
Case Number	1.2	3.0	2.0	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	13.0	41.0	21.1	49.1	18.9	30.9	12.0	24.0
Change Period, ($Y+R_c$), s	6.0	7.0	7.0	7.0	6.0	6.0	6.0	6.0
Max Allow Headway (*MAH*), s	4.1	0.0	4.1	0.0	4.2	4.3	4.1	4.3
Queue Clearance Time (g_s), s	8.2		10.4		11.9	26.9	6.1	10.3
Green Extension Time (g_e), s	0.0	0.0	3.7	0.0	1.0	0.0	0.1	2.6
Phase Call Probability	0.97		1.00		1.00	1.00	0.97	1.00
Max Out Probability	1.00		0.98		0.01	1.00	1.00	0.54


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	118	459	152	259	1812	168	306	353	441	118	59	129
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1545	1471	1378	1503	1566	1381	1569	1730	1490	1483	1599	1374
Queue Service Time (g_s), s	6.2	7.9	7.6	8.4	38.9	6.4	9.9	20.5	24.9	4.1	3.3	8.3
Cycle Queue Clearance Time (g_c), s	6.2	7.9	7.6	8.4	38.9	6.4	9.9	20.5	24.9	4.1	3.3	8.3
Green Ratio (*g/C*)	0.29	0.32	0.45	0.13	0.40	0.46	0.12	0.24	0.37	0.06	0.17	0.24
Capacity (*c*), veh/h	173	1429	616	404	1880	631	387	411	554	169	273	328
Volume-to-Capacity Ratio (*X*)	0.681	0.321	0.246	0.641	0.964	0.266	0.791	0.860	0.797	0.696	0.215	0.395
Available Capacity (c_a), veh/h	173	1429	616	429	1880	631	714	411	554	252	273	328
Back of Queue (*Q*), veh/ln (95th percentile)	4.8	5.0	2.7	4.3	15.2	2.9	7.3	15.8	7.7	2.9	2.3	5.0
Queue Storage Ratio (*RQ*) (95th percentile)	0.73	0.12	0.31	0.65	0.40	0.51	0.74	0.40	0.98	0.38	0.08	0.87
Uniform Delay (d_1), s/veh	31.0	25.5	5.9	40.8	23.8	13.4	44.7	38.4	8.6	48.6	37.5	33.6
Incremental Delay (d_2), s/veh	10.0	0.6	0.9	0.7	4.4	0.2	3.7	16.6	8.0	5.1	0.4	0.8
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	41.0	26.0	6.9	41.4	28.1	13.6	48.4	55.0	16.6	53.7	37.9	34.4
Level of Service (LOS)	D	C	A	D	C	B	D	D	B	D	D	C
Approach Delay, s/veh / LOS	24.4	C		28.6	C		37.7	D		42.5	D	
Intersection Delay, s/veh / LOS	31.2						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.1	C	2.8	C	3.5	D	3.5	D
Bicycle LOS Score / LOS	0.9	A	1.7	A	2.3	B	1.0	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Bahnson Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice2_AM_6Lane.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	200	740	50	80	1800	50	50	80	40	10	20	80

Signal Information										
Cycle, s	110.6	Reference Phase	2							
Offset, s	74	Reference Point	Begin							
Uncoordinated	Yes	Simult. Gap E/W	On							
Force Mode	Fixed	Simult. Gap N/S	On							
				Green	4.5	63.0	10.7	8.5	0.0	0.0
				Yellow	4.0	4.0	4.0	4.0	0.0	0.0
				Red	2.0	2.0	2.0	2.0	0.0	0.0



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	2.0	3.0	1.2	3.0		5.0		5.0
Phase Duration, s	16.7	85.6	10.5	79.5		14.5		14.5
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0		6.0		6.0
Max Allow Headway (*MAH*), s	3.2	3.2	4.0	2.9		4.3		4.3
Queue Clearance Time (g_s), s	10.0	3.9	4.6	67.4		7.9		8.8
Green Extension Time (g_e), s	0.6	3.2	0.1	5.8		0.6		0.0
Phase Call Probability	1.00	1.00	0.95	1.00		1.00		1.00
Max Out Probability	0.03	0.00	0.03	0.29		0.05		1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	235	871	59	94	2118	59	59	94	47	12	24	94
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1570	1617	1439	1617	1617	1439	1382	1765	1496	1297	1765	1496
Queue Service Time (g_s), s	8.0	1.9	0.2	2.6	65.4	0.5	4.6	5.8	3.2	1.0	1.4	6.2
Cycle Queue Clearance Time (g_c), s	8.0	1.9	0.2	2.6	65.4	0.5	5.9	5.8	3.2	6.8	1.4	6.2
Green Ratio (*g/C*)	0.10	0.72	0.72	0.63	0.66	0.66	0.08	0.08	0.12	0.08	0.08	0.17
Capacity (*c*), veh/h	304	2327	1036	467	2149	956	155	135	175	96	135	259
Volume-to-Capacity Ratio (*X*)	0.774	0.374	0.057	0.201	0.986	0.062	0.380	0.698	0.269	0.123	0.175	0.364
Available Capacity (c_a), veh/h	679	2327	1036	577	2331	1038	273	286	303	96	135	259
Back of Queue (*Q*), veh/ln (95th percentile)	5.6	0.6	0.1	1.4	12.0	0.3	3.0	5.0	2.2	0.6	1.1	4.2
Queue Storage Ratio (*RQ*) (95th percentile)	0.84	0.01	0.01	0.25	0.31	0.04	0.51	0.13	0.37	0.10	0.03	0.71
Uniform Delay (d_1), s/veh	47.1	0.7	0.6	8.1	5.8	2.2	50.6	50.0	44.7	53.3	48.0	40.5
Incremental Delay (d_2), s/veh	3.4	0.0	0.0	0.2	14.6	0.0	1.5	6.3	0.8	0.6	0.6	0.9
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	50.5	0.7	0.6	8.3	20.5	2.2	52.2	56.3	45.5	53.9	48.6	41.3
Level of Service (LOS)	D	A	A	A	C	A	D	E	D	D	D	D
Approach Delay, s/veh / LOS	10.8	B		19.5	B		52.6	D		43.8	D	
Intersection Delay, s/veh / LOS	19.4						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.4	B	2.9	C	3.0	C	3.1	C
Bicycle LOS Score / LOS	1.4	A	2.4	B	0.8	A	0.7	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Cliff Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice2_PM_6Lane.xus				
Project Description	2035 NB PM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	100	1200	250	220	760	150	200	250	410	450	650	240

Signal Information			
Cycle, s	120.0	Reference Phase	2
Offset, s	0	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On



Green	4.0	5.0	48.5	9.0	5.7	16.8
Yellow	4.0	4.0	3.6	4.0	4.0	3.6
Red	1.0	1.0	1.9	1.0	1.0	1.9

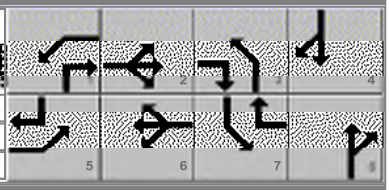

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8	7	4
Case Number	1.1	3.0	1.1	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	9.0	54.0	19.0	64.0	14.0	22.3	24.7	33.0
Change Period, ($Y+R_c$), s	5.0	5.5	5.0	5.5	5.0	5.5	5.0	5.5
Max Allow Headway (*MAH*), s	4.3	4.2	4.1	4.2	4.1	4.2	4.1	4.2
Queue Clearance Time (g_s), s	6.0	49.5	14.6	18.0	9.9	18.8	19.7	26.6
Green Extension Time (g_e), s	0.0	0.0	0.0	19.4	0.0	0.0	0.0	0.7
Phase Call Probability	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Max Out Probability	1.00	1.00	1.00	0.27	1.00	1.00	1.00	1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	108	1290	269	237	817	161	215	269	441	484	699	258
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1617	1439	1617	1617	1439	1616	1664	1311	1616	1664	1481
Queue Service Time (g_s), s	4.0	47.5	14.4	12.6	16.0	3.8	7.9	9.1	16.8	17.7	24.6	18.7
Cycle Queue Clearance Time (g_c), s	4.0	47.5	14.4	12.6	16.0	3.8	7.9	9.1	16.8	17.7	24.6	18.7
Green Ratio (*g/C*)	0.44	0.40	0.48	0.54	0.49	0.65	0.08	0.14	0.26	0.16	0.23	0.26
Capacity (*c*), veh/h	330	1307	690	252	1576	938	242	466	673	531	763	389
Volume-to-Capacity Ratio (*X*)	0.326	0.987	0.390	0.938	0.518	0.172	0.887	0.577	0.655	0.912	0.917	0.664
Available Capacity (c_a), veh/h	330	1307	690	252	1576	938	242	466	673	531	763	389
Back of Queue (*Q*), veh/ln (95th percentile)	0.8	30.5	8.7	9.4	8.1	1.9	7.6	6.9	10.0	13.3	17.3	11.6
Queue Storage Ratio (*RQ*) (95th percentile)	0.14	0.80	0.91	0.61	0.21	0.28	0.70	0.18	0.93	0.97	0.44	0.99
Uniform Delay (d_1), s/veh	21.6	35.4	20.0	33.5	13.6	5.4	55.0	48.3	39.9	49.3	45.1	39.5
Incremental Delay (d_2), s/veh	0.6	21.8	0.4	36.0	0.3	0.1	30.1	1.8	2.3	20.1	15.9	4.2
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	22.2	57.3	20.4	69.5	13.8	5.5	85.1	50.0	42.2	69.4	61.0	43.7
Level of Service (LOS)	C	E	C	E	B	A	F	D	D	E	E	D
Approach Delay, s/veh / LOS	49.1	D		23.6	C		54.4	D		60.7	E	
Intersection Delay, s/veh / LOS	47.3						D					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.2	C	3.0	C	3.0	C	3.0	C
Bicycle LOS Score / LOS	1.9	A	1.5	A	1.3	A	1.7	A

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Wayland Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice2_PM_6Lane.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	30	1990	40	90	1070	150	30	10	100	70	10	30

Signal Information			
Cycle, s	120.0	Reference Phase	2
Offset, s	82	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	2.6	1.2	90.1	9.5	0.0	0.0
Yellow	4.0	0.0	3.9	3.0	0.0	0.0
Red	2.0	0.0	1.2	2.5	0.0	0.0



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	1.1	4.0	1.1	4.0		8.0		8.0
Phase Duration, s	8.6	95.2	9.8	96.4		15.0		15.0
Change Period, (Y+R_c), s	6.0	5.1	6.0	5.1		5.5		5.5
Max Allow Headway (*MAH*), s	4.1	4.0	4.1	4.0		4.1		4.1
Queue Clearance Time (g_s), s	2.6	2.0	3.7	2.0		5.3		9.9
Green Extension Time (g_e), s	0.0	45.9	0.0	46.2		0.1		0.0
Phase Call Probability	1.00	1.00	1.00	1.00		1.00		1.00
Max Out Probability	1.00	0.46	1.00	0.45		0.92		1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	32	1089	1089	97	669	643		43			99	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1698	1687	1617	1698	1625		1462			1478	
Queue Service Time (g_s), s	0.6	0.0	0.0	1.7	0.0	0.0		0.0			4.6	
Cycle Queue Clearance Time (g_c), s	0.6	0.0	0.0	1.7	0.0	0.0		3.3			7.9	
Green Ratio (*g*/*C*)	0.77	0.75	0.75	0.78	0.76	0.76		0.08			0.08	
Capacity (*c*), veh/h	394	1275	1267	241	1292	1236		168			170	
Volume-to-Capacity Ratio (*X*)	0.082	0.854	0.860	0.402	0.518	0.520		0.256			0.582	
Available Capacity (c_a), veh/h	394	1275	1267	241	1292	1236		168			170	
Back of Queue (*Q*), veh/ln (95th percentile)	0.3	1.5	1.6	0.8	0.6	0.7		2.3			5.7	
Queue Storage Ratio (*RQ*) (95th percentile)	0.05	0.04	0.04	0.15	0.00	0.00		0.23			0.58	
Uniform Delay (d_1), s/veh	3.1	0.0	0.0	3.0	0.0	0.0		52.3			54.4	
Incremental Delay (d_2), s/veh	0.0	2.4	2.5	0.7	1.0	1.1		0.8			5.0	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0			0.0	
Control Delay (*d*), s/veh	3.2	2.4	2.5	3.7	1.0	1.1		53.1			59.4	
Level of Service (LOS)	A	A	A	A	A	A		D			E	
Approach Delay, s/veh / LOS	2.5	A		1.2	A		53.1	D		59.4	E	
Intersection Delay, s/veh / LOS	4.1						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.2	B	2.1	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	2.3	B	1.6	A	0.6	A	0.7	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 SB	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice2_PM_6Lane.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	170	1980			1285	500				210		70

Signal Information					Green	Yellow	Red
Cycle, s	100.0	Reference Phase	2		6.7	3.0	2.0
Offset, s	35	Reference Point	Begin		58.7	5.0	2.0
Uncoordinated	No	Simult. Gap E/W	On		16.6	4.0	2.0
Force Mode	Fixed	Simult. Gap N/S	On		0.0	0.0	0.0
					0.0	0.0	0.0
					0.0	0.0	0.0



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	1.0	4.0		7.3				9.0
Phase Duration, s	11.7	77.4		65.7				22.6
Change Period, ($Y+R_c$), s	5.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.1
Queue Clearance Time (g_s), s	6.4							16.0
Green Extension Time (g_e), s	0.3	0.0		0.0				0.7
Phase Call Probability	0.99							1.00
Max Out Probability	0.13							0.12


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	183	2129			1382	538				226		75
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1561	1583			1655	1449				1573		1406
Queue Service Time (g_s), s	4.4	6.9			25.4	16.0				14.0		4.3
Cycle Queue Clearance Time (g_c), s	4.4	6.9			25.4	16.0				14.0		4.3
Green Ratio (*g/C*)	0.67	0.70			0.59	0.59				0.17		0.23
Capacity (*c*), veh/h	298	3341			1942	850				262		328
Volume-to-Capacity Ratio (*X*)	0.613	0.637			0.711	0.633				0.863		0.230
Available Capacity (c_a), veh/h	403	3341			1942	850				378		431
Back of Queue (*Q*), veh/ln (95th percentile)	2.9	1.7			10.7	6.0				10.3		2.6
Queue Storage Ratio (*RQ*) (95th percentile)	0.38	0.01			0.27	0.63				0.90		0.07
Uniform Delay (d_1), s/veh	12.9	1.1			10.3	6.3				40.6		31.1
Incremental Delay (d_2), s/veh	0.9	0.4			1.5	2.3				13.2		0.4
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	13.8	1.5			11.8	8.6				53.8		31.4
Level of Service (LOS)	B	A			B	A				D		C
Approach Delay, s/veh / LOS	2.5	A		10.9	B		0.0			48.2	D	
Intersection Delay, s/veh / LOS	9.1						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.7	A	2.2	B	3.2	C	3.0	C
Bicycle LOS Score / LOS	1.8	A	2.1	B				F

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 NB / Clevel	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice2_PM_6Lane.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	140	1550	500	300	1270	50	385	90	80	280	100	130

Signal Information												
Cycle, s	100.0	Reference Phase	2									
Offset, s	62	Reference Point	Begin									
Uncoordinated	No	Simult. Gap E/W	On									
Force Mode	Fixed	Simult. Gap N/S	On									
				Green	12.8	26.4	5.6	12.3	2.9	9.0		
				Yellow	4.0	5.0	4.0	4.0	0.0	4.0		
				Red	2.0	2.0	2.0	2.0	0.0	2.0		



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8	7	4
Case Number	1.3	3.0	2.0	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	11.6	45.0	18.8	52.1	21.2	17.9	18.3	15.0
Change Period, ($Y+R_c$), s	7.0	7.0	6.0	7.0	6.0	6.0	6.0	6.0
Max Allow Headway (*MAH*), s	4.1	0.0	4.1	0.0	4.2	4.2	4.1	4.2
Queue Clearance Time (g_s), s	2.0		12.3		14.8	7.4	11.7	8.5
Green Extension Time (g_e), s	2.4	0.0	0.4	0.0	0.4	0.8	0.6	0.5
Phase Call Probability	0.98		1.00		1.00	1.00	1.00	1.00
Max Out Probability	1.00		1.00		1.00	0.12	0.48	0.94


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	151	1667	366	323	1366	37	414	97	59	301	108	84
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1552	1550	1416	1510	1529	1357	1582	1670	1414	1507	1609	1365
Queue Service Time (g_s), s	0.0	34.2	15.0	10.3	19.9	0.9	12.8	5.4	3.3	9.7	6.5	5.6
Cycle Queue Clearance Time (g_c), s	0.0	34.2	15.0	10.3	19.9	0.9	12.8	5.4	3.3	9.7	6.5	5.6
Green Ratio (*g/C*)	0.29	0.38	0.53	0.13	0.45	0.57	0.15	0.12	0.25	0.12	0.09	0.14
Capacity (*c*), veh/h	229	1767	753	386	2057	775	481	199	349	370	145	191
Volume-to-Capacity Ratio (*X*)	0.657	0.943	0.485	0.836	0.664	0.047	0.861	0.486	0.169	0.813	0.741	0.440
Available Capacity (c_a), veh/h	235	1767	753	477	2057	775	538	262	403	512	206	242
Back of Queue (*Q*), veh/ln (95th percentile)	6.4	17.4	7.3	6.4	8.4	0.2	9.7	4.2	2.0	7.0	5.1	2.6
Queue Storage Ratio (*RQ*) (95th percentile)	0.96	0.44	0.85	0.96	0.22	0.03	0.98	0.11	0.26	0.91	0.17	0.45
Uniform Delay (d_1), s/veh	38.5	26.3	12.0	40.5	15.1	2.0	41.4	41.2	29.6	42.7	44.3	3.1
Incremental Delay (d_2), s/veh	4.5	8.8	1.6	6.1	1.0	0.1	12.4	1.8	0.2	6.9	8.3	1.6
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	43.0	35.1	13.6	46.6	16.1	2.0	53.7	43.0	29.8	49.6	52.6	4.7
Level of Service (LOS)	D	D	B	D	B	A	D	D	C	D	D	A
Approach Delay, s/veh / LOS	32.0	C		21.5	C		49.4	D		42.6	D	
Intersection Delay, s/veh / LOS	31.4						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.0	C	2.7	B	3.5	D	3.6	D
Bicycle LOS Score / LOS	1.7	A	1.4	A	1.4	A	1.3	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Bahnson Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice2_PM_6Lane.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	120	1680	110	60	1370	20	120	40	60	60	120	130

Signal Information												
Cycle, s	100.3	Reference Phase	2									
Offset, s	100	Reference Point	Begin									
Uncoordinated	Yes	Simult. Gap E/W	On	Green	6.2	45.0	4.7	20.3	0.0	0.0		
Force Mode	Fixed	Simult. Gap N/S	On	Yellow	4.0	4.0	4.0	4.0	0.0	0.0		
				Red	2.0	2.0	2.0	2.0	0.0	0.0		



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	2.0	3.0	1.3	3.0		5.0		5.0
Phase Duration, s	12.2	63.2	10.7	61.8		26.3		26.3
Change Period, (Y+R_c), s	6.0	6.0	6.0	6.0		6.0		6.0
Max Allow Headway (*MAH*), s	4.0	2.9	3.0	3.0		4.3		4.3
Queue Clearance Time (g_s), s	6.0	54.4	2.0	32.0		18.4		9.6
Green Extension Time (g_e), s	0.4	3.0	3.7	4.5		2.2		2.3
Phase Call Probability	0.97	1.00	0.83	1.00		1.00		1.00
Max Out Probability	0.00	0.64	0.12	0.00		0.00		0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	129	1806	118	65	1473	22	129	43	65	65	129	140
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1570	1617	1439	1617	1617	1439	1256	1765	1496	1358	1765	1496
Queue Service Time (g_s), s	4.0	52.4	2.2	0.0	30.0	0.4	9.9	2.0	3.4	4.1	6.3	7.6
Cycle Queue Clearance Time (g_c), s	4.0	52.4	2.2	0.0	30.0	0.4	16.4	2.0	3.4	6.2	6.3	7.6
Green Ratio (*g*/*C*)	0.06	0.57	0.57	0.47	0.56	0.56	0.20	0.20	0.25	0.20	0.20	0.27
Capacity (*c*), veh/h	196	1845	821	158	1799	801	243	355	372	317	355	394
Volume-to-Capacity Ratio (*X*)	0.658	0.979	0.144	0.409	0.819	0.027	0.531	0.121	0.173	0.204	0.363	0.355
Available Capacity (c_a), veh/h	722	1939	863	307	2295	1021	505	723	684	600	723	706
Back of Queue (*Q*), veh/ln (95th percentile)	2.6	11.2	1.0	2.7	9.3	0.2	5.7	1.6	2.2	2.5	4.9	5.0
Queue Storage Ratio (*RQ*) (95th percentile)	0.39	0.13	0.18	0.48	0.24	0.03	0.96	0.04	0.38	0.42	0.13	0.84
Uniform Delay (d_1), s/veh	44.8	11.4	5.4	44.4	9.6	5.8	41.6	32.7	29.5	35.3	34.4	29.9
Incremental Delay (d_2), s/veh	1.2	7.1	0.0	1.7	1.5	0.0	1.8	0.2	0.2	0.3	0.6	0.5
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	46.0	18.4	5.4	46.1	11.1	5.8	43.4	32.9	29.7	35.6	35.1	30.5
Level of Service (LOS)	D	B	A	D	B	A	D	C	C	D	D	C
Approach Delay, s/veh / LOS	19.4	B		12.5	B		37.7	D		33.2	C	
Intersection Delay, s/veh / LOS	19.0						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.5	B	2.8	C	3.0	C	3.1	C
Bicycle LOS Score / LOS	2.2	B	1.8	A	0.9	A	1.0	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Cliff Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice3C_AM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB AM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	110	450	200	190	1190	250	340	300	70	80	240	150

Signal Information			
Cycle, s	110.0	Reference Phase	2
Offset, s	0	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On



Green	7.2	3.8	44.7	5.0	6.4	16.9
Yellow	4.0	0.0	3.6	4.0	4.0	3.6
Red	1.0	0.0	1.9	1.0	1.0	1.9

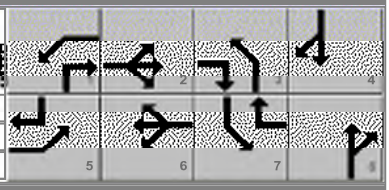

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8	7	4
Case Number	1.1	3.0	1.1	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	12.2	50.2	16.0	54.0	21.4	33.8	10.0	22.4
Change Period, ($Y+R_c$), s	5.0	5.5	5.0	5.5	5.0	5.5	5.0	5.5
Max Allow Headway (*MAH*), s	4.3	4.2	4.1	4.2	4.1	4.1	4.1	4.1
Queue Clearance Time (g_s), s	7.1	14.8	10.7	48.4	15.2	11.7	5.1	13.6
Green Extension Time (g_e), s	0.0	14.5	0.0	0.1	0.2	3.5	0.0	0.3
Phase Call Probability	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Max Out Probability	1.00	0.42	1.00	1.00	1.00	0.05	1.00	1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	129	529	235	224	1400	294	400	353	82	94	282	176
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1617	1439	1617	1617	1439	1616	1664	1311	1616	1664	1481
Queue Service Time (g_s), s	5.1	12.8	9.6	8.7	46.4	11.7	13.2	9.7	2.3	3.1	8.6	11.6
Cycle Queue Clearance Time (g_c), s	5.1	12.8	9.6	8.7	46.4	11.7	13.2	9.7	2.3	3.1	8.6	11.6
Green Ratio (*g/C*)	0.47	0.41	0.56	0.51	0.44	0.49	0.15	0.26	0.36	0.05	0.15	0.22
Capacity (*c*), veh/h	172	1314	799	470	1426	700	482	856	937	147	511	324
Volume-to-Capacity Ratio (*X*)	0.755	0.403	0.294	0.476	0.982	0.420	0.830	0.412	0.088	0.641	0.552	0.544
Available Capacity (c_a), veh/h	172	1314	799	470	1426	700	482	856	937	147	511	324
Back of Queue (*Q*), veh/ln (95th percentile)	4.9	8.7	5.7	5.2	22.1	5.6	10.0	7.0	1.3	2.6	6.5	7.7
Queue Storage Ratio (*RQ*) (95th percentile)	0.86	0.23	0.60	0.34	0.58	0.83	0.93	0.18	0.12	0.19	0.17	0.66
Uniform Delay (d_1), s/veh	25.8	23.2	13.0	15.7	22.2	12.9	45.4	33.9	23.5	51.6	43.1	38.1
Incremental Delay (d_2), s/veh	17.2	0.2	0.2	0.5	14.5	0.2	11.6	0.3	0.0	9.0	1.3	1.9
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	42.9	23.4	13.2	16.1	36.7	13.2	57.1	34.3	23.5	60.6	44.3	40.0
Level of Service (LOS)	D	C	B	B	D	B	E	C	C	E	D	D
Approach Delay, s/veh / LOS	23.5	C		30.7	C		44.1	D		45.7	D	
Intersection Delay, s/veh / LOS	33.8						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.2	C	3.0	C	3.0	C	3.0	C
Bicycle LOS Score / LOS	1.2	A	2.1	B	1.2	A	0.9	A

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Wayland Ave	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice3C_AM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	10	580	10	20	1600	40	20	10	40	50	10	10

Signal Information			
Cycle, s	110.0	Reference Phase	2
Offset, s	65	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	1.2	0.8	83.9	7.5	0.0	0.0
Yellow	4.0	0.0	3.9	3.0	0.0	0.0
Red	2.0	0.0	1.2	2.5	0.0	0.0

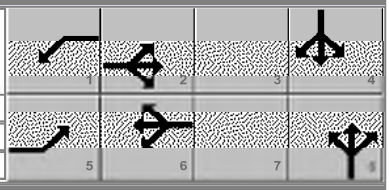

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	1.1	4.0	1.1	4.0		8.0		8.0
Phase Duration, s	7.2	89.0	8.0	89.8		13.0		13.0
Change Period, (Y+R_c), s	6.0	5.1	6.0	5.1		5.5		5.5
Max Allow Headway (*MAH*), s	4.1	4.0	4.1	4.0		4.2		4.2
Queue Clearance Time (g_s), s	2.2	2.0	2.4	2.0		4.9		7.5
Green Extension Time (g_e), s	0.0	22.9	0.0	22.9		0.1		0.0
Phase Call Probability	1.00	1.00	1.00	1.00		1.00		1.00
Max Out Probability	1.00	0.11	1.00	0.11		1.00		1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	12	348	346	24	965	965		45			76	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1698	1688	1617	1698	1683		1585			1477	
Queue Service Time (g_s), s	0.2	0.0	0.0	0.4	0.0	0.0		0.0			2.7	
Cycle Queue Clearance Time (g_c), s	0.2	0.0	0.0	0.4	0.0	0.0		2.9			5.5	
Green Ratio (*g*/*C*)	0.77	0.76	0.76	0.78	0.77	0.77		0.07			0.07	
Capacity (*c*), veh/h	249	1295	1287	643	1308	1296		158			159	
Volume-to-Capacity Ratio (*X*)	0.047	0.269	0.269	0.037	0.738	0.744		0.283			0.482	
Available Capacity (c_a), veh/h	249	1295	1287	643	1308	1296		158			159	
Back of Queue (*Q*), veh/ln (95th percentile)	0.1	0.3	0.3	0.2	0.9	0.9		2.2			3.9	
Queue Storage Ratio (*RQ*) (95th percentile)	0.00	0.01	0.01	0.00	0.01	0.01		0.22			0.40	
Uniform Delay (d_1), s/veh	2.8	0.0	0.0	2.7	0.0	0.0		49.1			50.3	
Incremental Delay (d_2), s/veh	0.1	0.5	0.5	0.0	1.3	1.4		1.0			2.3	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0			0.0	
Control Delay (*d*), s/veh	2.9	0.5	0.5	2.7	1.3	1.4		50.0			52.5	
Level of Service (LOS)	A	A	A	A	A	A		D			D	
Approach Delay, s/veh / LOS	0.5	A		1.4	A		50.0	D		52.5	D	
Intersection Delay, s/veh / LOS	3.4						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.1	B	2.0	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	1.1	A	2.1	B	0.6	A	0.6	A

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & I-229 SB / Lowell	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice3C_AM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	90	550	30	20	1560	470	40	20	30	130	20	60

Signal Information			
Cycle, s	130.0	Reference Phase	2
Offset, s	99	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	2.3	3.3	74.4	9.0	17.0	0.0	
Yellow	3.0	0.0	5.0	4.0	4.0	0.0	
Red	2.0	0.0	2.0	2.0	2.0	0.0	

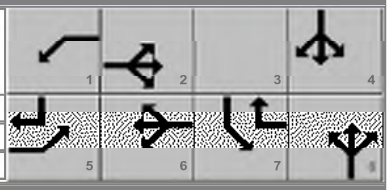

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8	7	4
Case Number	1.1	4.0	1.1	3.0		8.3	1.0	4.0
Phase Duration, s	10.6	84.7	7.3	81.4		23.0	15.0	38.0
Change Period, ($Y+R_c$), s	5.0	7.0	5.0	7.0		6.0	6.0	6.0
Max Allow Headway (*MAH*), s	4.1	0.0	4.1	0.0		4.3	4.1	4.3
Queue Clearance Time (g_s), s	5.7		2.8			11.0	11.0	8.9
Green Extension Time (g_e), s	0.0	0.0	0.0	0.0		0.2	0.0	0.7
Phase Call Probability	0.98		0.57			1.00	1.00	1.00
Max Out Probability	1.00		1.00			0.32	1.00	0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	106	458	224	24	1835	553		106		153	94	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1549	1649	1603	1519	1749	1485		1364		1566	1425	
Queue Service Time (g_s), s	3.7	4.5	4.5	0.8	53.1	15.0		7.0		9.0	6.9	
Cycle Queue Clearance Time (g_c), s	3.7	4.5	4.5	0.8	53.1	15.0		9.0		9.0	6.9	
Green Ratio (*g/C*)	0.62	0.60	0.60	0.59	0.57	0.64		0.13		0.22	0.25	
Capacity (*c*), veh/h	160	1972	959	456	2003	953		218		240	351	
Volume-to-Capacity Ratio (*X*)	0.662	0.232	0.234	0.052	0.916	0.580		0.485		0.637	0.268	
Available Capacity (c_a), veh/h	177	1972	959	476	2003	953		218		240	351	
Back of Queue (*Q*), veh/ln (95th percentile)	3.9	2.7	2.8	0.5	18.0	4.4		6.0		2.2	4.4	
Queue Storage Ratio (*RQ*) (95th percentile)	0.68	0.02	0.02	0.09	0.45	0.11		0.32		0.39	0.33	
Uniform Delay (d_1), s/veh	27.4	5.8	5.8	11.3	12.4	4.4		53.1		46.8	39.6	
Incremental Delay (d_2), s/veh	7.6	0.3	0.6	0.0	4.2	1.2		1.7		5.5	0.4	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0		0.0	0.0	
Control Delay (*d*), s/veh	35.0	6.0	6.3	11.4	16.6	5.6		54.8		52.2	40.0	
Level of Service (LOS)	C	A	A	B	B	A		D		D	D	
Approach Delay, s/veh / LOS	10.0	A		14.0	B		54.8	D		47.6	D	
Intersection Delay, s/veh / LOS	16.7						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.1	B	2.3	B	3.3	C	3.0	C
Bicycle LOS Score / LOS	0.9	A	2.5	B	0.7	A	0.9	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & I-229 NB	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice3C_AM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB AM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	100	610			1800	470				150		250

Signal Information			
Cycle, s	130.0	Reference Phase	2
Offset, s	65	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

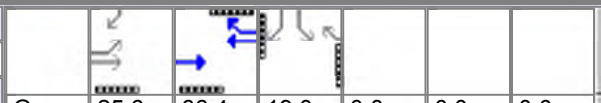

Green	25.6	66.4	19.0	0.0	0.0	0.0
Yellow	4.0	5.0	4.0	0.0	0.0	0.0
Red	2.0	2.0	2.0	0.0	0.0	0.0



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	2.0	4.0		7.3				9.0
Phase Duration, s	31.6	105.0		73.4				25.0
Change Period, (*Y*+*Rc*), s	6.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.2
Queue Clearance Time (*gs*), s	11.4							10.9
Green Extension Time (*ge*), s	0.3	0.0		0.0				0.7
Phase Call Probability	0.98							1.00
Max Out Probability	0.00							0.10


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	116	707			2118	521				176		129
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1552	1499			1630	1477				1497		1378
Queue Service Time (*gs*), s	9.4	10.2			42.5	19.4				7.0		8.9
Cycle Queue Clearance Time (*gc*), s	9.4	10.2			42.5	19.4				7.0		8.9
Green Ratio (*g/C*)	0.20	0.54			0.51	0.66				0.15		0.34
Capacity (*c*), veh/h	306	2446			2497	970				438		473
Volume-to-Capacity Ratio (*X*)	0.379	0.289			0.848	0.537				0.403		0.274
Available Capacity (*ca*), veh/h	310	2446			2497	970				438		473
Back of Queue (*Q*), veh/ln (95th percentile)	7.1	6.2			15.8	6.1				4.7		5.3
Queue Storage Ratio (*RQ*) (95th percentile)	0.93	0.15			0.41	0.92				0.45		0.51
Uniform Delay (*d1*), s/veh	53.7	8.7			16.9	7.2				50.4		31.0
Incremental Delay (*d2*), s/veh	0.7	0.3			1.2	0.7				0.6		0.3
Initial Queue Delay (*d3*), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	54.5	9.0			18.1	7.8				51.0		31.3
Level of Service (LOS)	D	A			B	A				D		C
Approach Delay, s/veh / LOS	15.4		B	16.1		B	0.0			42.6		D
Intersection Delay, s/veh / LOS	18.1						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.8	A	2.6	B	3.4	C	3.4	C
Bicycle LOS Score / LOS	0.9	A	1.9	A		A		F

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	AM Peak	PHF	0.85
Intersection	Rice St & Cleveland Ave/Ba	Analysis Year	2035	Analysis Period	1> 7:15
File Name	2035_Build_Rice_St_Rice3C_AM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB AM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	100	365	295	280	1600	50	605	180	415	10	35	65

Signal Information			
Cycle, s	107.3	Reference Phase	2
Offset, s	74	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	13.5	25.1	7.0	25.8	6.0	0.0	
Yellow	4.0	4.0	4.0	4.0	4.0	0.0	
Red	2.0	2.0	2.0	2.0	2.0	0.0	

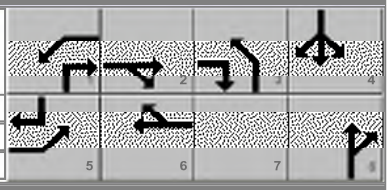

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8		4
Case Number	2.0	3.0	2.0	4.0	2.0	3.0		5.3
Phase Duration, s	13.0	44.0	19.5	50.6	31.8	43.8		12.0
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0	6.0	6.0		6.0
Max Allow Headway (*MAH*), s	3.2	3.2	4.0	2.9	3.2	4.3		4.3
Queue Clearance Time (g_s), s	6.5	17.7	12.9	39.6	24.8	29.2		7.1
Green Extension Time (g_e), s	0.6	2.7	0.6	4.9	0.9	2.9		0.0
Phase Call Probability	0.98	1.00	1.00	1.00	1.00	1.00		1.00
Max Out Probability	1.00	0.00	0.53	0.05	0.60	0.20		1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	136	495	400	329	1300	641	712	212	488	12	41	76
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1570	1542	1439	1570	1698	1671	1632	1765	1496	1165	1765	1496
Queue Service Time (g_s), s	4.5	7.1	15.7	10.9	37.5	37.6	22.8	9.5	27.2	1.0	2.4	5.1
Cycle Queue Clearance Time (g_c), s	4.5	7.1	15.7	10.9	37.5	37.6	22.8	9.5	27.2	1.0	2.4	5.1
Green Ratio (*g/C*)	0.06	0.35	0.60	0.13	0.42	0.42	0.24	0.35	0.48	0.06	0.06	0.12
Capacity (*c*), veh/h	204	1639	856	396	1412	694	785	621	715	132	98	180
Volume-to-Capacity Ratio (*X*)	0.665	0.302	0.467	0.831	0.921	0.923	0.907	0.341	0.683	0.089	0.418	0.424
Available Capacity (c_a), veh/h	234	2151	1015	526	1895	932	880	673	759	132	98	180
Back of Queue (*Q*), veh/ln (95th percentile)	3.3	4.2	6.6	7.8	18.2	19.2	15.5	7.2	14.8	0.6	2.1	2.8
Queue Storage Ratio (*RQ*) (95th percentile)	0.35	0.05	0.69	0.63	0.48	0.50	0.79	0.18	1.00	0.09	0.05	0.41
Uniform Delay (d_1), s/veh	48.0	20.2	9.8	43.6	22.4	22.4	39.7	25.7	21.7	48.4	49.1	1.7
Incremental Delay (d_2), s/veh	5.5	0.0	0.1	8.3	5.4	10.2	11.4	0.3	2.3	0.3	2.8	1.6
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	53.5	20.2	10.0	51.9	27.8	32.6	51.1	26.0	24.1	48.7	51.9	3.2
Level of Service (LOS)	D	C	A	D	C	C	D	C	C	D	D	A
Approach Delay, s/veh / LOS	20.6	C		32.6	C		38.0	D		22.8	C	
Intersection Delay, s/veh / LOS	31.4						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.9	C	2.9	C	3.4	C	3.5	C
Bicycle LOS Score / LOS	1.0	A	1.7	A	2.8	C	0.7	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Cliff Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice3C_PM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	100	1200	250	220	760	150	200	250	410	450	650	240

Signal Information												
Cycle, s	120.0	Reference Phase	2									
Offset, s	0	Reference Point	Begin									
Uncoordinated	Yes	Simult. Gap E/W	On	Green	4.0	5.0	48.5	9.0	5.7	16.8		
Force Mode	Fixed	Simult. Gap N/S	On	Yellow	4.0	4.0	3.6	4.0	4.0	3.6		
				Red	1.0	1.0	1.9	1.0	1.0	1.9		

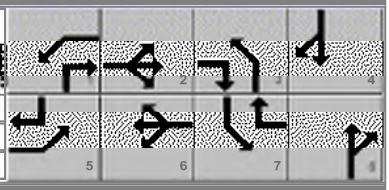

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8	7	4
Case Number	1.1	3.0	1.1	3.0	2.0	3.0	2.0	3.0
Phase Duration, s	9.0	54.0	19.0	64.0	14.0	22.3	24.7	33.0
Change Period, ($Y+R_c$), s	5.0	5.5	5.0	5.5	5.0	5.5	5.0	5.5
Max Allow Headway (*MAH*), s	4.3	4.2	4.1	4.2	4.1	4.2	4.1	4.2
Queue Clearance Time (g_s), s	6.0	49.5	14.6	18.0	9.9	18.8	19.7	26.6
Green Extension Time (g_e), s	0.0	0.0	0.0	19.4	0.0	0.0	0.0	0.7
Phase Call Probability	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Max Out Probability	1.00	1.00	1.00	0.27	1.00	1.00	1.00	1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	108	1290	269	237	817	161	215	269	441	484	699	258
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1617	1439	1617	1617	1439	1616	1664	1311	1616	1664	1481
Queue Service Time (g_s), s	4.0	47.5	14.4	12.6	16.0	3.8	7.9	9.1	16.8	17.7	24.6	18.7
Cycle Queue Clearance Time (g_c), s	4.0	47.5	14.4	12.6	16.0	3.8	7.9	9.1	16.8	17.7	24.6	18.7
Green Ratio (*g/C*)	0.52	0.40	0.48	0.52	0.49	0.65	0.08	0.14	0.26	0.16	0.23	0.26
Capacity (*c*), veh/h	341	1307	690	252	1576	938	242	466	673	531	763	389
Volume-to-Capacity Ratio (*X*)	0.316	0.987	0.390	0.938	0.518	0.172	0.887	0.577	0.655	0.912	0.917	0.664
Available Capacity (c_a), veh/h	341	1307	690	252	1576	938	242	466	673	531	763	389
Back of Queue (*Q*), veh/ln (95th percentile)	2.9	30.5	8.7	9.5	8.1	1.9	7.6	6.9	10.0	13.3	17.3	11.6
Queue Storage Ratio (*RQ*) (95th percentile)	0.50	0.80	0.91	0.63	0.21	0.28	0.78	0.18	0.93	0.97	0.44	0.99
Uniform Delay (d_1), s/veh	16.3	35.4	20.0	32.9	13.6	5.4	55.0	48.3	39.9	49.3	45.1	39.5
Incremental Delay (d_2), s/veh	0.5	21.8	0.4	36.1	0.3	0.1	30.1	1.8	2.3	20.1	15.9	4.2
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	16.8	57.3	20.4	69.0	13.8	5.5	85.1	50.0	42.2	69.4	61.0	43.7
Level of Service (LOS)	B	E	C	E	B	A	F	D	D	E	E	D
Approach Delay, s/veh / LOS	48.7	D		23.5	C		54.4	D		60.7	E	
Intersection Delay, s/veh / LOS	47.2						D					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.2	C	3.0	C	3.0	C	3.0	C
Bicycle LOS Score / LOS	1.9	A	1.5	A	1.3	A	1.7	A

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Wayland Ave	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice3C_PM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	30	1990	40	90	1070	150	30	10	100	70	10	30

Signal Information			
Cycle, s	120.0	Reference Phase	2
Offset, s	105	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	2.6	1.2	90.1	9.5	0.0	0.0
Yellow	4.0	0.0	3.9	3.0	0.0	0.0
Red	2.0	0.0	1.2	2.5	0.0	0.0

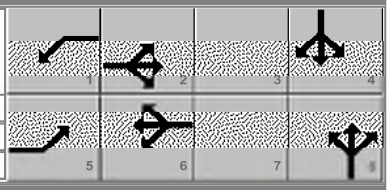

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8		4
Case Number	1.1	4.0	1.1	4.0		8.0		8.0
Phase Duration, s	8.6	95.2	9.8	96.4		15.0		15.0
Change Period, (Y+R_c), s	6.0	5.1	6.0	5.1		5.5		5.5
Max Allow Headway (*MAH*), s	4.1	4.0	4.1	4.0		4.1		4.1
Queue Clearance Time (g_s), s	2.6	2.0	3.7	2.0		5.3		9.9
Green Extension Time (g_e), s	0.0	45.9	0.0	46.2		0.1		0.0
Phase Call Probability	1.00	1.00	1.00	1.00		1.00		1.00
Max Out Probability	1.00	0.46	1.00	0.45		0.92		1.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	32	1089	1089	97	669	643		43			99	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1617	1698	1687	1617	1698	1625		1462			1478	
Queue Service Time (g_s), s	0.6	0.0	0.0	1.7	0.0	0.0		0.0			4.6	
Cycle Queue Clearance Time (g_c), s	0.6	0.0	0.0	1.7	0.0	0.0		3.3			7.9	
Green Ratio (*g*/*C*)	0.77	0.75	0.75	0.78	0.76	0.76		0.08			0.08	
Capacity (*c*), veh/h	394	1275	1267	241	1292	1236		168			170	
Volume-to-Capacity Ratio (*X*)	0.082	0.854	0.860	0.402	0.518	0.520		0.256			0.582	
Available Capacity (c_a), veh/h	394	1275	1267	241	1292	1236		168			170	
Back of Queue (*Q*), veh/ln (95th percentile)	0.3	1.5	1.6	0.8	0.6	0.6		2.3			5.7	
Queue Storage Ratio (*RQ*) (95th percentile)	0.05	0.04	0.04	0.15	0.00	0.00		0.23			0.58	
Uniform Delay (d_1), s/veh	3.1	0.0	0.0	3.0	0.0	0.0		52.3			54.4	
Incremental Delay (d_2), s/veh	0.0	2.4	2.5	0.7	0.9	1.0		0.8			5.0	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0			0.0	
Control Delay (*d*), s/veh	3.2	2.4	2.5	3.7	0.9	1.0		53.1			59.4	
Level of Service (LOS)	A	A	A	A	A	A		D			E	
Approach Delay, s/veh / LOS	2.5	A		1.1	A		53.1	D		59.4	E	
Intersection Delay, s/veh / LOS	4.1						A					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.2	B	2.1	B	2.9	C	2.9	C
Bicycle LOS Score / LOS	2.3	B	1.6	A	0.6	A	0.7	A

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 SB / Lowell	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice3C_PM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB PM				

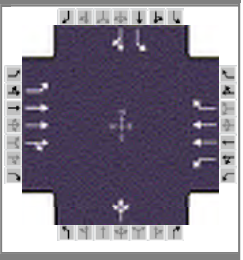

Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	150	1960	50	45	1240	500	40	20	20	210	40	30

Signal Information			
Cycle, s	125.0	Reference Phase	2
Offset, s	31	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	3.3	3.8	66.0	13.0	14.9	0.0	
Yellow	3.0	0.0	5.0	4.0	4.0	0.0	
Red	2.0	0.0	2.0	2.0	2.0	0.0	

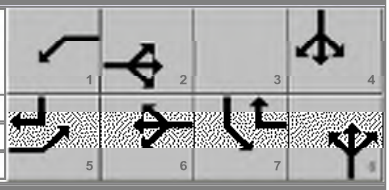

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6		8	7	4
Case Number	1.1	4.0	1.1	3.0		8.3	1.0	4.0
Phase Duration, s	12.1	76.8	8.3	73.0		20.9	19.0	39.9
Change Period, ($Y+R_c$), s	5.0	7.0	5.0	7.0		6.0	6.0	6.0
Max Allow Headway (*MAH*), s	4.1	0.0	4.1	0.0		4.2	4.1	4.2
Queue Clearance Time (g_s), s	8.0		3.8			9.0	15.0	6.8
Green Extension Time (g_e), s	0.0	0.0	0.0	0.0		0.1	0.0	0.5
Phase Call Probability	1.00		0.81			1.00	1.00	1.00
Max Out Probability	1.00		1.00			0.25	1.00	0.00


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	161	1446	716	48	1333	538		86		226	75	
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1566	1791	1766	1527	1688	1475		1362		1590	1494	
Queue Service Time (g_s), s	6.0	27.9	28.2	1.8	46.2	33.6		5.4		13.0	4.8	
Cycle Queue Clearance Time (g_c), s	6.0	27.9	28.2	1.8	46.2	33.6		7.0		13.0	4.8	
Green Ratio (*g/C*)	0.59	0.56	0.56	0.55	0.53	0.63		0.12		0.24	0.27	
Capacity (*c*), veh/h	206	2000	986	150	1783	932		206		305	406	
Volume-to-Capacity Ratio (*X*)	0.782	0.723	0.726	0.322	0.748	0.577		0.417		0.741	0.186	
Available Capacity (c_a), veh/h	206	2000	986	160	1783	932		207		305	406	
Back of Queue (*Q*), veh/ln (95th percentile)	4.7	10.6	10.9	1.2	27.5	26.1		4.7		3.3	3.2	
Queue Storage Ratio (*RQ*) (95th percentile)	0.82	0.08	0.08	0.20	0.69	0.65		0.24		0.57	0.24	
Uniform Delay (d_1), s/veh	25.3	10.6	10.6	16.5	41.5	26.2		51.6		44.0	34.9	
Incremental Delay (d_2), s/veh	8.0	1.0	2.0	0.9	2.1	1.8		1.3		9.3	0.2	
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0		0.0		0.0	0.0	
Control Delay (*d*), s/veh	33.3	11.6	12.6	17.3	43.6	28.0		52.9		53.3	35.1	
Level of Service (LOS)	C	B	B	B	D	C		D		D	D	
Approach Delay, s/veh / LOS	13.4	B		38.6	D		52.9	D		48.8	D	
Intersection Delay, s/veh / LOS	26.9						C					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	2.1	B	2.3	B	3.3	C	3.0	C
Bicycle LOS Score / LOS	1.8	A	2.1	B	0.6	A	1.0	A

Copyright © 2016 University of Florida, All Rights Reserved.


HCS 2010 Signalized Intersection Results Summary

General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & I-229 NB	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice3C_PM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB PM				




Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	140	2050			1655	140				380		130

Signal Information			
Cycle, s	125.0	Reference Phase	2
Offset, s	57	Reference Point	Begin
Uncoordinated	No	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

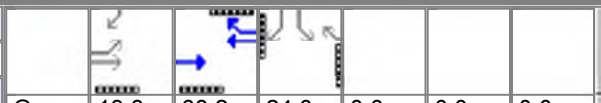

Green	13.8	68.2	24.0	0.0	0.0	0.0
Yellow	4.0	5.0	4.0	0.0	0.0	0.0
Red	2.0	2.0	2.0	0.0	0.0	0.0



Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2		6				4
Case Number	2.0	4.0		7.3				9.0
Phase Duration, s	19.8	95.0		75.2				30.0
Change Period, (*Y*+*Rc*), s	6.0	7.0		7.0				6.0
Max Allow Headway (*MAH*), s	4.1	0.0		0.0				4.1
Queue Clearance Time (g_s), s	13.5							17.5
Green Extension Time (g_e), s	0.3	0.0		0.0				1.2
Phase Call Probability	0.99							1.00
Max Out Probability	0.01							0.36


Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2			6	16				7		14
Adjusted Flow Rate (*v*), veh/h	151	2204			1780	133				409		84
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1563	1630			1590	1379				1536		1413
Queue Service Time (g_s), s	11.5	18.4			25.3	2.2				15.5		5.5
Cycle Queue Clearance Time (g_c), s	11.5	18.4			25.3	2.2				15.5		5.5
Green Ratio (*g*/*C*)	0.11	0.70			0.55	0.74				0.19		0.30
Capacity (*c*), veh/h	172	3442			2603	1018				590		427
Volume-to-Capacity Ratio (*X*)	0.874	0.640			0.684	0.131				0.693		0.196
Available Capacity (c_a), veh/h	300	3442			2603	1018				590		427
Back of Queue (*Q*), veh/ln (95th percentile)	6.8	6.0			10.0	1.0				10.2		3.4
Queue Storage Ratio (*RQ*) (95th percentile)	0.90	0.15			0.12	0.15				0.97		0.32
Uniform Delay (d_1), s/veh	45.5	4.1			11.2	2.7				47.1		32.4
Incremental Delay (d_2), s/veh	8.5	0.6			1.0	0.2				3.5		0.2
Initial Queue Delay (d_3), s/veh	0.0	0.0			0.0	0.0				0.0		0.0
Control Delay (*d*), s/veh	54.0	4.7			12.2	2.9				50.5		32.6
Level of Service (LOS)	D	A			B	A				D		C
Approach Delay, s/veh / LOS	7.9	A		11.6	B		0.0			47.5	D	
Intersection Delay, s/veh / LOS	13.4						B					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	0.7	A	2.5	B	3.3	C	3.5	D
Bicycle LOS Score / LOS	1.7	A	1.5	A		A		F

Copyright © 2016 University of Florida, All Rights Reserved.

HCS 2010 Signalized Intersection Results Summary


General Information				Intersection Information	
Agency	HDR			Duration, h	0.25
Analyst	GHM	Analysis Date	Nov 11, 2015	Area Type	Other
Jurisdiction	Sioux Falls, SD	Time Period	PM Peak	PHF	0.93
Intersection	Rice St & Cleveland Ave/Ba	Analysis Year	2035	Analysis Period	1> 4:30
File Name	2035_Build_Rice_St_Rice3C_PM_Cleveland_Bahnson_Realign.xus				
Project Description	2035 NB PM				



Demand Information	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Demand (*v*), veh/h	115	1610	705	320	1110	20	575	45	130	60	140	110

Signal Information			
Cycle, s	123.6	Reference Phase	2
Offset, s	95	Reference Point	Begin
Uncoordinated	Yes	Simult. Gap E/W	On
Force Mode	Fixed	Simult. Gap N/S	On

Green	6.8	34.2	15.0	25.0	12.6	0.0
Yellow	4.0	4.0	4.0	4.0	4.0	0.0
Red	2.0	2.0	2.0	2.0	2.0	0.0

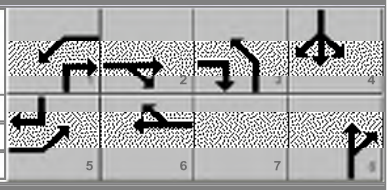

Timer Results	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Assigned Phase	5	2	1	6	3	8		4
Case Number	2.0	3.0	2.0	4.0	2.0	3.0		5.3
Phase Duration, s	12.8	53.0	21.0	61.2	31.0	49.6		18.6
Change Period, ($Y+R_c$), s	6.0	6.0	6.0	6.0	6.0	6.0		6.0
Max Allow Headway (*MAH*), s	4.0	3.0	3.2	3.2	3.2	4.3		4.3
Queue Clearance Time (g_s), s	6.8	49.0	15.3	19.6	25.0	8.7		12.4
Green Extension Time (g_e), s	0.1	0.0	0.0	4.3	0.0	1.6		0.2
Phase Call Probability	0.99	1.00	1.00	1.00	1.00	1.00		1.00
Max Out Probability	0.85	1.00	1.00	0.00	1.00	0.08		1.00

Movement Group Results	EB			WB			NB			SB		
Approach Movement	L	T	R	L	T	R	L	T	R	L	T	R
Assigned Movement	5	2	12	1	6	16	3	8	18	7	4	14
Adjusted Flow Rate (*v*), veh/h	125	1749	766	344	813	403	618	48	140	65	151	118
Adjusted Saturation Flow Rate (*s*), veh/h/ln	1570	1542	1439	1570	1698	1682	1632	1765	1496	1351	1765	1496
Queue Service Time (g_s), s	4.8	46.5	47.0	13.3	17.6	17.6	23.0	2.3	6.7	5.6	10.4	8.9
Cycle Queue Clearance Time (g_c), s	4.8	46.5	47.0	13.3	17.6	17.6	23.0	2.3	6.7	5.8	10.4	8.9
Green Ratio (*g/C*)	0.06	0.38	0.58	0.12	0.45	0.45	0.20	0.35	0.47	0.10	0.10	0.16
Capacity (*c*), veh/h	174	1759	838	381	1515	750	660	622	708	194	180	235
Volume-to-Capacity Ratio (*X*)	0.718	0.994	0.914	0.903	0.536	0.536	0.937	0.078	0.197	0.333	0.837	0.502
Available Capacity (c_a), veh/h	280	1759	838	381	1515	750	660	622	708	209	200	252
Back of Queue (*Q*), veh/ln (95th percentile)	3.5	22.8	11.7	10.2	9.5	9.5	16.7	1.7	4.3	3.5	9.7	6.2
Queue Storage Ratio (*RQ*) (95th percentile)	0.36	0.27	1.23	0.82	0.25	0.25	0.85	0.04	0.29	0.59	0.25	0.90
Uniform Delay (d_1), s/veh	56.3	30.3	7.6	51.1	17.4	17.4	48.5	26.7	18.9	52.5	54.5	47.6
Incremental Delay (d_2), s/veh	3.9	16.8	10.7	24.0	0.2	0.4	20.6	0.1	0.1	1.0	23.7	1.7
Initial Queue Delay (d_3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay (*d*), s/veh	60.2	47.1	18.4	75.1	17.6	17.8	69.2	26.7	19.0	53.5	78.2	49.3
Level of Service (LOS)	E	D	B	E	B	B	E	C	B	D	E	D
Approach Delay, s/veh / LOS	39.4	D		30.4	C		57.9	E		63.2	E	
Intersection Delay, s/veh / LOS	41.0						D					

Multimodal Results	EB		WB		NB		SB	
Pedestrian LOS Score / LOS	3.0	C	2.8	C	3.4	C	3.5	C
Bicycle LOS Score / LOS	1.9	A	1.3	A	1.8	A	1.0	A

Copyright © 2016 University of Florida, All Rights Reserved.

APPENDIX D1 -


PRELIMINARY CONCEPT FIGURES

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

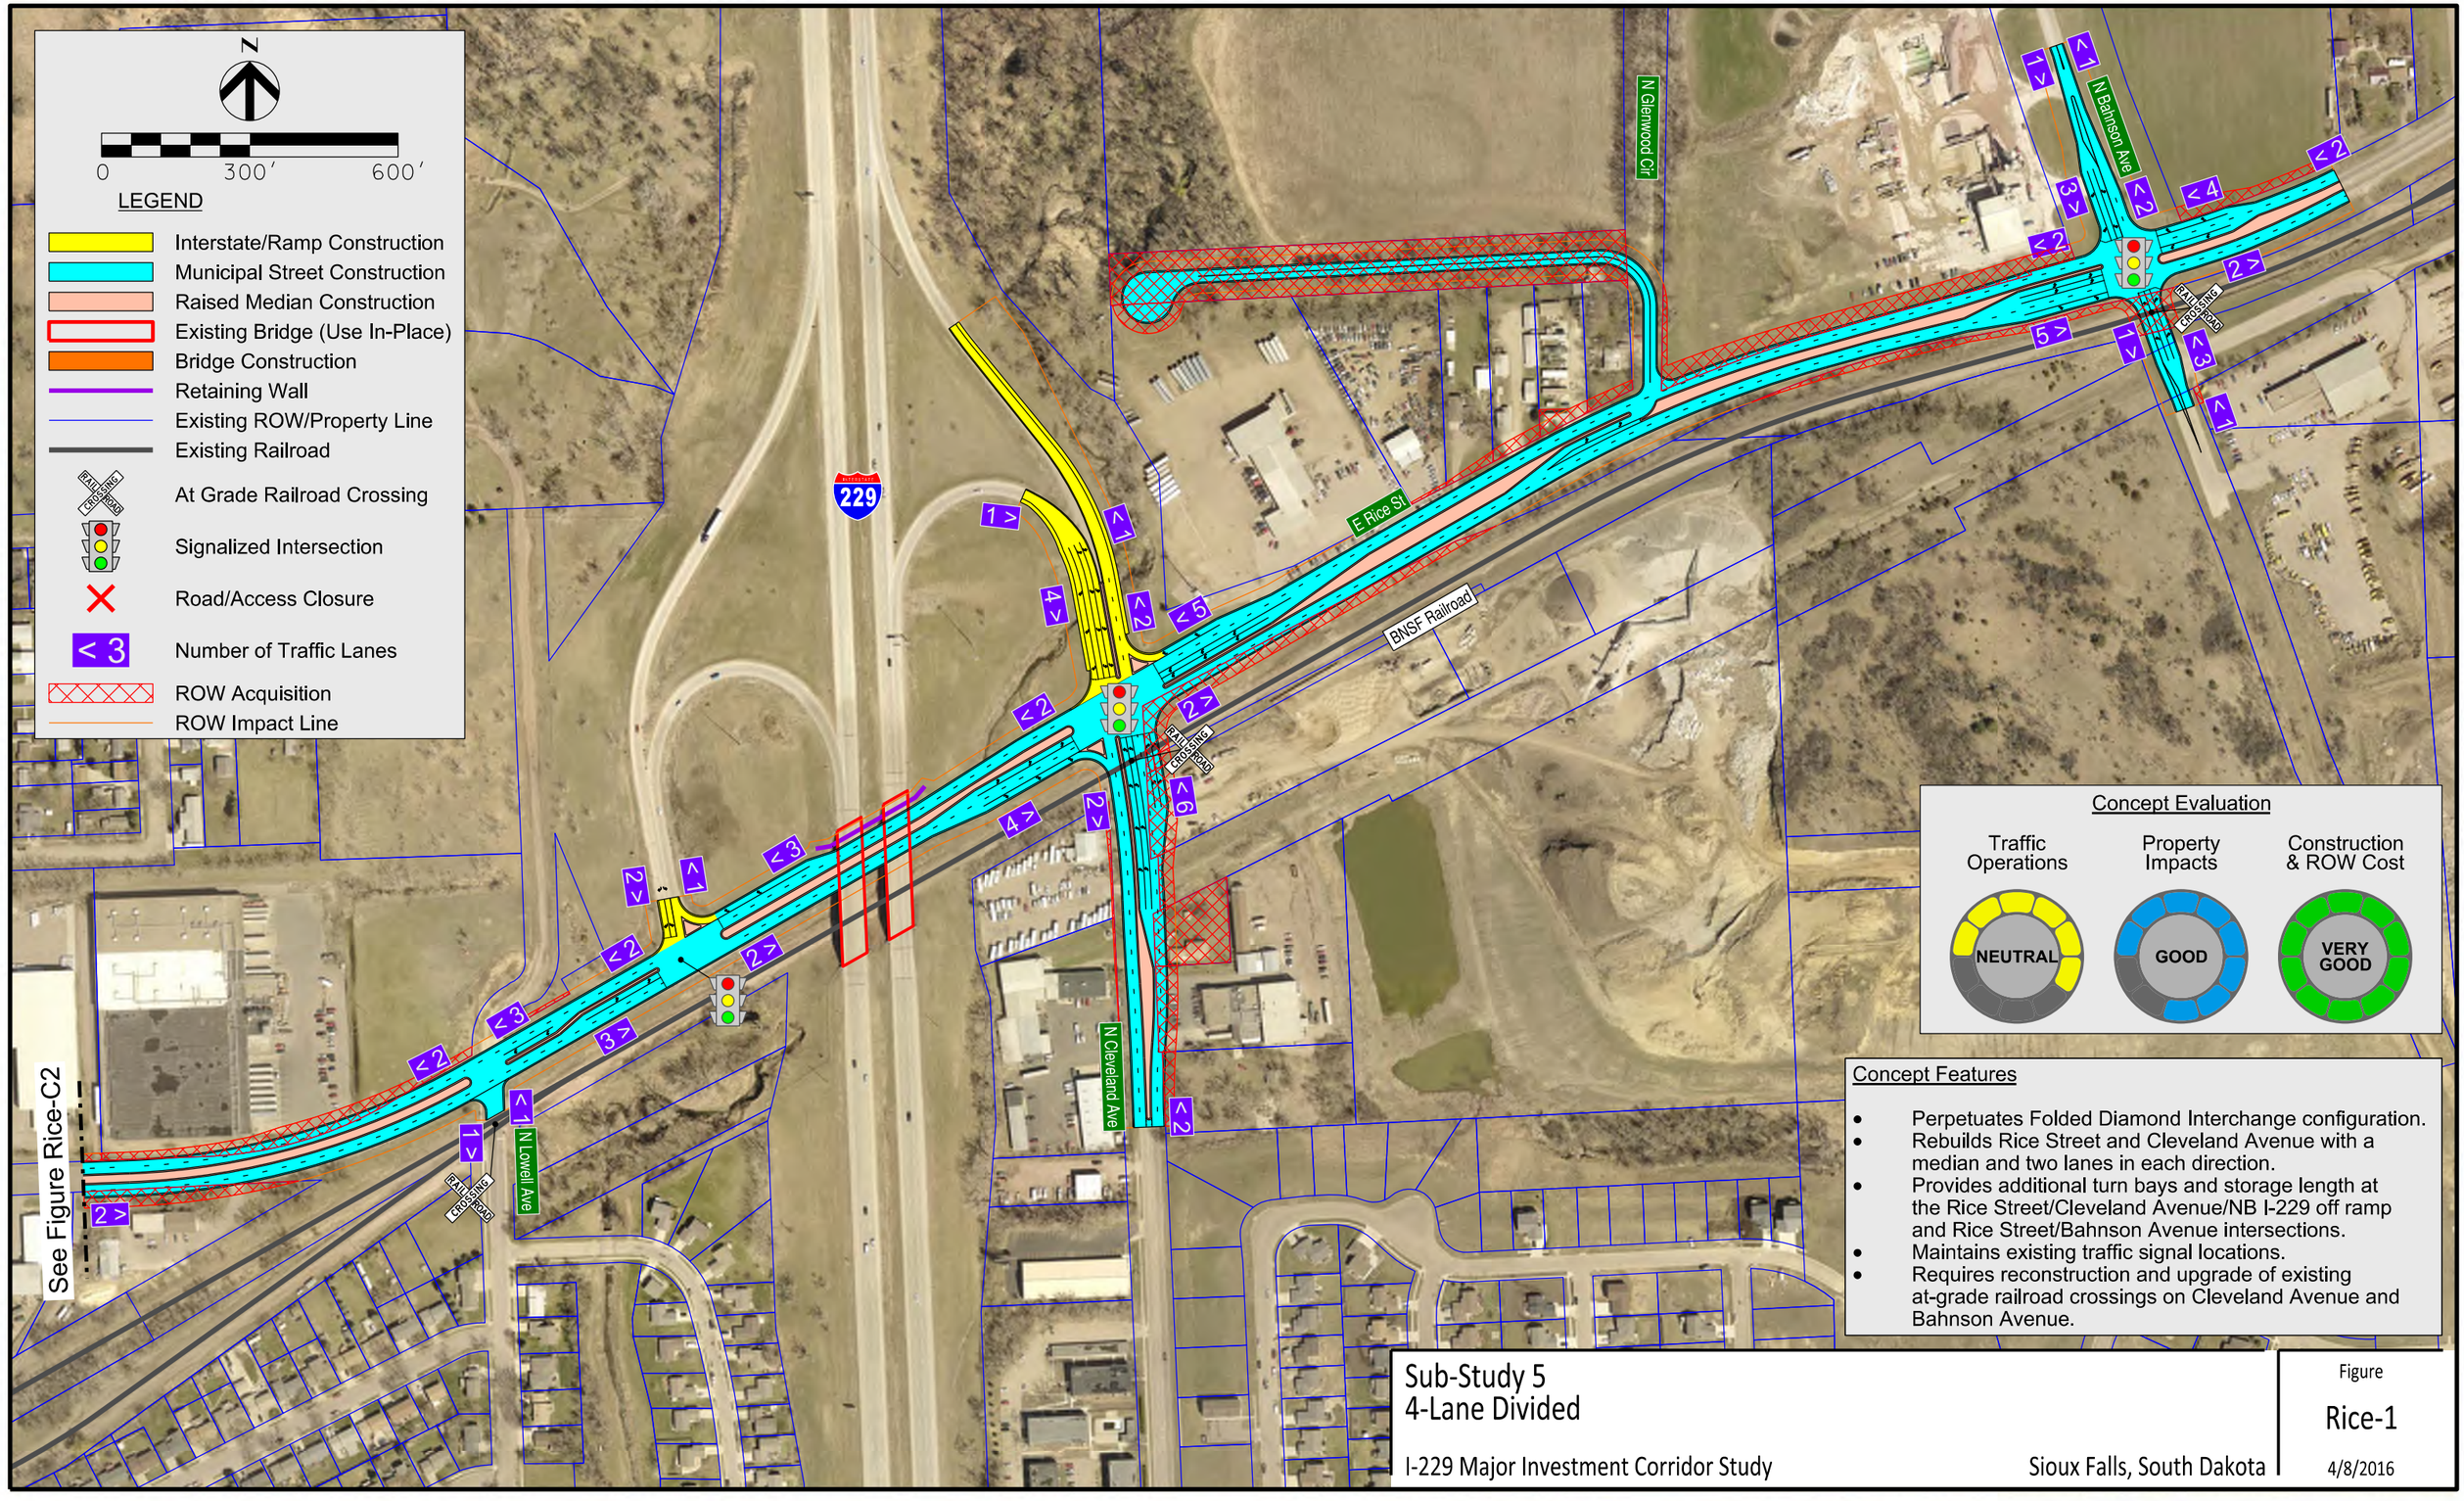

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
NEUTRAL	GOOD	VERY GOOD

Concept Features

- Perpetuates Folded Diamond Interchange configuration.
- Rebuilds Rice Street and Cleveland Avenue with a median and two lanes in each direction.
- Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
- Maintains existing traffic signal locations.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

Sub-Study 5
4-Lane Divided

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota


Figure
Rice-1
4/8/2016

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

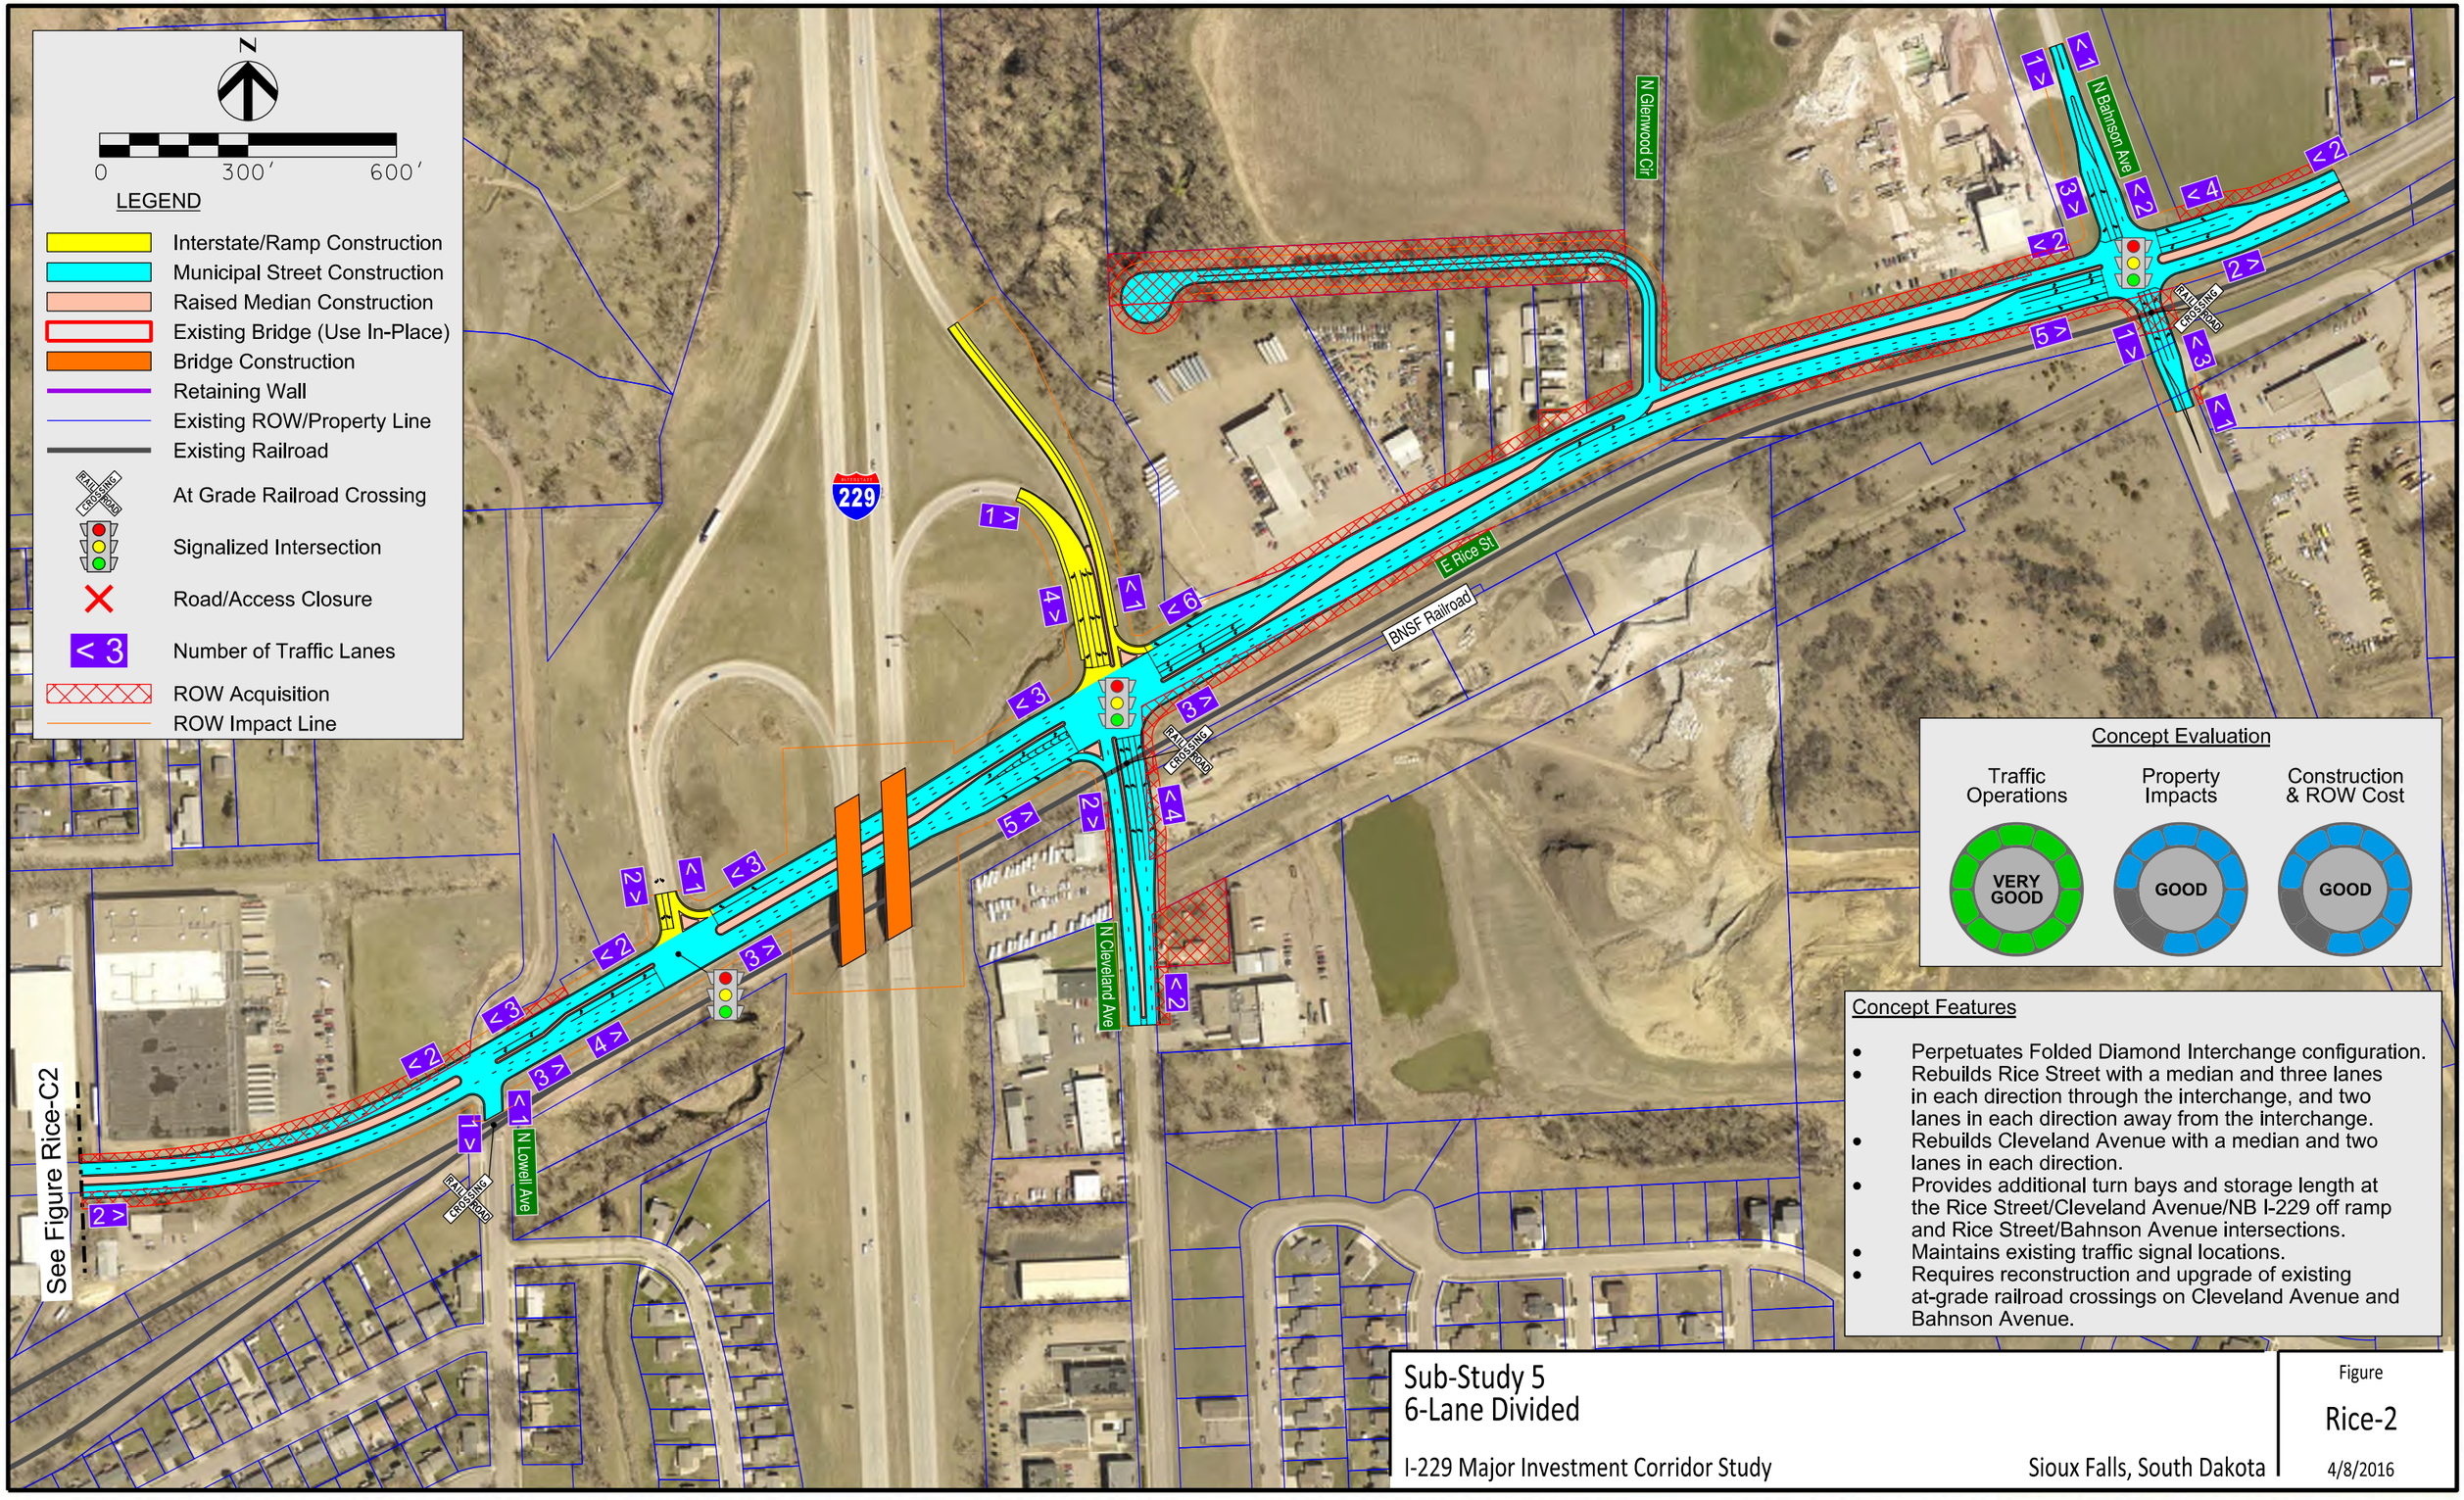

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
VERY GOOD	GOOD	GOOD

Concept Features

- Perpetuates Folded Diamond Interchange configuration.
- Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
- Rebuilds Cleveland Avenue with a median and two lanes in each direction.
- Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
- Maintains existing traffic signal locations.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

Sub-Study 5
6-Lane Divided

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-2
4/8/2016

N

0 300' 600'

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

229

N Glenwood Cir

N Bahnson Ave

E Rice St

BNSF Railroad

RAILROAD CROSSING

N Lowell Ave

N Cleveland Ave

See Figure Rice-C2

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
GOOD	POOR	NEUTRAL

Concept Features

- Perpetuates Folded Diamond Interchange configuration.
- Rebuilds Rice Street with a median and two lanes in each direction.
- Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
- Adds a traffic signal at a new intersection with Rice Street and realigned Cleveland Avenue.
- Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

Sub-Study 5
4-Lane Divided, Cleveland Realigned

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-3
4/8/2016

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

Concept Features

- Perpetuates Folded Diamond Interchange configuration.
- Rebuilds Rice Street with a median and two lanes in each direction west of the interchange, and three lanes in each direction east of the interchange.
- Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
- Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
- Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection.

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
VERY GOOD	POOR	POOR

N Glenwood Cir

N Bahnson Ave

N Cleveland Ave

E Rice St

BNSF Railroad

N Lowell Ave

RAILROAD CROSSING

See Figure Rice-C2

Sub-Study 5
4-Lane Divided, Cleveland Realigned to Bahnson

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-3b
4/8/2016

Match Line A-A

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

Concept Features

- Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration.
- Aligns southbound I-229 ramps with Lowell Avenue and improves geometrics at northbound I-229 ramps.
- Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
- Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
- Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
- Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection.
- Requires reconstruction and upgrade of an existing at-grade railroad crossing on Lowell Avenue.

Match Line A-A

See Figure Rice-C2

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
VERY GOOD	POOR	POOR

Sub-Study 5
4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota


Figure
Rice-3c
4/8/2016

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

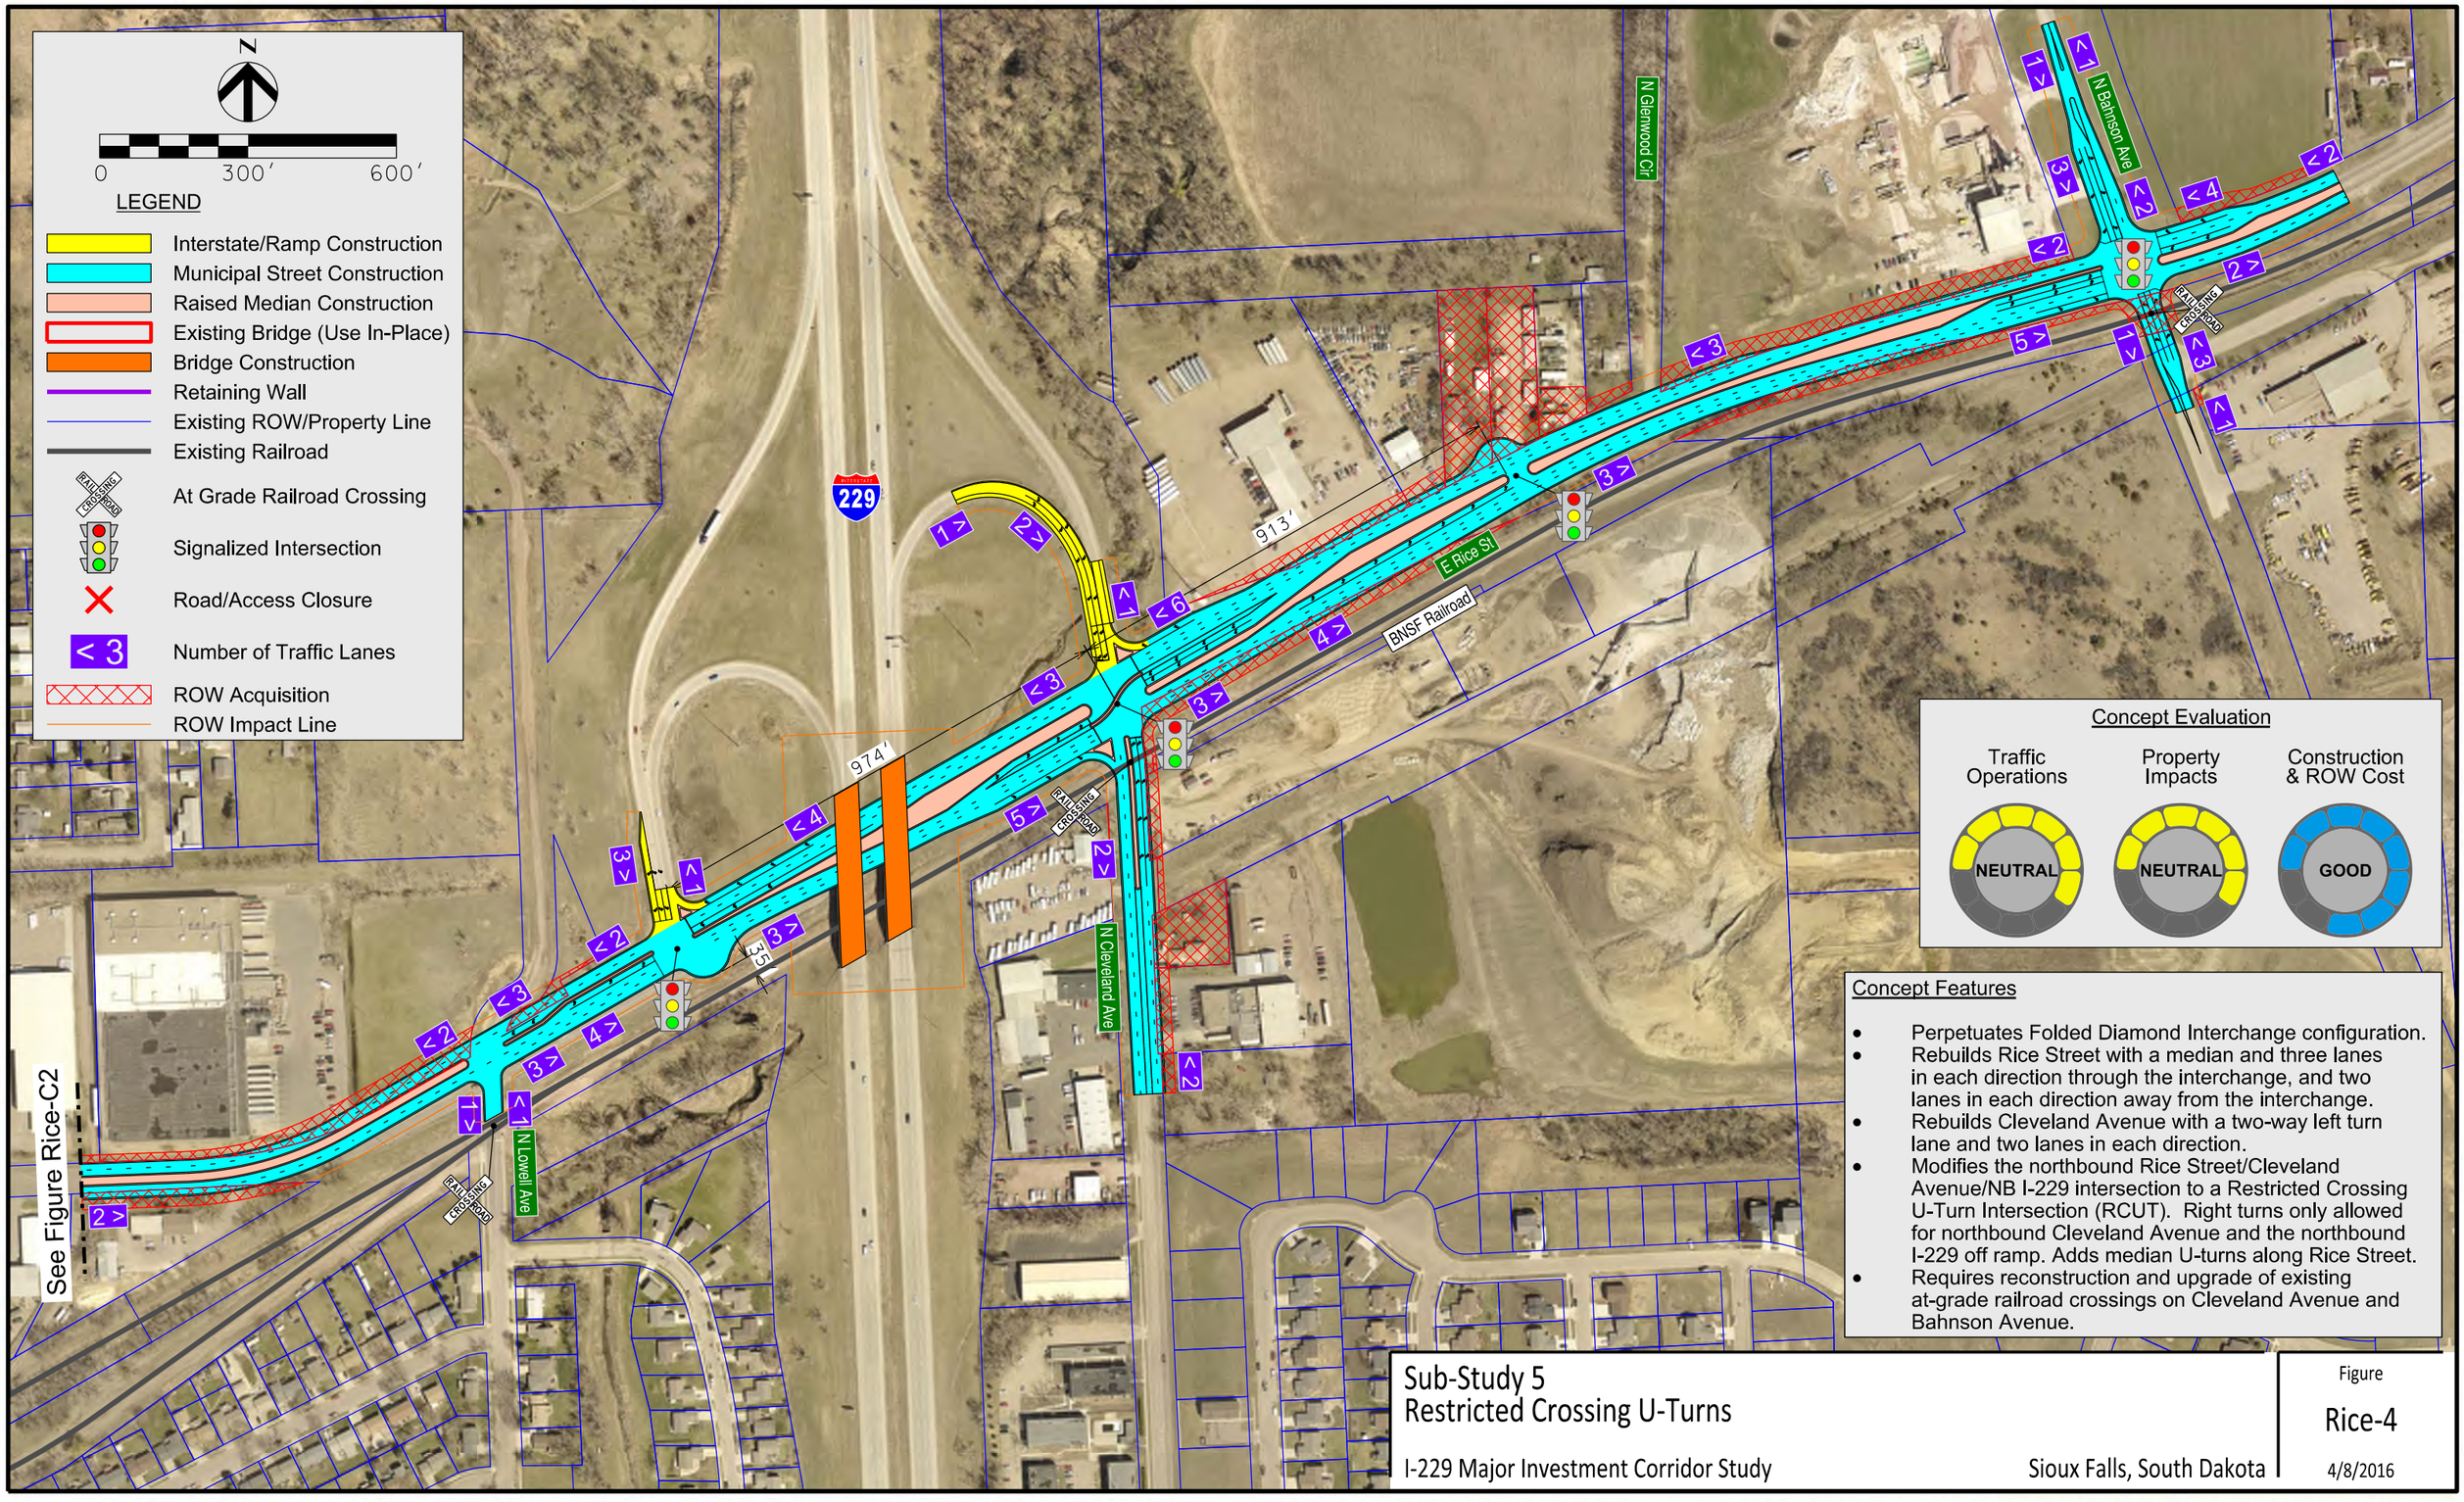

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
NEUTRAL	NEUTRAL	GOOD

Concept Features

- Perpetuates Folded Diamond Interchange configuration.
- Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
- Rebuilds Cleveland Avenue with a two-way left turn lane and two lanes in each direction.
- Modifies the northbound Rice Street/Cleveland Avenue/NB I-229 intersection to a Restricted Crossing U-Turn Intersection (RCUT). Right turns only allowed for northbound Cleveland Avenue and the northbound I-229 off ramp. Adds median U-turns along Rice Street.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

Sub-Study 5
Restricted Crossing U-Turns

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-4
4/8/2016

Concept Features

- Replaces Folded Diamond Interchange with Single Point Urban Intersection (SPUI) configuration offset north of the current interchange.
- Eliminates existing ramp terminals and creates new collector road to access the interchange north of Rice Street.
- Rebuilds Rice Street and Cleveland Avenue with a median and two lanes in each direction.
- Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue intersection.
- Adds traffic signals at the new intersections with Rice Street and SPUI access road.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Lowell Avenue, Cleveland Avenue, and Bahnson Avenue.

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
VERY GOOD	POOR	POOR

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

N Lowell Ave

N Cleveland Ave

E Rice St

N Glenwood Cir

N Bahnson Ave

BNSF Railroad

RAILROAD CROSSING

229

Match Line B-B

Match Line B-B

Sub-Study 5
Offset Interchange - SPUI

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-5
4/8/2016

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
GOOD	POOR	POOR

Concept Features

- Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration.
- Aligns southbound I-229 ramps with Lowell Avenue.
- Shifts the northbound I-229 ramp terminal intersection to the east, between Cleveland Avenue and Bahnson Avenue.
- Rebuilds Rice Street with a median and three lanes in each direction approaching and through the interchange, and two lanes in each direction away from the interchange.
- Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice-Street/Cleveland Avenue intersections.
- Adds traffic signals at the new I-229 ramp terminals.
- Requires reconstruction and upgrade of existing at-grade railroad crossings on Lowell Avenue, Cleveland Avenue, and Bahnson Avenue.

See Figure Rice-C2

N Glenwood Cir

N Bahnson Ave

E Rice St

BNSF Railroad

N Cleveland Ave

RAIL CROSSING ROAD

Sub-Study 5
I-229 Ramps Realigned

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-7
4/8/2016

N

0 300′ 600′

LEGEND

- Interstate/Ramp Construction
- Municipal Street Construction
- Raised Median Construction
- Existing Bridge (Use In-Place)
- Bridge Construction
- Retaining Wall
- Existing ROW/Property Line
- Existing Railroad
- At Grade Railroad Crossing
- Signalized Intersection
- Road/Access Closure
- < 3 Number of Traffic Lanes
- ROW Acquisition
- ROW Impact Line

N Cliff Ave

N Wayland Pl

N Jessica Ave

E Rice St

BNSF Railroad

See Interchange Options

Concept Evaluation

Traffic Operations	Property Impacts	Construction & ROW Cost
GOOD	NEUTRAL	NEUTRAL

Concept Features

- All on street parking will be removed.
- Rebuilds Rice Street with a median and two lanes in each direction.
- Maintains existing traffic signal locations.
- Requires land acquisition for widened roadway.
- Impacts adjacent properties by limiting driveway access to and from Rice Street to right turns in and out only.

Sub-Study 5
Rice Street 4-Lane Divided Corridor

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure
Rice-C2
4/8/2016

Appendix D2. Preliminary Concepts Tech Memo

Preliminary Concepts – Rice Street Corridor and Interchanges

The Rice Street Corridor portion of the Preliminary Concept Matrix was developed following the January 2016 Concept Web Meeting to document Study Advisory Team (SAT) decisions and serves as a road map for the development of concepts identified during the meeting. A comments column has been added to allow notes regarding evolution of the concepts from the workshop to be explained. The Preliminary Concept Matrix is shown in ***TABLE 1***.

The concepts depicted in ***APPENDIX D1- PRELIMINARY CONCEPT FIGURES*** following this memorandum have had one or the other of the following actions determined by the SAT, as documented in the Concept Matrix:

- Develop comparative data for preliminary concept screening
- Eliminate from further development due to anticipated impacts, but will be shown at the second public meeting to note that the concept was identified and received initial consideration.

Table 1. Preliminary Concept Matrix

I-229 Major Investment Study - Preliminary Concept Matrix

Type SPUI = Single Point TD = Tight Diamond DDI = Diverging Diamond Par = Parclo TSD = Tight Split Diamond FD = Folded Diamond CFI = Continuous Flow Intersection	**Concept Workshop Decision** **Develop** = Develop for public meeting **Show** = Show public / No further development **Eliminate** = Do not show public / No further development

Concept ID	Type / Details Description	Web Meeting Decision	Development Items		Comments
			Traffic Assessment	ROW/Environ /Cost	
Rice Street Interchange					
Rice-1	4-Lane Divided	Develop	X	X	-Perpetuates FD configutation; tie in ramps to Rice Street corridor
Rice-2	6-Lane Divided	Develop	X	X	-Perpetuates FD configutation; tie in ramps to Rice Street corridor
Rice-3	4-Lane Divided, Cleveland Realigned	Develop	X	X	-Perpetuates FD configutation; tie in ramps to Rice Street corridor
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	Develop	X	X	-New Concept added by SAT -Perpetuates FD configuration; tie in ramps to Rice Street corridor
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	Develop	X	X	-New Concept added by SAT -Replaces FD interchange with improved geometrics FD interchange
Rice-4	Restricted Crossing U-Turns	Develop	X	X	-Perpetuates FD configutation; tie in ramps to Rice Street corridor
Rice-5	Offset Interchange - SPUI	Develop	X	X	-Replaces FD interchange with SPUI configuration offset north of the current interchange
Rice-6	Center Turn Overpass	Eliminate			
Rice-6b	Elevated Intersection	Eliminate			
Rice-7	I-229 Ramps Realigned	Develop	X	X	-New Concept added by SAT -Replaces FD interchange with improved geometrics FD interchange
Rice Street Corridor					
Rice-C1	Rice Street/Cliff Avenue Improvements	Eliminate			
Rice-C2	Rice Street 4-Lane Divided Corridor	Develop		X	

Preliminary Concepts Comparative Data

The I-229 Major Investment Study scope identified the following four types of data to be developed for each preliminary concept identified for further consideration:

- Property Impacts
- Traffic Operations
- Environmental Review
- Construction and Property Impact Costs

This comparative data will be used in combination with public input to screen the concepts and identify "Build Scenarios" for further refinement. The remainder of this memorandum will describe the approach applied to preparing the comparative data and will document the comparative data for each concept.

Property Impacts

An approximate footprint for each preliminary concept was developed by setting impact limits based on the following criteria:

- 15 feet behind the back of curb
- 25-foot offset from ramp pavement (from back of curb or edge of shoulder)
- 100 feet from edge of I-229 shoulder pavement
- 5 feet behind retaining walls

The criteria that resulted in the greatest offset from a given roadway set the impact limit for that roadway.

The portion of each property parcel intersected by the impact limits that was inside of the impact limit was assumed to be an acquisition. If an acquisition impacted a structure, or rendered a parcel unusable in the opinion of the consultant (i.e. a large part of a parking lot was acquired), the entire structure or parcel was assumed to be an acquisition.

A unit price of $5 per square foot of acquisition area was applied to estimate the cost of property impacts. The total estimated cost of property impacts for a concept is the total impacted area times $5 per square foot plus the assessed value of structures impacted (from the Minnehaha County Assessor's website) times 1.5 (to estimate the fair market value of impacts).

The estimated property impact areas (in acres) and costs are included in the tabulation of estimated construction costs later in this memorandum.

Traffic Operations Assessment

The traffic operations assessment for each preliminary concept was developed using output from Highway Capacity Software 2010 (HCS 2010), which differs from the DTA model-based Measures of Effectiveness (MOEs) for Sub-Studies 1-4. The HCS 2010 output provides MOEs that address three key performance indicators used in Sub-Studies 1-4: Queues, Delay, and Travel Times. The MOEs used to address these key performance indicators are listed below, and are generally consistent with the MOEs previously derived from the DTA model. Any noteworthy differences between the previous sub-studies and Sub-Study 5 are included as sub-bullets in the following list.

- Total queues in the interchange area
    - The definition of interchange area for Sub-Study 5 is only inclusive of the Rice Street ramp terminals, which is smaller than the previous DTA interchange areas.
- Delay in the interchange area
    - The definition of interchange area for Sub-Study 5 is only inclusive of the Rice Street ramp terminals, which is smaller than the previous DTA interchange areas.
- Delay in the subarea
    - The definition of subarea for Sub-Study 5 is only inclusive of Rice Street between Cliff Avenue and Bahnson Avenue, which is much smaller than the previous DTA subareas.
- Travel times for select Origin-Destination pairs
    - The only travel times studied for Sub-Study 5 were for through trips on Rice Street from Cliff Avenue to Bahnson Avenue.
- Queue-to-ramp-length ratio
    - This measure was introduced as an improvement to Sub-Studies 1-4, which used Travel Time on I-229 to discover excessive ramp queuing.

For each concept, the MOEs were pulled for both AM and PM peaks and then averaged. The averaged MOEs from each concept were compared to the No-Build MOEs and a percent change calculated between each concept and No-Build. A subjective classification was then applied to each concept based on the areas of Queues, Delay, and Travel Time. The subjective classifications are Very Good, Good, Neutral, and Poor. Sub-Study 5 comparative traffic operations evaluations are shown on the following pages. Corridor only concepts were evaluated only on the metric of subarea delay as they do not affect the other MOEs, which primarily relate to the interchange area.

Queues

Interchange Area Total Queue Length		Queues	Subjective
Concept ID	Description	AM & PM	Classification
Rice-1	4-Lane Divided	-36%	Very Good
Rice-2	6-Lane Divided	-56%	Very Good
Rice-3	4-Lane Divided, Cleveland Realigned	-58%	Very Good
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	-66%	Very Good
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	-66%	Very Good
Rice-4	Restricted Crossing U-Turns	-37%	Very Good
Rice-5	Offset Interchange - SPUI	-83%	Very Good
Rice-7	I-229 Ramps Realigned	-48%	Very Good
Rice-C2	Rice Street 4-Lane Divided Corridor	N/A	N/A
Queue-to-ramp-length ratio		**Queue Ratio**	**Subjective**
Concept ID	Description	AM & PM	Classification
Rice-1	4-Lane Divided	-23%	Good
Rice-2	6-Lane Divided	-38%	Very Good
Rice-3	4-Lane Divided, Cleveland Realigned	-32%	Good
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	-18%	Good
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	-20%	Good
Rice-4	Restricted Crossing U-Turns	-7%	Neutral
Rice-5	Offset Interchange - SPUI	-52%	Very Good
Rice-7	I-229 Ramps Realigned	-46%	Very Good
Rice-C2	Rice Street 4-Lane Divided Corridor	N/A	N/A

Delay

Interchange Area Delay (veh-min)		Delay, veh-min	Subjective
Concept ID	Description	AM & PM	Classification
Rice-1	4-Lane Divided	-65%	Very Good
Rice-2	6-Lane Divided	-73%	Very Good
Rice-3	4-Lane Divided, Cleveland Realigned	-79%	Very Good
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	-83%	Very Good
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	-83%	Very Good
Rice-4	Restricted Crossing U-Turns	-68%	Very Good
Rice-5	Offset Interchange - SPUI	-92%	Very Good
Rice-7	I-229 Ramps Realigned	-71%	Very Good
Rice-C2	Rice Street 4-Lane Divided Corridor	N/A	N/A
Overall Subarea Delay (min)		**Delay, min**	**Subjective**
Concept ID	Description	AM & PM	Classification
Rice-1	4-Lane Divided	-57%	Very Good
Rice-2	6-Lane Divided	-61%	Very Good
Rice-3	4-Lane Divided, Cleveland Realigned	-51%	Very Good
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	-57%	Very Good
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	-58%	Very Good
Rice-4	Restricted Crossing U-Turns	-50%	Very Good
Rice-5	Offset Interchange - SPUI	-51%	Very Good
Rice-7	I-229 Ramps Realigned	-50%	Very Good
Rice-C2	Rice Street 4-Lane Divided Corridor	-48%	Very Good

Travel Time

Travel Time- Rice Street Corridor		Travel Time	Subjective
Concept ID	Description	AM & PM	Classification
Rice-1	4-Lane Divided	-41%	Very Good
Rice-2	6-Lane Divided	-43%	Very Good
Rice-3	4-Lane Divided, Cleveland Realigned	-35%	Good
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	-43%	Very Good
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	-43%	Very Good
Rice-4	Restricted Crossing U-Turns	-37%	Very Good
Rice-5	Offset Interchange - SPUI	-35%	Good
Rice-7	I-229 Ramps Realigned	-33%	Good
Rice-C2	Rice Street 4-Lane Divided Corridor	N/A	N/A

As evident from the preceding tables, all corridor and interchange options compare favorably to the No-Build condition. This favorable comparison is partially a byproduct of how the scope of analysis for Sub-Study 5 used HCS 2010, which is more suited for maximizing the traffic efficiency of the various concepts than the DTA model. Since the scenarios all compared favorably with the No-Build, the subjective assessment to portray traffic operations to the public needed to focus much more heavily on separating the concepts into categories based on comparing the concepts to one another. The following overall subjective classifications are recommended.

Overall

Overall Subjective Classification		Subjective
Concept ID	Description	Classification
Rice-1	4-Lane Divided	**Neutral**
Rice-2	6-Lane Divided	**Very Good**
Rice-3	4-Lane Divided, Cleveland Realigned	**Good**
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	**Very Good**
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	**Very Good**
Rice-4	Restricted Crossing U-Turns	**Neutral**
Rice-5	Offset Interchange - SPUI	**Very Good**
Rice-7	I-229 Ramps Realigned	**Good**
Rice-C2	Rice Street 4-Lane Divided Corridor	**Good**

Environmental Review

To analyze potential resources within the Study Area, a desktop review of available data was analyzed against the Project concepts, in addition to review of aerial imagery of the I-229 corridor. Items that could require further analysis at the time of future project initiation were identified in an Excel spreadsheet, which describes issues separated project concepts. Also note that in the future, when specific projects along the corridor are proposed, environmental documentation would be required if federal funds are used, which would require analysis of additional resources such as environmental justice, noise, etc.

Archaeological and Historical Resources

APPROACH

A Record Search was completed by the SD Archaeological Research Center. Within the Study Area, or that area which encompasses all of the roadway alternatives that have been screened in this memo, there is potential for historic and cultural resources. Historic and cultural resources are regulated under Section 106 of the National Historic Preservation Act, and may require consultation with the South Dakota Department of

Transportation (SDDOT) and the South Dakota State Historic Preservation Office (SHPO).

The record search identified record sites and cultural surveys that were completed within the Study Area for the entire I-229 corridor. Within the corridor for Sub-study 5, portions of the area is unevaluated for cultural resources. Known sites that were listed as eligible for the National Register of Historic Places (NRHP) include railroad beds. Shapefiles of these sites were imported into ArcGIS and compared against Project concepts to determine the potential for impacts to cultural resources.

LIMITATIONS

Early in project planning, the City of Sioux Falls (City) should work with SDDOT to coordinate its intent to proceed with a particular roadway improvement project, and request that the SDDOT advise the City on the applicability of Section 106, the need to identify consulting parties, and for a Class I cultural resource literature search. When appropriate, the City should anticipate that a Class III identification effort will be conducted, including identification of archaeological, architectural, and traditional cultural properties subject to the effects of the project. When historic properties are identified, the City should anticipate that avoidance or mitigation of adverse effects to such properties may be required.

Wetlands and Waters of the U.S.

APPROACH

For this Corridor Study, the National Wetlands Inventory (NWI) and aerial imagery were reviewed within the Study Area to determine potential project impacts. The Big Sioux River and its tributaries are located within the Study Area and cross the I-229 corridor three times. There are also several wetlands located adjacent to the I-229 corridor. Because the NWI provides an estimate of wetlands based on soil type and aerial photography, these boundaries are utilized as guidance for identifying wetland areas and delineation would be required for each project.

LIMITATIONS

Wetlands and other waters of the US will need to be considered for each project as the City wants to move the project from planning stages to construction. Early in project planning, an onsite wetland delineation of the Study Area is recommended to confirm the boundaries of wetlands and other waters of the U.S. within the Study Area and to coordinate with USACE to determine jurisdiction.

Threatened and Endangered Species

APPROACH

Fish and wildlife species listed under the Federal Endangered Species Act (ESA) would need to be considered for each project. The list of species identified for Minnehaha was identified from US Fish and Wildlife Service (USFWS) information. Four threatened, endangered, or proposed species exist in Minnehaha County. These include the rufa red knot (threatened); Topeka shiner (endangered); western prairie fringed orchid (threatened); and northern long-eared bat (threatened).

To identify the potential for threatened and endangered species to be present in an area, aerial imagery was used to identify potential habitat located within the Project corridor. The Study Area is highly developed with commercial, industrial, and residential activities. Undeveloped areas are generally limited to areas associated with the Big Sioux River.

Additionally, there is some cropland in the vicinity of the Study Area. Habitat for the western prairie fringed orchid is not believed to occur within most of the Study Area due to lack of native habitat. Habitat for the Topeka shiner is found within the Big Sioux River and its tributaries, and the I-229 corridor crosses the river in multiple places. Typically within the City, the USFWS has noted for previous projects that the Topeka shiner is not anticipated to occur within these stretches of the Big Sioux River. Habitat for the rufa red knot is limited to sandy or gravel shorelines associated with the Big Sioux River. No suitable habitat for rufa red knot is present in the Study Area for Substudy 5. Potential habitat associated with the northern long-eared bat in the Study Area includes riparian areas and bridges along the Big Sioux River.

LIMITATIONS

Consultation with USFWS would be required to determine which ESA-listed species have the potential to occur within each Study Area. Coordination with SD Game, Fish, and Parks would be recommended regarding impacts to state-listed sensitive species.

Section 4(f) and Section 6(f) Properties

APPROACH

The Department of Transportation Act (DOT Act) of 1966 included a special provision – Section 4(f) – which is intended to protect publicly owned parks, recreational areas, wildlife and waterfowl refuges, or public and private historical sites. Similarly, Section 6(f) protects state and locally sponsored projects that were funded as part of the Land and Water Conservation Fund (LWCF).

The LWCF website was reviewed to identify the use of Section 6(f) grants in the Study Area for Sub-Study 5. No publicly owned parks and recreation areas are present within the Study Area for Sub-Study 5. However, there is an active railroad in the Study Area, along with historic railroad beds. The SD SHPO has indicated all railroads in SD are considered to be historic. Additionally, there is potential for cultural resources or eligible buildings to be located within the Study Area. Any resources on or eligible for the National Register of Historic Places may also be protected under Section 4(f).

LIMITATIONS

Certain areas of the Study Area have not been evaluated for cultural resources or historic buildings. A Level III Cultural Resources Inventory would be required for any land or buildings that may be impacted that are currently unevaluated. Coordination for impacts to the railroad would be required as that is considered a historic property.

Environmental Justice/Socioeconomic

APPROACH

Any federally-funded projects need to be analyzed for their compliance with Environmental Justice Executive Order 12898, Environmental Justice for Low Income and Minority Populations, and Title VI of the 1964 Civil Rights Act.

No detailed review was initially planned during this review for environmental justice aspects. However, a trailer park is located in the Study Area for Sub-Study 5, which may provide housing for low-income or elderly populations and warranted a review for environmental justice purposes. For that reason, a preliminary review was completed for the study area. The trailer park is located within Block Group 3, Census Tract 104.04, Minnehaha County, SD. Three census block groups are located within the Study Area for Sub-Study 5.

To determine the potential for disproportionately high and adverse human health or environmental effects, including social and economic effects, on minority and low-income populations from the project, clusters of traditionally underserved populations were evaluated. Low-income populations, minority populations, and other protected categories such as vulnerable age groups, persons with a disability, and persons with limited English proficiency (LEP), within the Project Area were compared to the percentage of these populations residing in Sioux Falls as a whole.

Populations were analyzed with data from 2010 US Census and 2010-2014 American Community Survey 5—Year Estimates at the smallest geographical unit available (Census blocks for minorities and age, Census block groups for income, Census Tracts for LEP and disability). Overall, minority populations were equal to or less than the Sioux Falls average. LEP was only 1%. The poverty rate was less than the Sioux Falls average. Proportions of individuals with a disability were similar to the Sioux Falls average. Vulnerable populations such as elderly and children were comparable, although the proportion of elderly people is slightly higher than the Sioux Falls average. As a result of this preliminary screening, it is not anticipated the improvements would cause disproportionately high or adverse human health or environmental impacts.

LIMITATIONS

While census data is helpful to make comparisons and some assumptions as to the people living in an area, small sample sizes affect the accuracy of the results and census data is also continually updated over time. Efforts should be made in the public involvement process to obtain first-hand information with people living in the area to fully identify the potential impacts to area residents.

Floodplain

APPROACH

The City has been a participating member of the Federal Emergency Management Agency (FEMA) Flood Insurance Program since 1979. The current Minnehaha County Flood Insurance Study (FIS) that includes the City is dated September 2, 2009. The Project Area contains FEMA-designated zones for the Big Sioux River.

Some of the project concept options for Sub-Study 5 may affect the floodplain of the Big Sioux River.

LIMITATIONS

If any projects would involve areas associated with the Big Sioux River, a floodplain permit may be required if the floodplain would be encroached upon. A Floodplain Development Application would be completed for the project and the City would obtain a Floodplain Development Permit.

Regulated Materials

APPROACH

The SD Department of National Resources (SDDENR) Environmental Events Database website was reviewed for the Project Area to identify any areas that could be of concern for project concepts.

LIMITATIONS

Information for hazardous material should be reviewed at the time of a proposed project to identify any potential new hazards that may have occurred from the time of the Study to a project.

The environmental review findings for the I-229 corridor and interchange concepts are summarized in ***TABLE 2***.

Environmental constraints for the I-229 corridor are shown in ***APPENDIX D3- ENVIRONMENTAL CONSTRAINTS MAPS***.

Note, a noise assessment will be included at a later stage of the study.

Table 2. Preliminary Concepts Environmental Review

Concept ID	Description	Environmental Comparative Data					Environmental Summary	
		Wetlands	T&E	4(f) and 6(f) Properties	Cultural	Other	Anticipated Impact Level	Comments
Rice-1	4-Lane Divided	Potential wetlands present. Appears there could be impacts to a drainage on north side of Rice St.	Potential northern long-eared bat habitat (trees) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural impacts are no adverse effect, it is anticipated there would be no 4(f) impacts. No Section 6(f) properties are present.	Active RR is eligible. No adverse effect anticipated. Structures acquired should be reviewed for historic eligibility. No eligible buildings anticipated.	Improvements across RR ROW. Approx. two structures to be removed, including one residence.Some ROW required from businesses.	Low	Minimal impacts compared to other options.
Rice-2	6-Lane Divided	Potential wetlands present. Appears there could be impacts to a drainage on north side of Rice St.	Potential northern long-eared bat habitat (trees and bridge) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural impacts are no adverse effect, it is anticipated there would be no 4(f) impacts. No Section 6(f) properties are present.	Active RR is eligible. No adverse effect anticipated. Structures acquired should be reviewed for historic eligibility. No eligible buildings anticipated.	Improvements across RR ROW. Approx. two structures to be removed, including one residence. Some ROW required from businesses.	Low	Slightly more ROW needed than Rice-1. Similar potential for wetland impacts, although slightly higher than Rice-1.
Rice-3	6-Lane Divided, Cleveland Realigned	Appears to avoid potential wetlands. May have minor impacts to ditch wetlands, but not likely.	Potential northern long-eared bat habitat (trees and bridge) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural impacts are no adverse effect, it is anticipated there would be no 4(f) impacts. No Section 6(f) properties are present.	Active RR is eligible. No adverse effect anticipated. Structures acquired should be reviewed for historic eligibility. No eligible buildings anticipated.	Substantial amount of property impacts. Would impact almost entire trailer park (Velure Trailer Court). Up to 18 residences, one business, part of BNSF railyard would be acquired.	**Medium (property impacts)**	Amount of ROW impacts with trailer park acquisition makes this an undesireable option. Minimal wetland impacts.
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	Potential forested wetland impacts on east side of concept area.	Potential northern long-eared bat habitat (trees and bridge) but in accordance with final rule, take is not prohibited.	Appears to avoid active railroad tracks, but portions of undeveloped area contain an old RR bed which could be eligible. If eligible, there may be Section 4(f) impacts. No Section 6(f) properties are present.	Active RR is eligible, but appears to be avoided. An area containing an old RR bed[1] is present and may also be eligible. Structures acquired should be reviewed for historic eligibility. No eligible buildings anticipated.	Less ROW than Rice-3. Avoids relocating business, but would still require acquisition of parts of a trailer park.	**High (Potential 4(f) and property impacts)**	Potentially higher wetland impacts than Rice-3. Potential 4(f) impacts. Amount of ROW impacts and trailer park acquisition makes this an undesireable option.
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, 1-229 Ramps Realigned	Potential forested wetland impacts on east side of concept area and along I-229 ramp improvements.	Potential northern long-eared bat habitat (trees and bridge) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural is no adverse effect, there would be no 4(f) impacts.	Active RR is eligible, but appears to be avoided. An area containing an old RR bed[1] is present and may also be eligible. Structures acquired should be reviewed for historic eligibility.	Similar property impacts as Rice-3b, with additional property acquisition by I-229 ramps. Construction may occur within floodplain.	**High (Potential 4(f) and property impacts)**	Potentially higher wetland impacts than Rice-3b. Potential 4(f). Amount of ROW impacts and trailer park acquisition makes this an undesireable option. Potential need for floodplain permit depending on construction impacts. Highest amount of impacts.

Table 2. Preliminary Concepts Environmental Review (Continued)

Concept ID	Description	Environmental Comparative Data					Environmental Summary	
		Wetlands	T&E	4(f) and 6(f) Properties	Cultural	Other	Anticipated Impact Level	Comments
Rice-4	Restricted Crossing U-Turns	Minimal wetlands present. May have minor impacts to ditch wetlands.	Potential northern long-eared bat habitat (trees) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural is no adverse effect, there would be no 4(f) impacts.	Active RR is eligible. Assume it would be no adverse effect. Structures acquired should be reviewed for historic eligibility. No eligible buildings anticipated.	Improvements across RR ROW. Relocation of part of a trailer park and one residence, including 10 structures.	**Medium**	More impacts than Rice 1& 2, but less than Rice-3 options.
Rice-5	Offset Interchange - SPUI	Impacts to several forested wetlands on each side of I-229.	Potential northern long-eared bat habitat (trees) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural is no adverse effect, there would be no 4(f) impacts. No Section 6(f) properties are present.	Active RR is eligible. Assume it would be no effect. Portions of the area may need to be surveyed for cultural resources. Structure to be acquired should be reviewed for historic eligibility. No eligible buildings anticipated.	Improvements within floodway and floodplain. Potential farmland impacts. Relocation of one residence.	**Medium (Potential to be high if cultural resources are found)**	Potential wetland and floodplain impacts. Floodplain permit would be required. Less property impacts than Rice 3, 3b, and 3c options.
Rice-7	I-229 Ramps Realigned	Impacts to several forested wetlands on each side of I-229. Highest anticipated wetland impacts of project alternatives.	Potential northern long-eared bat habitat (trees) but in accordance with final rule, take is not prohibited.	Active RR is eligible, should be reviewed for potential 4(f). If cultural is no adverse effect, there would be no 4(f) impacts. No Section 6(f) properties are present.	Active RR is eligible. Assume it would be no effect. Portions of the area may need to be surveyed for cultural resources. Certain structures to be acquired should be reviewed for historic eligibility.	Improvements within floodway and floodplain. Substantial amount of property impacts. Would impact one business and an entire trailer park.	**High (Floodplain, wetland, property impacts)**	Potential floodplain and wetland impacts.Floodplain permit would be required. Amount of ROW impacts and potential EJ issue with trailer park acquisition makes this an undesireable option.
Rice-C2	Rice Street 4-Lane Divided Corridor	Does not appear to impact wetlands.	Does not appear to have T&E habitat.	Potential 4(f) impact if impacts to eligible buildings occur. No Section 6(f) properties are present.	Certain structures to be acquired should be reviewed for historic eligibility. Age of houses could be older than 50 years.	Acquisition of approx. 5 businesses and 9 residences.	**Medium (Potential to be high if buildings are eligible)**	Acquisition of potentially historic residences. Potential 4(f) if residences are eligible. No wetland or T&E impacts expected.

[1]The potential abandoned railroad bed is south of Rice Street and just west of N. Bahnson Avenue, to the east of the existing railyard.

Construction Costs

In preparing estimates of construction costs for the preliminary concepts, quantities were developed for the following items and the unit costs shown in parenthesis were applied to the quantities:

- Bridge deck area ($180 or $270/SF tangent or curved bridge)
- Municipal Retaining wall length ($100/LF)
- Interstate Retaining wall length ($600/LF)
- Interstate / ramp / street pavement area ($20/SF)

Pavement area costs are assumed to include curb, shoulder, median, sidewalk, and drainage items. For cost estimating purposes, all retaining walls were assumed to have a constant height of 12 feet over their entire estimated length.

The pavement unit costs applied were developed from unit prices computed from the following awarded local projects:

- 57th/Western (2013) — $5.3 million total, $21.81/SF
- Russell Street (2013) — $15 million total, $18.94/SF
- I-90/Cliff Ave Interchange (2013) — $15.8 million total, $25.61/SF (includes bridge costs)
- Cliff Ave, 61st to 85th (2015) — $8.9 million total, $16.91/SF

Estimated construction costs and property impacts costs for the preliminary concepts are shown in ***TABLE 3***.

Relocation costs are not included in the ROW cost estimates.

Preliminary Concepts Composite Comparative Assessment

The four types of data compiled for the Preliminary Concepts is shown in ***TABLE 4***, along with the qualitative classification for each measure.

Table 3. Preliminary Concepts Estimated Costs

Concept ID	Description	Bridge		Retaining Wall (Municipal)		Retaining Wall (Interstate)		Interstate & Ramps		Municipal Street		Contingency		Railroad Crossings		Property Impacts		Total Cost
		Area (ft^2)	Cost	Length (ft)	Cost	Length (ft)	Cost	Area (ft^2)	Cost	Area (ft^2)	Cost	%	Cost	Number	Cost	Area (acre)	Cost	
Rice-1	4-Lane Divided	0	$0	0	$0	258	$200,000	54,305	$1,100,000	473,034	$9,500,000	20%	$2,160,000	2	$700,000	6.5	$1,670,000	$15,330,000
Rice-2	6-Lane Divided	32,133	$5,800,000	0	$0	0	$0	45,923	$1,000,000	511,349	$10,300,000	20%	$2,260,000	2	$700,000	6.6	$1,690,000	$21,750,000
Rice-3	4-Lane Divided, Cleveland Realigned	0	$0	0	$0	258	$200,000	27,789	$600,000	552,981	$11,100,000	20%	$2,380,000	2	$700,000	21.1	$6,190,000	$21,170,000
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	53,537	$9,700,000	275	$28,000	2431	$1,500,000	27,196	$600,000	797,990	$16,000,000	20%	$3,625,600	0	$0	26.6	$5,910,000	$37,363,600
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	69,014	$12,500,000	275	$28,000	2431	$1,500,000	176,182	$3,600,000	832,038	$16,700,000	20%	$4,365,600	1	$350,000	64.1	$14,520,000	$53,563,600
Rice-4	Restricted Crossing U-Turns	34,832	$6,300,000	0	$0	0	$0	31,412	$700,000	502,216	$10,100,000	20%	$2,160,000	2	$700,000	6.1	$1,930,000	$21,890,000
Rice-5	Offset Interchange - SPUI	71,697	$13,000,000	0	$0	258	$200,000	141,887	$2,900,000	597,815	$12,000,000	20%	$3,020,000	3	$1,050,000	29.8	$6,730,000	$38,900,000
Rice-7	I-229 Ramps Realigned	75,990	$13,700,000	0	$0	0	$0	193,941	$3,900,000	455,070	$9,200,000	20%	$2,620,000	3	$1,050,000	59.3	$15,100,000	$45,570,000
Rice-C2	Rice Street 4-Lane Divided Corridor	0	$0	1139	$114,000	0	$0	0	$0	335,601	$6,800,000	20%	$1,382,800	0	$0	6.7	$3,210,000	$11,506,800

Footnotes

(1) Railroad crossing costs include crossing surfacing and interconnection with roadway traffic signals.

(2) The railroad crossing at Lowell Avenue is assumed to require upgrades only for concepts which include traffic signalization upgrades at the Rice Street intersection. These concepts include Rice-3c, Rice-5, and Rice-7.

(3) It is anticipated that the existing ditch between Rice Street and the BNSF railroad must be maintained. If BNSF objects to the limited impacts to the existing ditch included in any of the concepts, the Rice Street improvements may need to be shifted to the north from what is currently shown.


(4) Due to the realigned Cleveland Avenue corridor, Concepts Rice-3, Rice-3b, and Rice-3c impact large sections of property owned by Great Bear Sand & Gravel, LLC. If access is not able to be maintained to the remaining sections of their property, full property acquisition may be necessary.

Table 4. Preliminary Concepts Composite Comparative Assessment

Preliminary Concept		Traffic Assessment			Environmental Impacts	Cost	ROW (acre)
		Queues	Delay	Travel Time			
Rice-1	4-Lane Divided	Good	Very Good	Very Good	Low	$15,330,000	6.5
Rice-2	6-Lane Divided	Very Good	Very Good	Very Good	Low	$21,750,000	6.6
Rice-3	4-Lane Divided, Cleveland Realigned	Good	Very Good	Good	Medium (Property Impacts)	$21,170,000	21.1
Rice-3b	4-Lane Divided, Cleveland Realigned to Bahnson	Very Good	Very Good	Very Good	High (Potential 4(f) and property impacts)	$37,363,600	26.6
Rice-3c	4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned	Very Good	Very Good	Very Good	High (Potential 4(f) and property impacts)	$53,563,600	64.1
Rice-4	Restricted Crossing U-Turns	Neutral	Very Good	Very Good	Medium	$21,890,000	6.1
Rice-5	Offset Interchange - SPUI	Very Good	Very Good	Good	Medium (Potential to be high if cultural resources are found)	$38,900,000	29.8
Rice-7	I-229 Ramps Realigned	Very Good	Very Good	Good	High (Floodplain, wetland, property impacts)	$45,570,000	59.3
Rice-C2	Rice Street 4-Lane Divided Corridor	n/a	n/a	n/a	Medium (Potential to be high if buildings are eligible)	$11,506,800	6.7

APPENDIX D3 -

ENVIRONMENTAL CONSTRAINTS MAPS

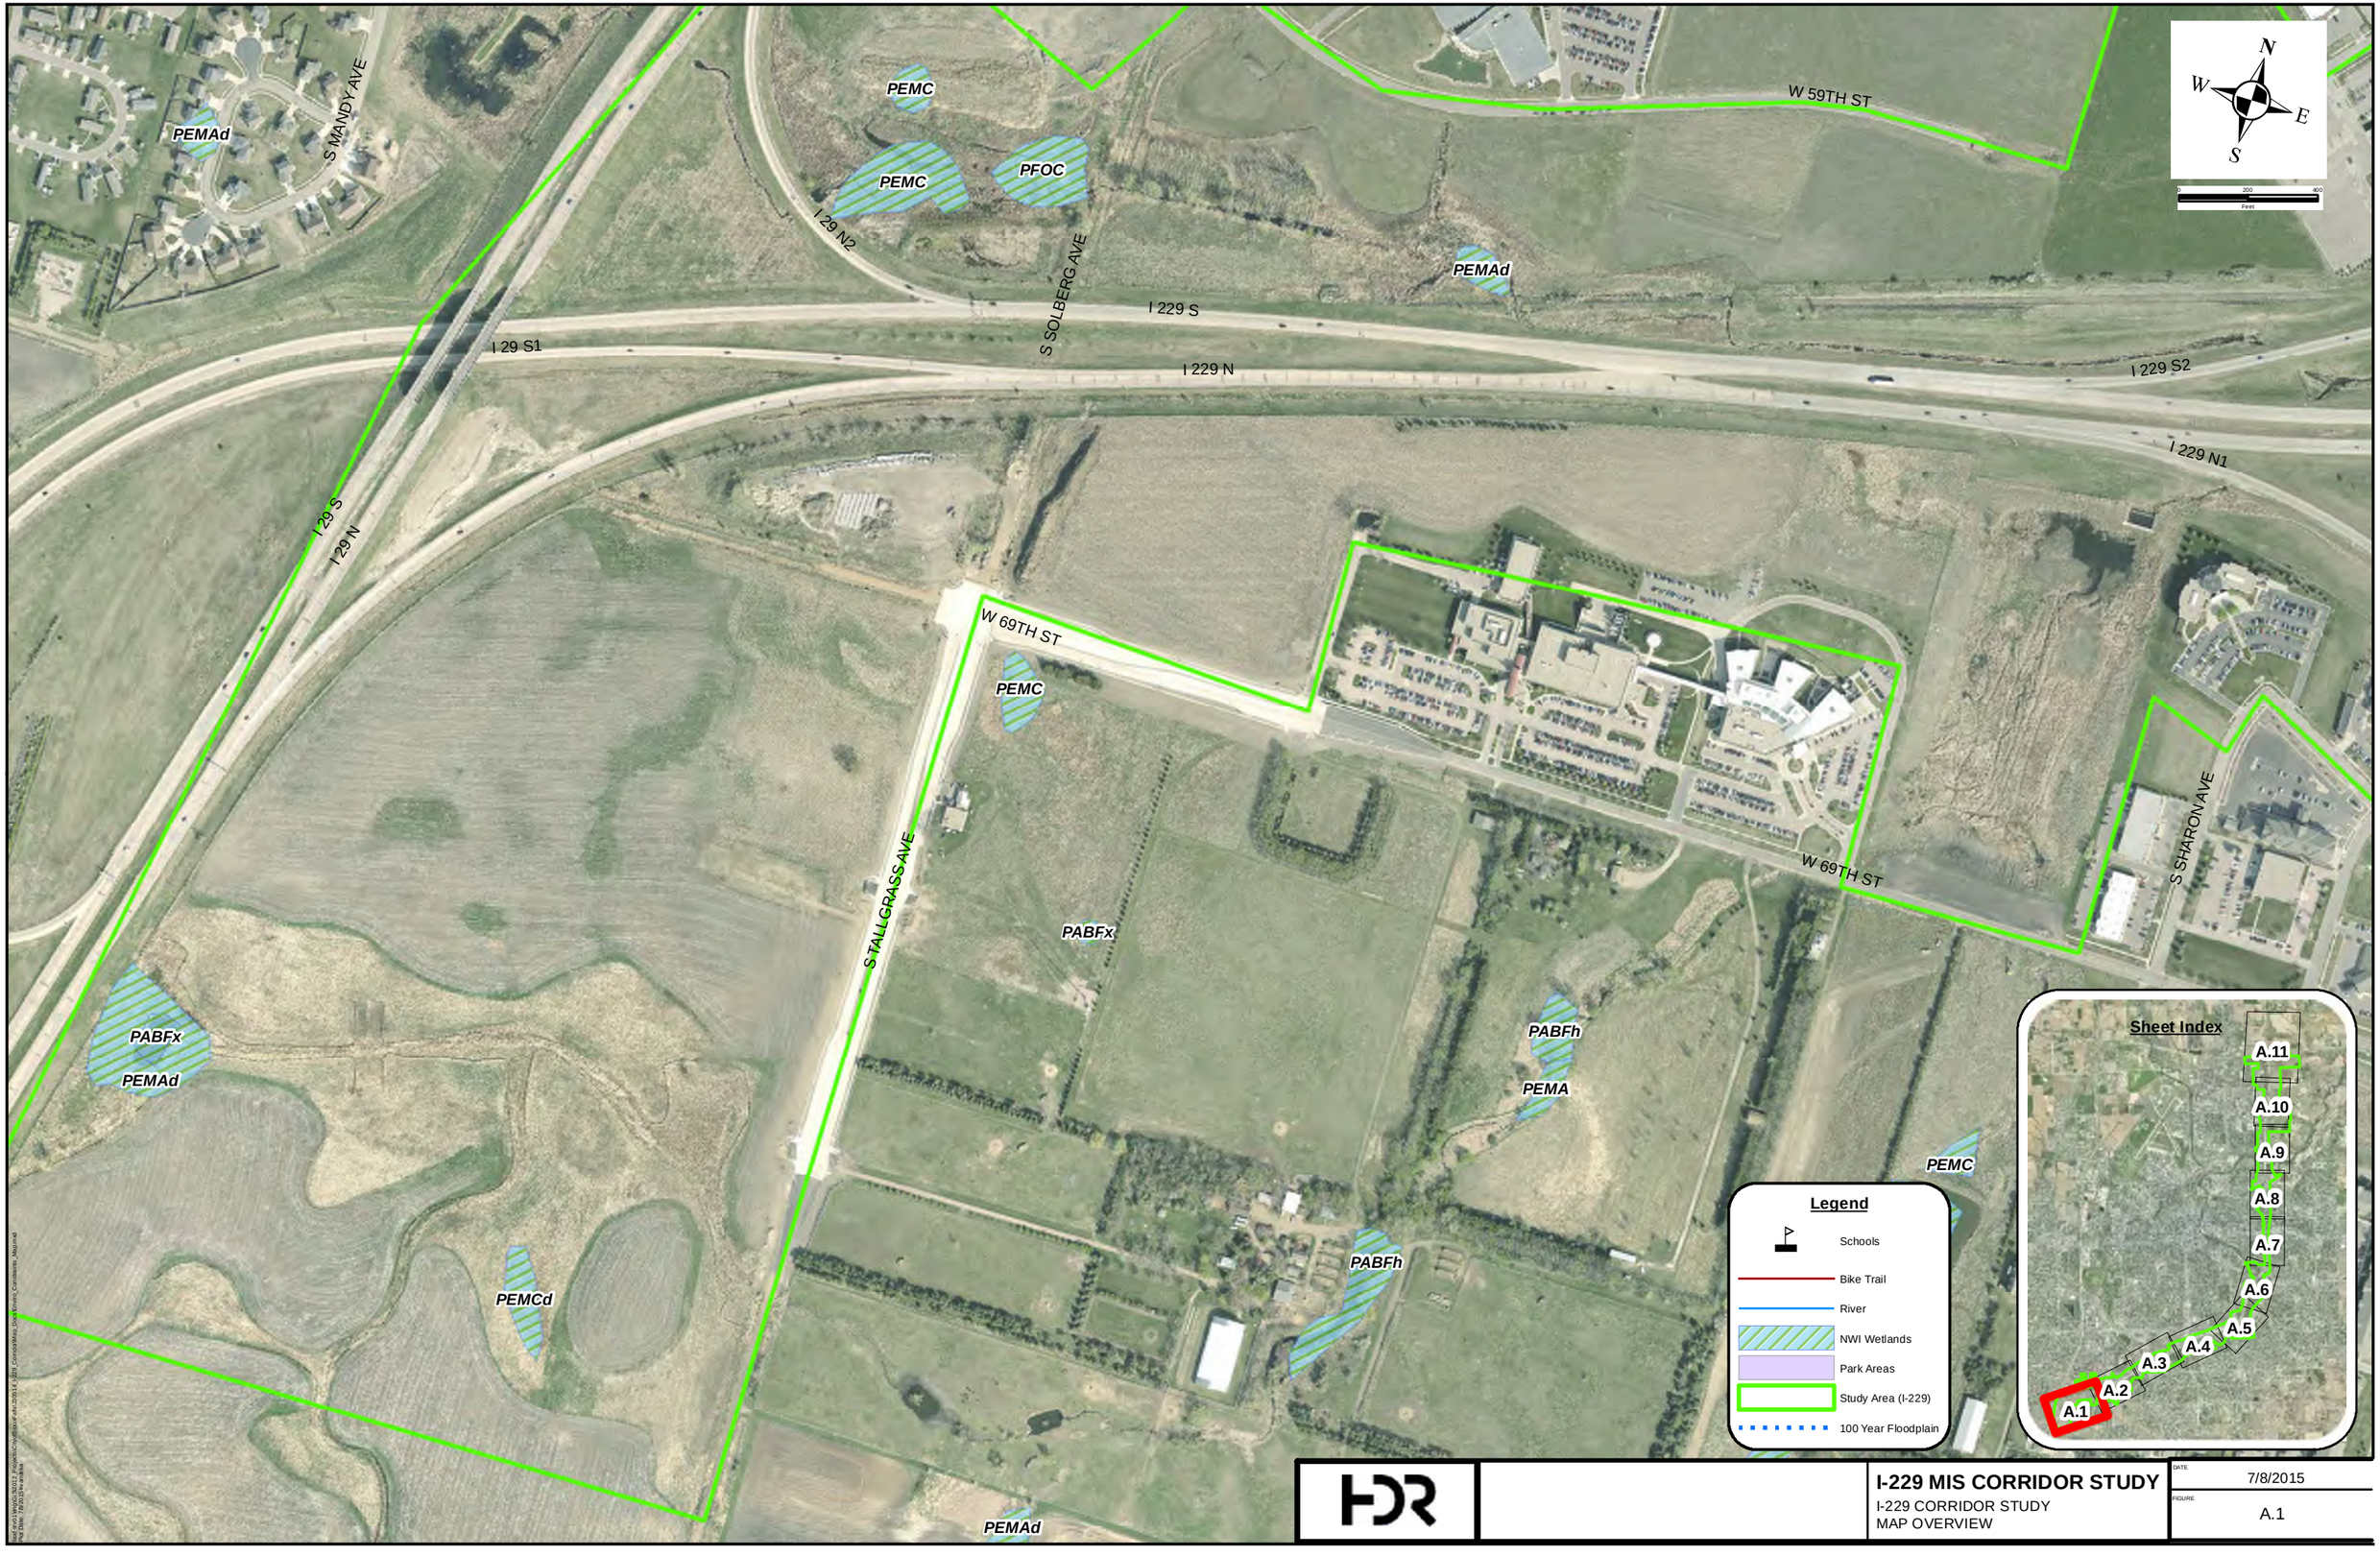

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.1




I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.2

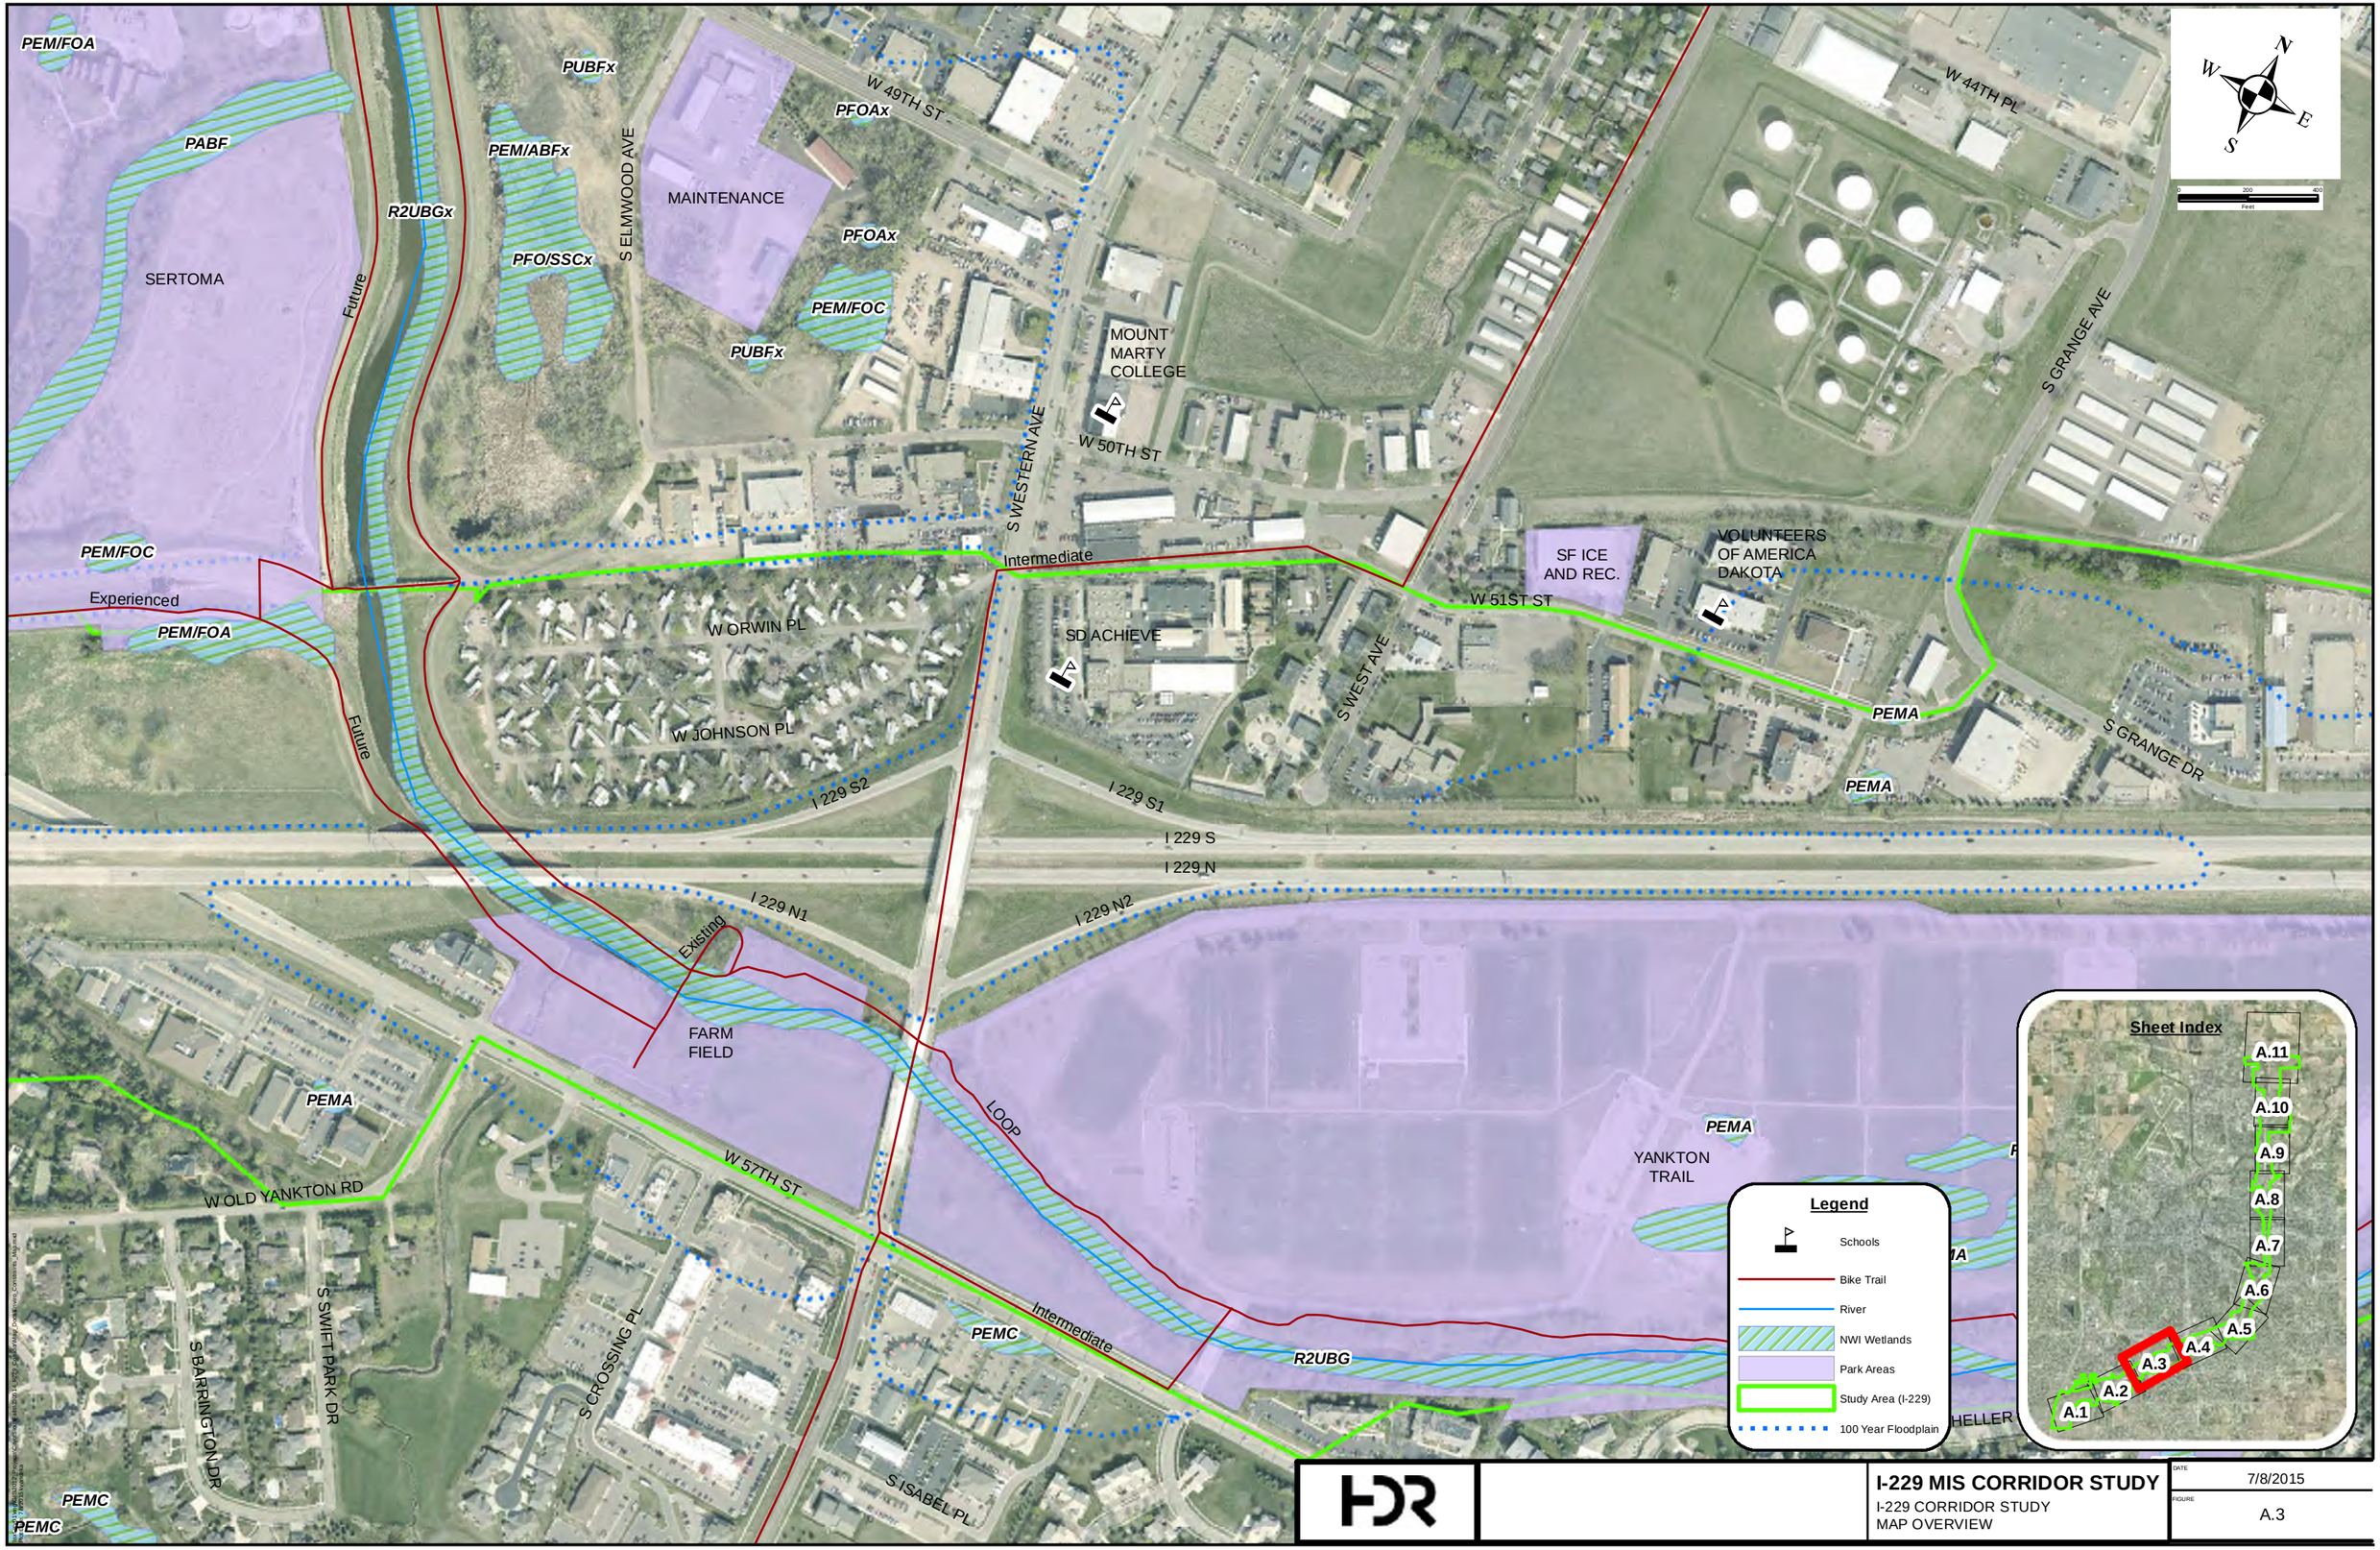


HDR

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.3

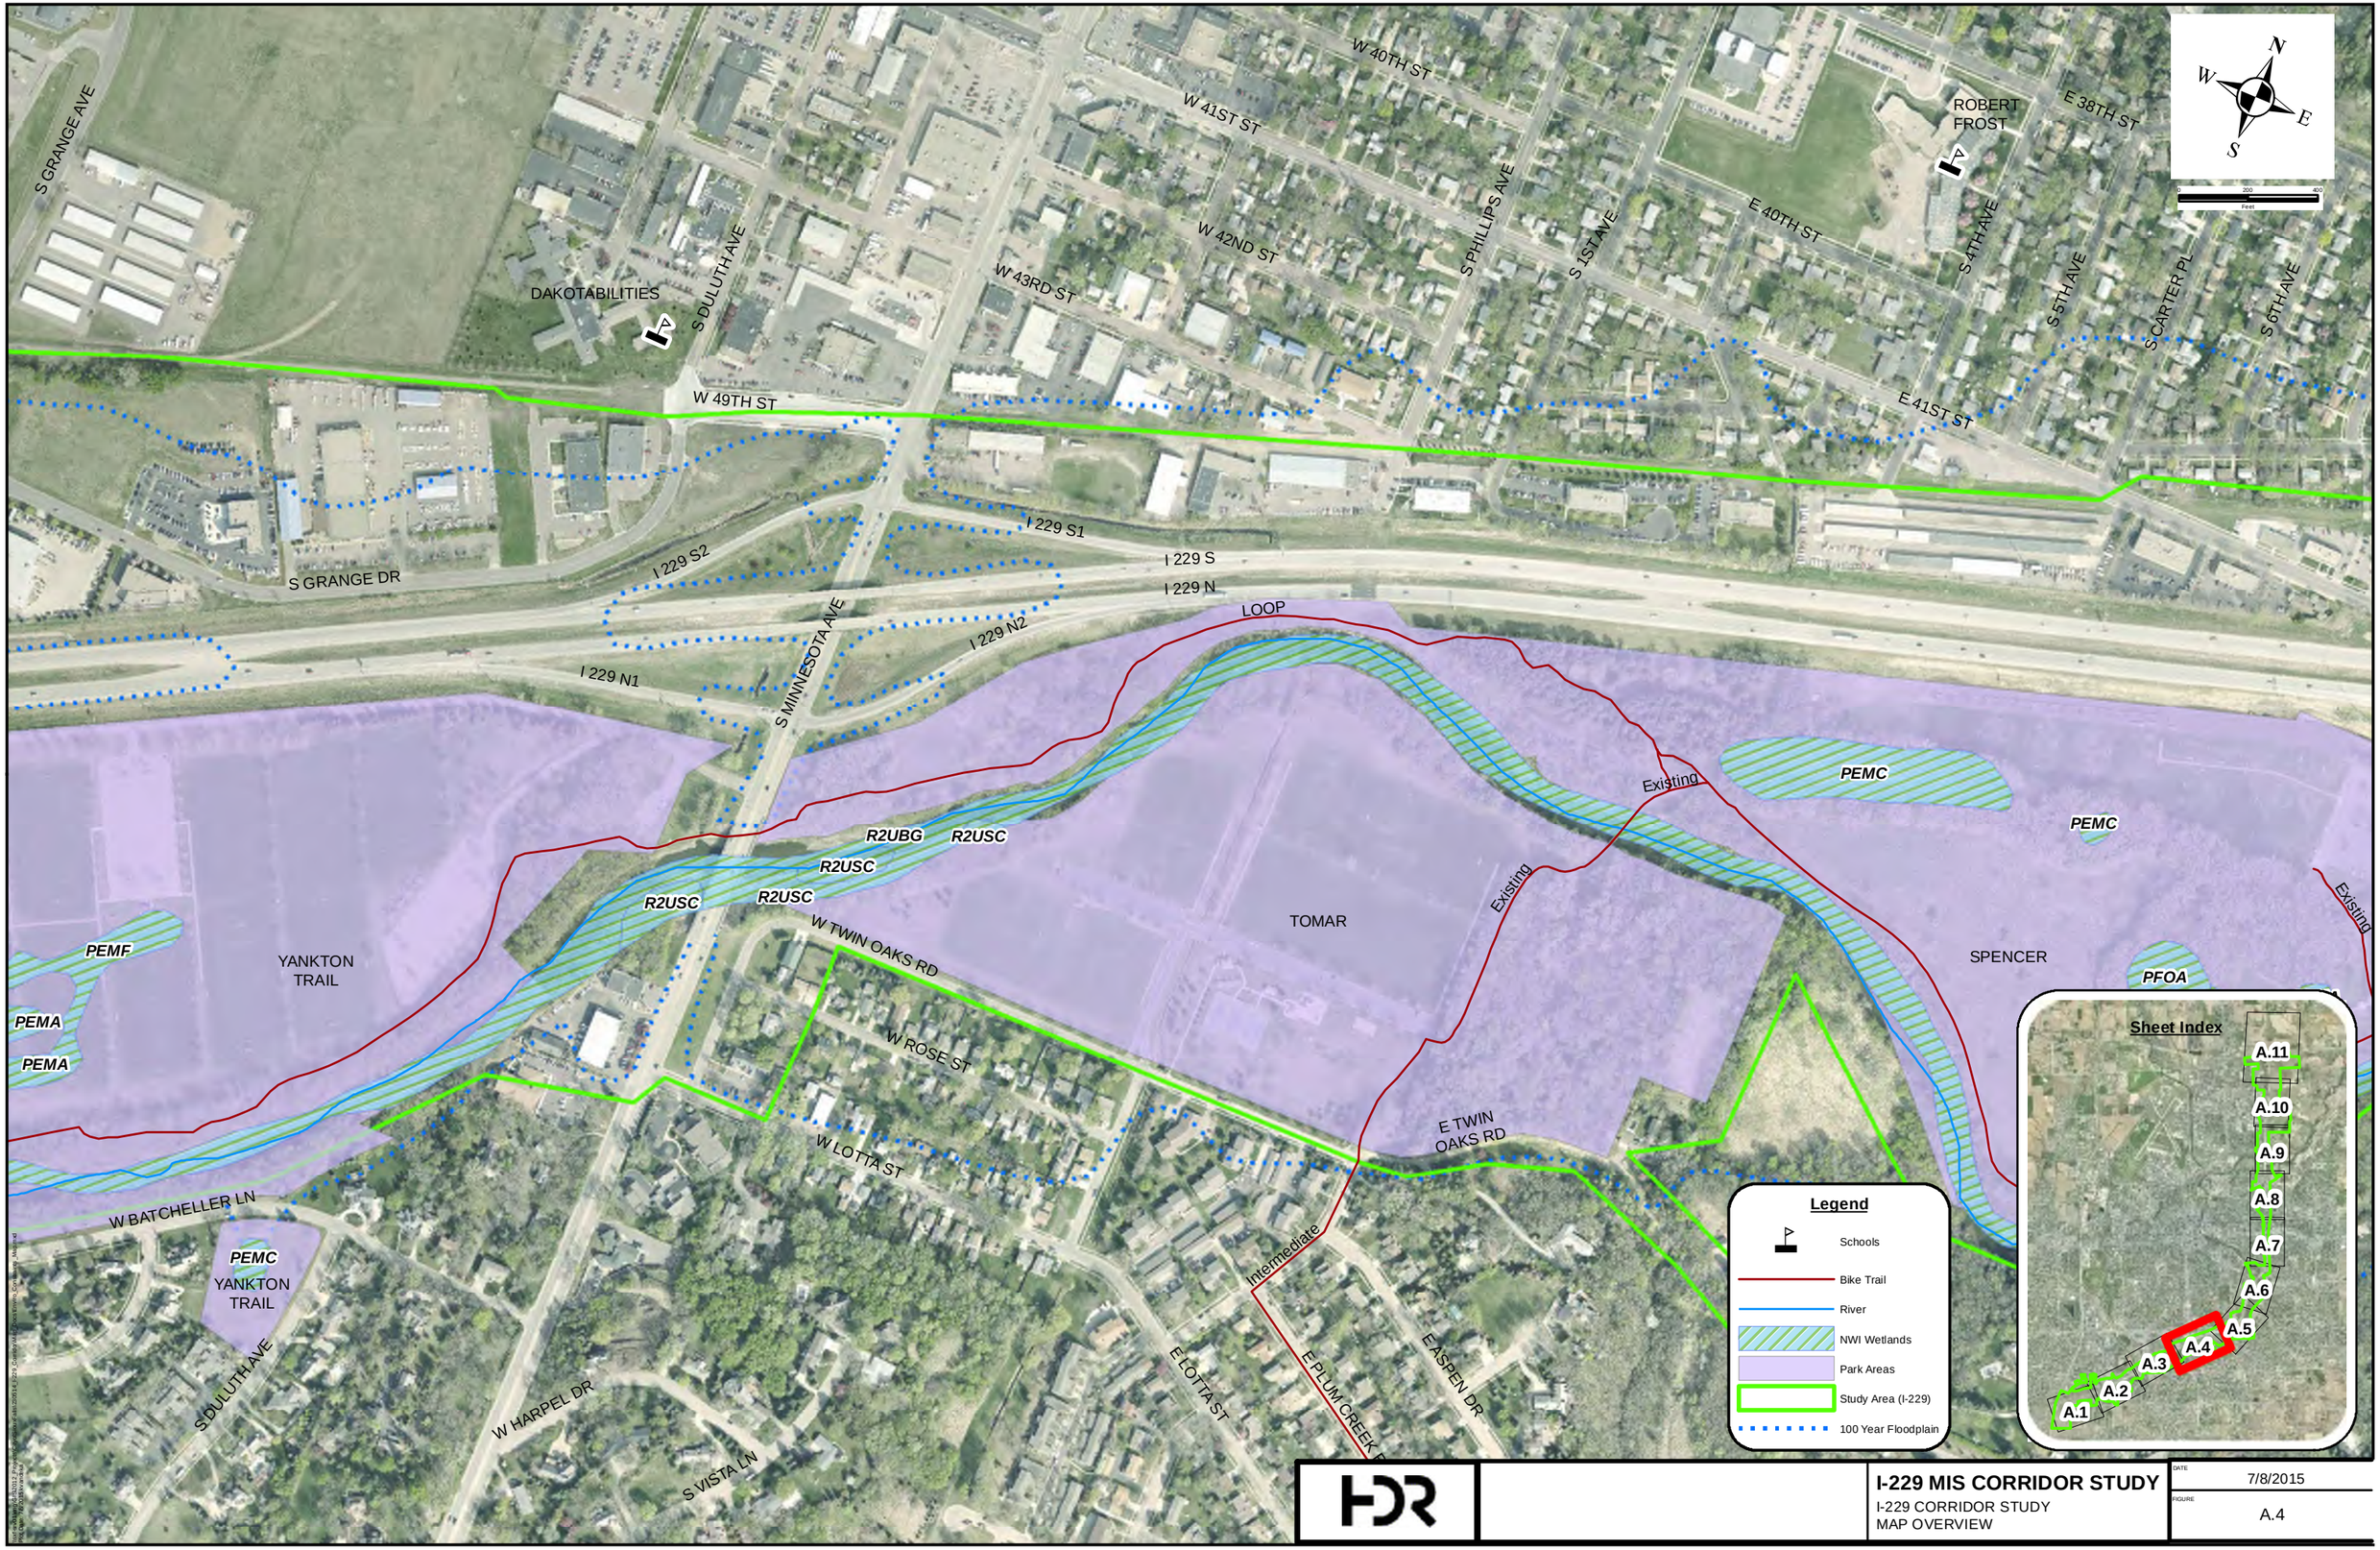

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.4

E 38TH ST
E PAM RD
E 41ST ST
S SHERMAN AVE
S VANEPS AVE
E 33RD ST
E 32ND ST
S BLAUVELT AVE
S CRESTW
S YEAGER RD
E 35TH ST
LINCOLN
Intermediate
I 229 S2
I 229 N1
I 229 S1
I 229 S
I 229 N2
I 229 N
Existing
Existing
Existing
Existing
LOOP
SPENCER
LEIF ERICKSON
NORLIN
PASLEY
TUTHILL
PEMC
PEMC
PFOA
PEMA
PEMA
PEMA
PEMA
PEMA
PEMC
PEM/FOC
PEM/FOC
PEM/FOA
R2USC
R2UBG
R2USC
R2USC
R2USC
E TWIN OAKS EST
S CLIFF AVE
E OTONKA TRL
E CEDAR LN
E EDGEWOOD RD
E 49TH ST
E CRESTVIEW DR
S SPENCER BLVD
S ST CH
RANCIS

N
W
E
S
0 200 400
Feet

Legend

- Schools
- Bike Trail
- River
- NWI Wetlands
- Park Areas
- Study Area (I-229)
- 100 Year Floodplain

Sheet Index

A.11
A.10
A.9
A.8
A.7
A.6
A.5
A.4
A.3
A.2
A.1

HDR

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.5

S SHERMAN AVE
S BRAEMAR DR
S WAYLAND AVE
S VAN EPS AVE
E 33RD ST
E 32ND ST
E 30TH ST
S BLAUVELT AVE
S CARDINAL DR
S CRESTWOOD RD
S YEAGER RD
S FREDERICK DR
S RIVERDALE RD
E 24TH ST
S COATES RD
Intermediate
S BRUCE RD
S CAMEO WAY
RIVERDALE
Existing
Existing
I 229 S
I 229 N
PEMA
I 229 N1
I 229 N2
E 26TH ST
ROTARY
Existing
R2UBG
Existing
E 18TH ST
E 17TH ST
E 19TH ST
Intermediate
PEM/FOC
R2USC
LEIF
ERICKSON
R2USC
NORLIN
R2USC
PASLEY
LOOP
Extension
S SOUTHEASTERN AVE
Existing
FRONTAGE RD
E WOODLAND HILLS RD
E OLD ORCHARD TRL
Intermediate
E KLONDIKE TRL
PABFx
S CLEVE
TOW

N
W
E
S
0 200 400
Feet

Sheet Index

A.11
A.10
A.9
A.8
A.7
A.6
A.5
A.4
A.3
A.2
A.1

Legend

- Schools
- Bike Trail
- River
- NWI Wetlands
- Park Areas
- Study Area (I-229)
- 100 Year Floodplain


HDR

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.6

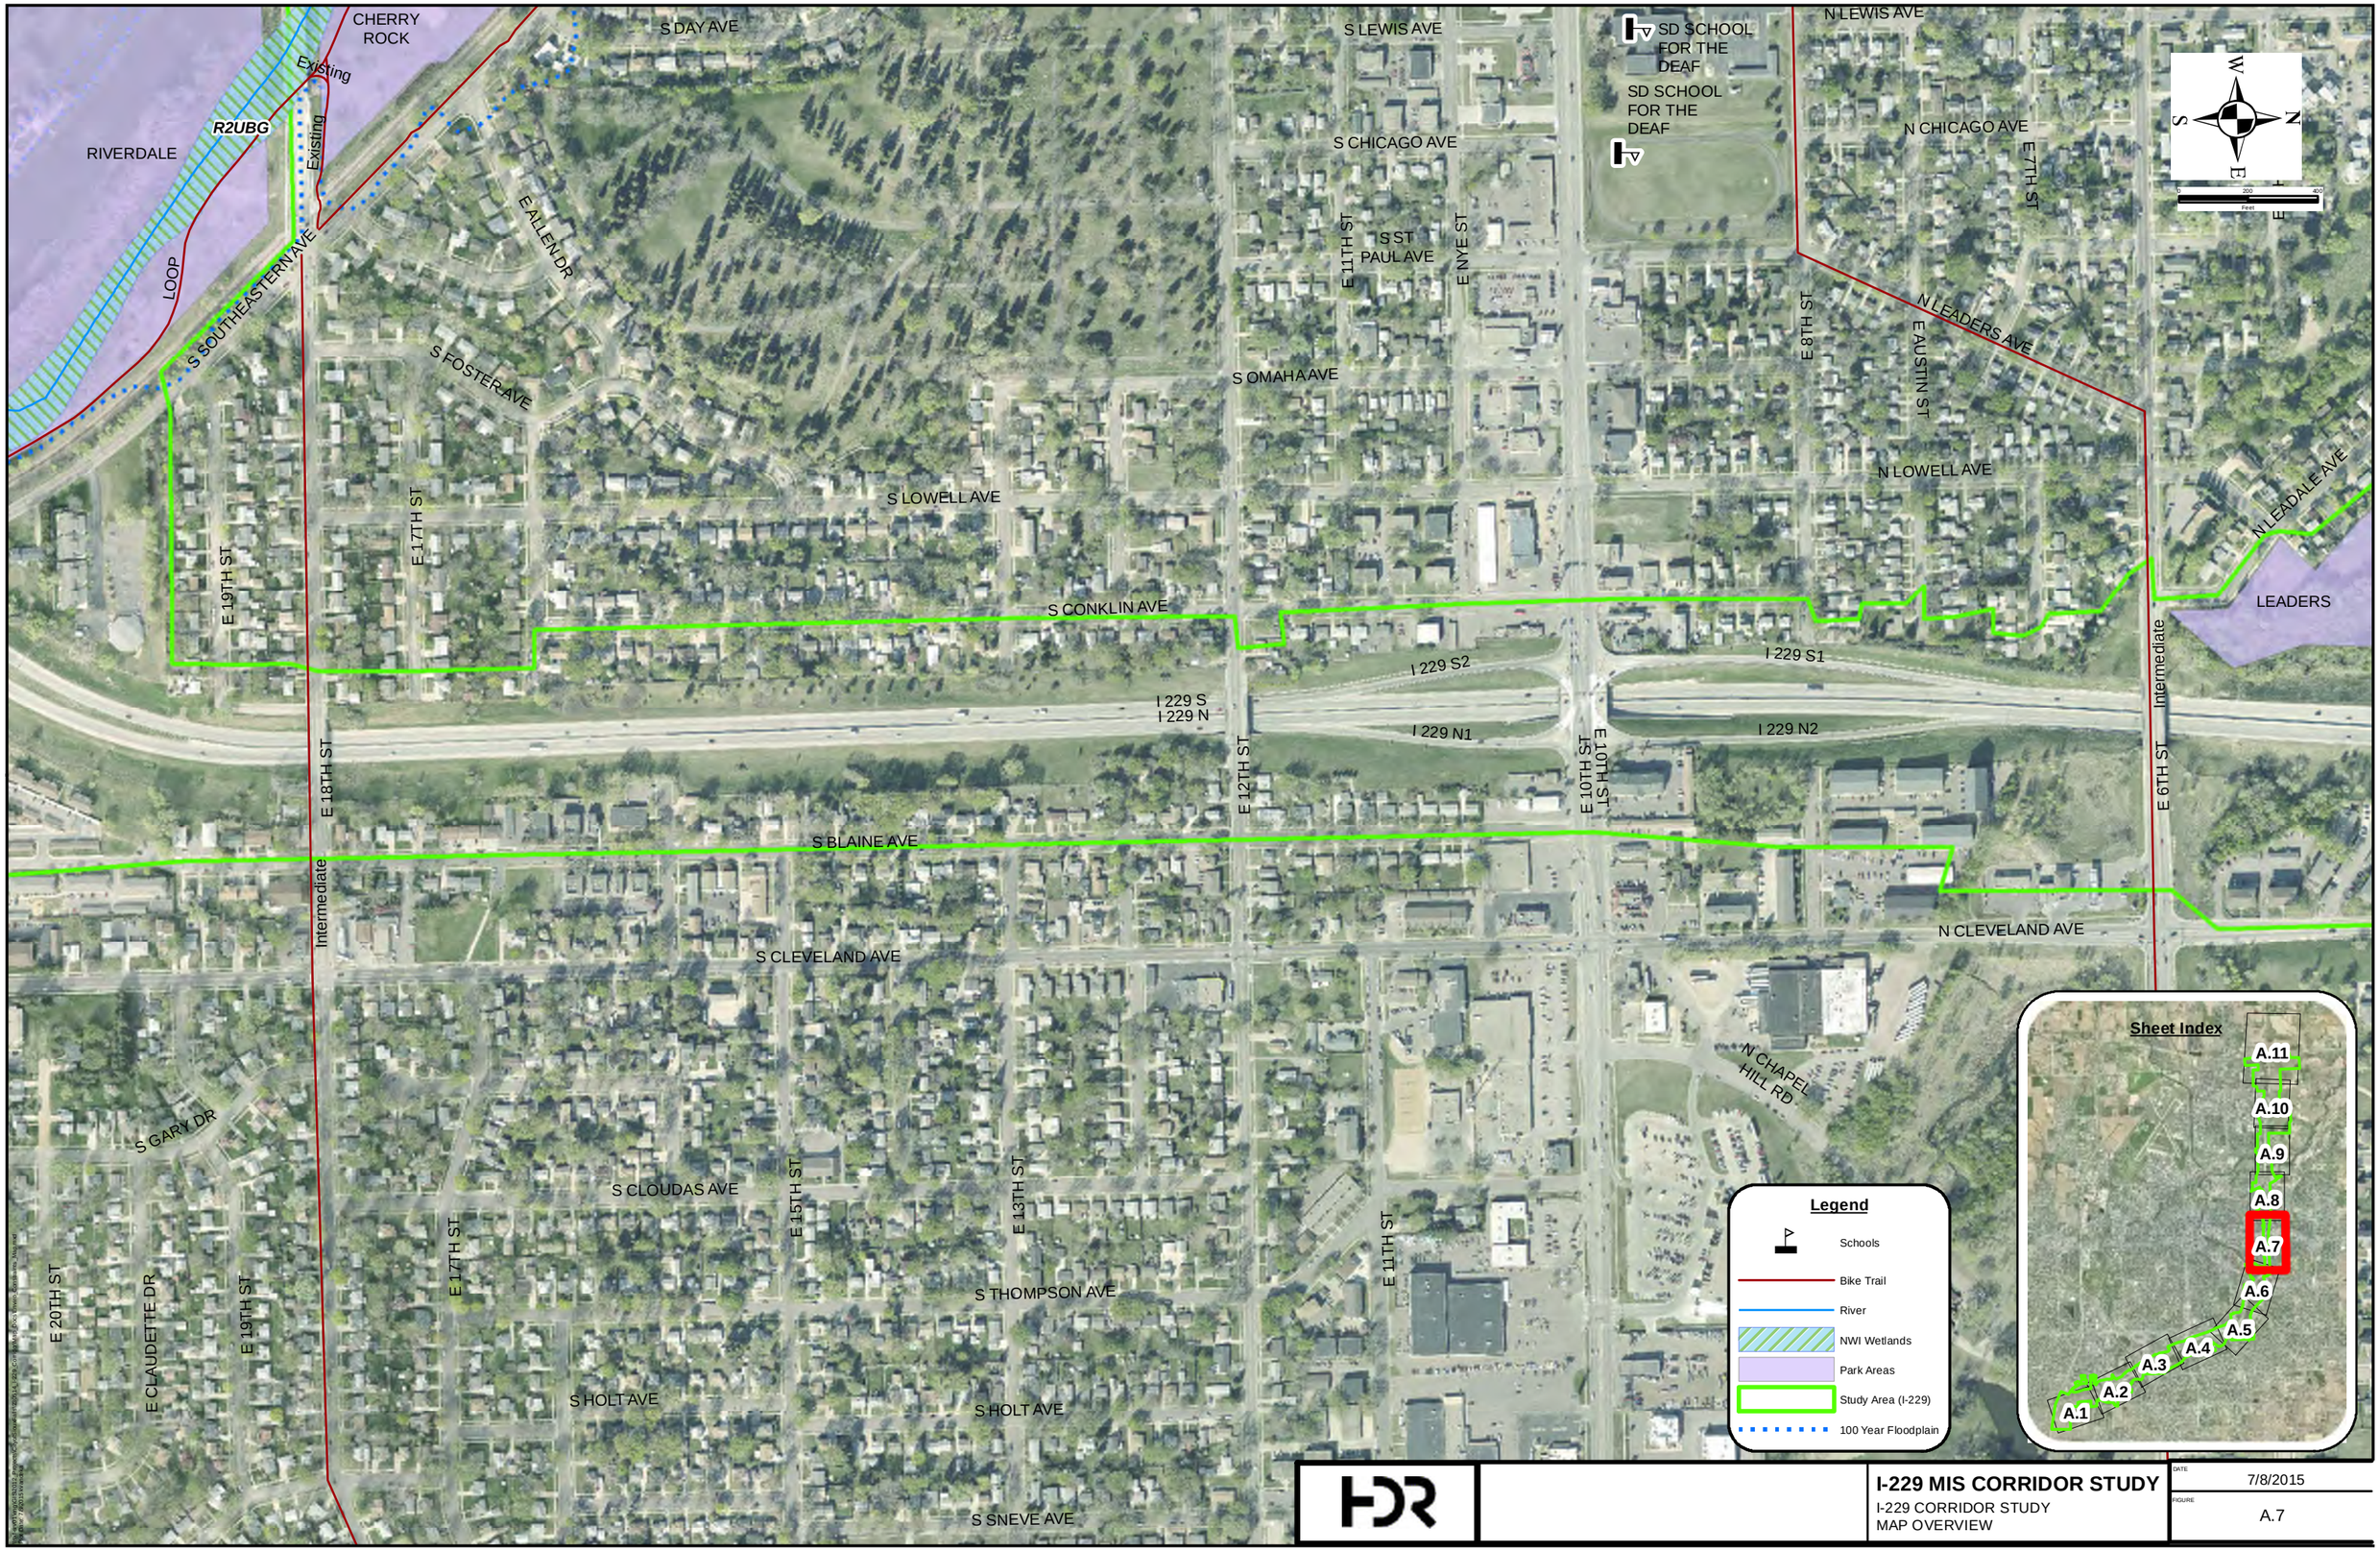

HDR

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.7

E 7TH ST
E 5TH ST
N LEADALE AVE
E 1ST ST
E MADISON ST
E TRICIA LN
E TRACY LN
E MULBERRY ST
N OMAHA AVE
RONNING
N LOWELL AVE
LEADERS
N LOWELL AVE
N HOMESTEAD CIR
I 229 S1
I 229 S2
I 229 S
I 229 N
E RICE ST
I 229 N1
I 229 N2
PEMCx
PEMCx
PEMA
PEMA
PEMCd
E 6TH ST
Intermediate
N CLEVELAND AVE
N SHERWOOD AVE
N SHEPHERD AVE
N SHAWNEE AVE
E LACEY PL
N CARBINE PL
N BULLET PL
N BUNKER PL
E MADISON ST
N ARCHER DR
N MOSSY OAK AVE
N BROKEN BOW AVE
PABFh
N ARCHER DR
W
S
N
E
0 200 400
Feet

Legend

- Schools
- Bike Trail
- River
- NWI Wetlands
- Park Areas
- Study Area (I-229)
- 100 Year Floodplain

Sheet Index

A.11
A.10
A.9
A.8
A.7
A.6
A.5
A.4
A.3
A.2
A.1

HDR

I-229 MIS CORRIDOR STUDY
I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015
FIGURE A.8

PEMCx
PEMCx
PEMA
PEMA
PEMA
PFOA
R2UBG
PEMCd
PFOA
PEMAd
PUBFx
PUBFx
PUBFx
PUBFx
PABFh
PUBFx
PUBGx
N FIERO PL
N PONTIAC PL
N POTSDAM AVE
I 229 S
I 229 N
I 229 N2
N GLENWOOD CIR
E RICE ST
N BAHNSON AVE
Future

W
S
N
E
0 200 400
Feet

Legend

- Schools
- Bike Trail
- River
- NWI Wetlands
- Park Areas
- Study Area (I-229)
- 100 Year Floodplain

Sheet Index

A.11
A.10
A.9
A.8
A.7
A.6
A.5
A.4
A.3
A.2
A.1

HDR

I-229 MIS CORRIDOR STUDY
I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015
FIGURE A.9



HDR

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.10



HDR

I-229 MIS CORRIDOR STUDY

I-229 CORRIDOR STUDY
MAP OVERVIEW

DATE 7/8/2015

FIGURE A.11

Appendix E. Predictive Safety Analysis

This memorandum presents a summary of the methodology and findings for the predicted safety performance analysis for the Existing, No-Build and Build conditions for the I-229 MIS.


The I-229 MIS has been separated into individual sub-studies. The sub-studies include:

- I-229 Corridor Study
- Minnesota Avenue Corridor Study (Exit 3)
- 10th Street Corridor Study (Exit 6)
- Benson Road Corridor Study (Exit 9)
- Rice Street Corridor Study (Exit 7)
- Cliff Avenue Corridor Study (Exit 4)

A map illustrating the overall study areas for each of the sub-studies is shown in ***Figure 1***. The study limits for the predictive safety analysis differ slightly. In general, the predictive safety analysis limits for the I-229 Corridor Study are focused on the freeway area impacted by the corridor concepts (26th Street to 10th Street) and the remaining sub-studies focus on their respective ramps and ramp terminals. The analysis limits for each sub-study will be detailed later in this memorandum.

The predictive safety analysis presented in this memorandum is based on the principles and methods of the Highway Safety Manual (HSM) as discussed in detail below. It presents a comparative analysis of the predicted crashes anticipated between the Existing (Year 2012) condition and the Future No-Build (Year 2035) condition, as well as a comparative analysis between No-Build and Build alternatives for each sub-study. The Build alternatives to be analyzed for this study will be described later in this memorandum. The results are intended to help guide the selection of the alternatives moving forward to the alternatives analysis stage of planning.

Figure 1. I-229 MIS Study Area Map

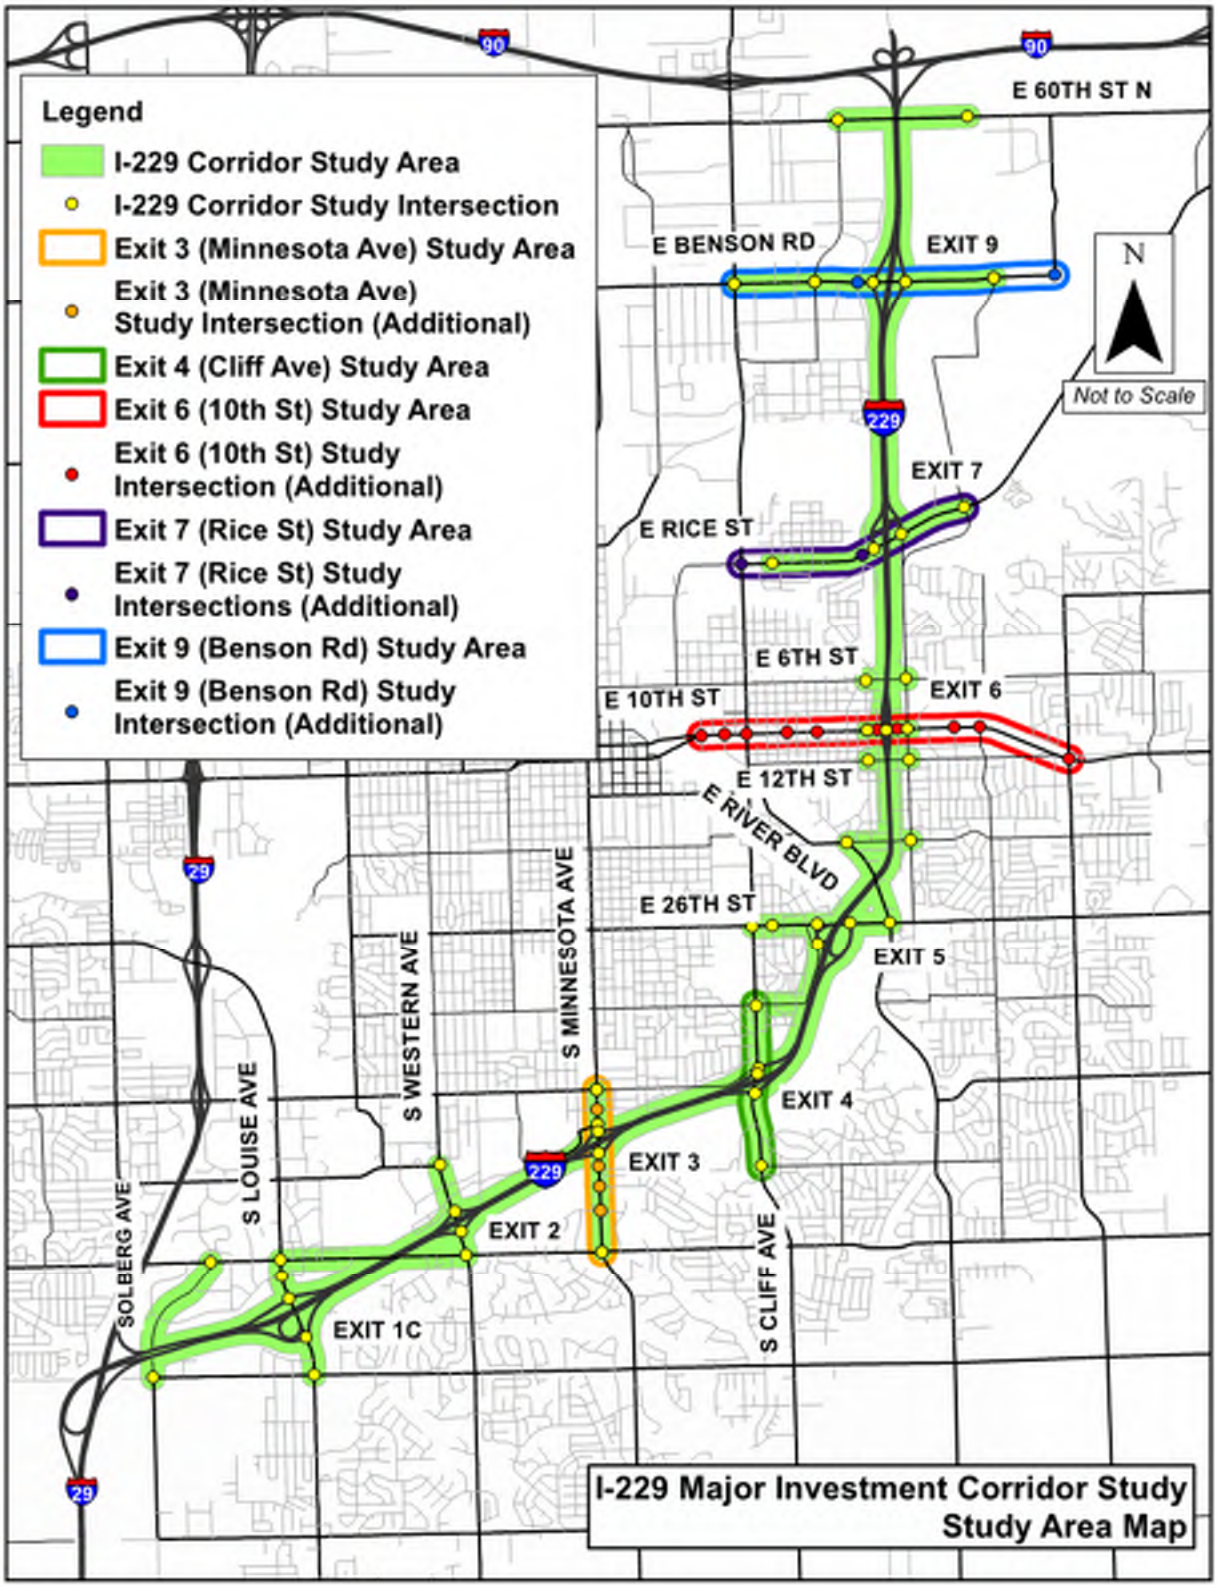

Methodology

Predictive safety analysis was completed using the American Association of State Highway and Transportation Officials (AASHTO) HSM methods, including the National Cooperative Highway Research Program (NCHRP) Report 17-45 methods for evaluating freeways and interchanges (now part of the HSM as a supplemental volume published in 2014). FHWA supports, and in many cases now requires, the use of HSM methods for the evaluation of proposed freeway facility improvements, including new or modified Interstate access. According to the HSM preface:

"The focus of the HSM is to provide quantitative information for decision making. The HSM assembles currently available information and methodologies on measuring, estimating, and evaluating roadways in terms of crash frequency (number of crashes per year) and crash severity (level of injures due to crashes). The HSM presents tools and methodologies for consideration of 'safety' across the range of highway activities …"

The HSM goes on to describe a primary benefit of the predictive method, "The predictive method provides a quantitative measure of expected crash frequency under both existing conditions and conditions which have not yet occurred. This allows proposed roadway conditions to be quantitatively assessed …" (HSM, 2010)

HSM-based crash predictions are developed using safety performance functions (SPFs) for specific facility types. The SPFs predict crash frequency for a variety of freeway types with direct consideration of factors of crash risk exposure (e.g. daily traffic volumes and segment lengths). However, crash prediction by SPF alone is limited to facilities with geometric and traffic control features that match a theoretical base condition for that facility type. To overcome this limitation to SPF applicability, crash modification factors (CMFs) are used to make adjustments to the initial SPF results to account for differences between the actual geometric and traffic control conditions and the theoretical base condition. CMFs are multiplicative factors. Thus, if a CMF greater than 1 is combined with an SPF the resulting number of predicted crashes will increase over the original SPF-based crash prediction. Conversely, a CMF less than 1 it will decrease the number of predicted crashes. For example, if an outside shoulder width is less than the assumed 10-foot base condition, then a CMF of greater than 1 is applied to adjust the SPF results for the segment.

The HSM methodology has been in development for many years and is rapidly advancing; however, there are still many limitations where the available tools do not yet offer SPFs and/or CMFs for certain conditions. Where this is the case, recent research and crash data were also considered to overcome analysis limitations. Crash prediction methods beyond the scope of the HSM that were deemed necessary for the I-229 MIS study were agreed upon in the project Methods and Assumptions document and are described later in this section.

Facilities, Segmentation and Data Inputs

The HSM allows for crash prediction to be conducted at the project level or site-specific level. A site-specific analysis parses the project study area into individual homogenous elements, such

as, freeway segments, ramp segments, and ramp terminal intersections. The I-229 MIS crash prediction area was segmented into 38 mainline freeway segments, 24 ramp segments, 11 ramp terminal intersections, and 4 arterial intersections. The segmentation will be provided as a digital appendix.

Crash prediction requires geometric and operational inputs to accurately compute the SPFs and apply the correct CMFs. These inputs include information such as segment length, daily traffic volume, ramp locations, merge distances, and horizontal curvature. The geometric inputs were primarily obtained from the conceptual design files and aerial photography. The traffic volume data was based on traffic counts provided by SDDOT and design year volume forecasts from the 2035 Sioux Falls Travel Demand Model.

I-229 Mainline Segments, Entrance and Exit Ramps, and Ramp Terminals

The I-229 mainline segments, entrance and exit ramps, and ramp terminals were evaluated using HSM methods implemented using the Enhanced Interchange Safety Analysis Tools (ISATe) version j software provided by FHWA. The ISATe analysis files are provided as a digital appendix for all freeway, ramp, and ramp terminal intersection sites that were reviewed.

The ISATe does have limitations however. Specifically, the ISATe ramp terminal method does not address Single-Point Urban Interchanges (SPUIs) or Diverging Diamond Interchanges (DDIs). It only predicts crashes for a variety of more typical diamond and partial cloverleaf interchange ramp terminals. Therefore, it was necessary to develop an estimate for an "operationally-similar" diamond interchange design and then use CMFs from HDR's "Crash Prediction Analysis Procedures for Diverging Diamond Interchange (DDI), Single-Point Urban Interchange (SPUI), and Two-Lane Loop Ramp" memo dated November 4th, 2015 to modify the results to estimate the predictions for a SPUI and DDI design. Based on available SDDOT data, the preliminary CMF for conversion of a traditional diamond interchange to a SPUI is 0.63 for ramp terminal intersection crashes. Based on research done in Missouri on safety evaluations of DDIs, the preliminary CMF for conversion of a traditional diamond interchange to a DDI is 0.37 for Fatal + Injury (F+I) crashes at ramp terminal intersections and 0.49 for Property Damage Only (PDO) crashes at ramp terminal intersections.

Cross Street Segments

Crashes within an interchange's functional area can be almost entirely predicted by evaluating the crashes from the freeway, freeway ramps, and ramp terminal intersections. However, some crashes near the interchange may be due to roadway segment characteristics of the arterial cross street. If these segment-related crashes are to be included, then HSM methods for urban and suburban arterials need to be applied. In this study, the primary area for crash prediction evaluation was focused on the interchange, and no arterial segment crashes were evaluated between scenarios.

Arterial Intersections

Some arterial intersections were included when the sub-study concepts involved realigning ramps to arterial intersections. Therefore, to make a fair comparison, the predictive safety analysis included the impacted arterial intersection for all sub-study concepts, including

No-Build. Methods from Chapter 12 of the HSM were used for analyzing arterial intersections. The analysis files for the 4 arterial intersections analyzed are provided as a digital appendix.

Calibration Factors

According to the HSM, "the predictive models were developed from the most complete and consistent data sets available." However, the report also recommends that the equations be calibrated for each jurisdiction because "the general level of crash frequencies may vary substantially from one jurisdiction to another." However, SDDOT has not yet conducted the extensive analyses required to develop a complete set of HSM related calibration factors. Therefore, using the national HSM equations is proposed as the best approach for this current analysis.

Empirical Bayes Approach: Considering Historical Crash Data

The HSM method includes an optional step called the Empirical Bayes (EB) approach, which combines "the estimate from a predictive model with observed crash data to obtain a more reliable estimate of the expected average crash frequency." (HSM, 2010) Essentially, the historical crash data is used to adjust the future crash prediction. Typically, the EB method is only used when it can be applied equally to all of the alternatives under consideration. Thus the improvements being considered must be moderate, so that the historical crash data is reasonable to consider for the conditions being compared. When major alignment or traffic control changes are proposed (such as the proposed SPUI's or DDI's), it is not used because "there is typically a small difference in the results obtained from the predictive method when it is used with and without the EB Method." Therefore, "if the EB Method is not applied consistently, such differences will likely introduce a small bias in the comparison of expected crash frequency among alternatives." (HSM Supplement, 2014) Therefore, the results are presented with the EB method adjustment when comparing Existing to No-Build conditions and without the EB method adjustment when comparing No-Build to the Build alternatives.

Planning Horizon Cost Savings

Planning horizon cost savings were calculated for the Build alternatives. The planning horizon cost savings is the discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035. This shows how much money is saved (or loss) from a safety standpoint for each alternative.

Analysis Results

The predicted number of crashes were compared for the Existing (Year 2012) and No-Build (Year 2035) conditions to see the effect on safety of the unimproved I-229 corridor with increased traffic volumes. This comparison of Existing and No-Build conditions comprises the entire crash prediction area for all six sub-studies, allowing adjacent interchanges to be compared for differences in predicted future crash frequency.

In a similar fashion, Build alternatives for each sub-study were evaluated and the predicted number of crashes was established for the 2012 to 2035 analysis period. The Build alternative


crash predictions were then compared to the No-Build crash prediction for subject interchange. Hence, the results of the crash predictions for Build alternatives are presented by sub-study.

Existing vs. No-Build

The first stage of the crash prediction analysis was to compare the safety impact of anticipated traffic volume growth over the study horizon. The predicted annual crash frequencies for the Existing (Year 2012) and No-Build (Year 2035) conditions are presented in ***Table 1***. For the comparison of the Existing and No-Build conditions, historical crash data was applied using the EB method adjustment.

As expected, crashes predicted for each location along I-229 increase because of the increase in traffic volume. Notably, the I-229 interchange areas experience higher levels of existing crashes than the connecting freeway segments. By 2035, those interchange areas all have nearly doubled in annual crashes. Particularly, the Benson Road interchange shows the highest increase in annual predicted crashes at 26 additional crashes per year.

Table 1: Expected Average Crash Frequency – Existing vs. 2035 No-Build

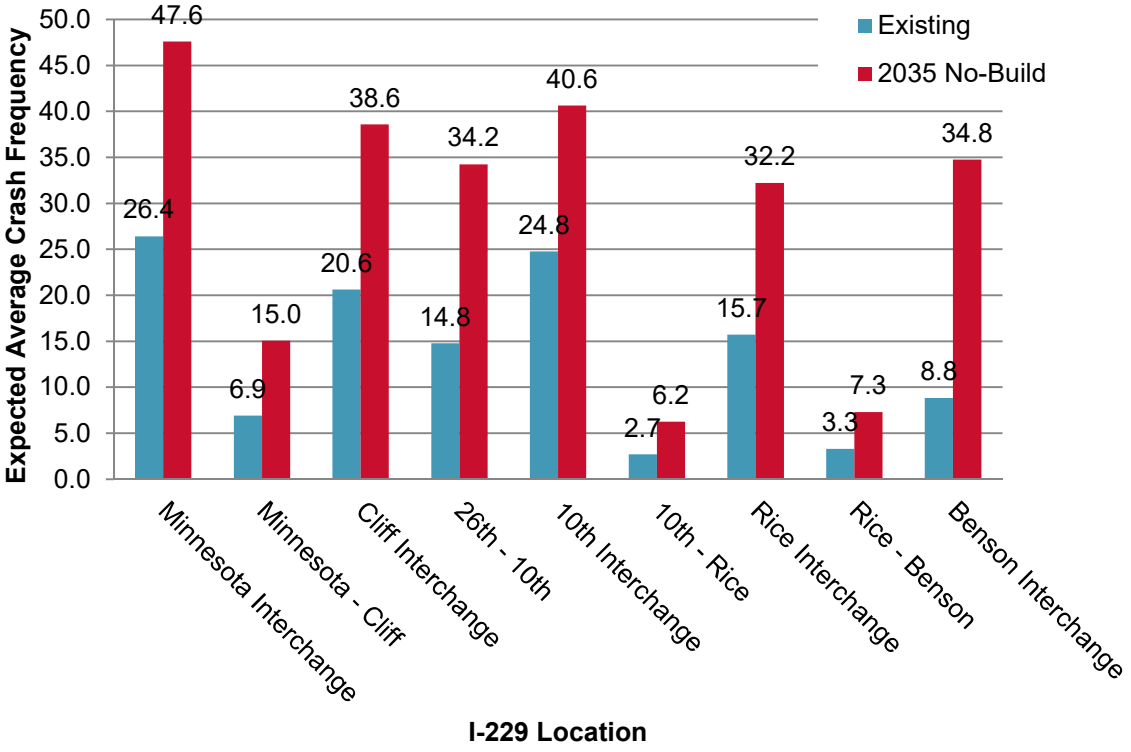

No-Build vs. Build Alternatives

I-229 Corridor Study

STUDY AREA

The ISATe analysis limits for the I-229 Corridor Study focus on the I-229 freeway portion from 26th Street to 10th Street. The analysis limits for the I-229 Corridor Study are shown in ***Figure 2***.

Figure 2: I-229 Corridor ISATe Analysis Limits



Source: Google Earth, December 2016

ALTERNATIVES


The alternatives to be analyzed for the I-229 Corridor Study are:

- I229-NB
  - No-Build
- I229-C1
  - 6-Lanes, From 26th St to 10th St
- I229-C2
  - 6-Lanes, From 26th St to 10th St
  - 65 MPH Improved Horizontal Curves

BUILD AND NO-BUILD CRASH FREQUENCY COMPARISON

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***Table 2*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

Table 2: I-229 Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

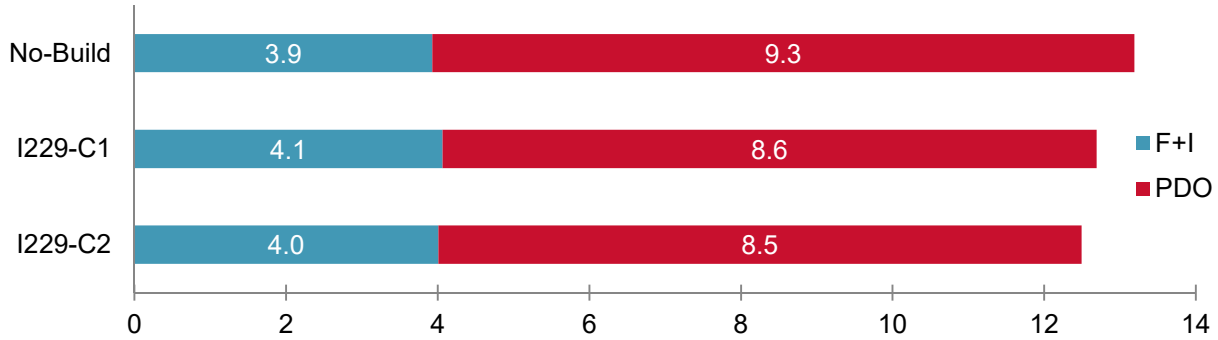

The resulting total number of annual predicted crashes is slightly lower for both Build alternatives The Build alternatives result in a 4-5% decrease in total crashes and a 7-8% decrease in PDO crashes, but a 2-3% increase in F+I crashes. The cost for an F+I crash is high so this results in a negative cost savings, which is shown below in ***Table 3***.

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***Table 3***.

Table 3: I-229 Corridor Planning Horizon Crash Cost Savings

Alternative	Total User Cost[1]	User Cost Savings[2]
No-Build	$ 24,600,000	$ -
I229-C1	$ 25,200,000	$ (600,000)
I229-C2	$ 24,900,000	$ (300,000)


[1]Total User Cost – The discounted, monetized safety benefit from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

Minnesota Avenue Corridor Study

STUDY AREA

The ISATe analysis limits for the Minnesota Avenue Corridor Study focus on the I-229 ramps, the ramp terminals, and the arterial intersection of Minnesota Avenue and 49th Street. The arterial intersection was included in the analysis because some of the Build alternatives involve realigning the I-229 westbound off-ramp to 49th Street. The analysis limits for the Minnesota Avenue Corridor Study are shown in ***Figure 3***.

Figure 3: Minnesota Avenue Corridor ISATe Analysis Limits

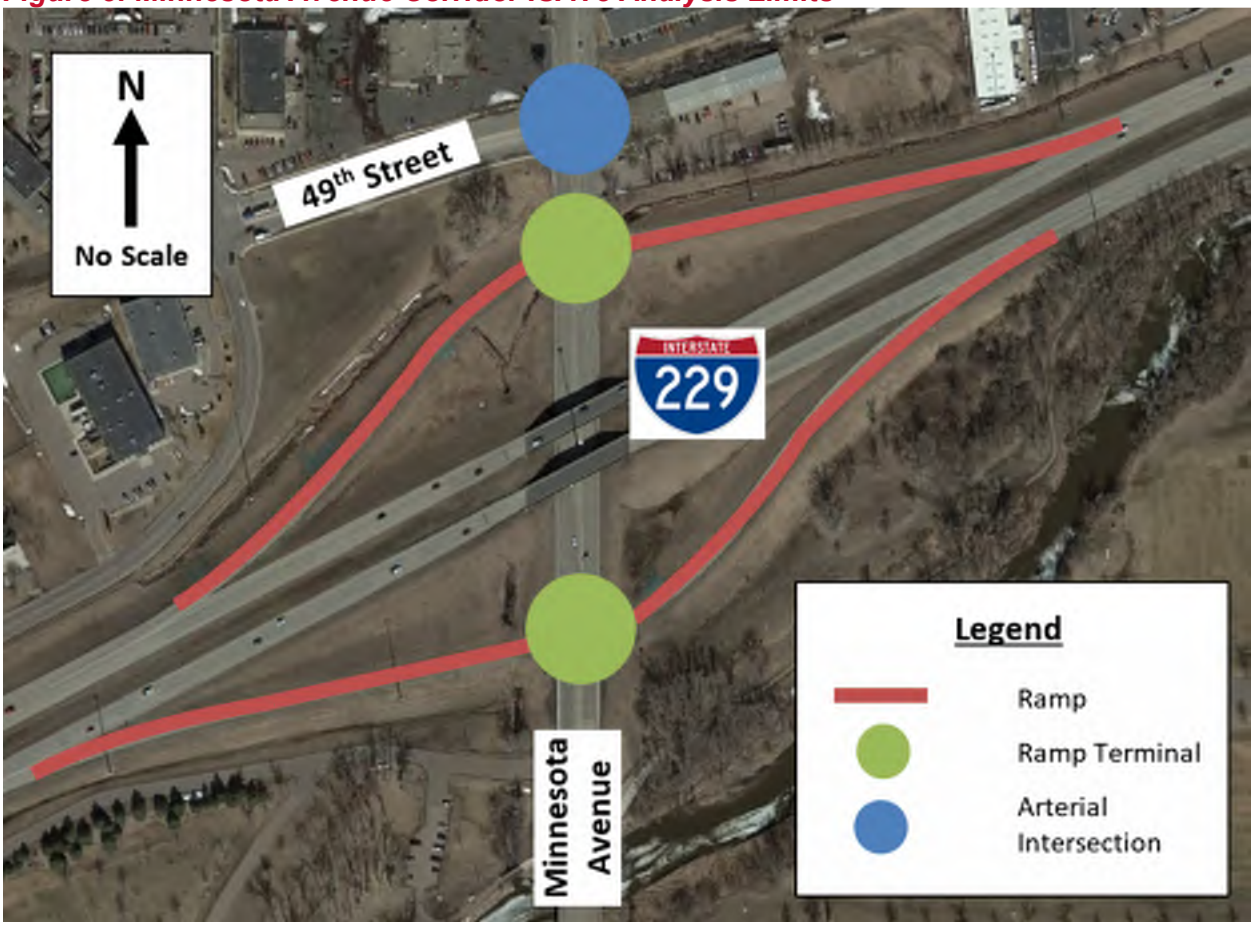

Source: Google Earth, December 2016

ALTERNATIVES

The alternatives to be analyzed for the Minnesota Avenue Corridor Study are:

- Minn-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Minn-2C
  - Realigns SB exit ramp with 49th Street; full access with signal-control.
  - Constructs loop ramp for NB Minnesota Ave to SB I-229.
  - Provides dual left-turn lanes for all signalized entrance and exit ramps.

- Increases separation between ramp terminal / 49th Street intersections.
- Rebuilds Minnesota Avenue with a median and two lanes in each direction.
- Third southbound lane added through 49th Street intersection.


- Minn-2D
  - Same as Minn-2C except rebuilds Minnesota Avenue with a median and three lanes in each direction.
- Minn-5D
  - Replaces Diamond Interchange with Diverging Diamond Interchange (DDI) configuration.
- Minn-8C
  - Replaces Diamond Interchange with Single Point Urban Interchange (SPUI) centered at existing interchange.
  - Provides dual-left turn lanes for all signalized entrance and exit ramps.
  - Incorporates full, signal-controlled access at 49th Street intersection.
  - Rebuilds Minnesota Avenue with a median and two lanes in each direction.
  - Third southbound lane added through 49th Street intersection.
- Minn-8D
  - Same as Minn-8C except rebuilds Minnesota Avenue with a median and three lanes in each direction.
- Minn-9D (Qualitative Analysis Only)
  - Same as Minn-8D except SB I-229 through and right-turn movements are provided direct connection to 49th Street.

BUILD AND NO-BUILD CRASH FREQUENCY COMPARISON

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***Table 4*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

The resulting total number of annual predicted crashes is lower for all the Build alternatives when compared to No-Build, with the DDI alternative expecting the least amount of crashes. The alternatives result in a 34-55% decrease in total crashes, with a 44-70% decrease in F+I crashes and 26-41% decrease in PDO crashes. Minn-9D is an alternative that was originally screened out prior to the concept refinement stage. As concept refinement progressed, Minn-9D was reconsidered and reinstated as a Build alternative. Shortly following the reinstatement of Minn-9D, the overall I-229 MIS entered into the final reporting stage of the project. The project team determined that a full crash prediction analysis of Minn-9D would not provide additional value to study recommendations. The project team's qualitative assessment of Minn-9D is that the concept would likely result in slightly fewer predicted crashes than Minn-8C and Minn-8D. That qualitative assessment is based on quantitative evaluation of very similar concepts at the Cliff Avenue interchange (Cliff-6 and Cliff-7).

Table 4: Minnesota Ave Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

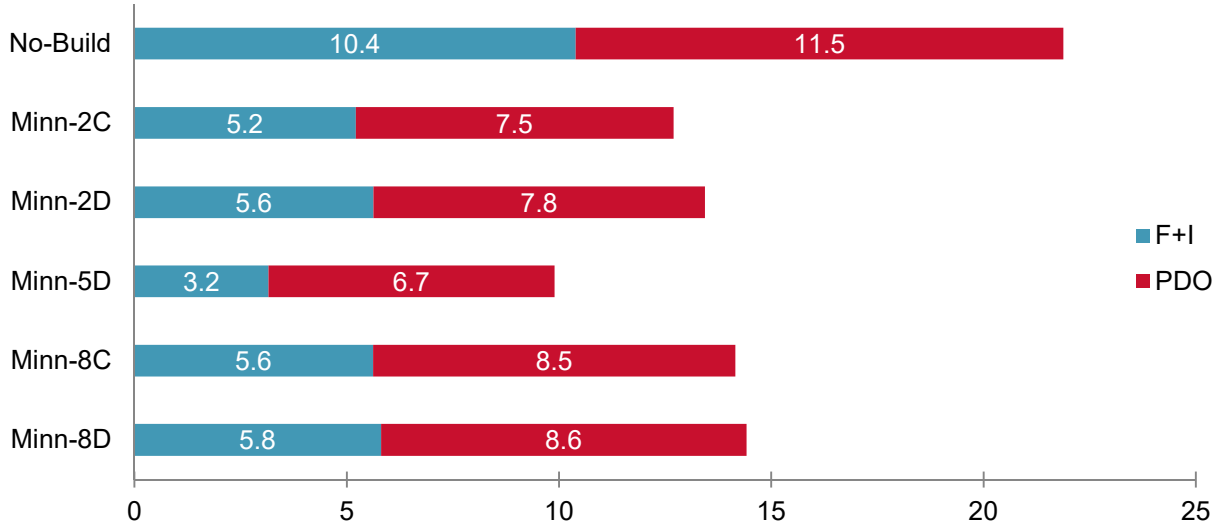

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***Table 5***.

Table 5: Minnesota Avenue Corridor Planning Horizon Crash Cost Savings

Alternative	Total User Cost[1]	User Cost Savings[2]
No-Build	$ 64,600,000	$ -
Minn-2C	$ 32,000,000	$ 32,600,000
Minn-2D	$ 34,400,000	$ 30,100,000
Minn-5D	$ 20,000,000	$ 44,600,000
Minn-8C	$ 34,500,000	$ 30,100,000
Minn-8D	$ 35,600,000	$ 29,000,000

[1]Total User Cost – The discounted, monetized safety benefit from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

10th Street Corridor Study

STUDY AREA


The ISATe analysis limits for the 10th Street Corridor Study focus on the I-229 ramps and the ramp terminals. For the Tight Split Diamond alternative, the proposed 6th Street ramp terminals were also included in the analysis. Because they are new intersections, no arterial intersection was included for the other alternatives. The analysis limits for the 10th Street Corridor Study are shown in ***Figure 4***.

ALTERNATIVES

The alternatives to be analyzed for the 10th Street Corridor Study are:

- 10th-NB
  - No-Build Interchange Configuration and Corridor Configuration

Figure 4: 10th Street Corridor ISATe Analysis Limits

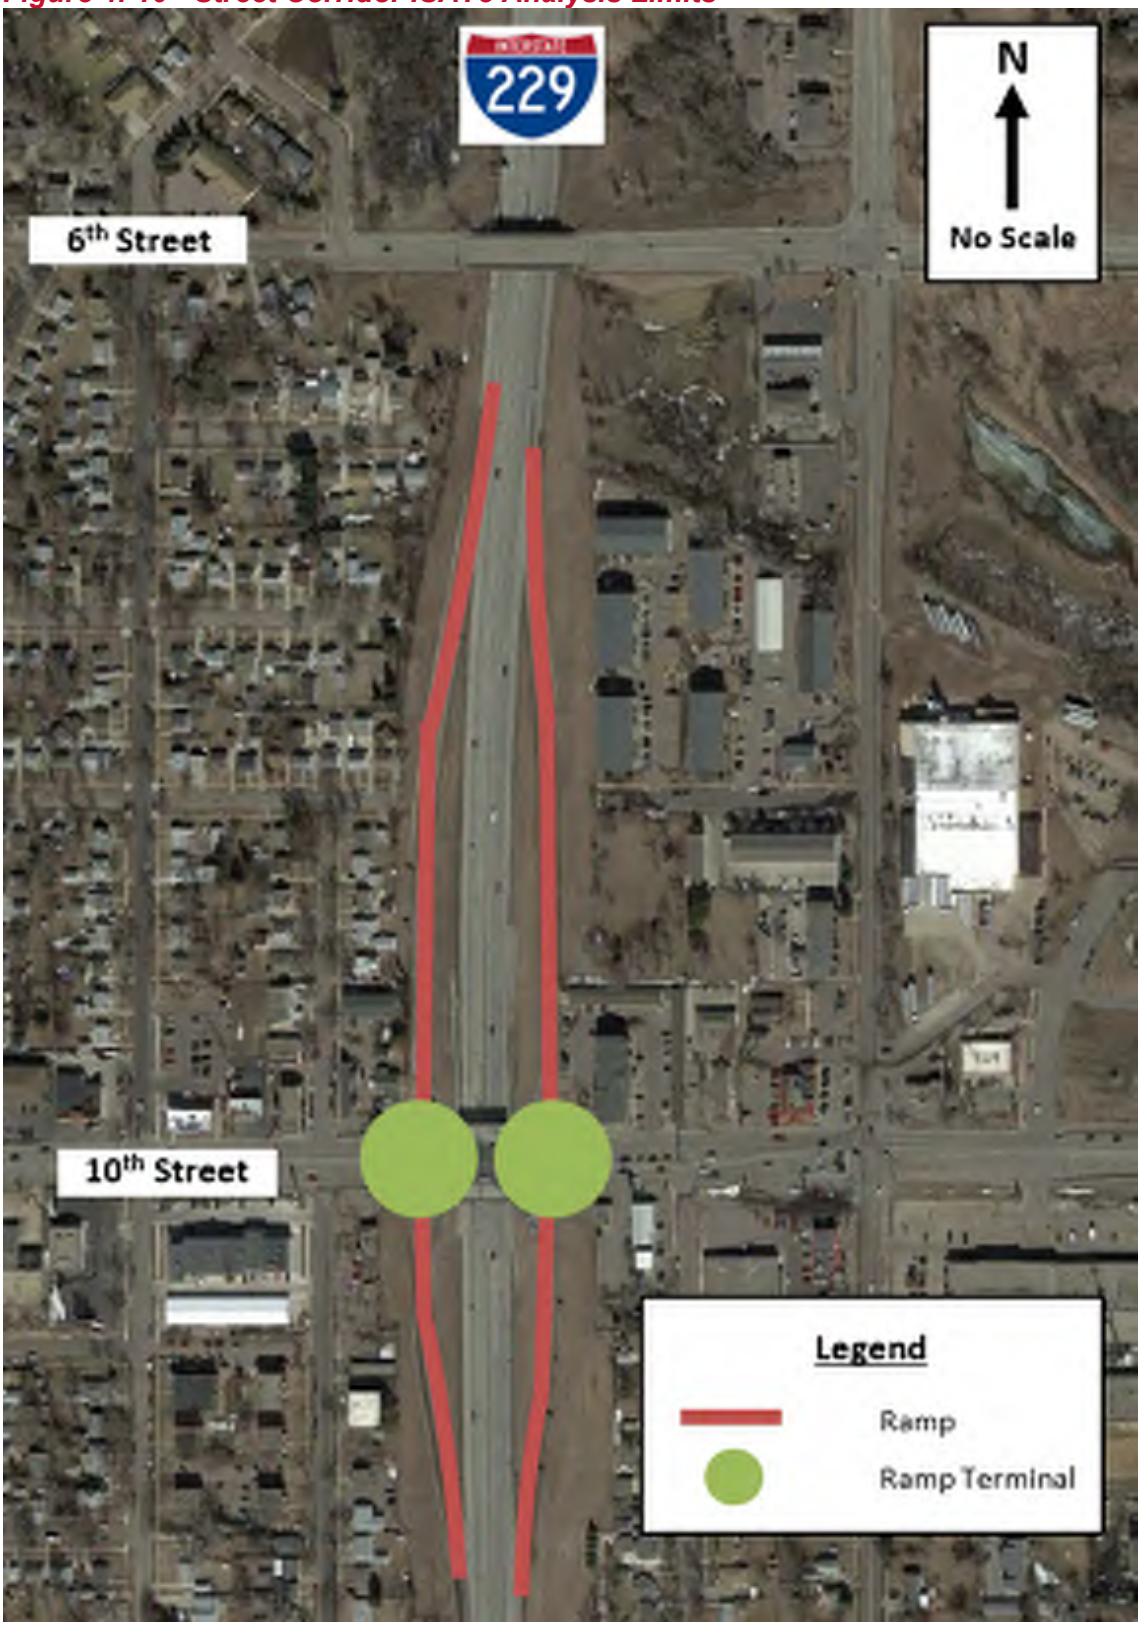


Source: Google Earth, December 2016

- 10th-2
  - Perpetuates Single Point Urban Interchange (SPUI) configuration.
  - Provides dual left-turn lanes for all entrance and exit ramps.
  - Rebuilds 10th Street with a median and three lanes in each direction through the interchange.
- 10th-5
  - Replaces Single Point Urban Interchange (SPUI) configuration with Diverging Diamond Interchange (DDI) configuration.
  - Eliminates left-turn movements on 10th Street by crossing 10th Street traffic to the left side between the ramp terminal intersections.
  - Rebuilds 10th Street with a median and three lanes in each direction through the interchange.
- 10th-9
  - Replaces Single Point Urban Interchange (SPUI) configuration with Tight Split Diamond Interchange (TSD) configuration with I-229 ramp connections to both 10th Street and 6th Street.
  - Provides dual left-turn lanes for all entrance and exit ramps except the NB entrance ramp.
  - Adds traffic signals at new ramp intersections with 6th Street.
- 10th-Var (Qualitative Analysis Only)
  - Unconstrained SB Entrance & NB Exit Ramps

BUILD AND NO-BUILD CRASH FREQUENCY COMPARISON

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***Table 6*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

Table 6: 10th Street Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

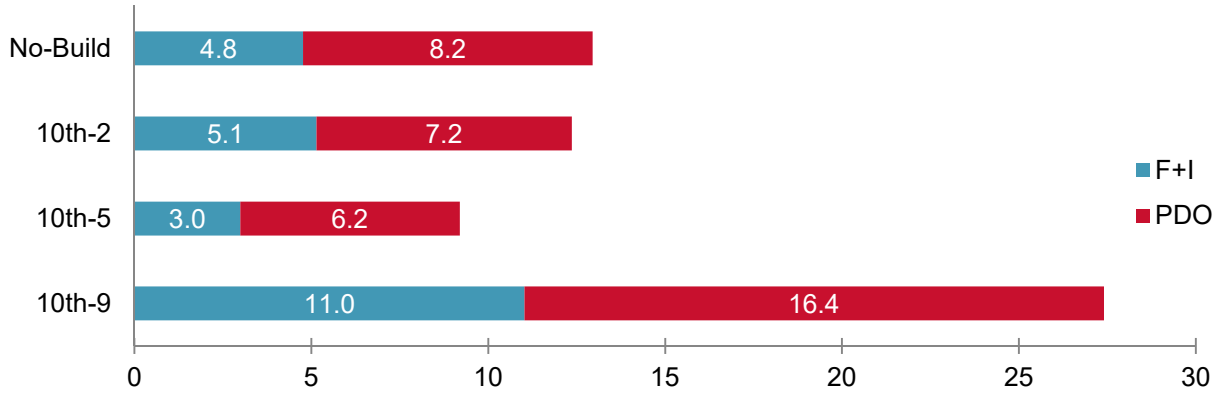

The resulting total number of annual predicted crashes is 5% less for the SPUI alternative, 29% less for the DDI alternative, and 131% more for TSD alternative. Even though the total number of crashes is less for the SPUI alternative, the F+I crashes is slightly higher. The cost for an F+I

crash is high so this results in a negative cost savings, which is shown below in ***Table 7***. 10th-9 results in a significant increase in crashes because the Tight Split Diamond alternative adds more exposure and conflict points from the addition of two new ramp terminals at 6th Street and two new collector-distributor roads between 10th Street and 6th Street. The 10th-Var concept would add a minor amount of crashes to 10th-2 and 10th-5 mainly due to added exposure from additional ramp length.

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***Table 7***.

Table 7: 10th Street Corridor Planning Horizon Crash Cost Savings

Alternative	Total User Cost[1]	User Cost Savings[2]
No-Build	$ 30,000,000	$ -
10th-2	$ 31,900,000	$ (2,000,000)
10th-5	$ 19,100,000	$ 10,900,000
10th-9	$ 67,800,000	$ (37,900,000)

[1]Total User Cost – The discounted, monetized safety benefit from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

Benson Road Corridor Study

STUDY AREA

The ISATe analysis limits for the Benson Road Corridor Study focus on the I-229 ramps and the ramp terminals. The analysis limits for the Benson Road Corridor Study are shown in ***Figure 5***.

ALTERNATIVES

The alternatives to be analyzed for the Benson Road Corridor Study are:

- Benson-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Benson-1A
  - 30 MPH 2-lane loop for NB I-229 to WB Benson Road.
  - Realign I-229 NB off ramp.
  - Dual right-turn lane and free right-turn movement for EB Benson Road to SB I-229.
  - Raised median on Benson Road with left-turn lanes.
- Benson-1B
  - Same as Benson-1A except single (instead of dual) right-turn lane and free right-turn movement for EB Benson Road to SB I-229.

Figure 5: Benson Road Corridor ISATe Analysis Limits




Source: Google Earth, December 2016

- Benson-4
  - Diverging Diamond Interchange (DDI) configuration.
  - Realign W I-229 ramps to maximize separation distance to Potsdam Avenue.
  - Right-turn lane and 2-lane free right-turn movement for EB Benson Road to SB I-229.

BUILD AND NO-BUILD CRASH FREQUENCY COMPARISON

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***Table 8*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

Table 8: Benson Road Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

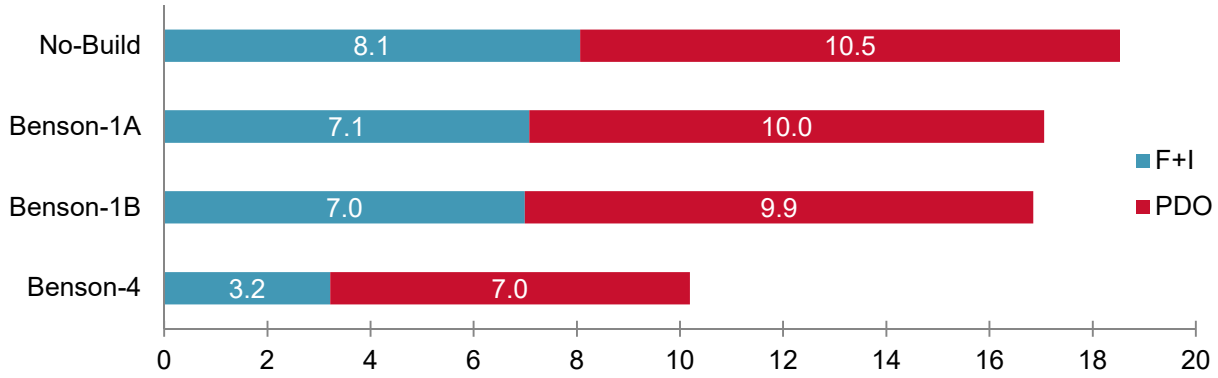

The resulting total number of annual predicted crashes is 8-9% less for the loop ramp alternatives and 45% less for the DDI alternative. The resulting annual PDO crashes is 5-6% less for the loop ramp alternatives and 33% less for the DDI alternative. The biggest safety benefit is in the F+I crashes, which is 12-13% less for the loop ramp alternatives and 60% less for the DDI alternative.

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***Table 9***.

Table 9: Benson Road Corridor Planning Horizon Crash Cost Savings

Alternative	Total User Cost[1]	User Cost Savings[2]
No-Build	$ 47,400,000	$ -
Benson-1A	$ 41,600,000	$ 5,800,000
Benson-1B	$ 41,000,000	$ 6,300,000
Benson-4	$ 19,500,000	$ 27,800,000


[1]Total User Cost – The discounted, monetized safety benefit from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

Rice Street Corridor Study

STUDY AREA

The ISATe analysis limits for the Rice Street Corridor Study focus on the I-229 ramps, the ramp terminals, and the arterial intersections of Rice Street/Bahnson Avenue and Rice Street/Lowell Avenue. The arterial intersections were included in the analysis because Rice-3C involves realigning Cleveland Avenue to Bahnson Avenue and the I-229 SB Ramps to Lowell Avenue. The analysis limits for the Rice Street Corridor Study are shown in ***Figure 6***.

Figure 6: Rice Street Corridor ISATe Analysis Limits

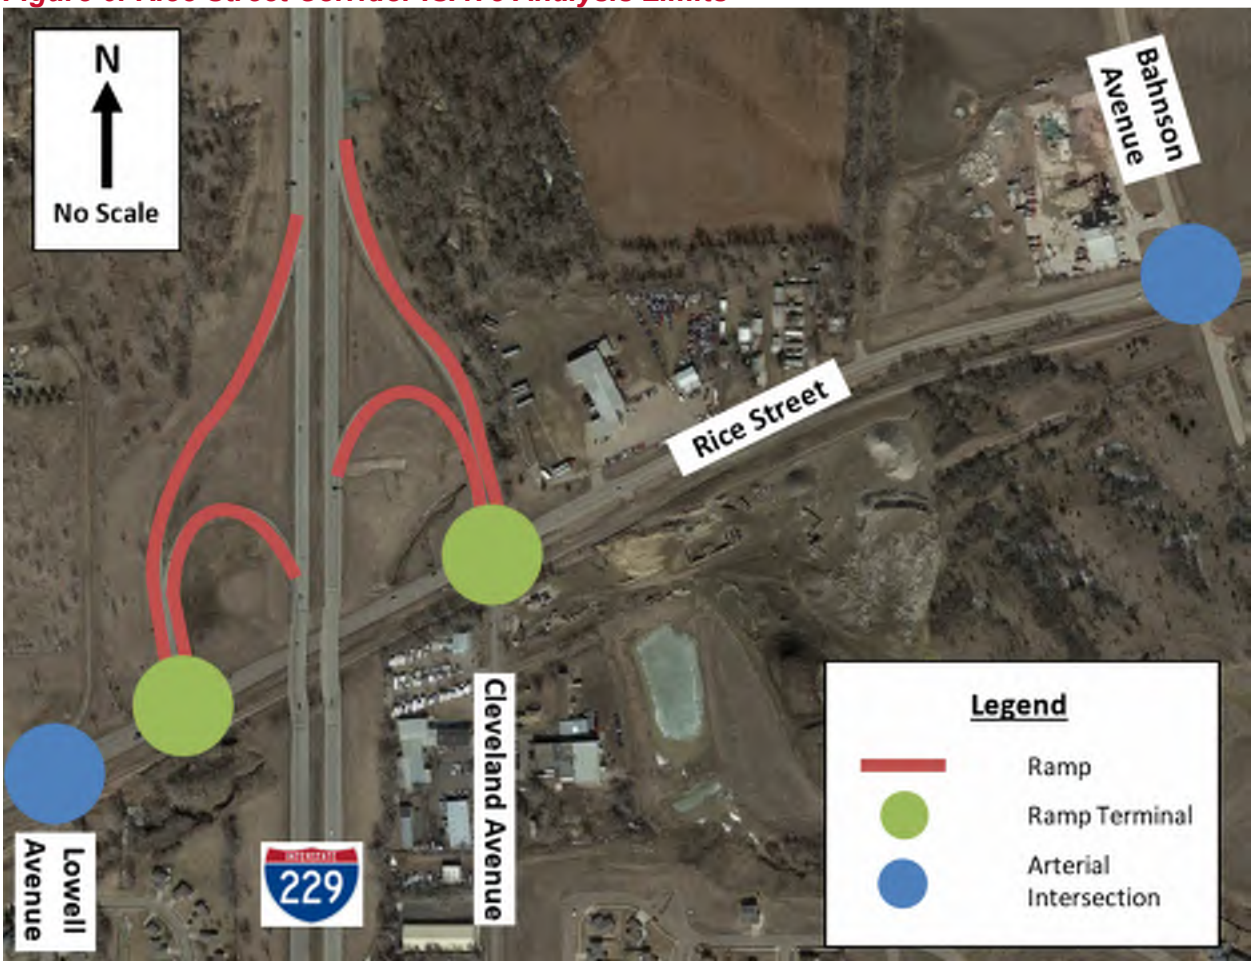

Source: Google Earth, December 2016

ALTERNATIVES

The alternatives to be analyzed for the Rice Street Corridor Study are:

- Rice-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Rice-2
  - Perpetuates Folded Diamond Interchange configuration.

- Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
- Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.


- Rice-2A
  - Same as Rice-2 except shifts and rebuilds Rice Street north of its current alignment to avoid impacts to BNSF Railroad Right-of-Way.
- Rice-3C
  - Replaces Folded Diamond Interchange with an improved geometrics Folded Diamond Interchange configuration.
  - Aligns SB I-229 ramps with Lowell Avenue and improves geometrics at NB I-229 ramps.
  - Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
  - Separates conflicting traffic movements at Cleveland Avenue and the NB I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left-turn lane and two lanes in each direction.
  - Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
  - Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersections.

Rice-2 and Rice-2A are treated the same for the predictive safety analysis because they comprise of the same cross section. The only difference between the two alternatives is that Rice-2A is shifted to the north.

BUILD AND NO-BUILD CRASH FREQUENCY COMPARISON

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***Table 10*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

Table 10: Rice Street Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

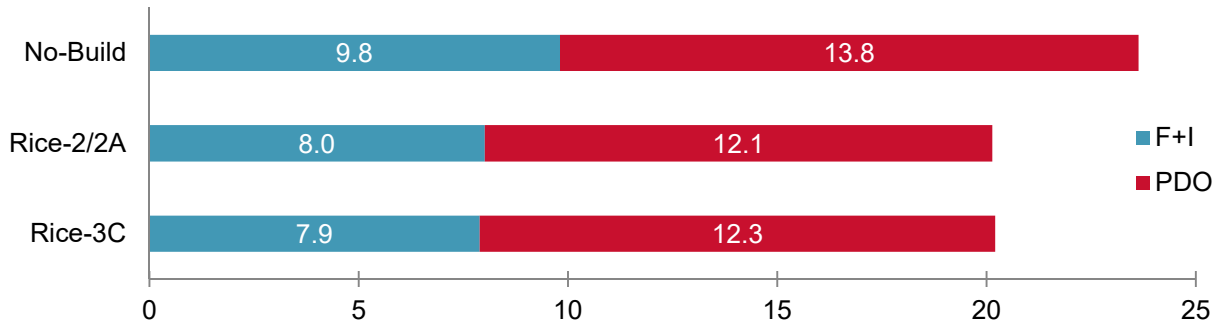

The resulting total number of annual predicted crashes is lower for all the Build alternatives. The Build alternatives result in a 14-15% decrease in total crashes, an 11-12% decrease in PDO crashes, and an 18-20% decrease in F+I crashes. It should be noted that the results for Rice-3C do not take into effect the safety benefit of removing two railroad at-grade crossings that result from realigning Cleveland Avenue to Bahnson Avenue. Analysis of the Rice-3C option also does not include an estimate of the change in crashes on Rice Street and Cleveland Avenue due to the significant increase in travel distance between Cleveland Avenue and the Northbound I-229 ramps.

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***Table 11***.

Table 11: Rice Street Corridor Planning Horizon Crash Cost Savings

Alternative	Total User Cost[1]	User Cost Savings[2]
No-Build	$ 58,700,000	$ -
Rice-2/2A	$ 48,300,000	$ 10,400,000
Rice-3c	$ 47,900,000	$ 10,800,000

[1]Total User Cost – The discounted, monetized safety benefit from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

Cliff Avenue Corridor Study

STUDY AREA


The ISATe analysis limits for the Cliff Avenue Corridor Study focus on the I-229 ramps, the ramp terminals, and the arterial intersection of Cliff Avenue and 41st Street. 41st Street is aligned with the I-229 southbound off-ramp for all the alternatives except Cliff-6. 41st Street is realigned to Pam Road in Cliff-6 so Cliff Avenue and 41st Street is analyzed as an arterial intersection. For the other alternatives, 41st Street is analyzed in ISATe as a non-ramp public street leg that is present at the north ramp terminal. The intersection of Cliff Avenue and Pam Road was not analyzed because the existing number of crashes is very low. Therefore, the predicted crashes for this intersection would be negligible. The analysis limits for the Cliff Avenue Corridor Study are shown in ***Figure 7***.

ALTERNATIVES

The alternatives to be analyzed for the Cliff Avenue Corridor Study are:

- Cliff-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Cliff-1
  - Adds a loop on ramp from NB Cliff Avenue to SB I-229.
  - Realigns SB Cliff Avenue to SB I-229 directional ramp.
  - Provides additional turn bays, storage length, and raised median at the Cliff Avenue/E 41st Street/SB I-229 off ramp terminal intersection.

Figure 7: Cliff Avenue Corridor ISATe Analysis Limits

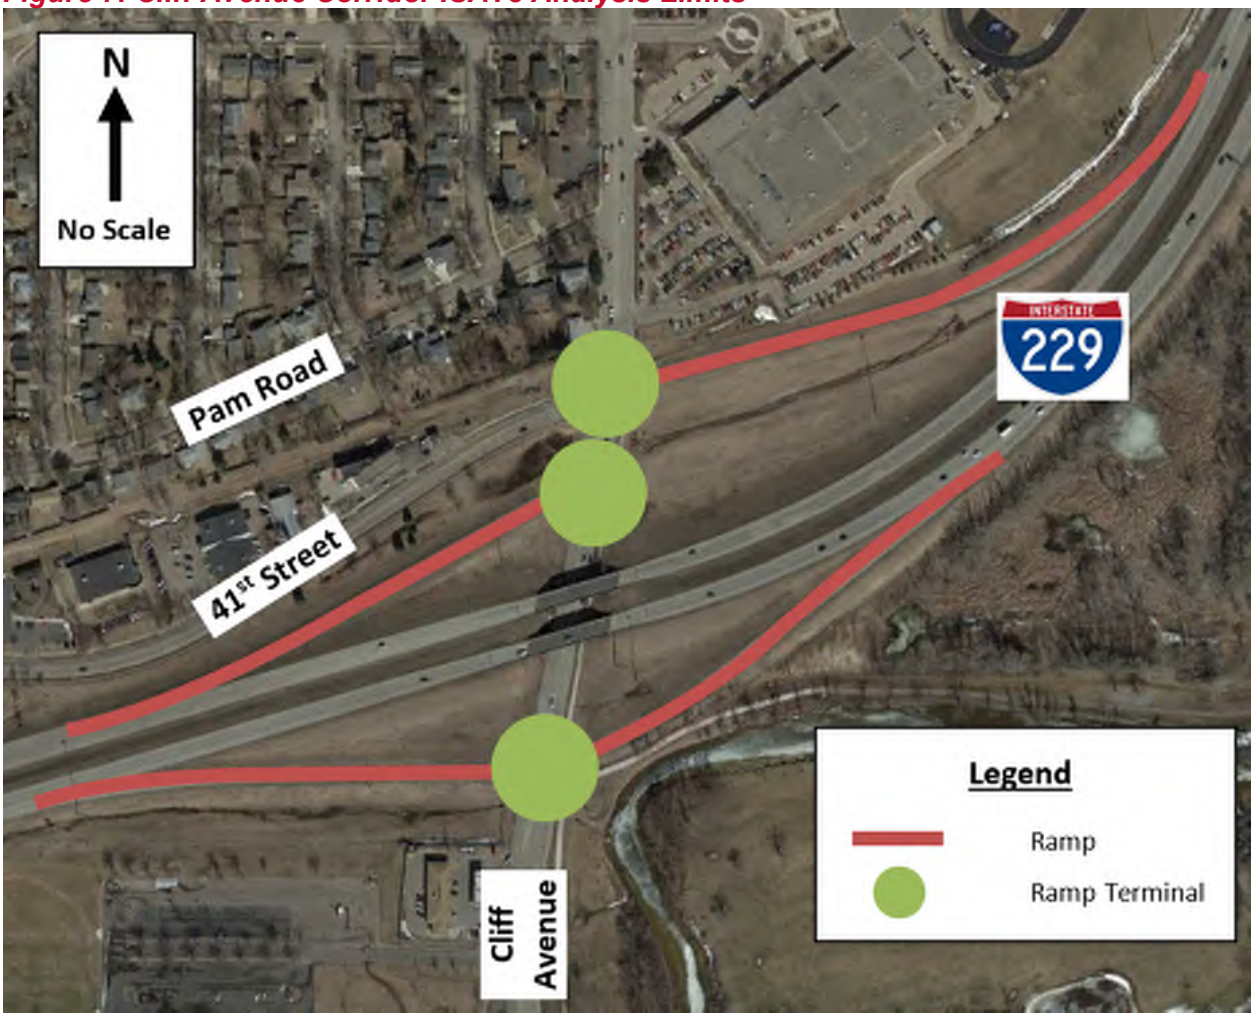


Source: Google Earth, December 2016

- Cliff-6
  - Replaces Diamond Interchange with Single Point Urban Interchange (SPUI)
  - Rebuilds Cliff Avenue with a median and two lanes in each direction.
  - Realigns the E 41st Street/Cliff Avenue intersection north to Pam Road.
- Cliff-7
  - Same as Cliff-6 except SB I-229 through and right movements utilize existing intersection location at Cliff Avenue.

BUILD AND NO-BUILD CRASH FREQUENCY COMPARISON

The predicted annual crash frequencies for the No-Build and Build alternatives (2012 to 2035) are presented in ***Table 12*** along with the breakdown of Fatal + Injury (F+I) and Property Damage Only (PDO) crashes.

Table 12: Cliff Avenue Corridor 2012-2035 Predicted Build and No-Build Annual Crashes

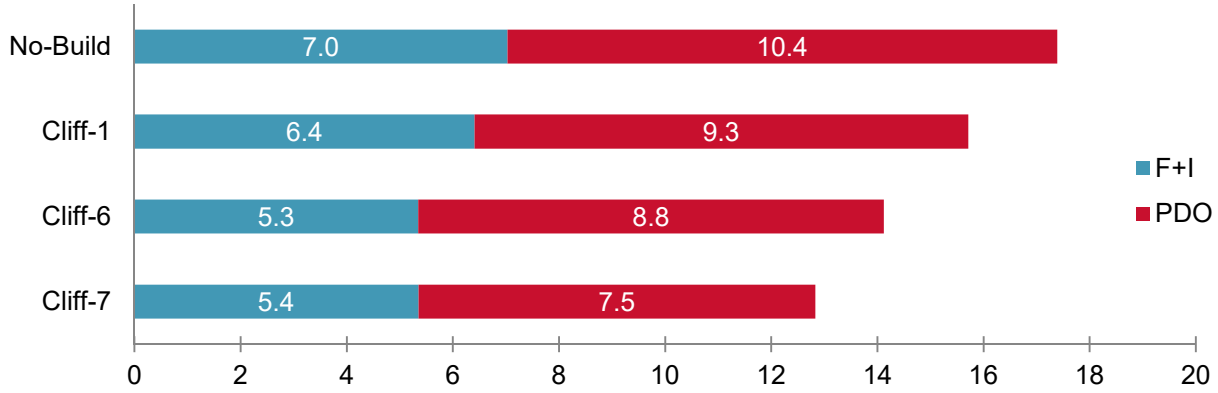

The resulting total number of annual predicted crashes is lower for all the Build alternatives, with Cliff-7 showing the least amount of crashes. The Build alternatives result in a 10-26% decrease in total crashes, a 10-28% decrease in PDO crashes, and a 9-24% decrease in F+I crashes.

Planning horizon crash cost savings were calculated for the Build alternatives and are shown in ***Table 13***.

Table 13: Cliff Avenue Corridor Planning Horizon Crash Cost Savings

Alternative	Total User Cost[1]	User Cost Savings[2]
No-Build	$ 42,900,000	$ -
Cliff-1	$ 39,100,000	$ 3,800,000
Cliff-6	$ 32,900,000	$ 10,100,000
Cliff-7	$ 32,600,000	$ 10,400,000

[1]Total User Cost – The discounted, monetized safety benefit from the crashes totaled for all years in the period 2012-2035 (rounded to $100,000).
[2]User Cost Savings - The discounted, monetized safety benefit from the crashes reduced by a scenario (compared to a baseline of No-Build) totaled for all years in the period 2012-2035 (rounded to $100,000).

Conclusions

Based on the preceding HSM analysis, the following conclusions can be drawn for the entire I-229 MIS study:

- Crashes predicted for each location along I-229 increase for the No-Build (Year 2035) condition compared to the Existing (Year 2012) condition because of the increase in traffic volume. Notably, the I-229 interchange areas experience higher levels of existing crashes than the connecting freeway segments.
- For the I-229 Corridor Study, both Build alternatives decrease the total number of crashes. However, the fatal and injury crashes increase slightly so there is an increase in user cost.
- For the 10th Street Corridor Study, the SPUI and DDI alternatives decrease the total number of crashes. However, the fatal and injury crashes increase slightly for the SPUI alternative so there is an increase in user cost. The Tight Split

Diamond alternative increases the total number of crashes 131% because it adds two new ramp terminals at 6th Street and two new collector-distributor roads between 10th Street and 6th Street.

- For the remaining corridor studies (Minnesota Avenue, Benson Road, Rice Street, Cliff Avenue), all Build alternatives decrease crashes compared to their respective No-Build alternatives.
- If the alternatives with the highest safety benefit for all sub-studies were chosen, the entire I-229 corridor would see approximately $104 million in user cost savings.

The safety evaluation, along with traffic operations, environmental impacts, property impacts, and construction and right-of-way cost, helped select alternatives and prioritize the phasing of each sub-study.

Appendix F. Year of Failure Analysis

This technical memorandum documents the Year of Failure analysis for the I-229 Major Investment Study (MIS), serving as part of the overall documentation for the I-229 MIS project. The content provided in ***Appendix B1. Traffic Capacity Analysis Methodologies*** *should be referenced to supplement the content in this memorandum.*

The purpose of the I-229 MIS is to develop a comprehensive plan for improvements needed along I-229, its interchanges, and its cross streets through a horizon year of 2035. While proposed improvement projects recommended by the study were designed to meet operational and design criteria by 2035, elements of existing and proposed corridor infrastructure have service lives beyond 20-30 years after initial construction. The year of failure analysis is one type of analysis that considers conditions beyond the horizon year.

A year of failure analysis helps decision makers roughly assess how long after the design or horizon year a proposed interchange design will operate acceptably. The longer the interchange operates sufficiently, the longer down the road the interchange will have prior to additional investments to deal with future capacity constraints.

This memorandum presents a summary of the methodology and findings for the year of failure analysis for the No-Build and Build alternatives for the I-229 MIS. The Build alternatives to be analyzed for this study will be described later in this memorandum. The results are intended to help guide the selection of the alternatives moving forward to the alternatives analysis stage of planning.

Study Area

The I-229 MIS has been separated into individual sub-studies. The sub-studies include:

- I-229 Corridor Study
- Minnesota Avenue Corridor Study (Exit 3)
- 10th Street Corridor Study (Exit 6)
- Benson Road Corridor Study (Exit 9)
- Rice Street Corridor Study (Exit 7)
- Cliff Avenue Corridor Study (Exit 4)

A map illustrating the overall study areas for each of the sub-studies is shown in ***Figure 1***. For the year of failure analysis, the area of study was reduced to the interchanges. For the I-229 Corridor Study, the year of failure analysis limits focus on two interchanges that do not have their own sub-study: Louise Avenue and Western Avenue. The remaining sub-studies, focus on their respective interchanges. The analysis does not include identifying year of failure for I-229 freeway segments. The first signalized intersection beyond each interchange ramp terminal was also included to model the arrival flow profile approaching the ramp terminal intersections.

Methodology


Volume Development

Traffic volumes were developed for the AM and PM peak hours on each cross street and each intersection within the study area until year of failure was identified. Volumes were developed for up to 30 years beyond the project future/design year (Year 2035) and at 5-year increments. The volumes beyond 2035 were linearly extrapolated using existing year (Year 2012) and future year (Year 2035) volumes. The traffic volume data was based on traffic counts provided by SDDOT and design year volume forecasts from the 2035 Sioux Falls Travel Demand Model.

Year of Failure Criteria

For the year of failure analysis, LOS 'D' was used as the worst allowable LOS for future year ramp terminal intersection operations. The interchange alternatives were considered failing when one of the ramp terminals was projected to operate at an average intersection LOS 'E' or 'F' or an intersection turning movement was projected to operate at LOS 'F'.

Figure 1. I-229 MIS Study Area Map

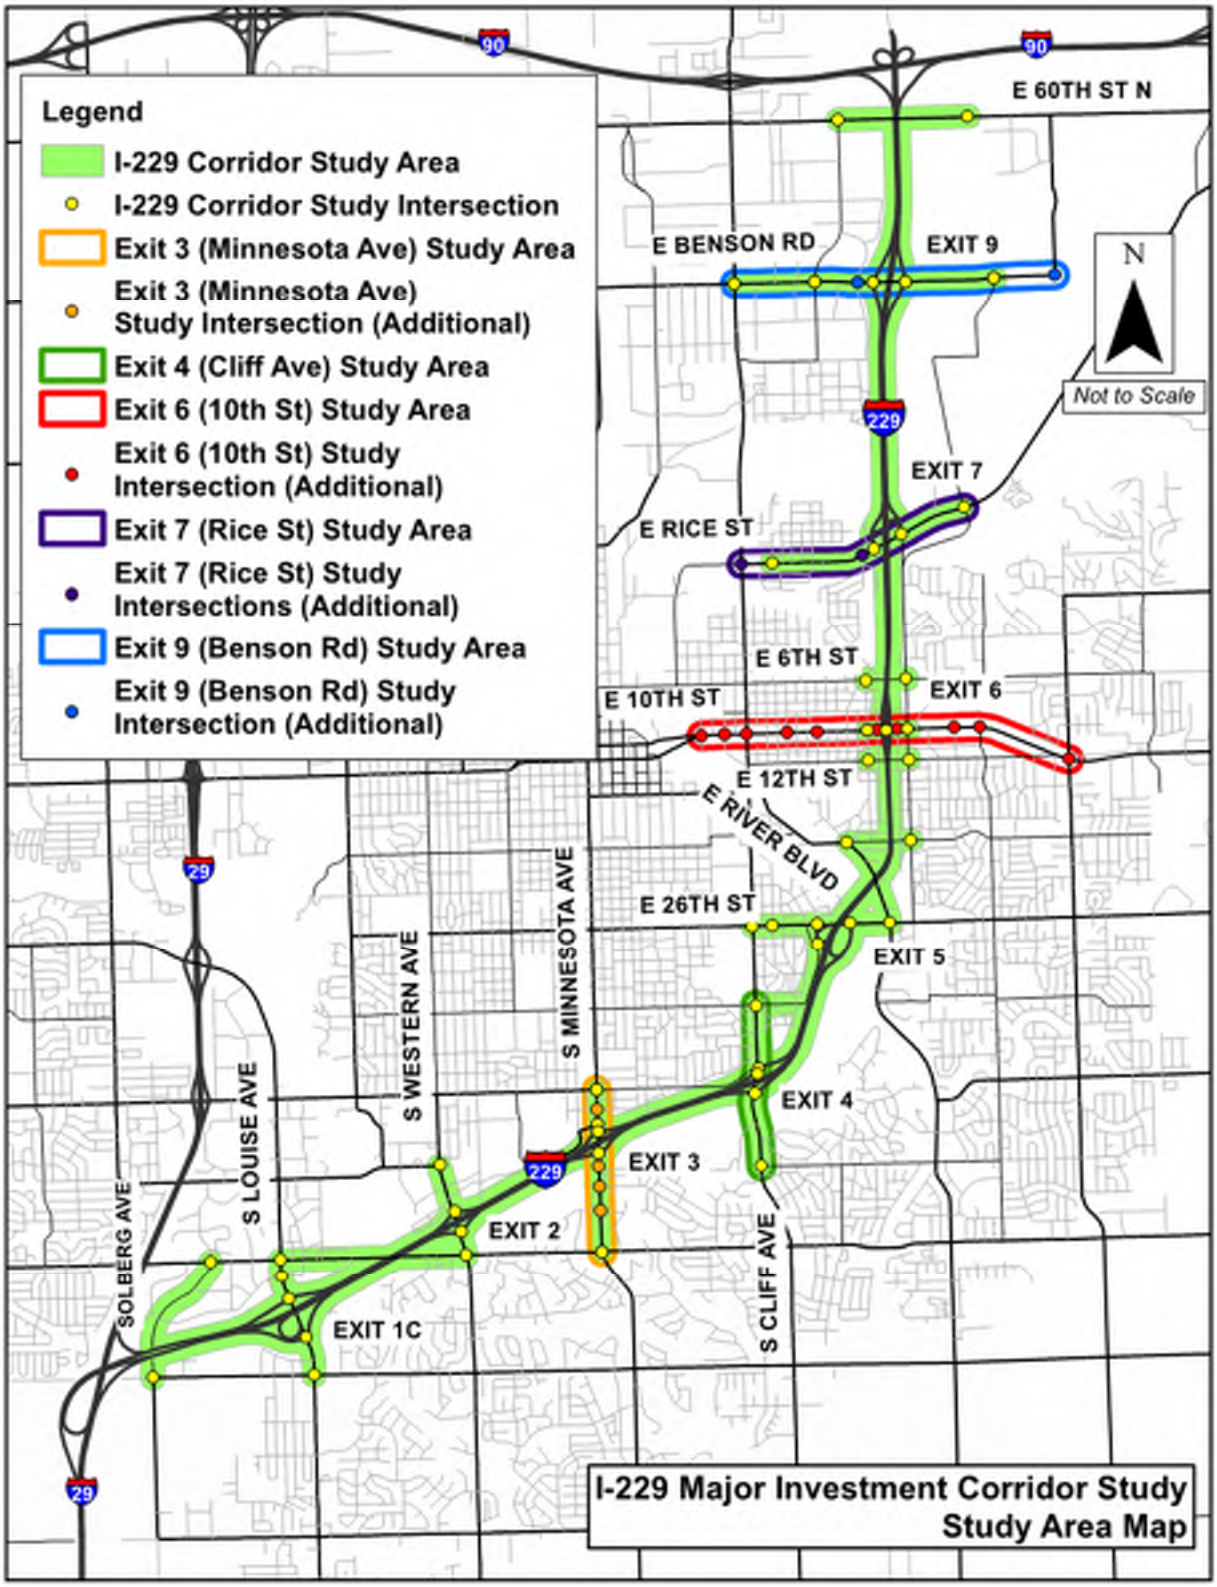

Analysis Results

I-229 Corridor Study

Alternatives
The alternatives to be analyzed for the I-229 Corridor Study are:

- Louise-NB
  - Louise No-Build Interchange
- Western-NB
  - Western No-Build Interchange

Year of Failure Results
The resulting year of failure for the I-229 Corridor Study alternatives is shown in ***Table 1***.

Table 1 – I-229 Corridor Year of Failure

Alternative	Year of Failure
Louise-NB	Beyond 2065
Western-NB	2040

Minnesota Avenue Corridor Study

Alternatives
The alternatives to be analyzed for the Minnesota Avenue Corridor Study are:

- Minn-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Minn-2C
  - Realigns SB exit ramp with 49th Street; full access with signal-control.
  - Constructs loop ramp for NB Minnesota Ave to SB I-229.
  - Provides dual left-turn lanes for all signalized entrance and exit ramps.
  - Increases separation between ramp terminal / 49th Street intersections.
  - Rebuilds Minnesota Avenue with a median and two lanes in each direction.
  - Third southbound lane added through 49th Street intersection.
- Minn-2D
  - Same as Minn-2C except rebuilds Minnesota Avenue with a median and three lanes in each direction.
- Minn-5D
  - Replaces Diamond Interchange with Diverging Diamond Interchange (DDI) configuration.

- Minn-8C
    - Replaces Diamond Interchange with Single Point Urban Interchange (SPUI) centered at existing interchange.
    - Provides dual-left turn lanes for all signalized entrance and exit ramps.
    - Incorporates full, signal-controlled access at 49th Street intersection.
    - Rebuilds Minnesota Avenue with a median and two lanes in each direction.
    - Third southbound lane added through 49th Street intersection.
- Minn-8D
    - Same as Minn-8C except rebuilds Minnesota Avenue with a median and three lanes in each direction.
- Minn-9D (Qualitative Analysis Only)
    - Same as Minn-8D except SB I-229 through and right-turn movements are provided direct connection to 49th Street.

Year of Failure Results

The resulting year of failure for the No-Build and Build alternatives is shown in ***Table 2***. Minn-9D is an alternative that was originally screened out prior to the concept refinement stage. As the concept refinement progressed, Minn-9D was reconsidered and reinstated as a Build alternative. The project team's qualitative assessment of Minn-9D is that the concept would likely result in a year of failure beyond the year of failure for Minn-8D. That qualitative assessment is based on quantitative evaluation of very similar concepts at the Cliff Avenue interchange (Cliff-6 and Cliff-7).

Table 2 – Minnesota Avenue Corridor Year of Failure

Alternative	Year of Failure
Minn-NB	Earlier than 2035
Minn-2C	2045
Minn-2D	2045
Minn-5D	2060
Minn-8C	2040
Minn-8D	2060
Minn-9D	Beyond 2060 (Estimation)

10th Street Corridor Study

Alternatives

The alternatives to be analyzed for the 10th Street Corridor Study are:

- 10th-NB
    - No-Build Interchange Configuration and Corridor Configuration

- 10th-2
  - Perpetuates Single Point Urban Interchange (SPUI) configuration.
  - Provides dual left-turn lanes for all entrance and exit ramps.
  - Rebuilds 10th Street with a median and three lanes in each direction through the interchange.
- 10th-5
  - Replaces Single Point Urban Interchange (SPUI) configuration with Diverging Diamond Interchange (DDI) configuration.
  - Eliminates left-turn movements on 10th Street by crossing 10th Street traffic to the left side between the ramp terminal intersections.
  - Rebuilds 10th Street with a median and three lanes in each direction through the interchange.
- 10th-9
  - Replaces Single Point Urban Interchange (SPUI) configuration with Tight Split Diamond Interchange (TSD) configuration with I-229 ramp connections to both 10th Street and 6th Street.
  - Provides dual left-turn lanes for all entrance and exit ramps except the NB entrance ramp.
  - Adds traffic signals at new ramp intersections with 6th Street.

Year of Failure Results

The resulting year of failure for the No-Build and Build alternatives is shown in ***Table 3***.

Table 3 – 10th Street Corridor Year of Failure

Alternative	Year of Failure
10th-NB	Earlier than 2035
10th-2	Beyond 2065
10th-5	Beyond 2065
10th-9	Beyond 2065

Benson Road Corridor Study

Alternatives

The alternatives to be analyzed for the Benson Road Corridor Study are:

- Benson-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Benson-1A
  - 30 MPH 2-lane loop for NB I-229 to WB Benson Road.
  - Realign I-229 NB off ramp.

- Dual right-turn lane and free right-turn movement for EB Benson Road to SB I-229.
- Raised median on Benson Road with left-turn lanes.

- Benson-1B
  - Same as Benson-1A except single (instead of dual) right-turn lane and free right-turn movement for EB Benson Road to SB I-229.

- Benson-4
  - Diverging Diamond Interchange (DDI) configuration.
  - Realign W I-229 ramps to maximize separation distance to Potsdam Avenue.
  - Right-turn lane and 2-lane free right-turn movement for EB Benson Road to SB I-229.

Year of Failure Results

The resulting year of failure for the No-Build and Build alternatives is shown in ***Table 4***.

Table 4 – Benson Road Corridor Year of Failure

Alternative	Year of Failure
Benson-NB	Earlier than 2035
Benson-1A	2050
Benson-1B	2050
Benson-4	2045

Rice Street Corridor Study

Alternatives

The alternatives to be analyzed for the Rice Street Corridor Study are:

- Rice-NB
  - No-Build Interchange Configuration and Corridor Configuration

- Rice-2
  - Perpetuates Folded Diamond Interchange configuration.
  - Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
  - Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.

- Rice-2A
  - Same as Rice-2 except shifts and rebuilds Rice Street north of its current alignment to avoid impacts to BNSF Railroad Right-of-Way.

- Rice-3C

- Replaces Folded Diamond Interchange with an improved geometrics Folded Diamond Interchange configuration.
- Aligns SB I-229 ramps with Lowell Avenue and improves geometrics at NB I-229 ramps.
- Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
- Separates conflicting traffic movements at Cleveland Avenue and the NB I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left-turn lane and two lanes in each direction.
- Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
- Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersections.

Year of Failure Results

The resulting year of failure for the No-Build and Build alternatives is shown in ***Table 5***.

Table 5 – Rice Street Corridor Year of Failure

Alternative	Year of Failure
Rice-NB	Earlier than 2035
Rice-2	2045
Rice-2A	2045
Rice-3C	2045

Cliff Avenue Corridor Study

Alternatives

The alternatives to be analyzed for the Cliff Avenue Corridor Study are:

- Cliff-NB
  - No-Build Interchange Configuration and Corridor Configuration
- Cliff-1
  - Adds a loop on ramp from NB Cliff Avenue to SB I-229.
  - Realigns SB Cliff Avenue to SB I-229 directional ramp.
  - Provides additional turn bays, storage length, and raised median at the Cliff Avenue/E 41st Street/SB I-229 off ramp terminal intersection.
- Cliff-6
  - Replaces Diamond Interchange with Single Point Urban Interchange (SPUI)
  - Rebuilds Cliff Avenue with a median and two lanes in each direction.

- Realigns the E 41st Street/Cliff Avenue intersection north to Pam Road.

- Cliff-7
  - Same as Cliff-6 except SB I-229 through and right movements utilize existing intersection location at Cliff Avenue.

Year of Failure Results

The resulting year of failure for the No-Build and Build alternatives is shown in ***Table 6***.

Table 6 – Cliff Avenue Corridor Year of Failure

Alternative	Year of Failure
Cliff-NB	Earlier than 2035
Cliff-1	2050
Cliff-6	2055
Cliff-7	2045

Conclusion

The year of failure analysis, along with safety impacts, environmental impacts, property impacts, construction and right-of-way cost, and other traffic operations, helped screen alternatives and prioritize the phasing of each sub-study. Between the two interchanges in the I-229 Corridor Study (Louise Avenue and Western Avenue), Western Avenue is the next interchange after 2035 that will need to be addressed for operational issues.

APPENDIX G -

SUB-STUDY 5 NOISE STUDY TECHNICAL REPORT

Noise Study Technical Report

I-229 Major Investment Corridor Study

Sub-Study #5

Sioux Falls, South Dakota

HDR Project Number: 207030

December 2016

I-229 Major Investment Corridor Study (Sub-Study #5)
NOISE STUDY TECHNICAL REPORT

EXECUTIVE SUMMARY

The South Dakota Department of Transportation (SDDOT) initiated this study in order to address the current and future transportation needs along the entire I-229 corridor. Sub-Study #5 assesses existing and future conditions along the Rice Street Corridor, which includes a combination of interchange concepts and corridor concepts (the Project). Four (4) Build Alternatives were evaluated as part of Sub-Study #5 (2, 2A, 3C, and C2). These four (4) alternatives were combined to evaluate the following three (3) scenarios: 2-C2, 2A-C2 and 3C-C2.

On behalf of SDDOT, and as part of the environmental documentation, HDR Engineering, Inc. (HDR) performed a traffic noise analysis along the Rice Street corridor's area of influence for the proposed improvements. The analysis included traffic noise monitoring and modeling. HDR used the FHWA Traffic Noise Model (TNM), Version 2.5, to evaluate projected traffic noise levels under the "Build" alternatives. If applicable, traffic noise impacts were identified in accordance with SDDOT Noise Analysis and Abatement Guidance (July 13, 2011). In areas where future noise levels exceed state and federal criteria, the conceptual feasibility of noise mitigation options is discussed if warranted.

Traffic noise levels were evaluated for the existing conditions and future Build Alternatives 2-C2, 2A-C2, and 3C-C2 at 237 receptors in the Project area. There are 15 traffic noise impacts predicted under the Existing Alternative; 42 impacts predicted under Future Build Alternatives 2-C2 and 2A-C2; 29 impacts predicted under Future Build Alternative 3C-C2.

Table of Contents

EXECUTIVE SUMMARY **2**

1. Introduction **4**

2. Nature of Noise **6**

3. SDDOT Noise Analysis and Abatement Guidance **8**

4. Noise Prediction Method **9**

5. Adjacent Land Use **10**

6. Model Validation **10**

6.1. Field Testing Procedure 10

6.2. Instrumentation 11

6.3. Field Measurement Methods 11

6.4. Field Measurement Locations 11

6.5. Model Validation Results 12

7. Traffic Noise Prediction **12**

8. Noise Impact Analysis **20**

8.1. Impacts 20

8.1.1. Alternative 2-C2 20

8.1.2. Alternative 2A-C2 20

8.1.3. Alternative 3C-C2 20

9. Noise Abatement Measures **21**

9.1. Discussion of Feasibility of Noise Barriers (based on SDDOT Guidance) 21

10. Construction Noise and Vibration **23**

11. Information for Local Officials **24**

12. Conclusion **24**

13. References **24**

1.Introduction

The South Dakota Department of Transportation (SDDOT) initiated this study in order to address the current and future transportation needs along the entire I-229 corridor. Sub-Study #5 assesses existing and future conditions along the Rice Street Corridor, which includes a combination of interchange concepts and corridor concepts (the Project). Four (4) Build Alternatives were evaluated as part of Sub-Study #5 (2, 2A, 3C, and C2). These four (4) alternatives were combined to evaluate the following three (3) scenarios: 2-C2, 2A-C2 and 3C-C2. Figure 1 shows the project area.

The study fulfills the following objectives:

1. Complete a traffic level of service analysis for both existing and future (2035) conditions on the I-229 mainline, select interchanges and crossroads.
2. Complete a safety analysis of I-229 mainline, interchanges and crossroads.
3. Identify locations on I-229 not in compliance with current design standards under both the current and forecasted future traffic conditions.
4. Determine the effects of incidents on traffic operations within the I-229 corridor's area of influence.
5. Develop a long range plan consisting of feasible solutions to address the portions of the Interstate System that fail to meet current design standards, traffic level of service expectations, and/or have identifiable safety concerns under both the current and forecasted future traffic conditions.
6. Create final products for use by the SDDOT which will guide the Department in the implementation of recommended improvements that will maximize the efficiency of the system.

Four (4) Build Alternatives were evaluated as part of Sub-Study #5.

1. **2:** Perpetuates Folded Diamond Interchange configuration; rebuilds Rice Street with a median and three lanes in each directions through the Interchange, and two lanes in each direction away from the Interchange; rebuilds Cleveland Avenue with a median and two lanes in each direction; provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB-I-229 off-ramp and Rice Street/Bahnson Avenue intersections; maintains existing traffic signal locations; requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
2. **2A:** Perpetuates Folded Diamond Interchange configuration; shifts and rebuilds Rice Street north of its current alignment with a median and three lanes in each directions through the interchange, and two lanes in each direction away from the Interchange; rebuilds Cleveland Avenue with a median and two lanes in each direction; provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB-I-229 off-ramp and Rice Street/Bahnson Avenue intersections; builds a retaining wall on the south side of Rice Street to avoid impacts to BNSF Railroad right-of-way; maintains

existing traffic signal locations; requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.

3. **3C:** Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration; aligns southbound I-229 ramps with Lowell Avenue and improves geometrics at northbound I-229 ramps; rebuilds Rice Street with a median and three lanes in each direction through the Interchange; separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction; provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad; provides additional turn bays and storage length at the Rice Street/ NB-I-229 off-ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection; requires reconstruction and upgrade of an existing at-grade railroad crossing on Lowell Avenue.
4. **C2:** All on street parking will be removed; rebuilds Rice Street with a median and two lanes in each direction; maintains existing traffic signal locations, requires land acquisition for widened roadway; impacts adjacent properties by limiting driveway access to and from Rice Street to right turns in and out only.

HDR Engineering, Inc. (HDR) performed a highway traffic noise analysis for SDDOT in support of the Project, as part of the environmental documentation. The analysis is based on the SDDOT Noise Analysis and Abatement Guidance (July 13, 2011). Results of the analysis are presented in this report.

2.Nature of Noise

Noise is defined as unwanted or excessive sound. Sound becomes unwanted when it interferes with normal activities, such as sleep, work, speech, or recreation. Vehicle noise is a combination of the noise produced by the engine, exhaust, and tires. Noise levels from highway traffic are affected by three factors: (1) the volume of the traffic, (2) the speed of the traffic, and (3) the number of trucks in the flow of traffic. Generally, traffic noise increases commensurate with these three factors.


Noise is measured in decibels (dB) – a logarithmic scale. Because human hearing is not equally sensitive to all frequencies of sound, certain frequencies are given more "weight." The A-weighted scale corresponds to the sensitivity range for human hearing. Therefore, noise levels are measured in dBA, the A-weighted sound level in decibels. When noise levels change 3-dBA, the change is considered barely perceptible to human hearing. However, a 5-dBA change in noise level is clearly noticeable. A 10-dBA change in noise levels is perceived as a doubling or halving of noise loudness, while a 20-dBA change is considered a dramatic change in loudness. Table 1 shows noise levels associated with common, everyday sources and helps the reader more fully understand the magnitude of noise levels discussed in this report.

Table 1: Common Noise Sources and Levels

Sound Pressure Level (dB)	Typical Sources
120	Jet aircraft takeoff at 100 feet
110	Same aircraft at 400 feet
90	Motorcycle at 400 feet
80	Garbage disposal
70	City street corner
60	Conversational speech
50	Typical office
40	Living room (without TV)
30	Quiet bedroom at night

Source: Environmental Impact Assessment Handbook, ed. by Rau and Wooten, 1980

Figure 1: Project Location

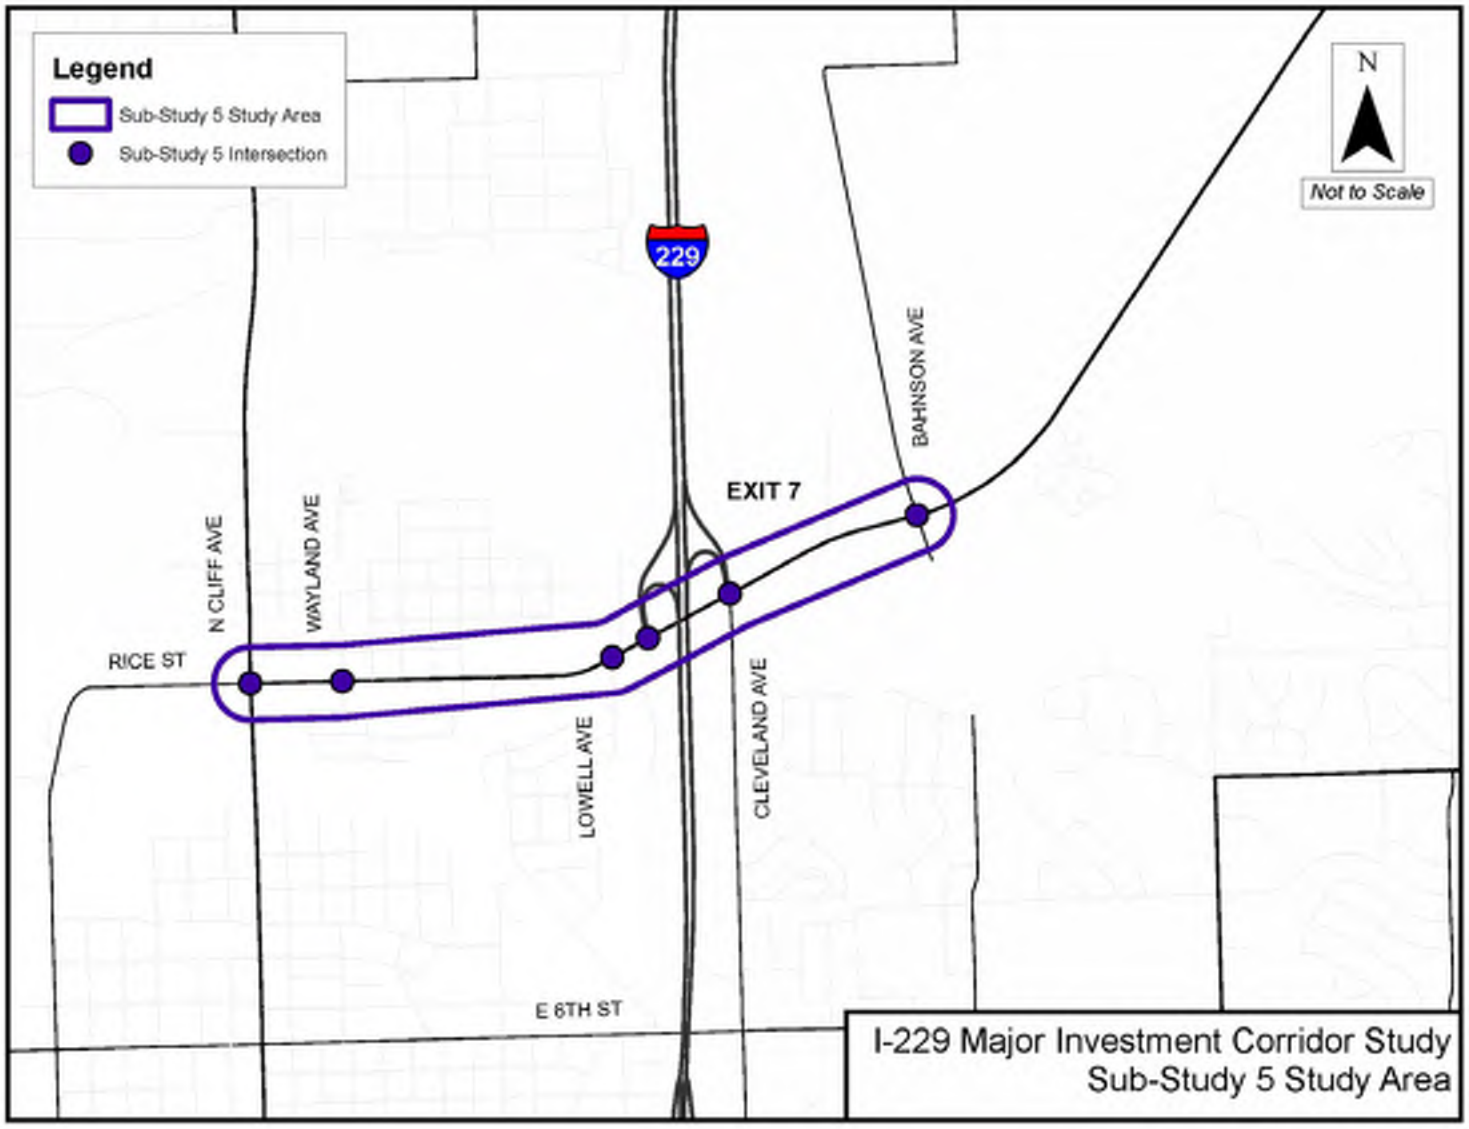

3.SDDOT Noise Analysis and Abatement Guidance

The updated (July 13, 2011) SDDOT Noise Analysis and Abatement Guidance (Guidance), upon which this analysis is based, is intended to supplement FHWA traffic noise and abatement regulations and guidance. The Guidance provides procedures for noise studies and noise abatement measures to help protect the public health and welfare, to supply noise abatement criteria, and to establish requirements for traffic noise information to be given to those officials who have planning and zoning authority.

The Guidance contains noise abatement criteria that are based on the Leq(h), which is used to analyze traffic noise levels and identify noise impacts. The Leq is defined as the equivalent, steady-state sound level that, in a stated period of time, contains the same acoustic energy as the time-varying sound level during the same period. Therefore, for the purposes of this analysis, Leq can be considered the average sound level and Leq(h) can be considered the average sound level occurring over a one-hour time period. It is representative of the overall (average) traffic-generated noise level expressed on an hourly basis.

Land uses are assigned to an activity category based on the type of activities occurring in each area (i.e. picnic areas, churches, commercial land, and undeveloped land). Activity Categories are then ordered based on their sensitivity to traffic noise levels. NAC are assigned to each Activity Category. These NAC represent the maximum traffic noise levels that allow uninterrupted land use within each Activity Category. Table 2 summarizes noise abatement criteria corresponding to various land use activity categories. Activity categories and related traffic noise impacts are determined based on the actual land use in a given area.

Table 2: Noise Abatement Criteria

23 CFR 772 Noise Abatement Criteria [Hourly A-Weighted Sound Level, decibels (dBA)]			
Activity Category	**Leq(h)**	**Evaluation Location**	**Activity Description**
A	57	Exterior	Lands on which serenity and quiet are of extraordinary significance and serve as an important public need and where the preservation of those qualities is essential if the area is to continue to serve its intended purpose.
B	67	Exterior	Residential
C	67	Exterior	Active sports areas, amphitheaters, auditoriums, campgrounds, cemeteries, day care centers, hospitals, libraries, medical facilities, parks, picnic areas, places of worship, playgrounds, public meeting rooms, public or nonprofit institutional structures, radio studios, recording studios, recreation areas, Section 4(f) sites, schools television studios, trails and trail crossings
D	52	Interior	Auditoriums, day care centers, hospitals, libraries, medical facilities, places of worship, public meeting rooms, public or nonprofit institutional structures, radio studios, recordings studios, schools, and television studios.
E	72	Exterior	Hotels, motels, office, restaurant/bars, and other developed lands, properties or activities not included in A-D or F.
F	--	--	Agriculture, airports, bus yards, emergency services, industrial, logging, maintenance facilities, manufacturing, mining, rail yards, retail facilities, shipyards, utilities (water resources, water treatment, electrical) and warehousing
G	--	--	Undeveloped lands that are not permitted

Highway traffic noise impacts occur when the predicted traffic noise levels for the design year approach (reach 1 decibel less than) or equal/exceed the NAC contained in 23 CFR 772 (Table 2), or when the predicted traffic noise levels substantially exceed the existing noise levels by 15 dBA, even though the predicted levels may not exceed the NAC.

4.Noise Prediction Method

Traffic noise levels were determined by using the FHWA Traffic Noise Model (TNM), Version 2.5. Basic model inputs are:

- Preliminary project concept and geometry
- 2035 traffic volumes in the Project Area (Appendix A)
- The operational speed for I-229: 65 miles per hour (mph); arterial streets: 30-45 mph

The traffic volume used for this analysis is the AM Peak Hourly Volume (PHV) traffic. Traffic was provided in a February 2015 HDR Technical Memo. Traffic volumes for the future “Build” condition were assumed to be the same as the future “No-Build” volumes.

5. Adjacent Land Use

Two-hundred thirty-seven (237) receptors were identified in the project area. The I-229 Rice Street corridor is located east of I-29 in the Sioux Falls metropolitan area. The Rice Street Corridor study limits include an approximately 1.8 mile section of Rice Street from Cliff Avenue to Bahnson Avenue and intersection improvements at Cliff Avenue, Cleveland Avenue and Bahnson Avenue.

Land use immediately adjacent to this Project is a combination of commercial/industrial, residential and a playground. If no exterior areas of frequent human use are present at the commercial/retail locations, no further noise analysis is required. Figures located in Appendix B provide an aerial view of the project area.

6. Model Validation

Existing traffic noise levels were measured in the field and then compared against computer modeling results to verify the accuracy of the computer model. When modeled and measured levels are within + or – 3 dBA of one another, this indicates that the model is within the accepted level of accuracy.

6.1. Field Testing Procedure

On November 2, 2015, HDR staff measured traffic noise levels at representative sites throughout the project corridor. Traffic noise measurements were conducted in accordance with the FHWA-PD-96-046 Measurement of Highway Related Noise (May 1996). The average meteorological conditions were reported as shown in Table 3 below.

Table 3: Meteorological Conditions

Temperature	≅ 61 °F
Humidity	≅ 62%
Wind	< 12 mph
Conditions	Partly Cloudy
Barometric Pressure	≅ 29.81 inches

6.2. Instrumentation

Traffic noise monitoring was conducted using a Larson Davis 824 Sound Level Meter (SLM). Table 4 summarizes the instruments used to collect the data for this noise analysis report.

Table 4: Noise Analysis Instrumentation Summary

Instrument	Make	Model	Serial Number
Sound Analyzer 1	Larson Davis	824	824A2636
Calibrator	Larson Davis	CAL200	3722

6.3. Field Measurement Methods

The SLM was programmed to compute the Leq(h). The following procedures were used for noise monitoring:

- The duration of the Leq(h) measurements was 15 minutes.
- The SLM was calibrated before and after monitoring. No significant calibration drifts were detected.
- The microphone was mounted on a tripod 5 feet above the ground.
- The microphone was covered with a windscreen.

6.4. Field Measurement Locations

Table 5 describes the location of the validation site in the project corridor.

Table 5: Noise Validation Location Summary

Measurement Location	Description
E	≈ 30’ south of E Rice Street

The validation location is shown in Appendix B, and is within 30 feet of the nearest roadway outside lane.

6.5. Model Validation Results

The measured and modeled noise level for the monitoring site selected along the project corridor is presented in Table 6. The predicted and measured data are within the acceptable + or – 3 dBA tolerance; therefore, the model is considered to be validated.

Table 6: Model Validation Results

Measurement Location	Leq(h)(dBA)		
	Measured	Modeled	Difference
E	69.1	66.2	-2.9

7.Traffic Noise Prediction

HDR used the FHWA TNM, Version 2.5, to evaluate future traffic noise levels at noise sensitive receptors within the limits of the Project. The TNM model accounts for the elevation differences and the proposed roadway alignment in relation to the noise-sensitive sites. Table 7 lists the NAC, existing Leq(h), and the future (2035) modeled Leq(h) for both the “Existing” and “Build” alternatives. Noise receptor locations are shown in Appendix B.

Table 7: Predicted Noise Levels at Receptors

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
1934	B	66	56.4	58.5	58.5	58.6	2.1	2.1	2.2
1935	B	66	56.3	58.5	58.5	58.5	2.2	2.2	2.2
1936	B	66	56.1	58.5	58.4	58.4	2.4	2.3	2.3
1937	B	66	56.0	58.4	58.4	58.4	2.4	2.4	2.4
1938	B	66	56.1	58.5	58.5	58.5	2.4	2.4	2.4
1939	B	66	56.0	58.4	58.4	58.4	2.4	2.4	2.4
1940	B	66	55.9	58.3	58.3	58.4	2.4	2.4	2.5
1941	B	66	55.8	58.3	58.3	58.3	2.5	2.5	2.5
1942	B	66	55.9	58.5	58.5	58.5	2.6	2.6	2.6
1943	B	66	56.1	58.7	58.7	58.7	2.6	2.6	2.6
1944	B	66	55.7	58.6	58.6	58.6	2.9	2.9	2.9
1945	B	66	55.9	58.9	58.9	58.9	3.0	3.0	3.0
1946	B	66	55.6	58.9	58.9	58.9	3.3	3.3	3.3
1947	B	66	55.8	59.3	59.3	59.3	3.5	3.5	3.5
1948	B	66	56.2	59.8	59.8	59.8	3.6	3.6	3.6
1949	B	66	53.6	56.6	56.6	56.6	3.0	3.0	3.0
1950	B	66	52.5	55.5	55.6	55.6	3.0	3.1	3.1
1951	B	66	52.7	55.8	55.8	55.8	3.1	3.1	3.1
1952	B	66	52.4	55.6	55.6	55.7	3.2	3.2	3.3
1953	B	66	52.7	56.0	56.0	56.0	3.3	3.3	3.3
1954	B	66	52.4	55.8	55.8	55.8	3.4	3.4	3.4
1955	B	66	52.6	56.1	56.1	56.1	3.5	3.5	3.5
1956	B	66	52.7	56.1	56.1	56.0	3.4	3.4	3.3
1957	B	66	52.8	56.2	56.2	56.2	3.4	3.4	3.4
1958	B	66	52.7	56.2	56.2	56.2	3.5	3.5	3.5
1959	B	66	52.6	56.4	56.4	56.4	3.8	3.8	3.8
1960	B	66	52.6	56.6	56.6	56.6	4.0	4.0	4.0
1961	B	66	52.5	56.4	56.4	56.4	3.9	3.9	3.9
1962	B	66	52.4	56.5	56.5	56.6	4.1	4.1	4.2
1963	B	66	52.6	56.9	56.9	56.9	4.3	4.3	4.3
1964	B	66	52.5	57.0	57.0	57.0	4.5	4.5	4.5
1965	B	66	57.3	60.9	60.9	60.9	3.6	3.6	3.6
1966	B	66	58.0	62.0	62.0	62.0	4.0	4.0	4.0
1967	B	66	58.0	62.5	62.5	62.5	4.5	4.5	4.5
1968	B	66	57.5	62.4	62.4	62.4	4.9	4.9	4.9
1969	B	66	63.6	69.2	69.2	69.2	5.6	5.6	5.6

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
1970	B	66	57.7	62.7	62.7	62.7	5.0	5.0	5.0
1971	B	66	58.3	63.0	63.0	63.1	4.7	4.7	4.8
1972	B	66	57.9	62.3	62.3	62.3	4.4	4.4	4.4
1973	B	66	58.4	62.4	62.4	62.4	4.0	4.0	4.0
1974	B	66	58.5	62.2	62.2	62.2	3.7	3.7	3.7
1975	B	66	58.6	62.1	62.1	62.0	3.5	3.5	3.4
1976	B	66	58.0	61.7	61.7	61.7	3.7	3.7	3.7
1977	B	66	53.7	58.8	58.8	58.8	5.1	5.1	5.1
1978	B	66	53.8	59.0	59.1	59.1	5.2	5.3	5.3
1979	B	66	53.9	59.3	59.3	59.3	5.4	5.4	5.4
1980	B	66	53.6	59.1	59.1	59.1	5.5	5.5	5.5
1981	B	66	54.0	59.3	59.3	59.3	5.3	5.3	5.3
1982	B	66	53.9	59.1	59.1	59.1	5.2	5.2	5.2
1983	B	66	54.2	59.1	59.1	59.2	4.9	4.9	5.0
1984	B	66	54.3	59.1	59.1	59.1	4.8	4.8	4.8
1985	B	66	54.3	58.9	58.9	58.9	4.6	4.6	4.6
1986	B	66	54.4	58.8	58.8	58.8	4.4	4.4	4.4
1987	B	66	52.1	57.0	57.0	57.0	4.9	4.9	4.9
1988	B	66	52.1	57.1	57.1	57.1	5.0	5.0	5.0
1989	B	66	52.2	57.2	57.2	57.2	5.0	5.0	5.0
1990	B	66	52.3	57.4	57.4	57.4	5.1	5.1	5.1
1991	B	66	52.3	57.4	57.4	57.5	5.1	5.1	5.2
1992	B	66	52.1	57.1	57.1	57.1	5.0	5.0	5.0
1993	B	66	52.3	57.2	57.2	57.2	4.9	4.9	4.9
1994	B	66	52.6	57.4	57.4	57.4	4.8	4.8	4.8
1995	B	66	52.7	57.4	57.4	57.4	4.7	4.7	4.7
1996	B	66	53.0	57.0	57.0	57.0	4.0	4.0	4.0
1997	B	66	53.8	57.9	57.9	57.9	4.1	4.1	4.1
1998	B	66	65.9	71.1	71.1	71.1	5.2	5.2	5.2
1999	B	66	66.0	70.8	70.8	70.8	4.8	4.8	4.8
2000	B	66	67.0	71.9	71.9	71.9	4.9	4.9	4.9
2001	B	66	66.9	71.6	71.6	71.6	4.7	4.7	4.7
2002	B	66	66.9	71.6	71.6	71.6	4.7	4.7	4.7
2003	B	66	67.5	71.2	71.2	71.2	3.7	3.7	3.7
2004	B	66	64.9	68.6	68.6	68.6	3.7	3.7	3.7
2005	B	66	62.5	65.9	65.9	65.9	3.4	3.4	3.4
2006	B	66	59.4	62.3	62.3	62.4	2.9	2.9	3.0

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
2007	B	66	58.3	61.2	61.2	61.2	2.9	2.9	2.9
2008	B	66	65.1	68.3	68.3	68.3	3.2	3.2	3.2
2009	B	66	62.8	66.0	66.0	66.0	3.2	3.2	3.2
2010	B	66	59.2	62.1	62.1	62.1	2.9	2.9	2.9
2011	B	66	58.3	61.1	61.2	61.2	2.8	2.9	2.9
2012	B	66	66.6	69.9	69.9	69.9	3.3	3.3	3.3
2013	B	66	60.4	63.4	63.4	63.4	3.0	3.0	3.0
2014	B	66	58.1	60.9	60.9	61.0	2.8	2.8	2.9
2015	B	66	55.4	58.4	58.4	58.5	3.0	3.0	3.1
2016	B	66	54.5	57.6	57.6	57.7	3.1	3.1	3.2
2017	B	66	53.5	56.7	56.7	56.8	3.2	3.2	3.3
2018	B	66	52.3	55.5	55.6	55.6	3.2	3.3	3.3
2019	B	66	58.3	61.1	61.2	61.2	2.8	2.9	2.9
2020	B	66	56.3	59.1	59.2	59.2	2.8	2.9	2.9
2021	B	66	55.0	58.1	58.1	58.1	3.1	3.1	3.1
2022	B	66	59.0	61.8	61.8	61.8	2.8	2.8	2.8
2023	B	66	56.5	59.4	59.4	59.4	2.9	2.9	2.9
2024	B	66	55.0	58.1	58.1	58.1	3.1	3.1	3.1
2025	B	66	52.9	56.3	56.4	56.4	3.4	3.5	3.5
2026	B	66	52.9	56.3	56.3	56.4	3.4	3.4	3.5
2027	B	66	53.1	56.4	56.4	56.4	3.3	3.3	3.3
2028	B	66	52.5	55.8	55.8	55.9	3.3	3.3	3.4
2029	B	66	51.7	54.9	55.0	55.0	3.2	3.3	3.3
2030	B	66	51.8	55.3	55.3	55.3	3.5	3.5	3.5
2031	B	66	51.4	54.8	54.9	54.9	3.4	3.5	3.5
2032	B	66	58.0	60.8	60.8	60.8	2.8	2.8	2.8
2033	B	66	62.9	66.0	66.0	66.0	3.1	3.1	3.1
2034	B	66	58.7	61.4	61.4	61.4	2.7	2.7	2.7
2035	B	66	54.9	58.1	58.1	58.1	3.2	3.2	3.2
2036	B	66	53.0	56.5	56.5	56.5	3.5	3.5	3.5
2037	B	66	52.6	56.2	56.2	56.2	3.6	3.6	3.6
2038	B	66	52.9	56.5	56.6	56.6	3.6	3.7	3.7
2039	B	66	51.2	55.0	55.0	55.0	3.8	3.8	3.8
2040	B	66	51.7	55.3	55.4	55.4	3.6	3.7	3.7
2041	B	66	51.2	54.8	54.9	54.9	3.6	3.7	3.7
2042	B	66	63.3	66.8	66.8	66.8	3.5	3.5	3.5
2043	B	66	60.5	63.3	63.3	63.3	2.8	2.8	2.8

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
2044	B	66	58.6	61.4	61.4	61.4	2.8	2.8	2.8
2045	B	66	56.5	59.5	59.5	59.5	3.0	3.0	3.0
2046	B	66	55.6	58.9	58.9	58.9	3.3	3.3	3.3
2047	B	66	60.3	63.4	63.4	63.4	3.1	3.1	3.1
2048	B	66	58.6	61.8	61.8	61.8	3.2	3.2	3.2
2049	B	66	57.0	60.4	60.4	60.4	3.4	3.4	3.4
2050	B	66	55.7	59.4	59.4	59.4	3.7	3.7	3.7
2051	B	66	52.7	56.7	56.7	56.7	4.0	4.0	4.0
2052	B	66	52.8	57.0	57.0	57.0	4.2	4.2	4.2
2053	B	66	52.8	57.3	57.3	57.3	4.5	4.5	4.5
2054	B	66	51.3	55.6	55.7	55.7	4.3	4.4	4.4
2055	B	66	51.5	55.6	55.6	55.6	4.1	4.1	4.1
2056	B	66	51.1	55.2	55.2	55.2	4.1	4.1	4.1
2057	B	66	66.6	72.1	72.1	72.1	5.5	5.5	5.5
2058	B	66	66.4	71.5	71.5	71.5	5.1	5.1	5.1
2059	B	66	66.8	71.9	71.9	71.9	5.1	5.1	5.1
2060	B	66	55.7	61.6	61.6	61.6	5.9	5.9	5.9
2061	B	66	56.8	62.2	62.2	62.2	5.4	5.4	5.4
2062	B	66	56.8	62.0	62.0	62.0	5.2	5.2	5.2
2063	B	66	57.0	61.8	61.8	61.8	4.8	4.8	4.8
2064	B	66	57.0	61.2	61.2	61.2	4.2	4.2	4.2
2065	B	66	57.6	61.3	61.3	61.3	3.7	3.7	3.7
2066	B	66	57.9	61.3	61.3	61.3	3.4	3.4	3.4
2067	B	66	58.4	61.5	61.5	61.5	3.1	3.1	3.1
2068	B	66	52.2	57.5	57.5	57.5	5.3	5.3	5.3
2069	B	66	53.2	58.7	58.7	58.7	5.5	5.5	5.5
2070	B	66	53.2	58.6	58.6	58.6	5.4	5.4	5.4
2071	B	66	53.3	58.6	58.6	58.6	5.3	5.3	5.3
2072	B	66	53.4	58.5	58.5	58.5	5.1	5.1	5.1
2073	B	66	53.6	58.5	58.5	58.5	4.9	4.9	4.9
2074	B	66	54.2	58.6	58.6	58.6	4.4	4.4	4.4
2075	B	66	54.8	58.6	58.6	58.6	3.8	3.8	3.8
2076	B	66	55.1	58.8	58.8	58.8	3.7	3.7	3.7
2077	B	66	55.6	58.9	58.9	58.9	3.3	3.3	3.3
1717	B	66	60.4	62.4	62.3	62.7	2.0	1.9	2.3
1718	B	66	60.3	62.3	62.2	62.6	2.0	1.9	2.3
1719	B	66	60.0	62.1	62.0	62.4	2.1	2.0	2.4

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
1720	B	66	60.1	62.2	62.2	62.4	2.1	2.1	2.3
1721	B	66	60.0	62.1	62.1	62.2	2.1	2.1	2.2
1722	B	66	59.9	62.0	62.0	62.1	2.1	2.1	2.2
1732	B	66	61.8	63.7	63.6	64.0	1.9	1.8	2.2
1733	B	66	62.3	64.3	64.2	64.4	2.0	1.9	2.1
1734	B	66	62.4	64.5	64.4	64.6	2.1	2.0	2.2
1840	B	66	62.6	64.9	64.8	64.9	2.3	2.2	2.3
1841	B	66	62.7	64.9	64.8	64.9	2.2	2.1	2.2
1842	B	66	62.7	64.9	64.8	64.9	2.2	2.1	2.2
1843	B	66	62.4	64.6	64.6	64.7	2.2	2.2	2.3
1844	B	66	62.5	64.7	64.6	64.8	2.2	2.1	2.3
1845	B	66	62.4	64.5	64.5	64.6	2.1	2.1	2.2
1846	B	66	65.0	68.1	68.1	65.4	3.1	3.1	0.4
1847	B	66	64.2	66.7	66.6	64.9	2.5	2.4	0.7
1848	B	66	64.0	66.0	65.9	65.2	2.0	1.9	1.2
1849	B	66	64.3	66.2	66.1	65.6	1.9	1.8	1.3
1850	B	66	65.0	68.2	68.2	65.4	3.2	3.2	0.4
1851	B	66	64.2	66.7	66.7	64.8	2.5	2.5	0.6
1852	B	66	64.0	65.9	65.9	65.1	1.9	1.9	1.1
1853	B	66	64.3	66.2	66.1	65.6	1.9	1.8	1.3
1854	B	66	63.9	66.1	66.0	64.7	2.2	2.1	0.8
1855	B	66	65.9	69.2	69.1	65.5	3.3	3.2	-0.4
1859	B	66	64.1	66.2	66.2	64.8	2.1	2.1	0.7
1863	B	66	64.2	66.1	66.0	65.4	1.9	1.8	1.2
1864	B	66	64.5	66.4	66.3	65.9	1.9	1.8	1.4
1865	B	66	66.0	67.7	67.7	67.5	1.7	1.7	1.5
1866	B	66	66.9	68.6	68.5	68.4	1.7	1.6	1.5
1867	B	66	64.2	66.1	66.1	65.5	1.9	1.9	1.3
1868	B	66	64.6	66.5	66.4	66.0	1.9	1.8	1.4
1869	B	66	66.0	67.8	67.7	67.5	1.8	1.7	1.5
1870	B	66	66.9	68.6	68.5	68.4	1.7	1.6	1.5
1871	B	66	65.2	67.1	67.0	66.7	1.9	1.8	1.5
1875	B	66	67.2	68.9	68.9	68.7	1.7	1.7	1.5
1922	B	66	58.9	60.5	60.5	61.6	1.6	1.6	2.7
1923	B	66	58.6	60.4	60.3	61.2	1.8	1.7	2.6
1924	B	66	58.8	59.8	59.7	61.6	1.0	0.9	2.8
1925	B	66	57.7	59.1	59.0	60.6	1.4	1.3	2.9

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
1926	B	66	57.4	58.7	58.7	60.1	1.3	1.3	2.7
1927	B	66	57.1	58.4	58.4	59.7	1.3	1.3	2.6
1928	B	66	56.6	58.0	58.0	59.3	1.4	1.4	2.7
1929	B	66	56.0	57.6	57.5	58.7	1.6	1.5	2.7
1930	B	66	55.5	57.1	57.2	58.1	1.6	1.7	2.6
1931	B	66	55.2	56.8	56.9	57.8	1.6	1.7	2.6
1932	B	66	54.8	56.4	56.5	57.3	1.6	1.7	2.5
1933	B	66	54.5	56.1	56.1	56.9	1.6	1.6	2.4
2078	B	66	62.3	65.3	65.2	63.1	3.0	2.9	0.8
2079	B	66	60.6	65.8	67.9	66.3	5.2	7.3	5.7
2080	B	66	64.1	71.0	73.7	70.7	6.9	9.6	6.6
2081	B	66	66.7	*Note 1*	*Note 1*	*Note 1*	*Note 1*	*Note 1*	*Note 1*
2082	B	66	62.5	69.5	71.5	69.6	7.0	9.0	7.1
2083	B	66	60.7	66.8	68.5	67.3	6.1	7.8	6.6
2084	B	66	58.9	64.3	65.8	65.1	5.4	6.9	6.2
2085	B	66	58.1	63.4	64.8	64.1	5.3	6.7	6.0
2086	B	66	56.9	61.9	63.1	62.4	5.0	6.2	5.5
2087	B	66	56.8	61.9	63.1	62.4	5.1	6.3	5.6
2088	B	66	61.4	68.1	69.9	68.6	6.7	8.5	7.2
5000	B	66	56.8	59.2	59.2	59.9	2.4	2.4	3.1
5001	B	66	56.3	58.7	58.7	59.3	2.4	2.4	3.0
5002	B	66	56.9	59.2	59.2	59.8	2.3	2.3	2.9
5003	B	66	63.3	66.4	66.4	63.9	3.1	3.1	0.6
5004	B	66	62.6	65.6	65.6	63.5	3.0	3.0	0.9
5005	B	66	62.1	64.9	64.9	63.3	2.8	2.8	1.2
5006	B	66	61.8	64.4	64.3	63.0	2.6	2.5	1.2
5007	B	66	59.3	61.7	61.7	60.8	2.4	2.4	1.5
5008	B	66	59.1	61.6	61.5	60.7	2.5	2.4	1.6
5009	B	66	59.5	61.7	61.7	60.9	2.2	2.2	1.4
5010	B	66	59.5	62.0	62.0	61.2	2.5	2.5	1.7
5011	B	66	60.1	62.5	62.5	61.9	2.4	2.4	1.8
5012	B	66	60.2	62.7	62.7	62.1	2.5	2.5	1.9
5013	B	66	59.9	62.4	62.4	61.9	2.5	2.5	2.0
5014	B	66	58.9	61.5	61.5	60.9	2.6	2.6	2.0
5015	B	66	58.1	61.0	60.9	60.1	2.9	2.8	2.0
5016	B	66	57.6	60.9	60.9	59.5	3.3	3.3	1.9
5017	B	66	57.1	60.6	60.6	58.9	3.5	3.5	1.8

Receptor ID	Land Use	NAC dBA	Hourly Leq(h) dBA						
			2012 Existing	2035 Build			Difference between Existing/Build		
				Rice-2	Rice-2a	Rice-3c	Rice-2	Rice-2a	Rice-3c
Shaded cells indicate noise levels that exceed the NAC									
5018	B	66	56.7	60.3	60.3	58.4	3.6	3.6	1.7
5019	B	66	56.2	59.9	59.9	57.9	3.7	3.7	1.7
5020	B	66	56.2	60.1	60.0	57.9	3.9	3.8	1.7
5021	B	66	56.6	59.6	59.6	59.1	3.0	3.0	2.5
5022	B	66	54.9	58.3	58.3	58.0	3.4	3.4	3.1
5023	B	66	55.5	58.9	58.9	59.1	3.4	3.4	3.6
5024	B	66	53.8	57.2	57.3	57.3	3.4	3.5	3.5
5025	B	66	52.8	56.1	56.1	56.9	3.3	3.3	4.1
5026	B	66	52.5	55.5	55.6	56.4	3.0	3.1	3.9
5027	B	66	48.3	51.9	52.0	51.2	3.6	3.7	2.9
5028	B	66	59.9	64.6	64.9	65.2	4.7	5.0	5.3
5029	B	66	56.8	62.6	62.6	62.6	5.8	5.8	5.8
5030	B	66	56.3	61.7	61.7	61.7	5.4	5.4	5.4
5031	B	66	56.3	60.9	60.9	60.9	4.6	4.6	4.6
5032	B	66	56.6	61.0	61.0	61.0	4.4	4.4	4.4
5033	C	66	51.8	56.8	56.8	56.8	5.0	5.0	5.0

Note 1: This receptor will be acquired as part of the proposed project.

8.Noise Impact Analysis

Noise abatement measures are considered when predicted traffic noise levels approach or exceed the NAC, or when the predicted traffic noise levels substantially exceed existing noise levels. As shown in Table 8, there are 15 traffic noise impacts predicted under the Existing Alternative; 42 impacts predicted under Future Build Alternatives 2-C2 and 2A-C2; 29 impacts predicted under Future Build Alternative 3C-C2.

Table 8: Impact Summary

Alternative	Approach/ Exceed NAC	Substantially Exceed	Total Receptors Affected
Existing	15	0	15
Build – 2-C2	42	0	42
Build – 2A-C2	42	0	42
Build – 3C-C2	29	0	29

8.1. Impacts

8.1.1. Alternative 2-C2

The difference between the existing 2012 and the predicted 2035 Build noise levels range from +1.0 to +7.0 dBA. The difference in noise levels can be accounted for by the increase in traffic between the existing and build alternatives as well as any changes in geometry. Results of this analysis indicate that 42 traffic noise impacts are predicted to occur as a result of Alternative 2-C2.

8.1.2. Alternative 2A-C2

The difference between the existing 2012 and the predicted 2035 Build noise levels range from +0.9 to +9.6 dBA. The difference in noise levels can be accounted for by the increase in traffic between the existing and build alternatives as well as any changes in geometry. Results of this analysis indicate that 42 traffic noise impacts are predicted to occur as a result of Alternative 2A-C2.

8.1.3. Alternative 3C-C2

The difference between the existing 2012 and the predicted 2035 Build noise levels range from -0.4 to +7.2 dBA. The difference in noise levels can be accounted for by the increase in traffic between the existing and build alternatives as well as any changes in geometry (moving lanes/traffic away from receptors can result in lower noise levels). Results of this analysis indicate that 29 traffic noise impacts are predicted to occur as a result of Alternative 3C-C2.

9.Noise Abatement Measures

Per the scope for this sub-study, “in areas where future noise levels exceed state and federal criteria (23 CFR, Part 772 and the SDDOT noise policy), noise mitigation options will be identified and the conceptual feasibility of those options will be described. A detailed analysis of the cost reasonability of noise mitigation options will not be conducted at the corridor study phase. In addition, this task excludes specific public involvement for noise mitigation features such as providing ballots to owners and tenants of impacted properties.”

Traffic noise impacts are predicted as a result of all of the Build alternatives. Potential traffic noise abatement measures that could be considered for Build Alternatives 2-C2, 2A-C2 and 3C-C2 are listed below, along with reasons why some are considered infeasible.

1. Modifying the proposed horizontal and/or vertical alignments of the roadway
    - *Several different alignments are under investigation*
2. Traffic management measures (e.g. modify speed limits and restrict truck traffic)
    - *Impractical given the type of road in question*
3. Construction of noise barriers along or within the ROW
    - *Potentially possible; to be discussed further in Section 9.1.*
4. Acquisition of property rights for construction of noise barriers
    - *Potentially possible; would be investigated further in final design.*
5. Acquisition of property to serve as a buffer zone
    - *Prohibitively expensive*

9.1. Discussion of Feasibility of Noise Barriers (based on SDDOT Guidance)

All of the following conditions must be met in order for noise abatement to be considered feasible. Failure to achieve any single element of feasibility will result in the noise abatement measure being deemed not feasible. Further investigation into feasibility and reasonability (noise reduction goal, cost-effectiveness, viewpoints of benefited receptors) would need to occur once a preferred alternative is selected.

Feasibility

When a traffic noise impact is identified on a project, noise abatement will be considered and evaluated for engineering and acoustical feasibility.

- **Engineering feasibility:**
  - Safety: An abatement measure will be deemed not feasible if it causes an excessive restriction of sight distance, continuous shadow resulting in icing or snow accumulation on driving lanes, or severe drainage problems associated either with the barrier or flood-prone areas.
  - Barrier height: The design of each proposed barrier will be considered on an individual basis when determining barrier height. The designed height of any proposed barrier may be adjusted based on feasibility and reasonableness considerations. Due to safety concerns, SDDOT will generally not construct barriers higher than 20 feet.
  - Topography: If the topography is such that an abatement measure cannot be built, then it will be deemed not feasible.
  - Drainage and utilities: A noise abatement measure is not feasible if access to drainage and utilities cannot be maintained.
  - Maintenance of the abatement measure, maintenance access to adjacent properties, and access to adjacent properties: A noise abatement measure is not feasible if access to the abatement measure, side streets, driveways, ramps, etc., cannot be maintained.

- **Acoustic Feasibility:** A noise abatement measure is considered acoustically feasible when a minimum of 60 percent of front-row receptors directly behind the noise wall (noise wall must extend entirely across receptor's property line) achieve a 5 dBA noise reduction.

To be most effective, a noise barrier must be long and continuous to prevent sounds from passing around the ends in a manner that reduces or compromises the noise reduction provided by the noise barrier. It must also be solid, with few, if any, holes, cracks or openings. The majority of the impacts with each proposed alternative occur along I-229. There is sufficient right-of-way for noise barriers that are continuously long-enough with no breaks or openings to be designed. Noise barriers shielding many of the impacted receptors along I-229 are potentially feasible. Further detailed analysis would need to be performed when a preferred alternative has been chosen to further examine individual noise barrier feasibility and reasonableness.

Noise barriers shielding the impacted receptors along the crossroads are unlikely to be feasible as a lack of sufficient right-of-way to construct many of the noise barriers is available and lack of access control would create too many openings in the noise barrier to allow access to driveways and cross-streets.

10. Construction Noise and Vibration

Construction of the Project would result in temporary noise and vibration increases within the Project area. The evaluation and control of construction noise and vibration must be considered along with traffic noise. This Project is bordered by commercial and residential receptors for which impacts from construction noise and vibration are a concern.

The following are basic categories for mitigation measures for construction noise. Due to the interrelatedness of construction noise and vibration, some of these measures will also apply for vibration resulting from construction activities.

Design Considerations: Design considerations include measures in the plans and specifications to minimize or eliminate adverse impacts. The proposed changes and their proximity to noise sensitive receptors were considered during design.

Community Awareness: It is important for people to be made aware of the possible inconvenience construction can cause, and to know its approximate duration so they can plan their activities accordingly. It is SDDOT's policy to submit such Project information to all local news media.

Source Control: Source control involves reducing noise impacts from construction by controlling the noise emissions at their source. This can be accomplished by specifying proper muffler systems, either as a requirement in the plans and specifications on this Project or through an established local noise ordinance requiring mufflers. Contractors generally maintain proper muffler systems on their equipment to ensure efficient operation and to minimize noise for the benefit of their own personnel as well as the adjacent receptors.

Site Control: Site control involves the specification of certain areas where extra precautions should be taken to minimize construction noise. One way to reduce construction noise impacts at sensitive receptors is to operate stationary equipment, such as air compressors or generators, as far away from the sensitive receptors as possible. Another method might be placing a temporary noise barrier in front of the equipment. As a general rule, good coordination between the project engineer, the contractor and the affected receptors is less confusing, less likely to increase the cost of the project ,and provides a more personal approach to work out ways to minimize construction noise impacts in the more noise-sensitive areas.

Time and Activity Constraints: Limiting working hours on a construction site can be very beneficial during the hours of sleep or on Sundays and holidays. However, most construction activities do not occur at night and usually not on Sundays. Exceptions due to weather, schedule, and time-related phases of construction could occur. Enforcement of such constraints could be handled through a general city or county ordinance, either listing the exceptions or granting them on a case-by-case basis.

11. Information for Local Officials

Local officials will be provided with information on noise compatible planning techniques that can be used to prevent future highway traffic noise impacts. To assist local officials within whose jurisdiction a Type I highway project is located, SDDOT will provide information on future noise levels for each Activity Category located along the project. This is accomplished by providing a copy of the noise analysis report to the local official. The local official will also be provided with an estimation of future noise levels at various distances from the highway (Appendix B Noise Contours).

12. Conclusion

Traffic noise levels were evaluated for the existing conditions and future Build Alternatives 2-C2, 2A-C2 and 3C-C2 at 237 receptors in the Project area. There are 15 traffic noise impacts predicted under the Existing Alternative; 42 impacts predicted under Future Build Alternatives 2-C2 and 2A-C2; 29 impacts predicted under Future Build Alternative 3C-C2.


13. References

South Dakota Department of Transportation, “Noise Analysis and Abatement Guidance,” July 13, 2011.

Federal Highway Administration (FHWA), “Procedures for Abatement of Highway Traffic Noise and Construction Noise,” July 13, 2011.

Methods for evaluation and control of construction noise were taken from the FHWA Special Report – “Highway Construction Noise: Measurement, Prediction and Mitigation.”

Appendix A
Traffic Volumes

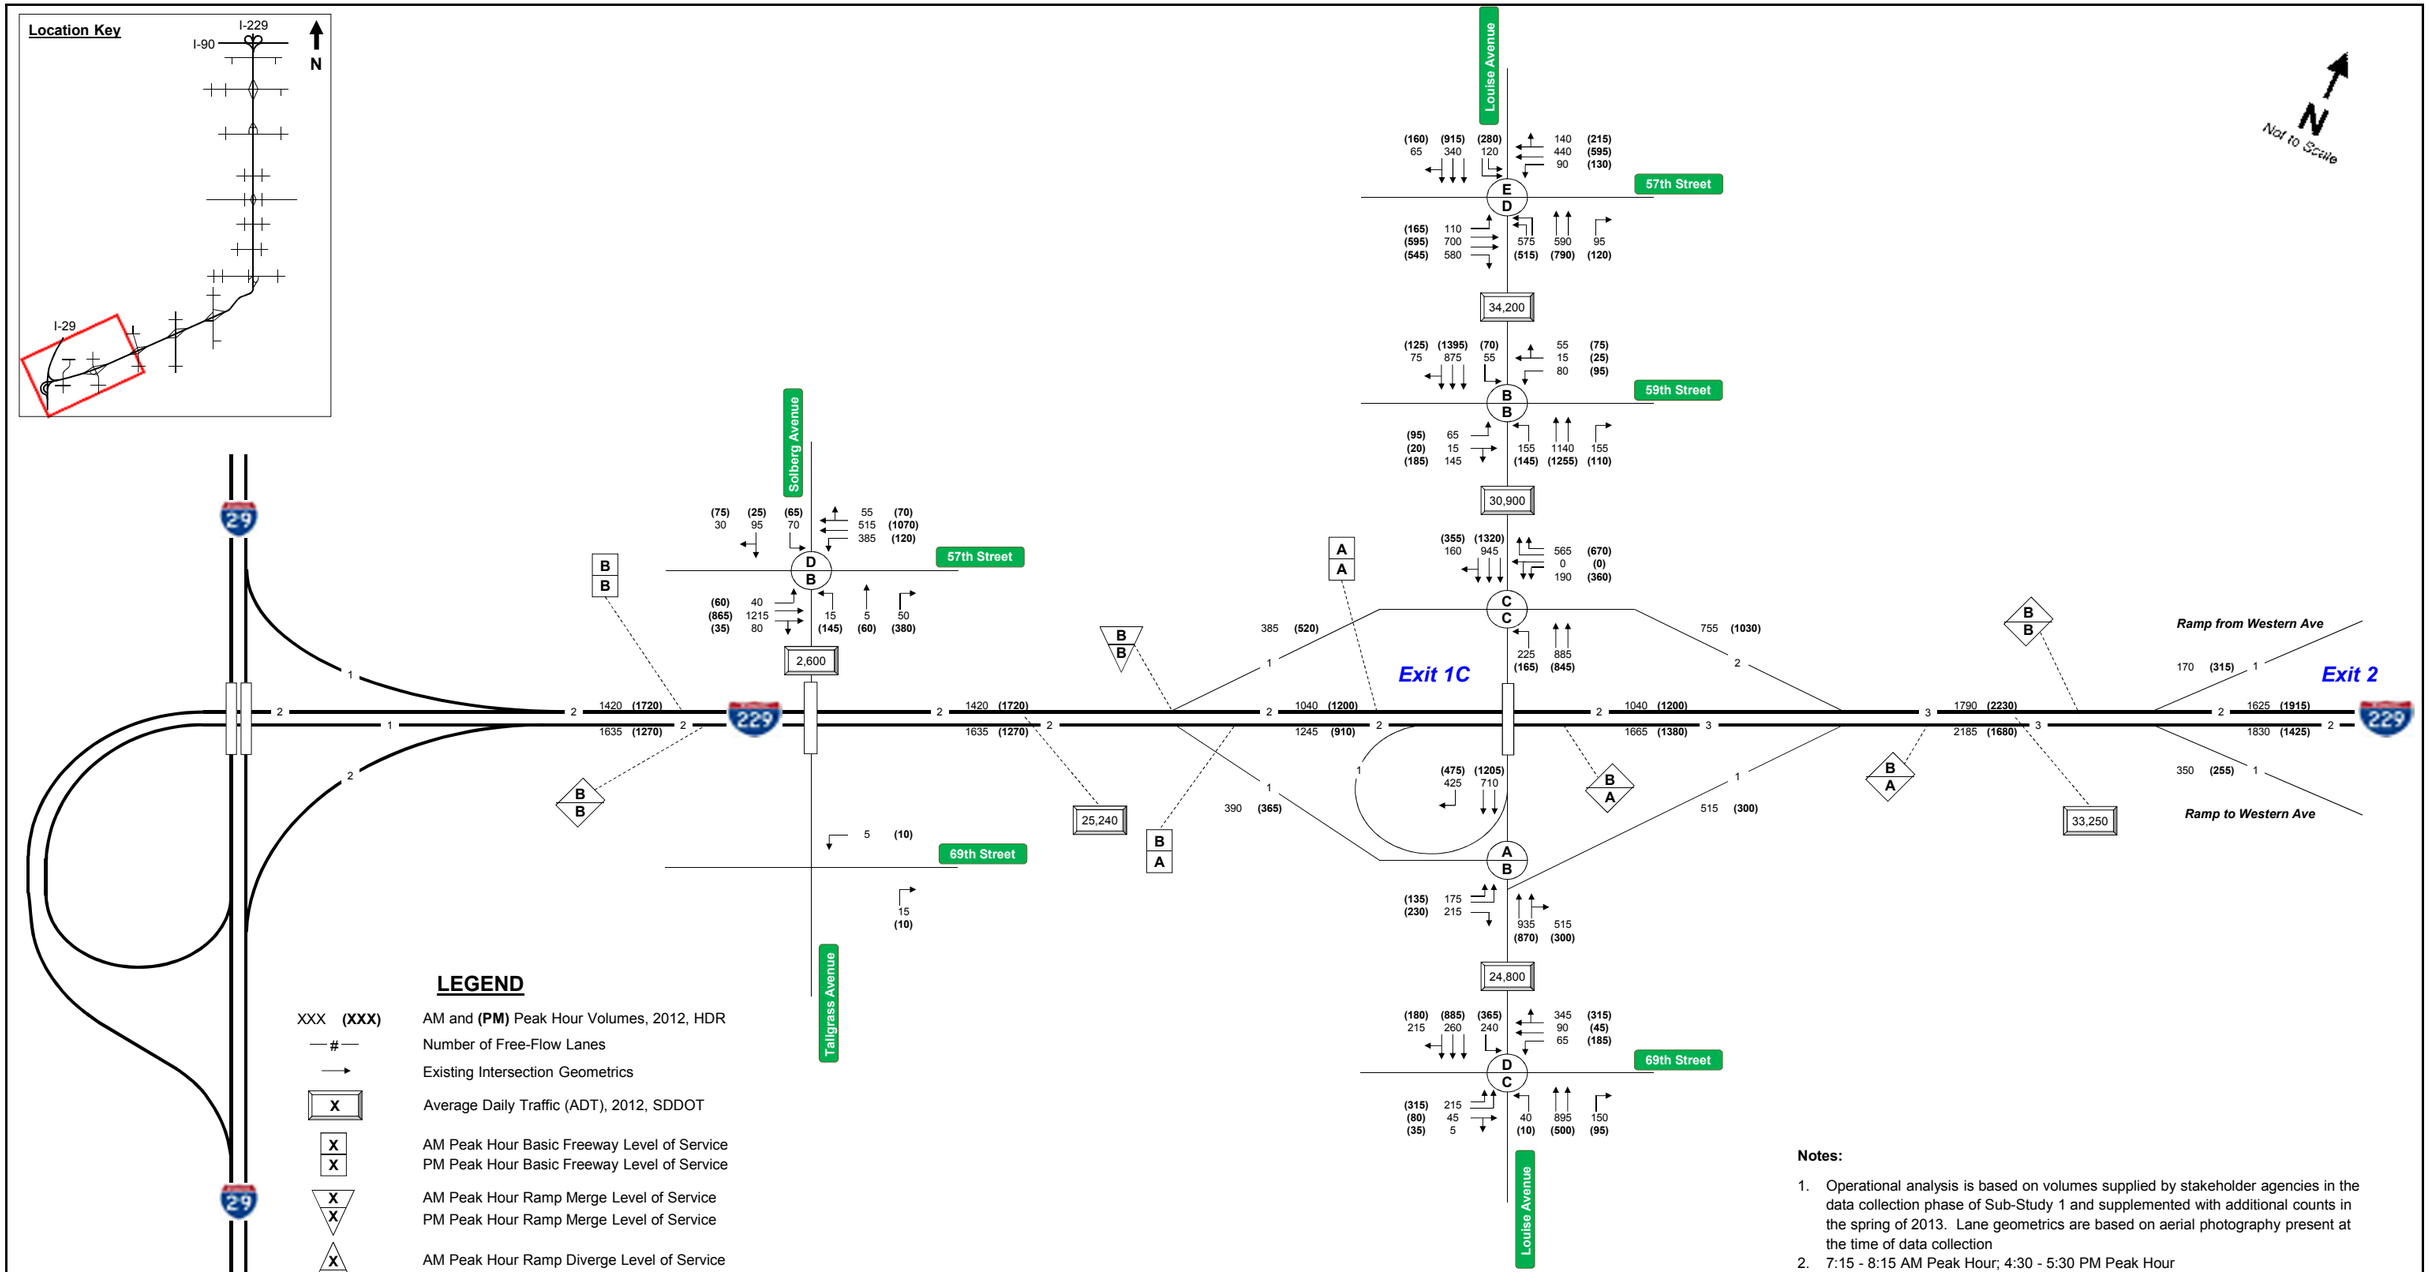

Notes:


1. Operational analysis is based on volumes supplied by stakeholder agencies in the data collection phase of Sub-Study 1 and supplemented with additional counts in the spring of 2013. Lane geometrics are based on aerial photography present at the time of data collection
2. 7:15 - 8:15 AM Peak Hour; 4:30 - 5:30 PM Peak Hour
3. Worst case stop controlled approach Level of Service reported

Existing Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
Sioux Falls, South Dakota

Date
03/05/2014

Figure
1 of 5

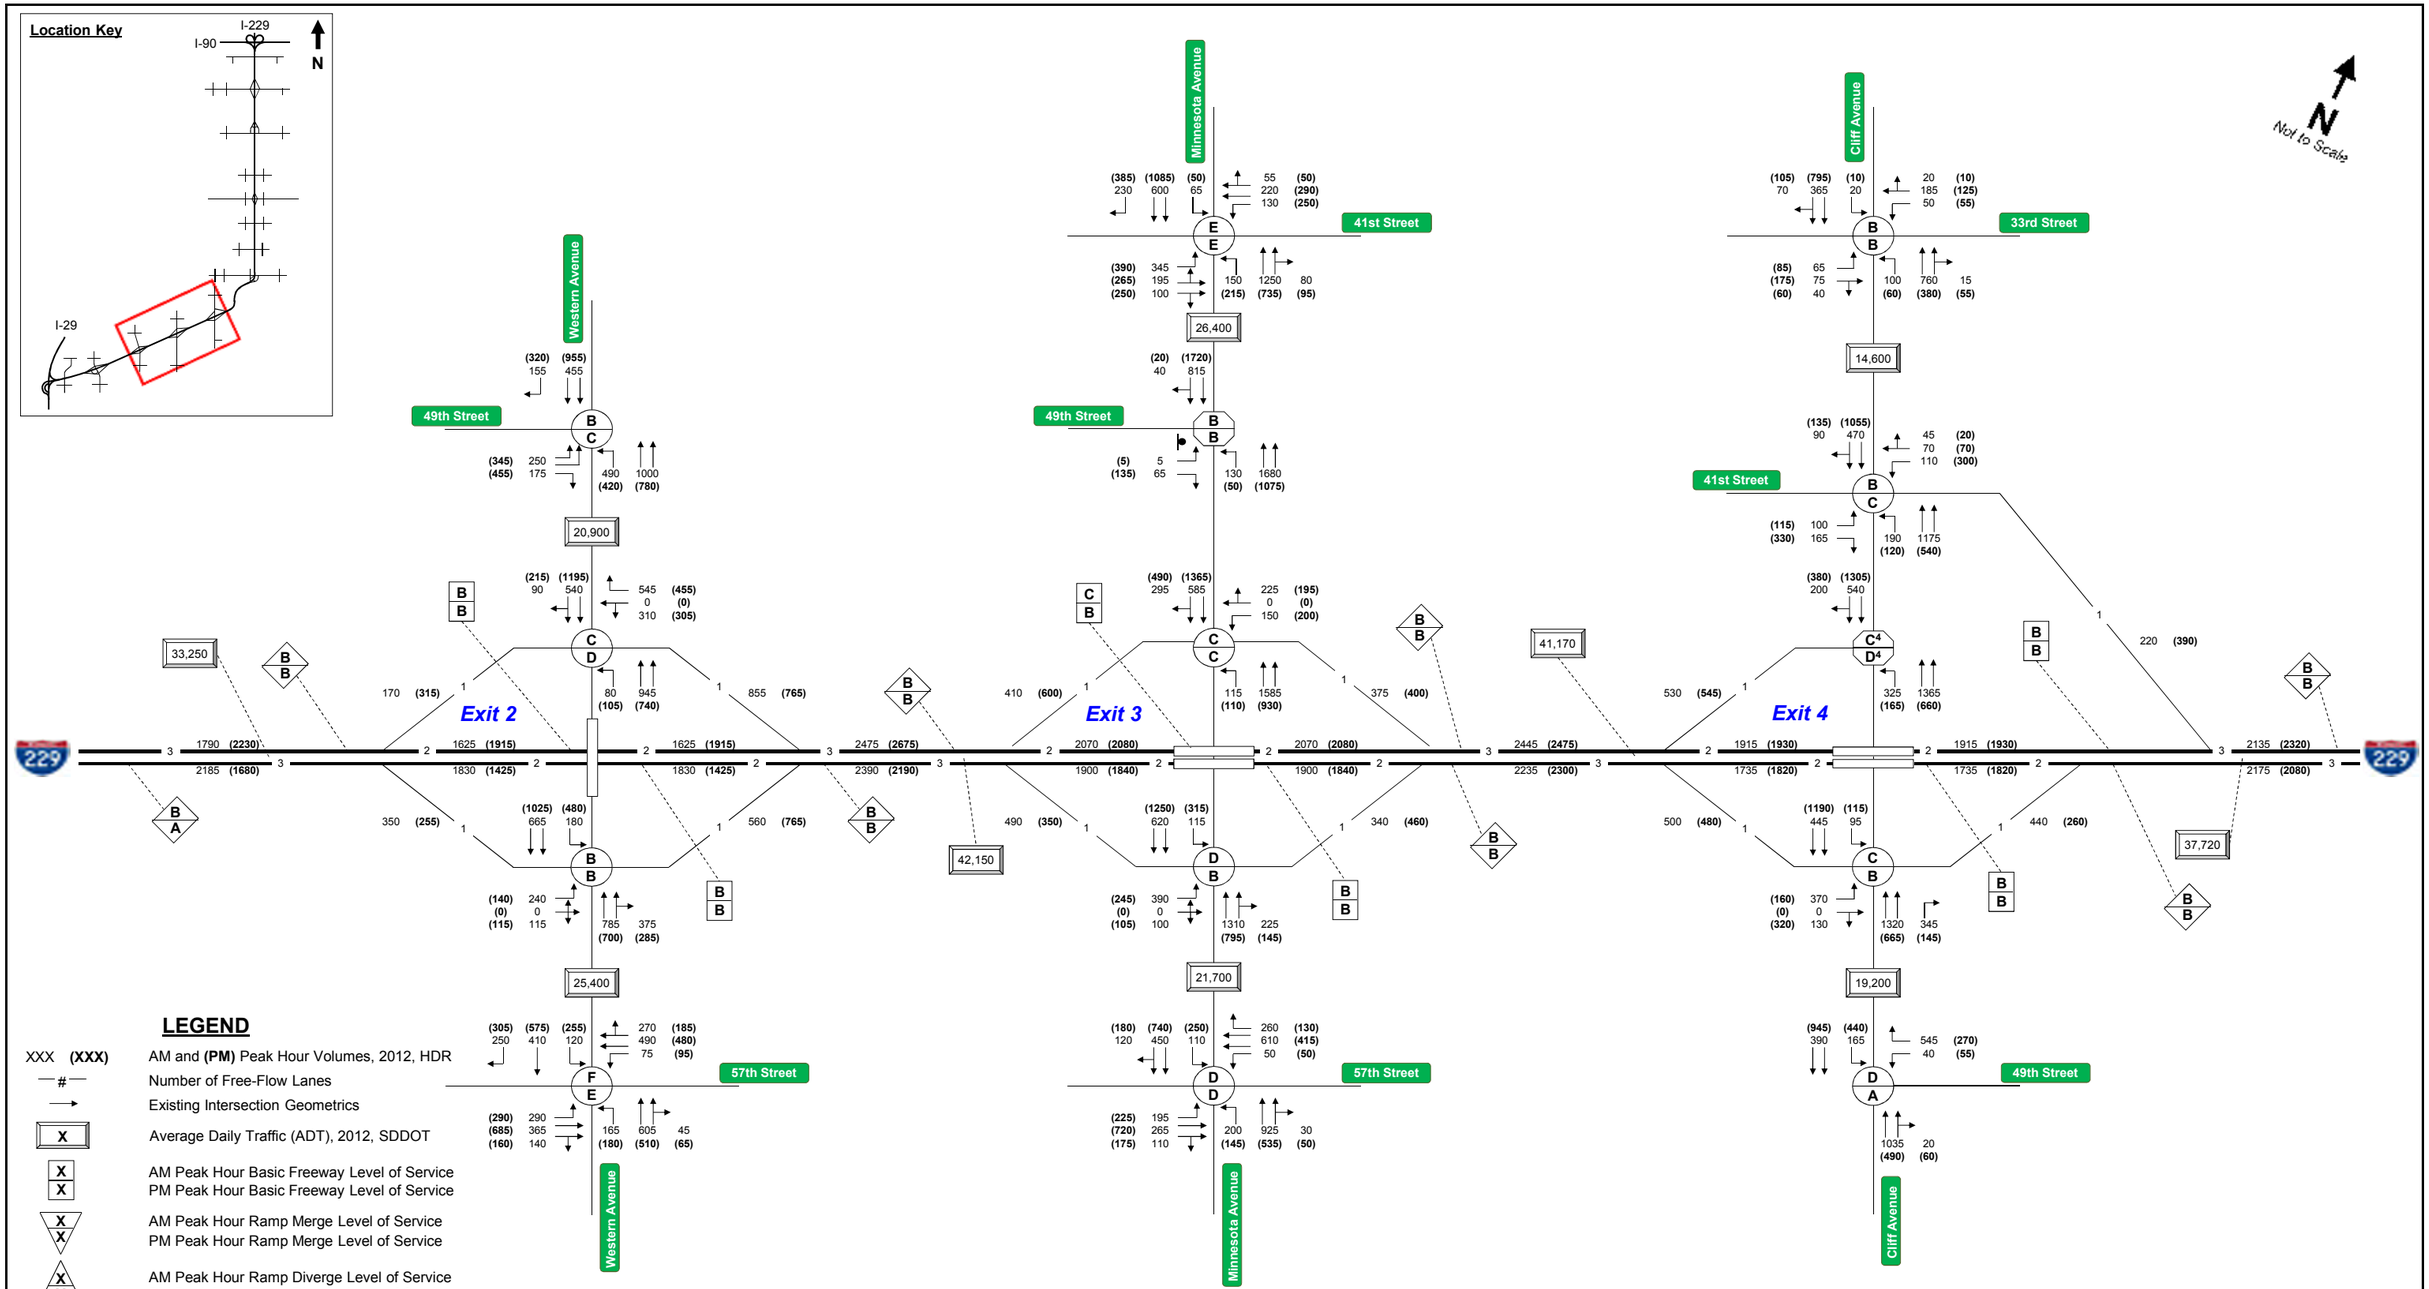

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes, 2012, HDR
—#—	Number of Free-Flow Lanes
→	Existing Intersection Geometrics
X	Average Daily Traffic (ADT), 2012, SDDOT
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:


1. Operational analysis is based on volumes supplied by stakeholder agencies in the data collection phase of Sub-Study 1 and supplemented with additional counts in the spring of 2013. Lane geometrics are based on aerial photography present at the time of data collection
2. 7:15 - 8:15 AM Peak Hour; 4:30 - 5:30 PM Peak Hour
3. Worst case stop controlled approach Level of Service reported

Existing Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
Sioux Falls, South Dakota

Date
03/05/2014

Figure
2 of 5

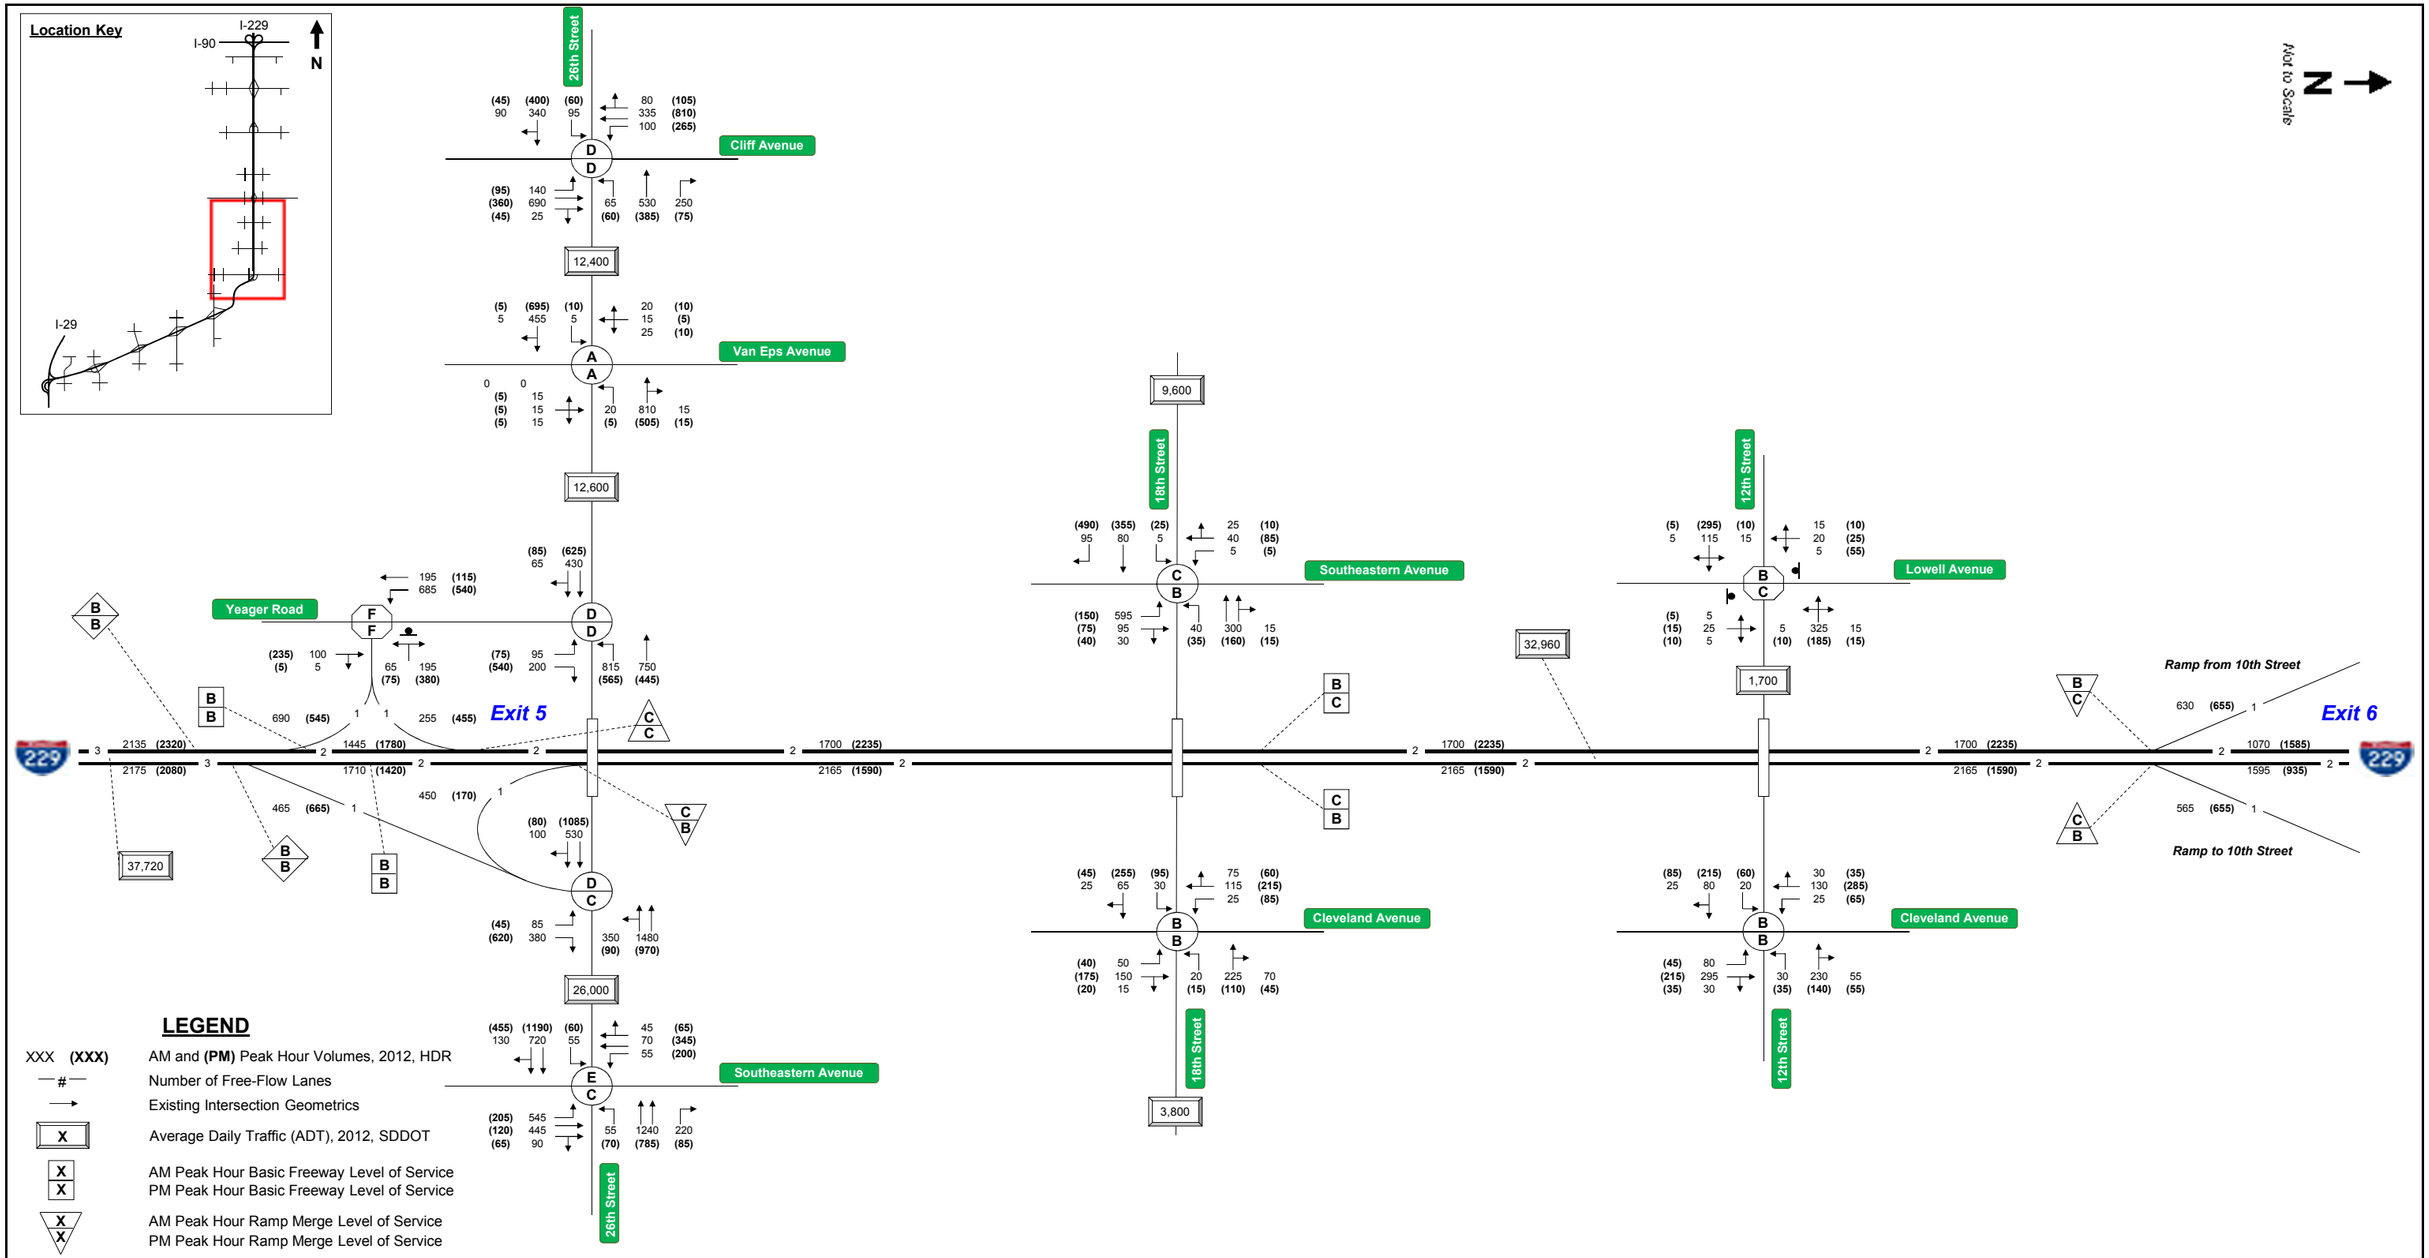

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes, 2012, HDR
—#—	Number of Free-Flow Lanes
→	Existing Intersection Geometrics
X	Average Daily Traffic (ADT), 2012, SDDOT
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Operational analysis is based on volumes supplied by stakeholder agencies in the data collection phase of Sub-Study 1 and supplemented with additional counts in the spring of 2013. Lane geometrics are based on aerial photography present at the time of data collection
2. 7:15 - 8:15 AM Peak Hour; 4:30 - 5:30 PM Peak Hour
3. Worst case stop controlled approach Level of Service reported


HDR

Existing Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
Sioux Falls, South Dakota

Date
03/05/2014

Figure
3 of 5

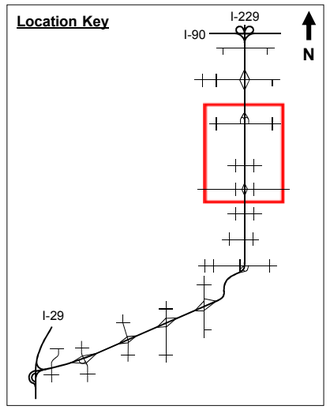

Not to Scale

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes, 2012, HDR
—#—	Number of Free-Flow Lanes
→	Existing Intersection Geometrics
X	Average Daily Traffic (ADT), 2012, SDDOT
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Operational analysis is based on volumes supplied by stakeholder agencies in the data collection phase of Sub-Study 1 and supplemented with additional counts in the spring of 2013. Lane geometrics are based on aerial photography present at the time of data collection
2. 7:15 - 8:15 AM Peak Hour; 4:30 - 5:30 PM Peak Hour
3. Worst case stop controlled approach Level of Service reported


HDR

Existing Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
Sioux Falls, South Dakota

Date
03/05/2014

Figure
4 of 5

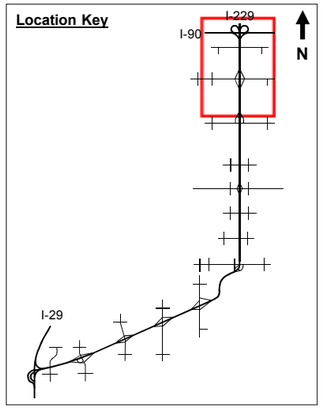

Not to Scale

N

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes, 2012, HDR
—#—	Number of Free-Flow Lanes
→	Existing Intersection Geometrics
X	Average Daily Traffic (ADT), 2012, SDDOT
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Operational analysis is based on volumes supplied by stakeholder agencies in the data collection phase of Sub-Study 1 and supplemented with additional counts in the spring of 2013. Lane geometrics are based on aerial photography present at the time of data collection
2. 7:15 - 8:15 AM Peak Hour; 4:30 - 5:30 PM Peak Hour
3. Worst case stop controlled approach Level of Service reported


HDR

Existing Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
Sioux Falls, South Dakota

Date
03/05/2014

Figure
5 of 5

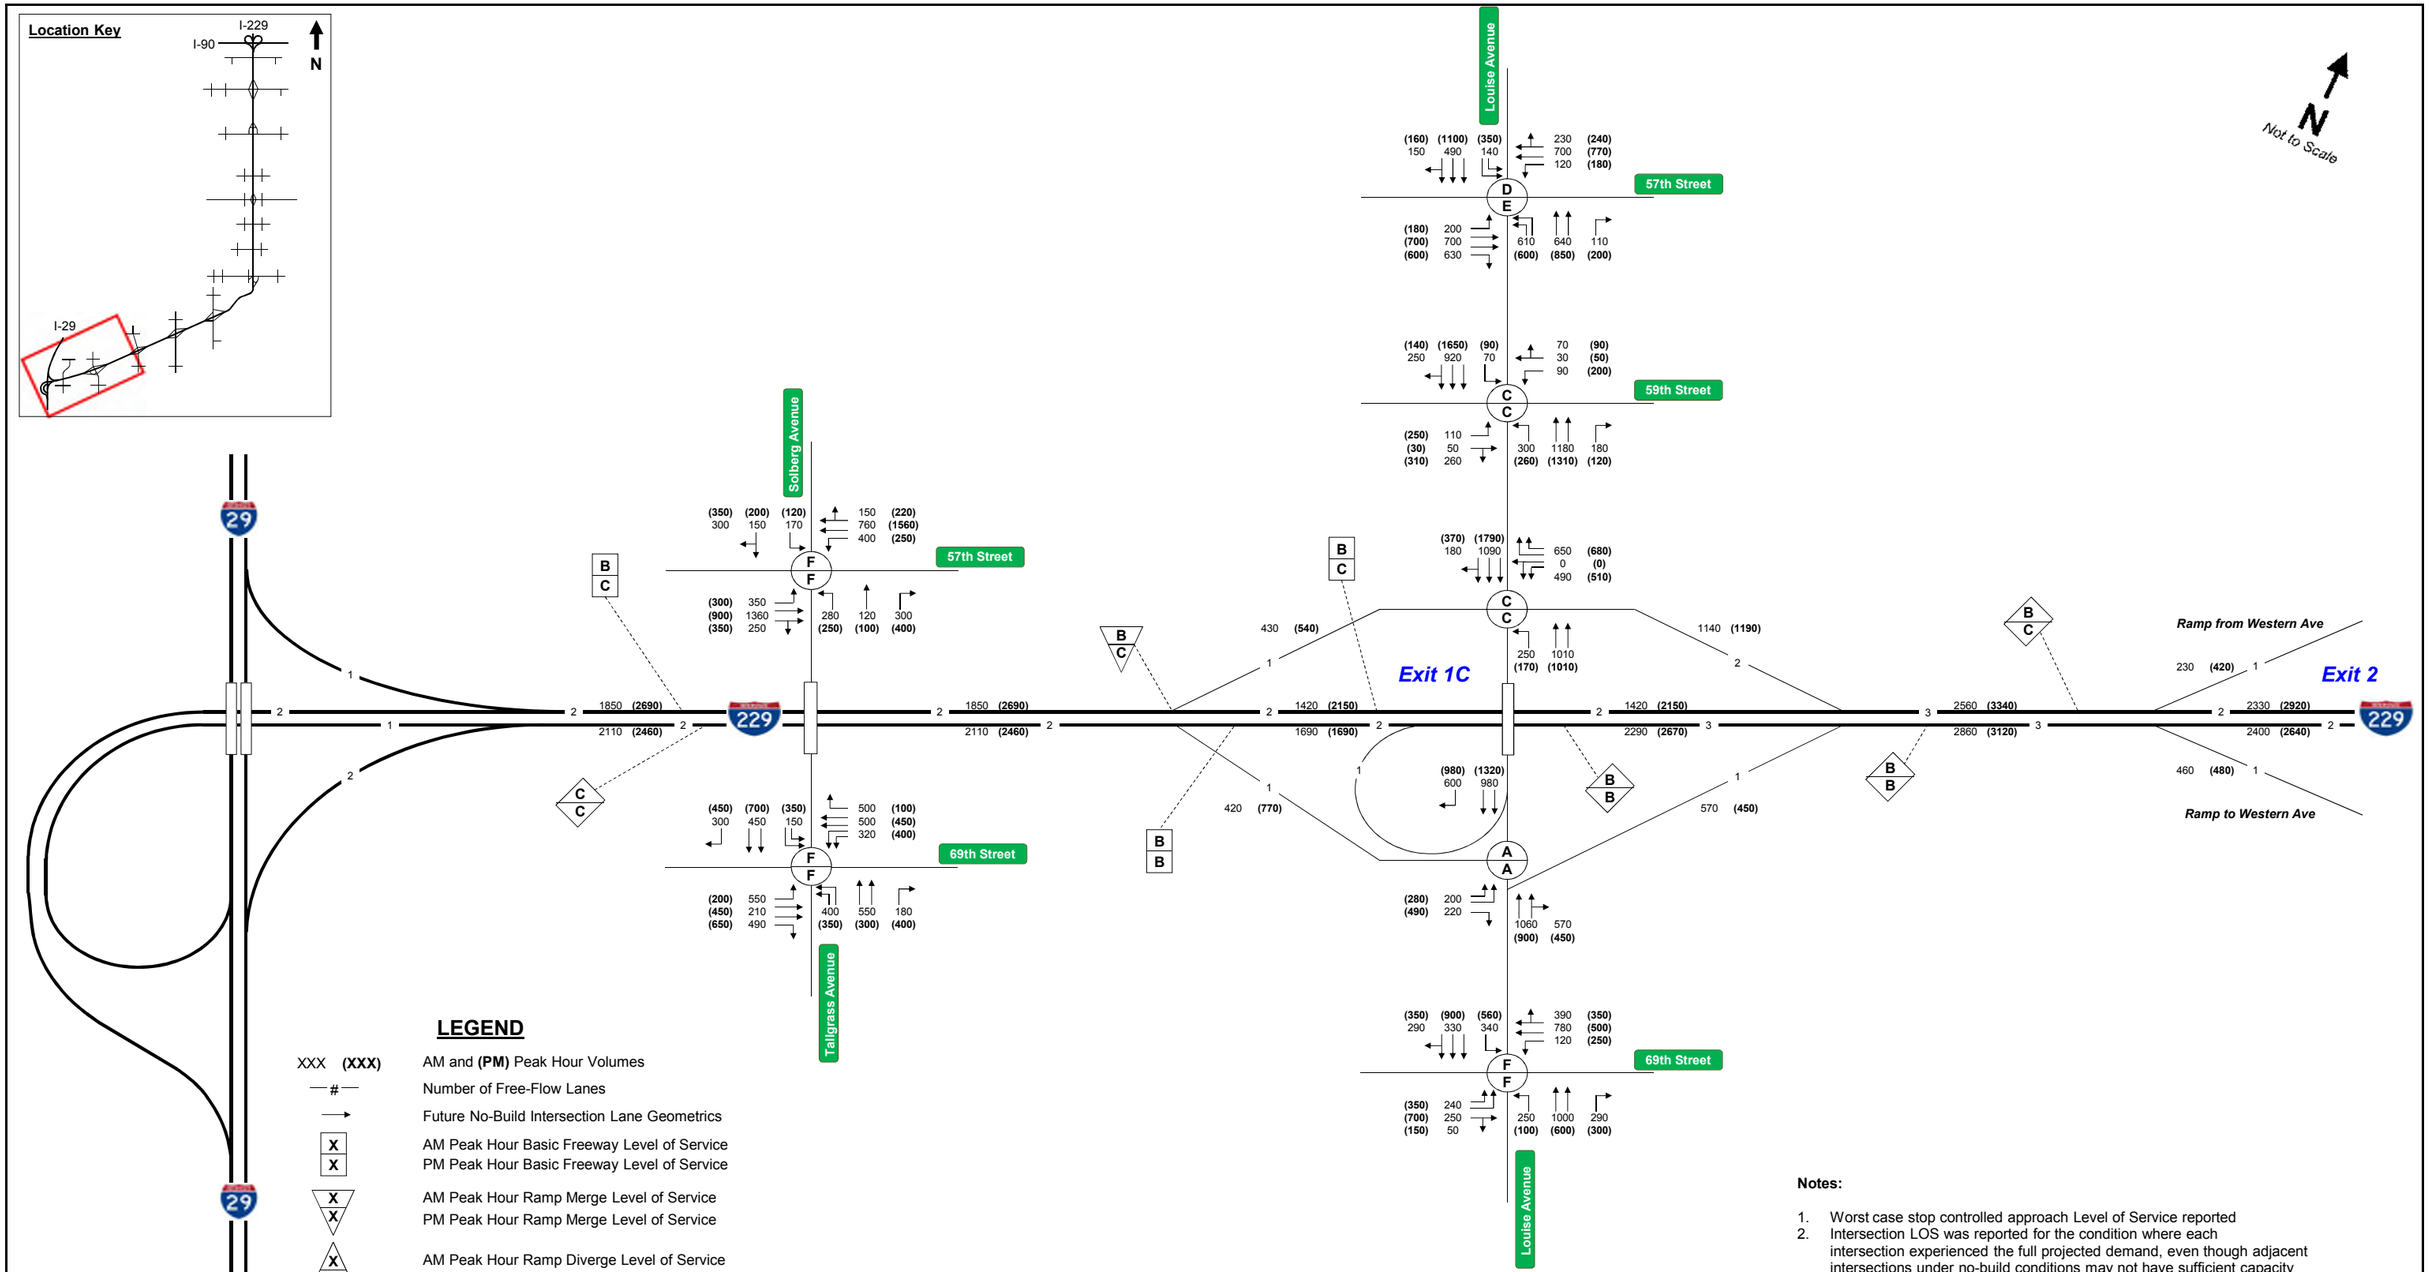

LEGEND

XXX (XXX)	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Future No-Build Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:


1. Worst case stop controlled approach Level of Service reported
2. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity to convey all projected demand.

2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
I-229 Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
1

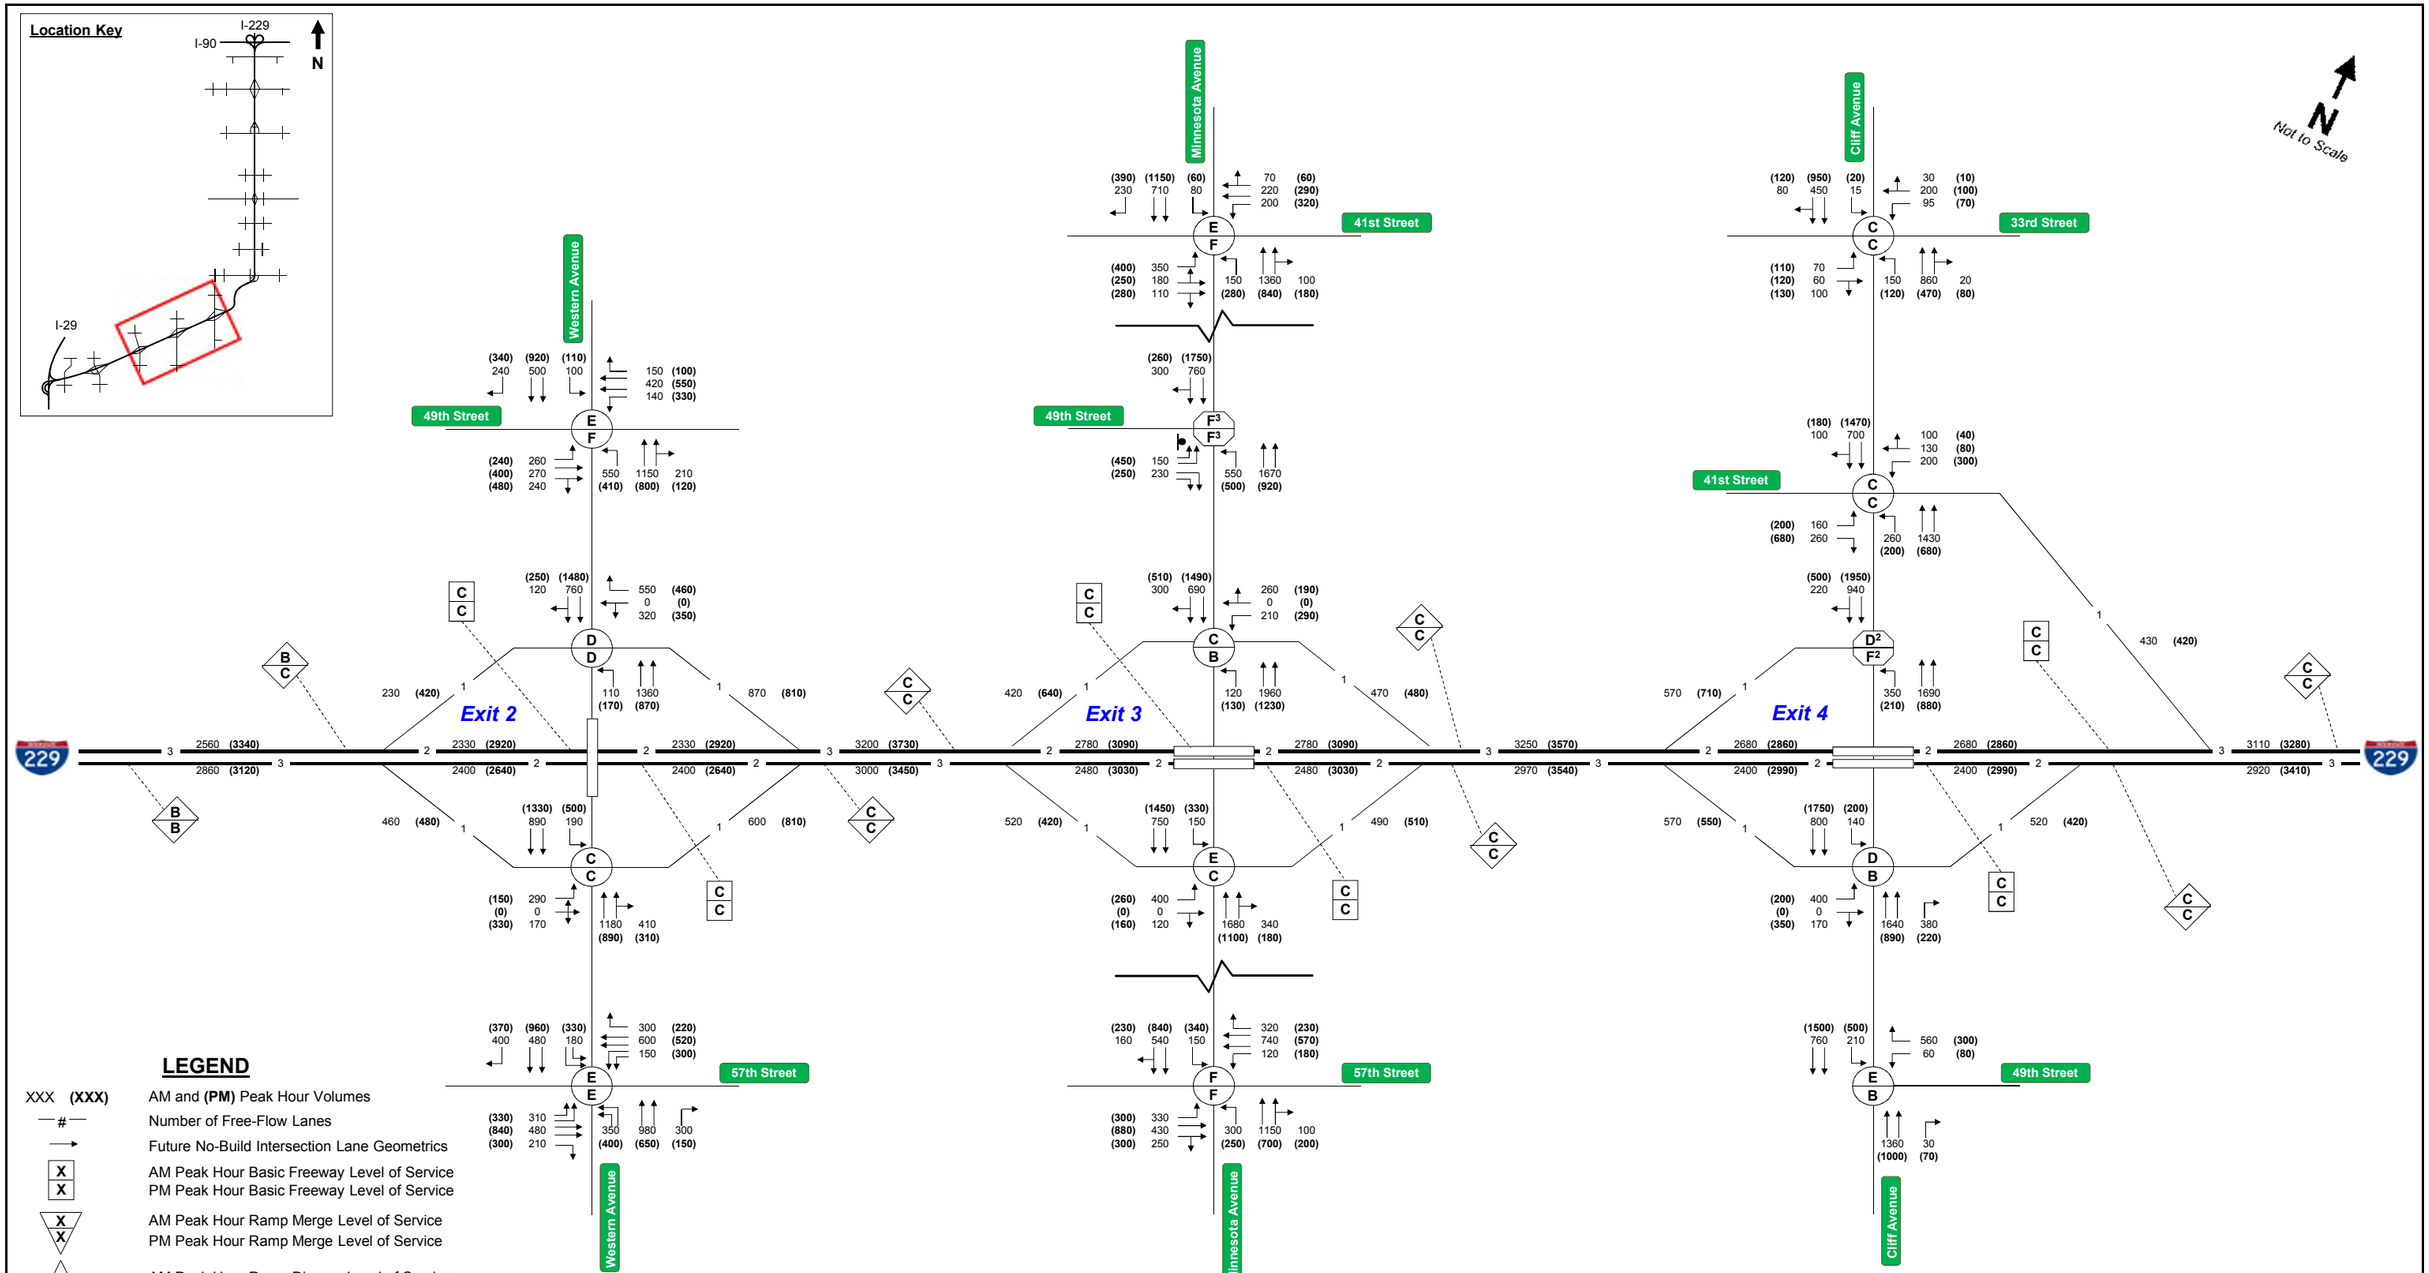

Notes:


1. Worst case stop controlled approach Level of Service reported
2. Worst case stop controlled movement Level of Service reported
3. Level of Service reported from HCS 2010 analysis using a single left-turn lane and a single right-turn lane due to limitations of HCS 2010 software.
4. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity

2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
I-229 Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
2

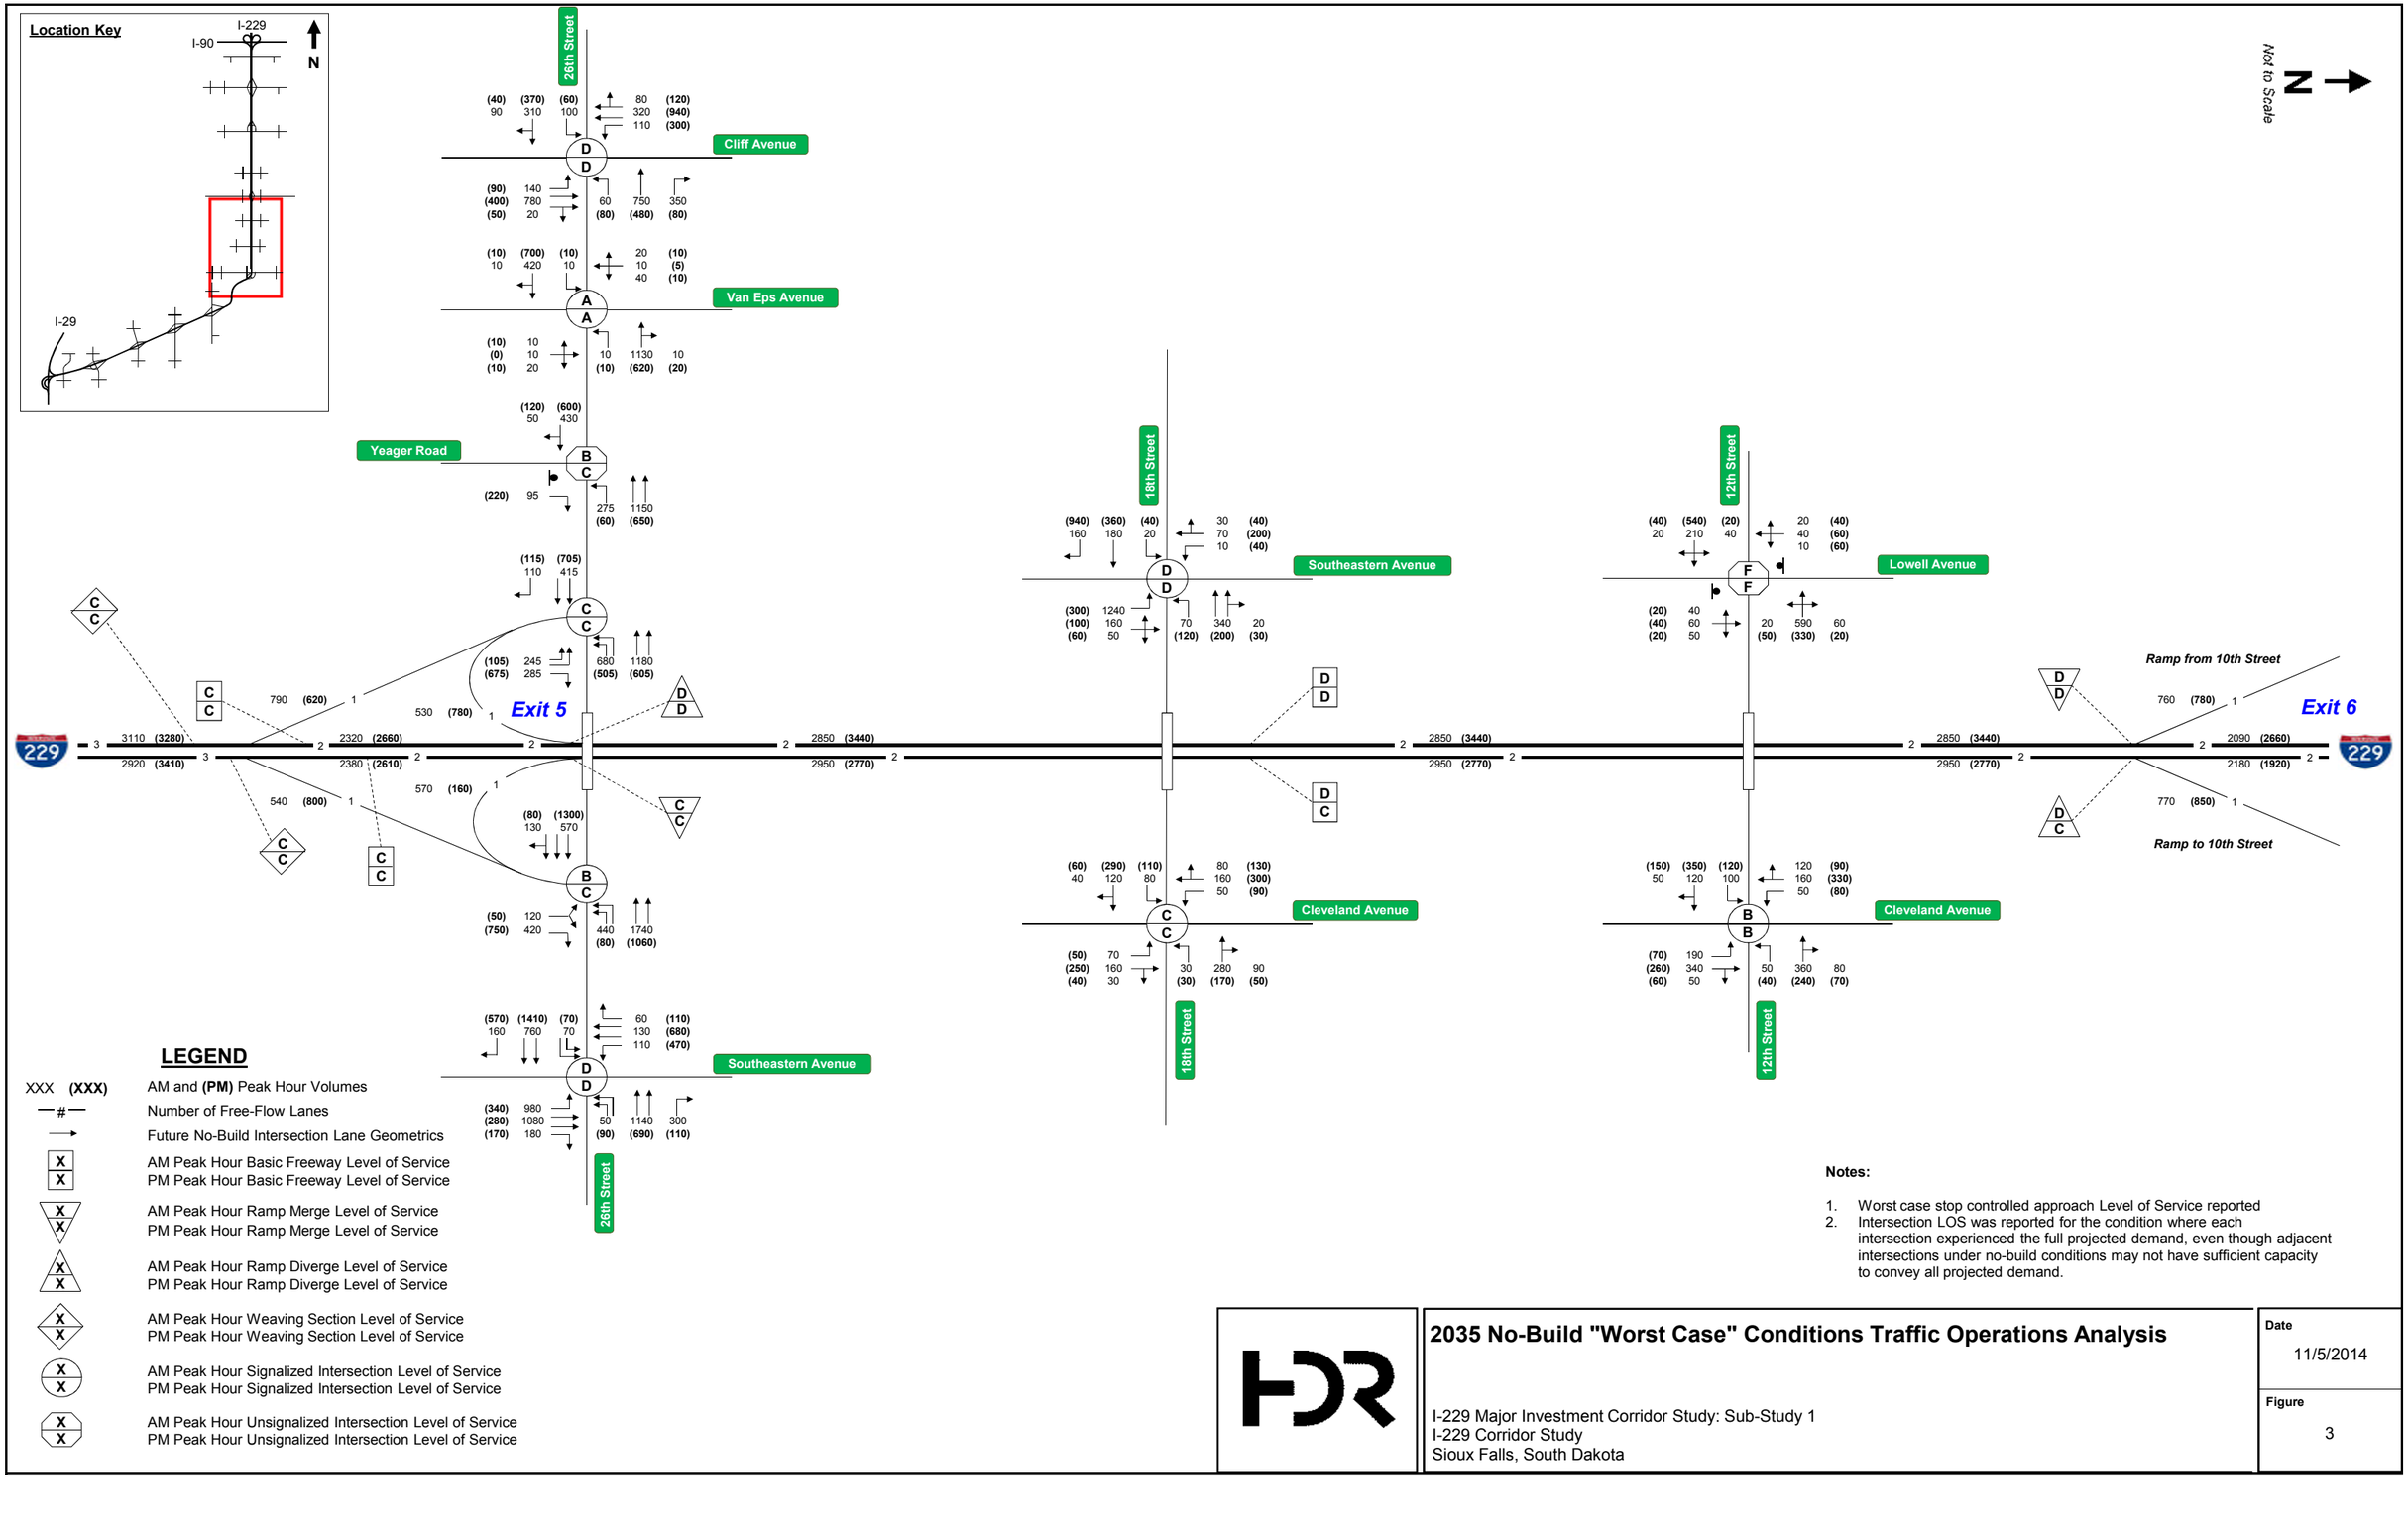

Notes:


1. Worst case stop controlled approach Level of Service reported
2. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity to convey all projected demand.

2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
I-229 Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
3

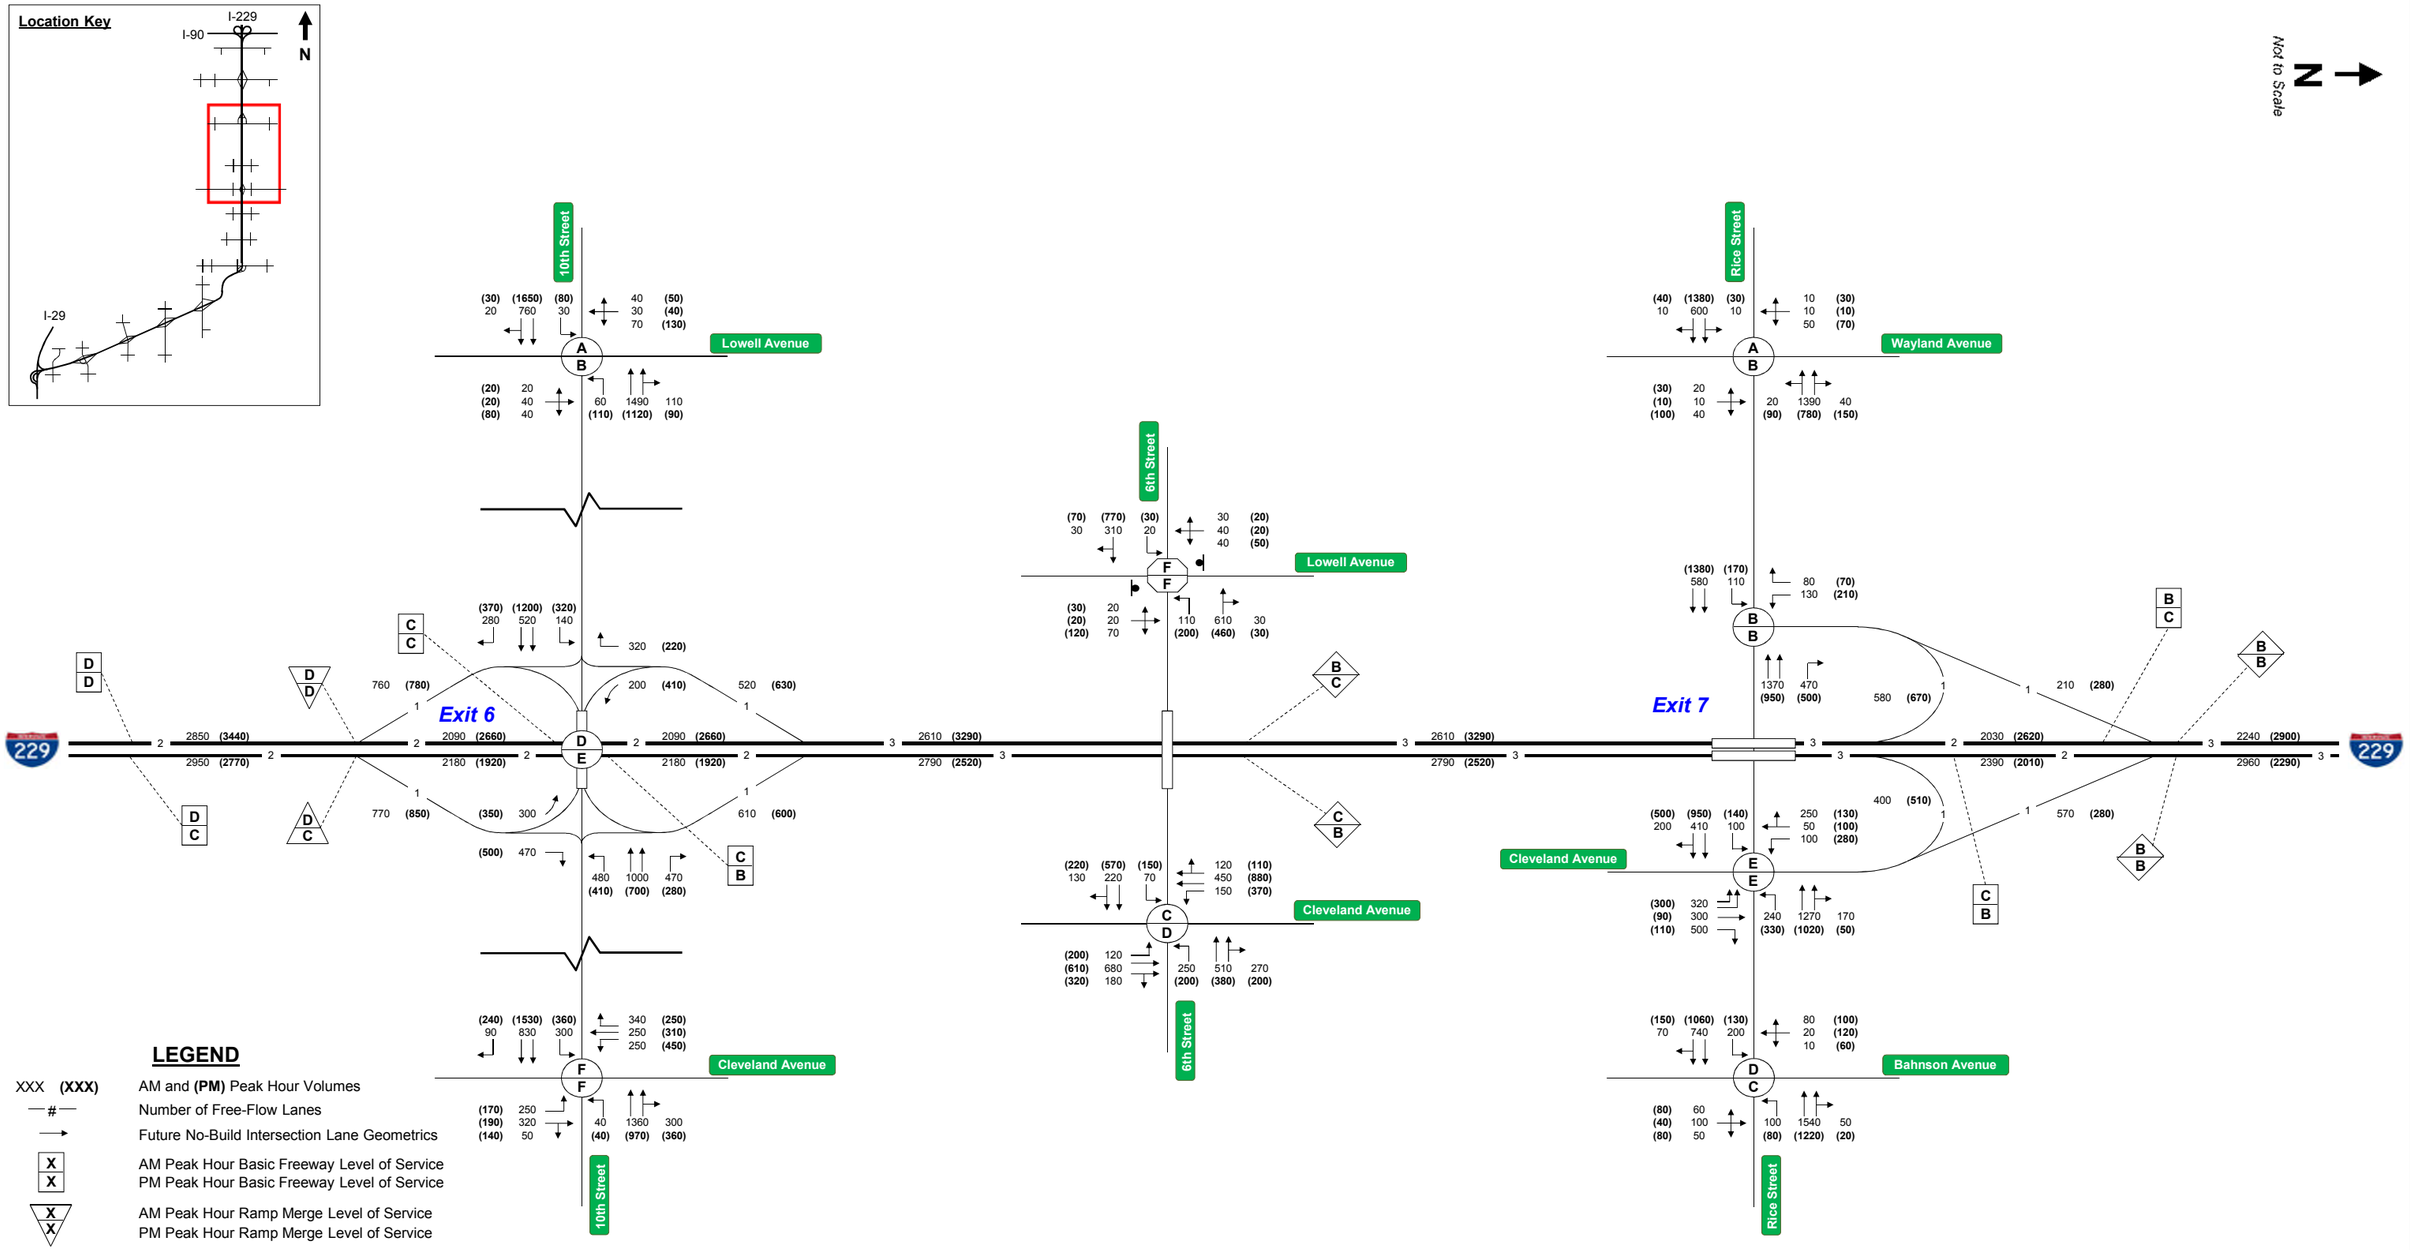

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Future No-Build Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:


1. Worst case stop controlled approach Level of Service reported
2. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity to convey all projected demand.

2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
I-229 Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
4

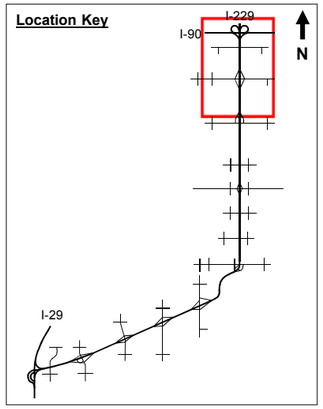

Not to Scale

N

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Future No-Build Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:


1. Worst case stop controlled approach Level of Service reported
2. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity to convey all projected demand.

2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 1
I-229 Corridor Study
Sioux Falls, South Dakota


Date
11/5/2014

Figure
5

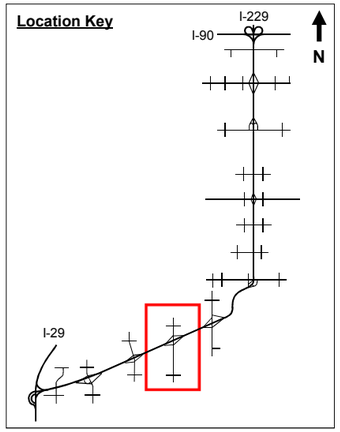

N

Not to Scale

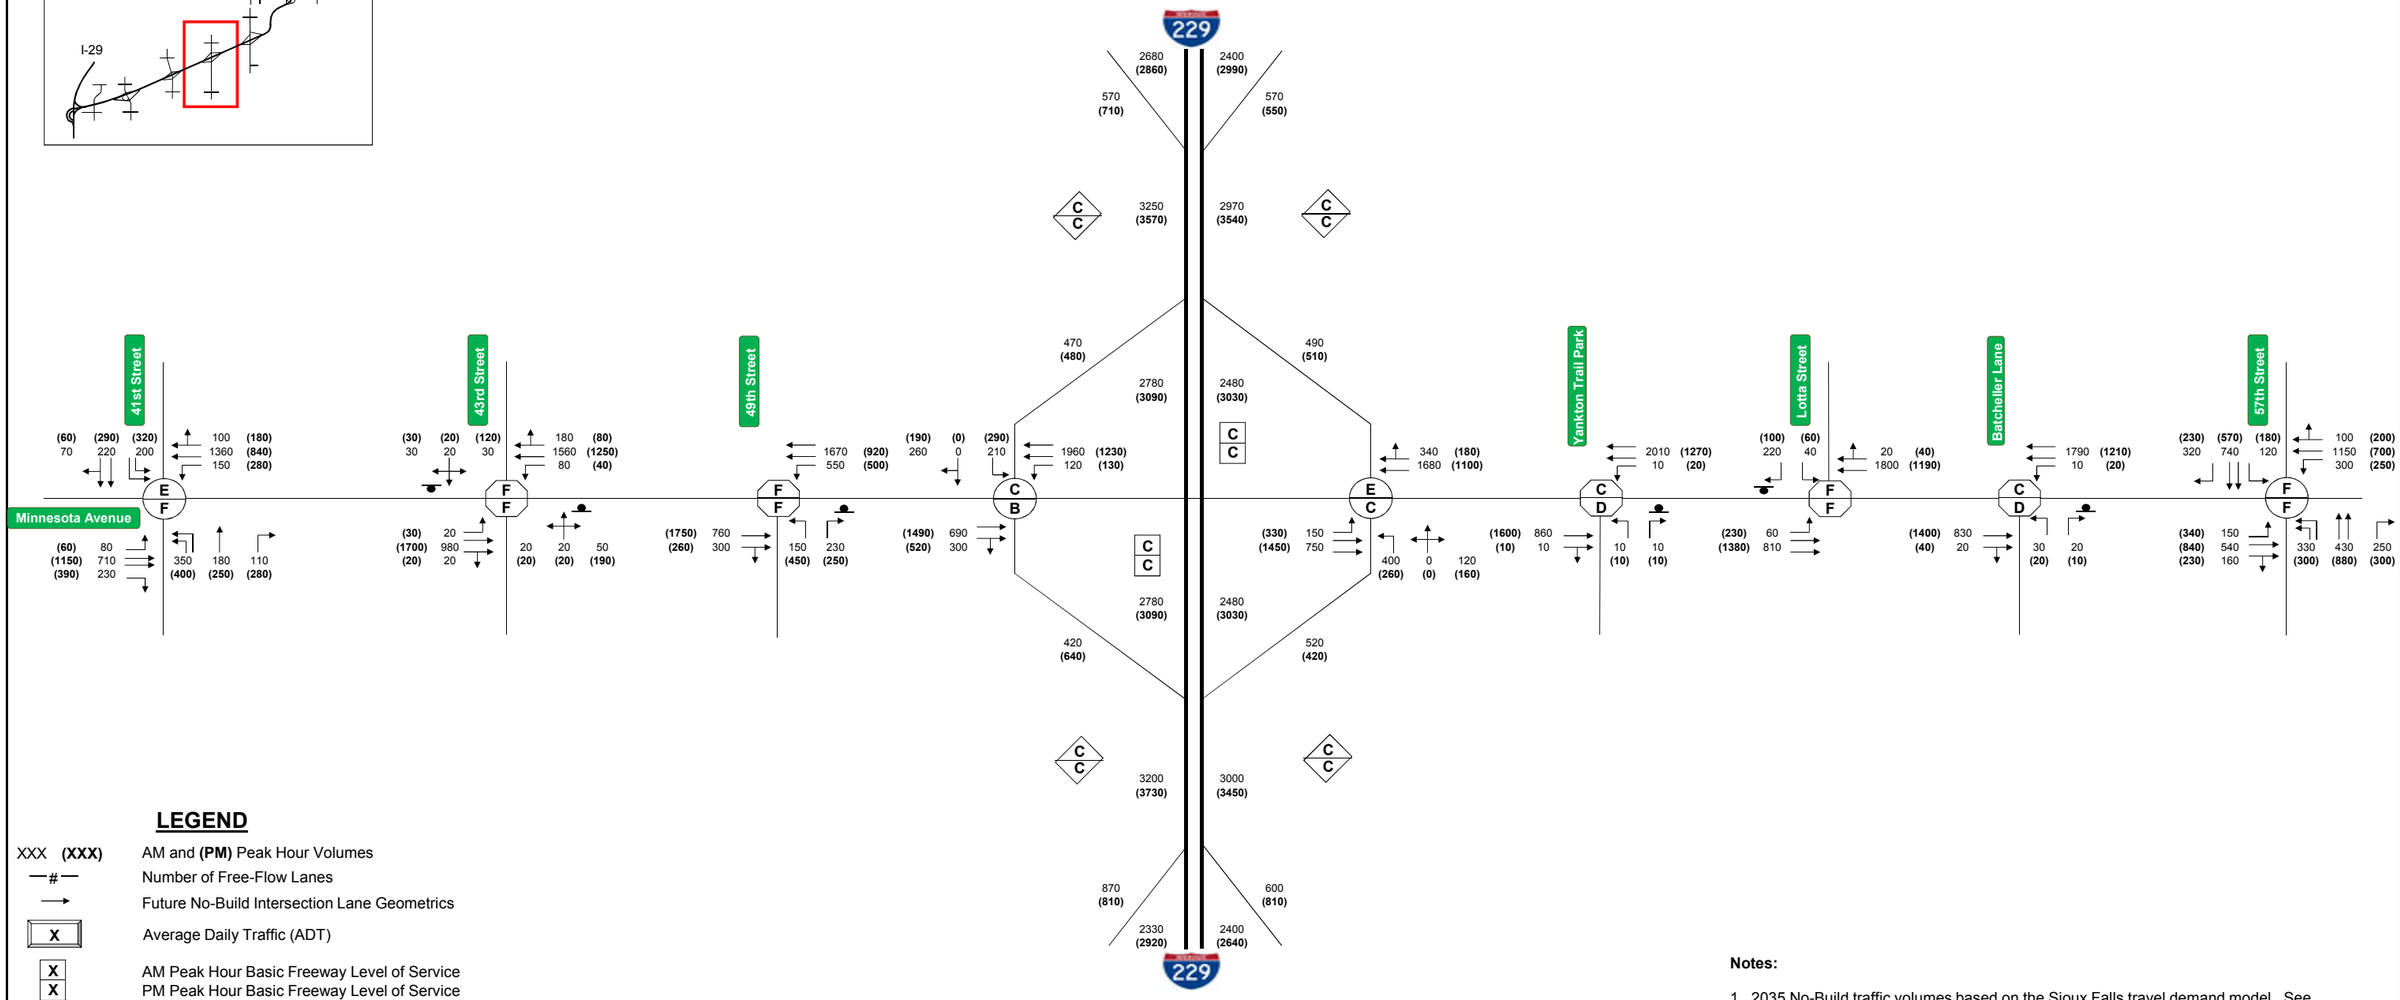

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Future No-Build Intersection Lane Geometrics
X	Average Daily Traffic (ADT)
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. 2035 No-Build traffic volumes based on the Sioux Falls travel demand model. See report text for additional information on volume development.
2. Worst case stop controlled approach Level of Service reported


HRGreen

2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 2
Minnesota Avenue Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
6

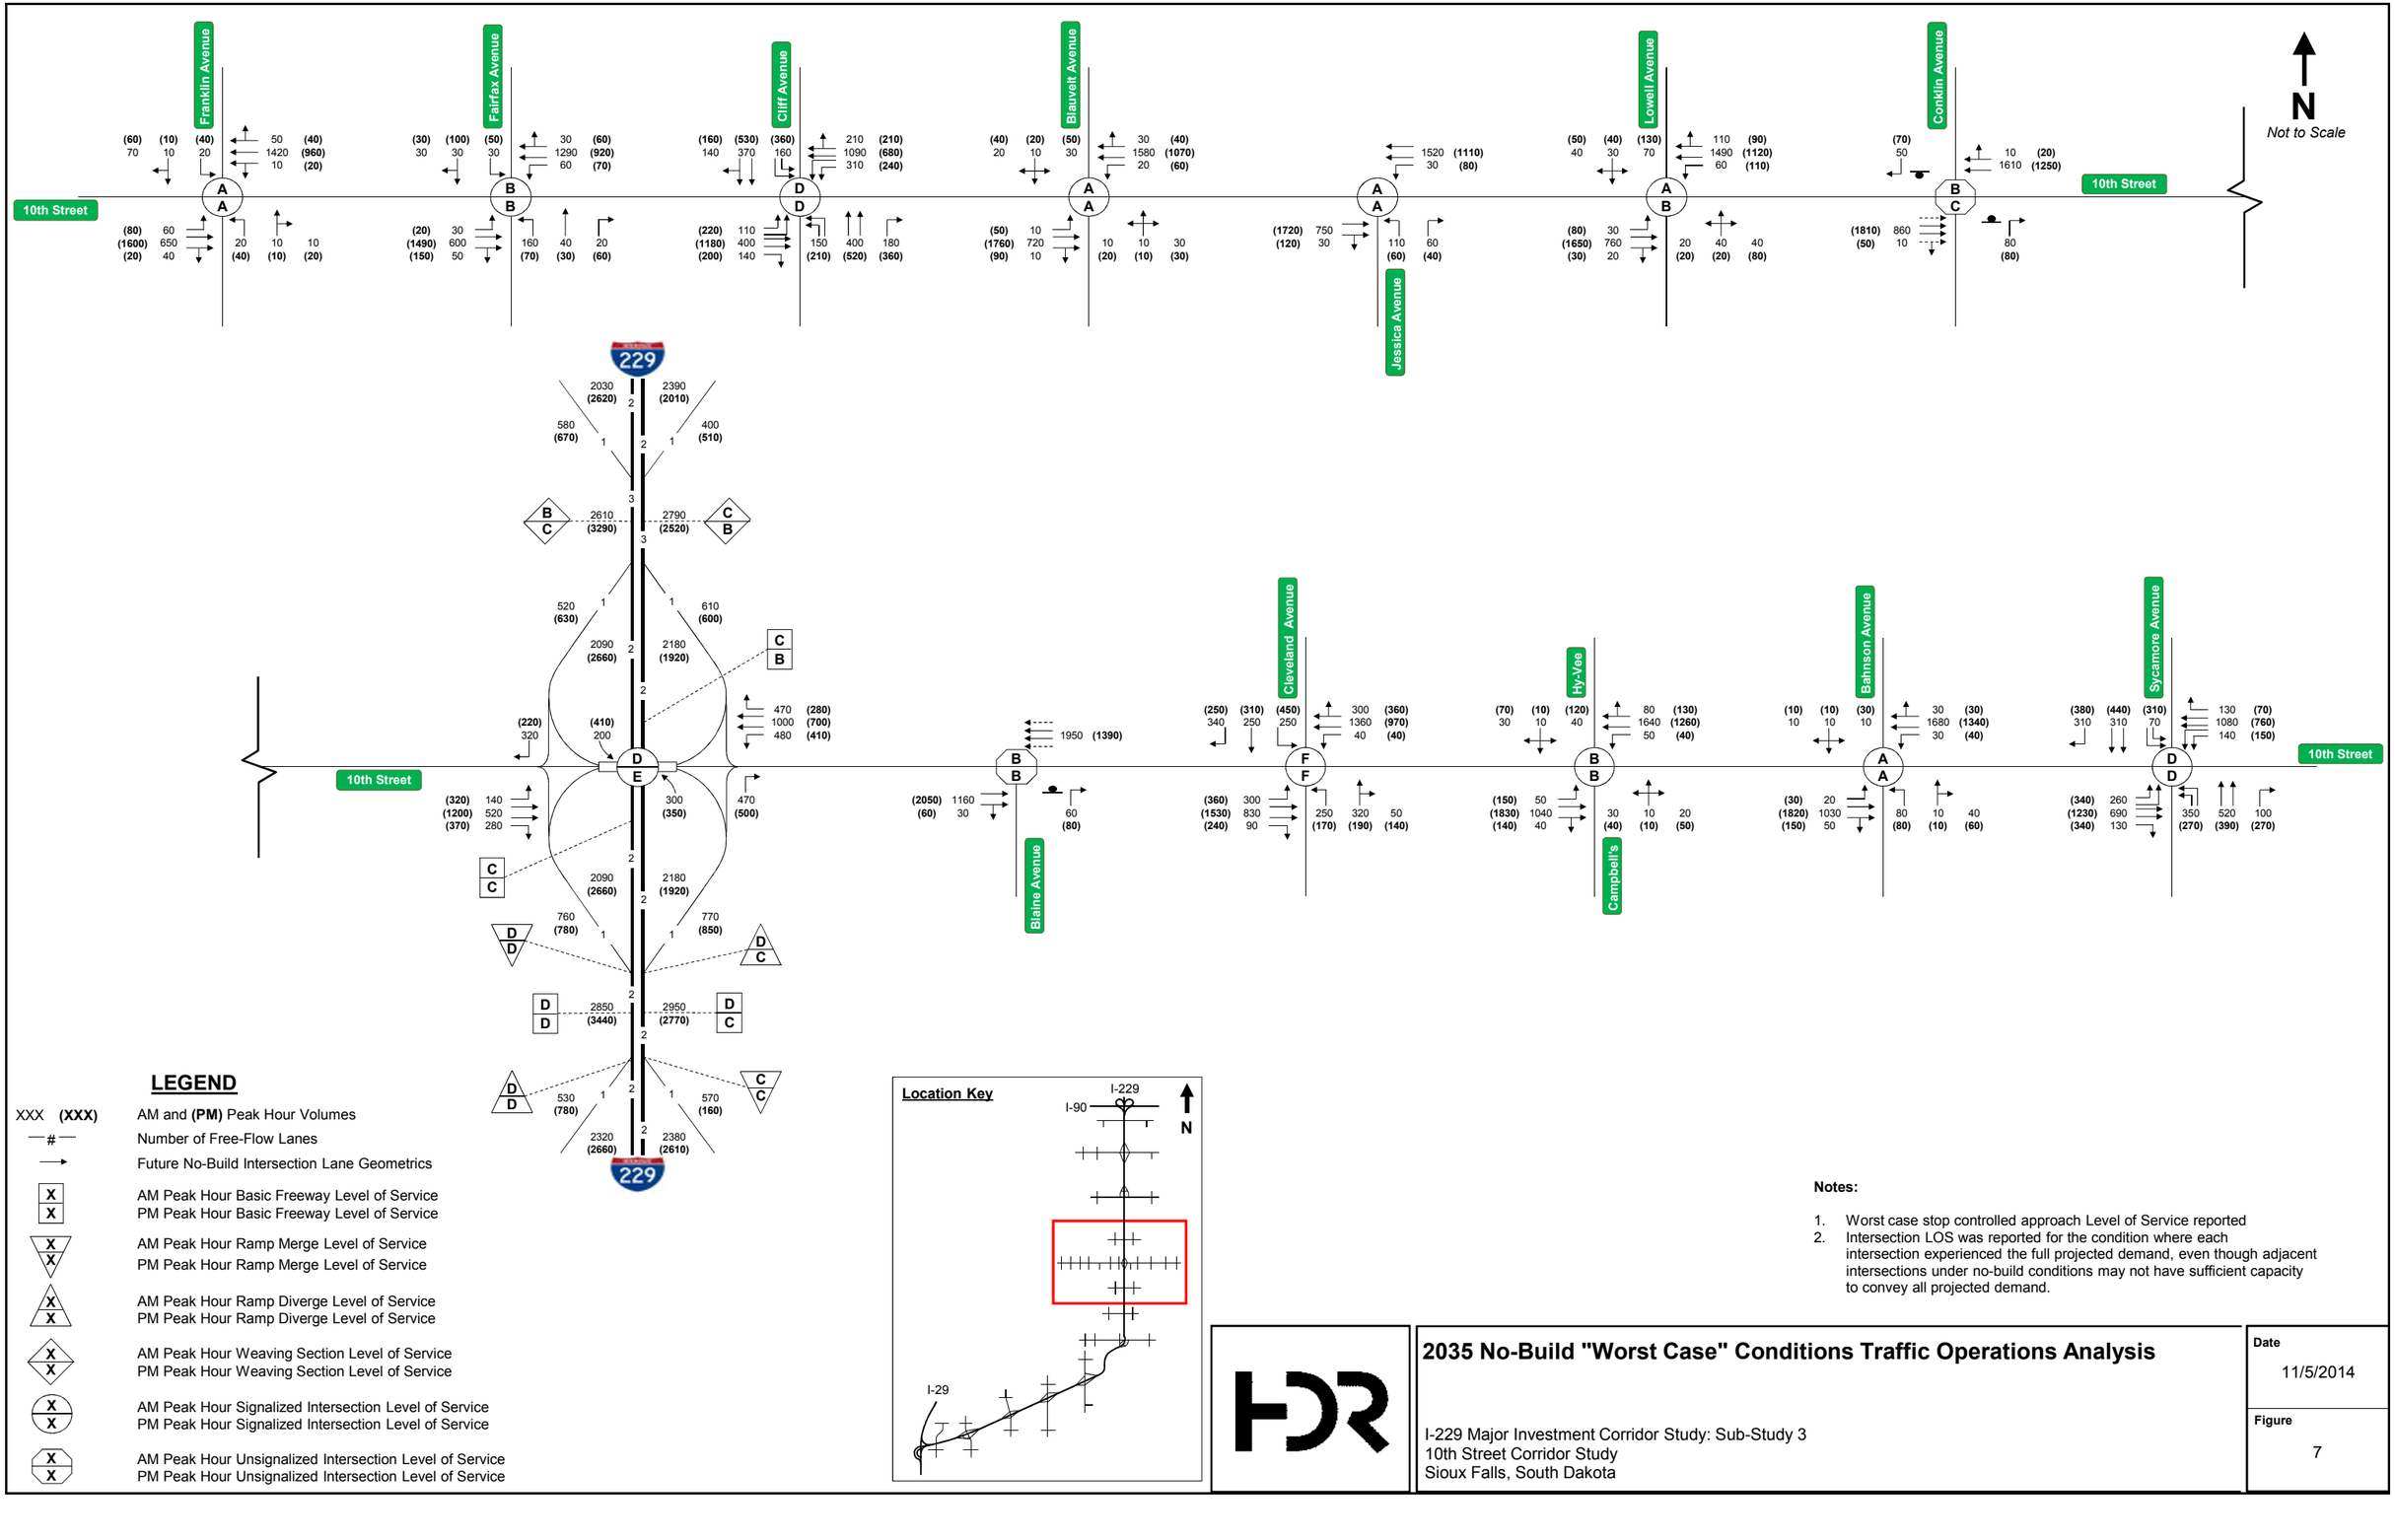

LEGEND

XXX (XXX)	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Future No-Build Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Worst case stop controlled approach Level of Service reported
2. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity to convey all projected demand.


2035 No-Build "Worst Case" Conditions Traffic Operations Analysis

I-229 Major Investment Corridor Study: Sub-Study 3
10th Street Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
7

Location Key

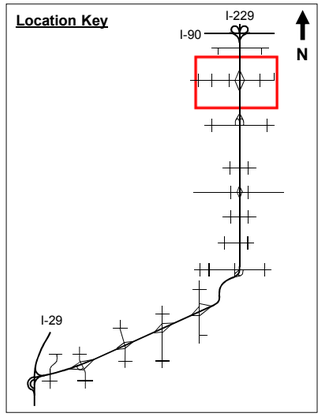

N

Not to Scale

LEGEND

XXX **(XXX)**	AM and **(PM)** Peak Hour Volumes
—#—	Number of Free-Flow Lanes
→	Future No-Build Intersection Lane Geometrics
X / X	AM Peak Hour Basic Freeway Level of Service PM Peak Hour Basic Freeway Level of Service
X / X	AM Peak Hour Ramp Merge Level of Service PM Peak Hour Ramp Merge Level of Service
X / X	AM Peak Hour Ramp Diverge Level of Service PM Peak Hour Ramp Diverge Level of Service
X / X	AM Peak Hour Weaving Section Level of Service PM Peak Hour Weaving Section Level of Service
X / X	AM Peak Hour Signalized Intersection Level of Service PM Peak Hour Signalized Intersection Level of Service
X / X	AM Peak Hour Unsignalized Intersection Level of Service PM Peak Hour Unsignalized Intersection Level of Service

Notes:

1. Worst case stop controlled approach Level of Service reported
2. Intersection LOS was reported for the condition where each intersection experienced the full projected demand, even though adjacent intersections under no-build conditions may not have sufficient capacity to convey all projected demand.


2035 No-Build "Worst Case" Conditions Traffic Operations Analysis


I-229 Major Investment Corridor Study: Sub-Study 4
Benson Road Corridor Study
Sioux Falls, South Dakota

Date
11/5/2014

Figure
8

Appendix B
Figures

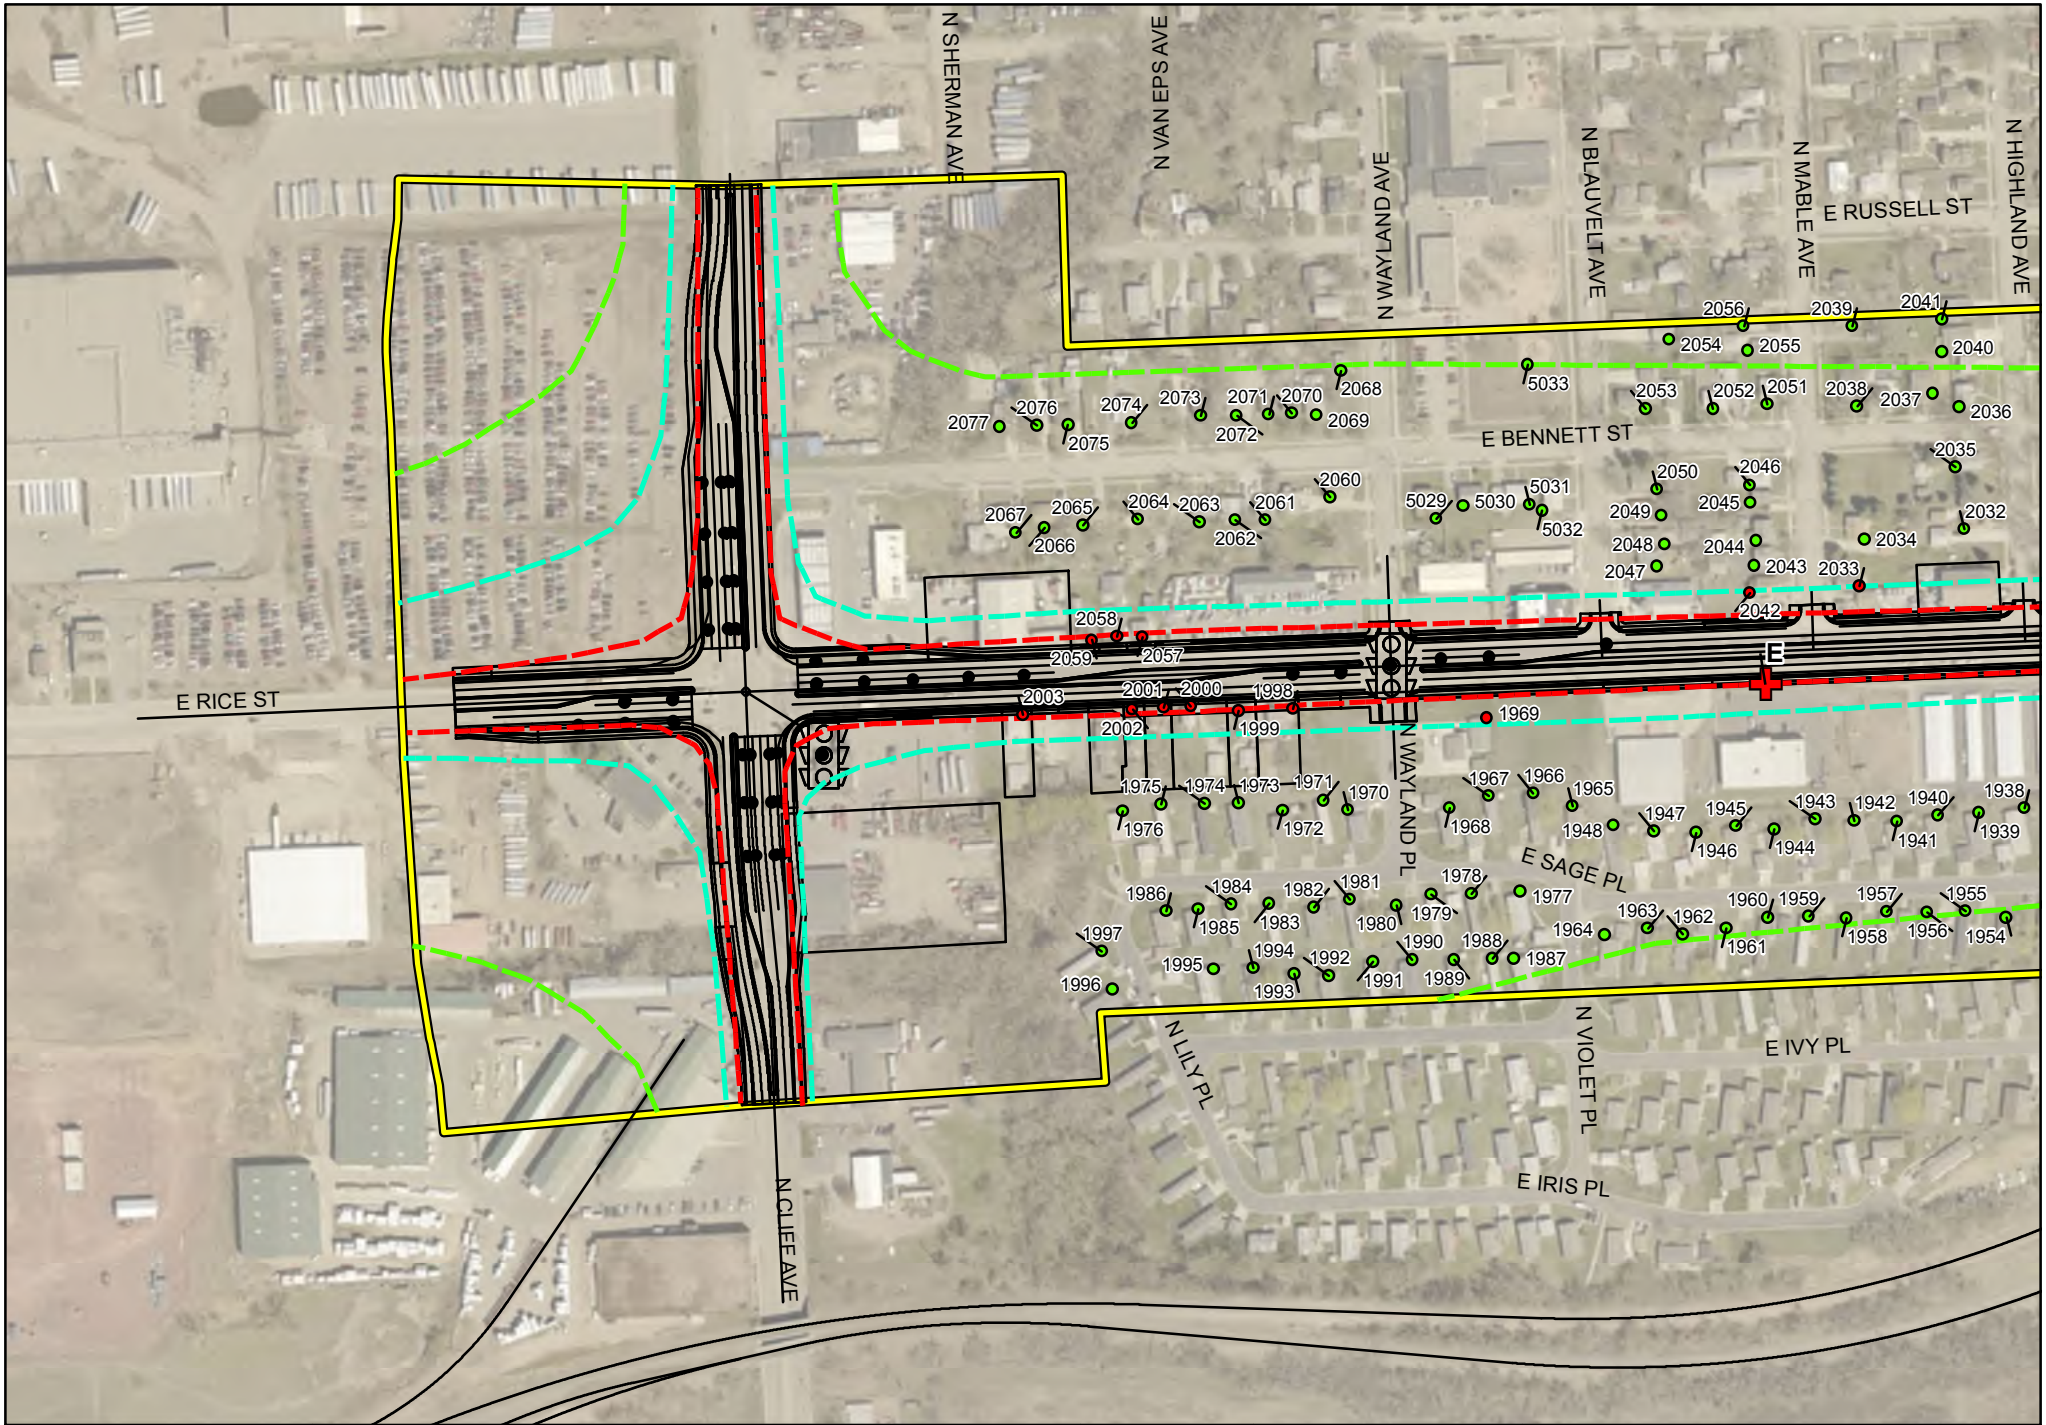


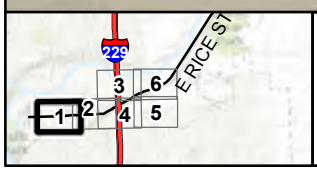



Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2 with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2 with Rice C-2

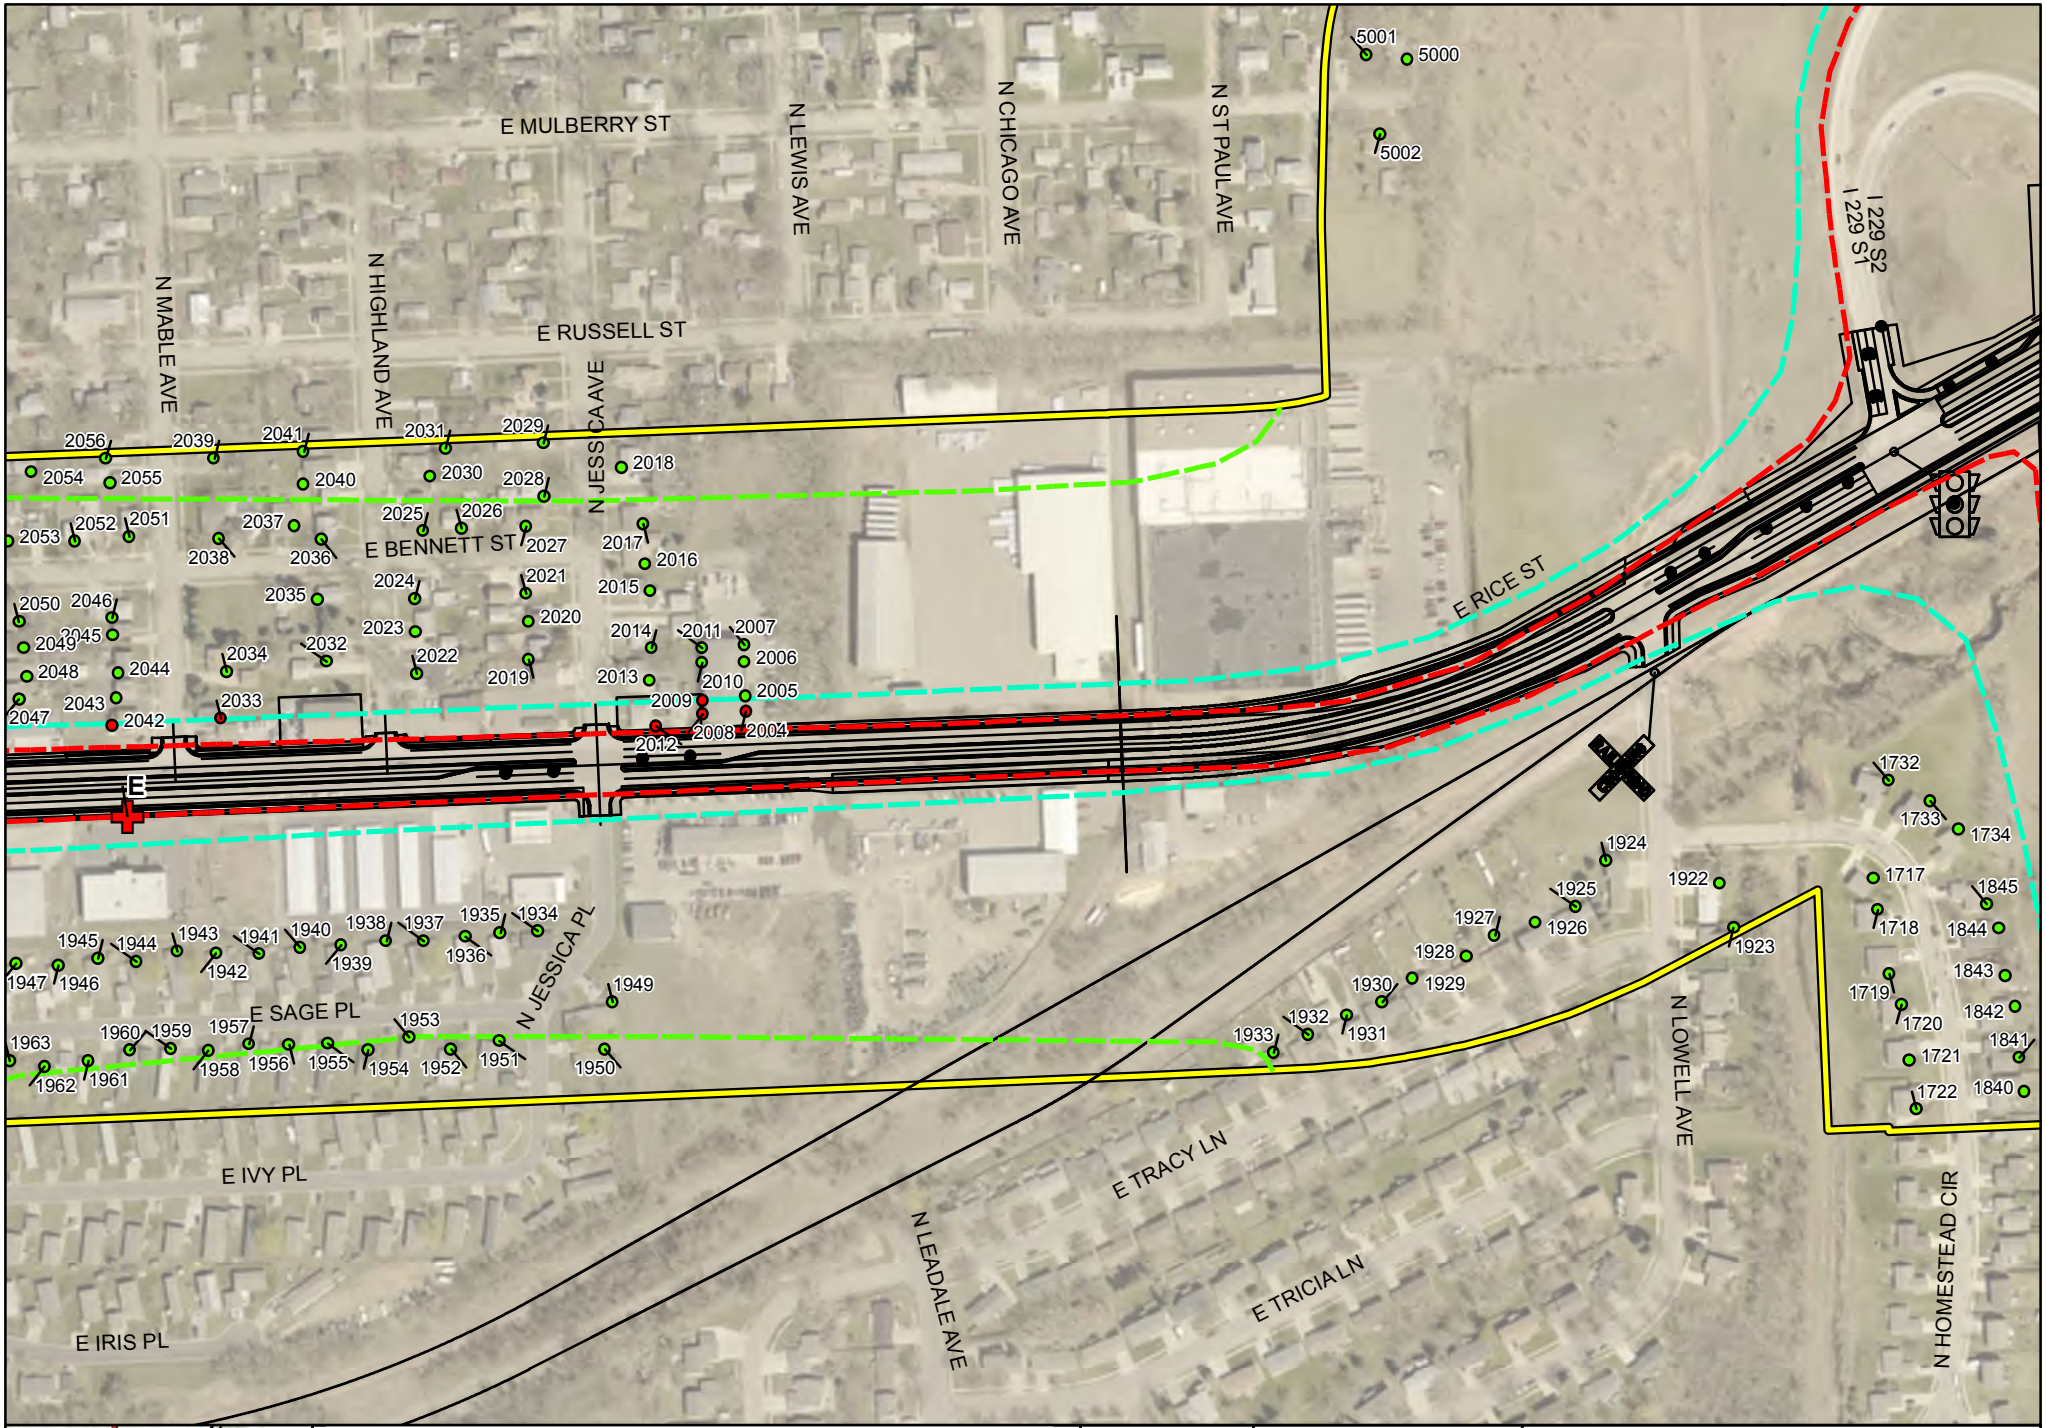
E MULBERRY ST
N LEWIS AVE
N CHICAGO AVE
N ST PAUL AVE
N MABLE AVE
N HIGHLAND AVE
E RUSSELL ST
N JESSICA AVE
E BENNETT ST
E RICE ST
I 229 S2
I 229 S1
N JESSICA PL
E SAGE PL
N LOWELL AVE
E IVY PL
E TRACY LN
N LEADALE AVE
E TRICIA LN
N HOMESTEAD CIR
E IRIS PL
5001
5000
5002
2056
2039
2041
2031
2029
2018
2054
2055
2040
2030
2028
2053
2052
2051
2037
2025
2026
2038
2036
2027
2017
2016
2024
2021
2035
2015
2050
2046
2023
2020
2049
2045
2014
2011
2007
2034
2032
2022
2006
2048
2044
2019
2013
2010
2005
2043
2033
2009
2047
2042
2008
2004
2012
E
1732
1733
1734
1924
1922
1717
1845
1925
1927
1926
1718
1844
1928
1923
1843
1930
1929
1719
1842
1720
1932
1931
1933
1721
1841
1722
1840
1945
1944
1943
1941
1940
1938
1937
1935
1934
1936
1947
1946
1942
1939
1949
1963
1960
1959
1957
1953
1962
1961
1958
1956
1955
1954
1952
1951
1950
229
3
6
1
2
4
5
E RICE ST
Legend
Non-Impacted Receptor
Impacted Receptor
Noise Monitoring Location
56 dBA Contour Line
66 dBA Contour Line
71 dBA Contour Line
Noise Study Area
Sub-Study 5 Concept Linework Alternative Rice-2 with Rice C-2
N
HDR
I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2 with Rice C-2

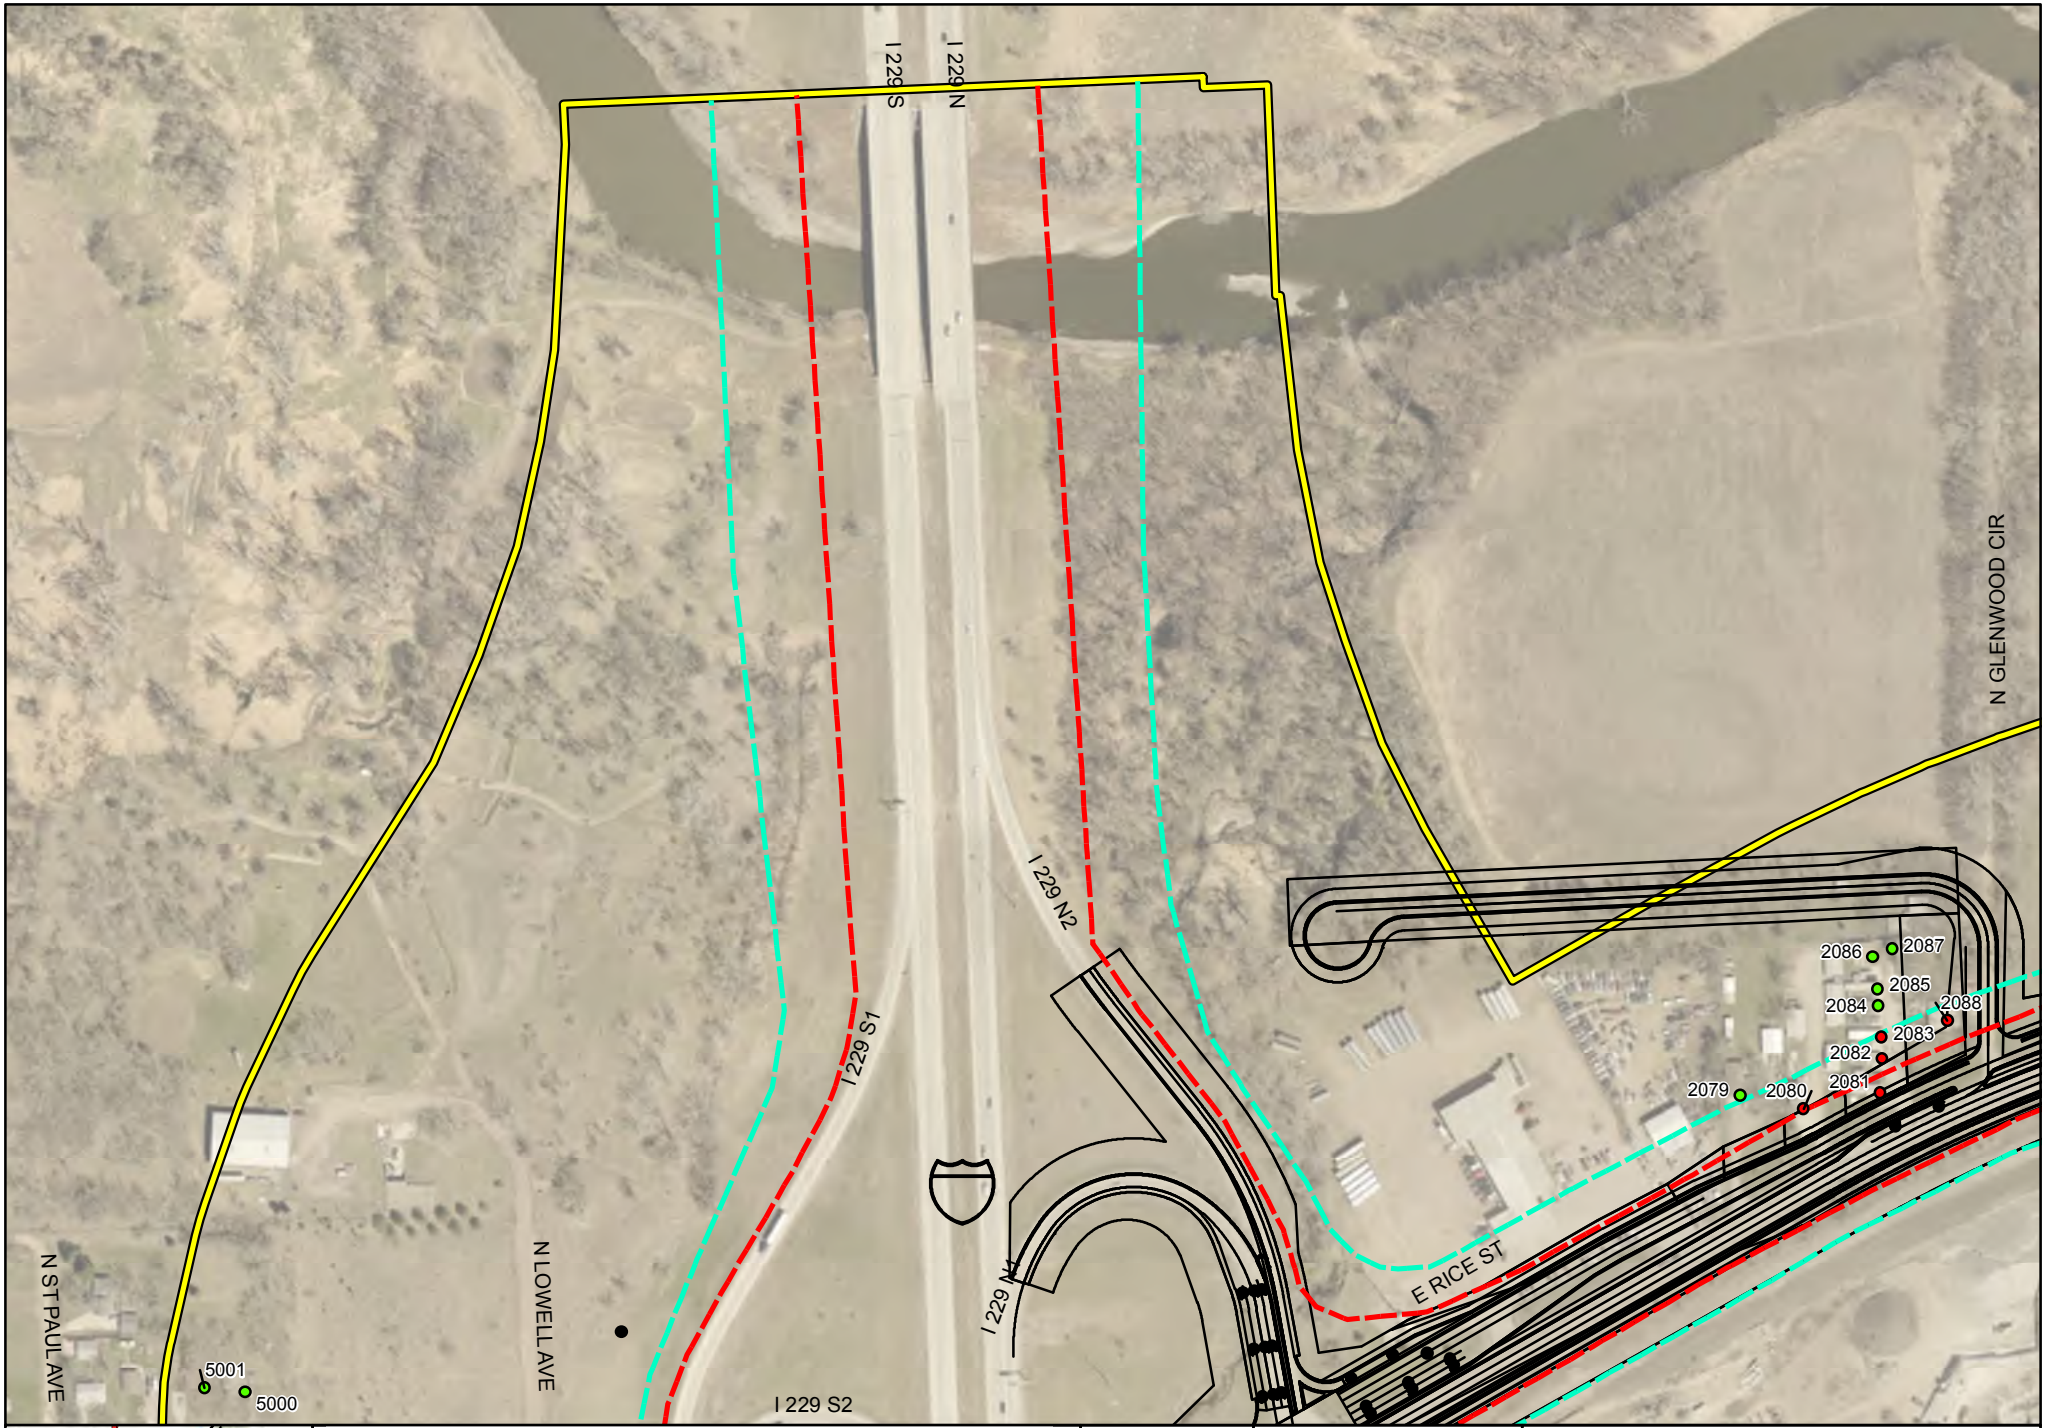


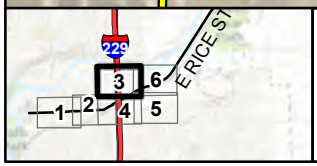


Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2 with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2 with Rice C-2

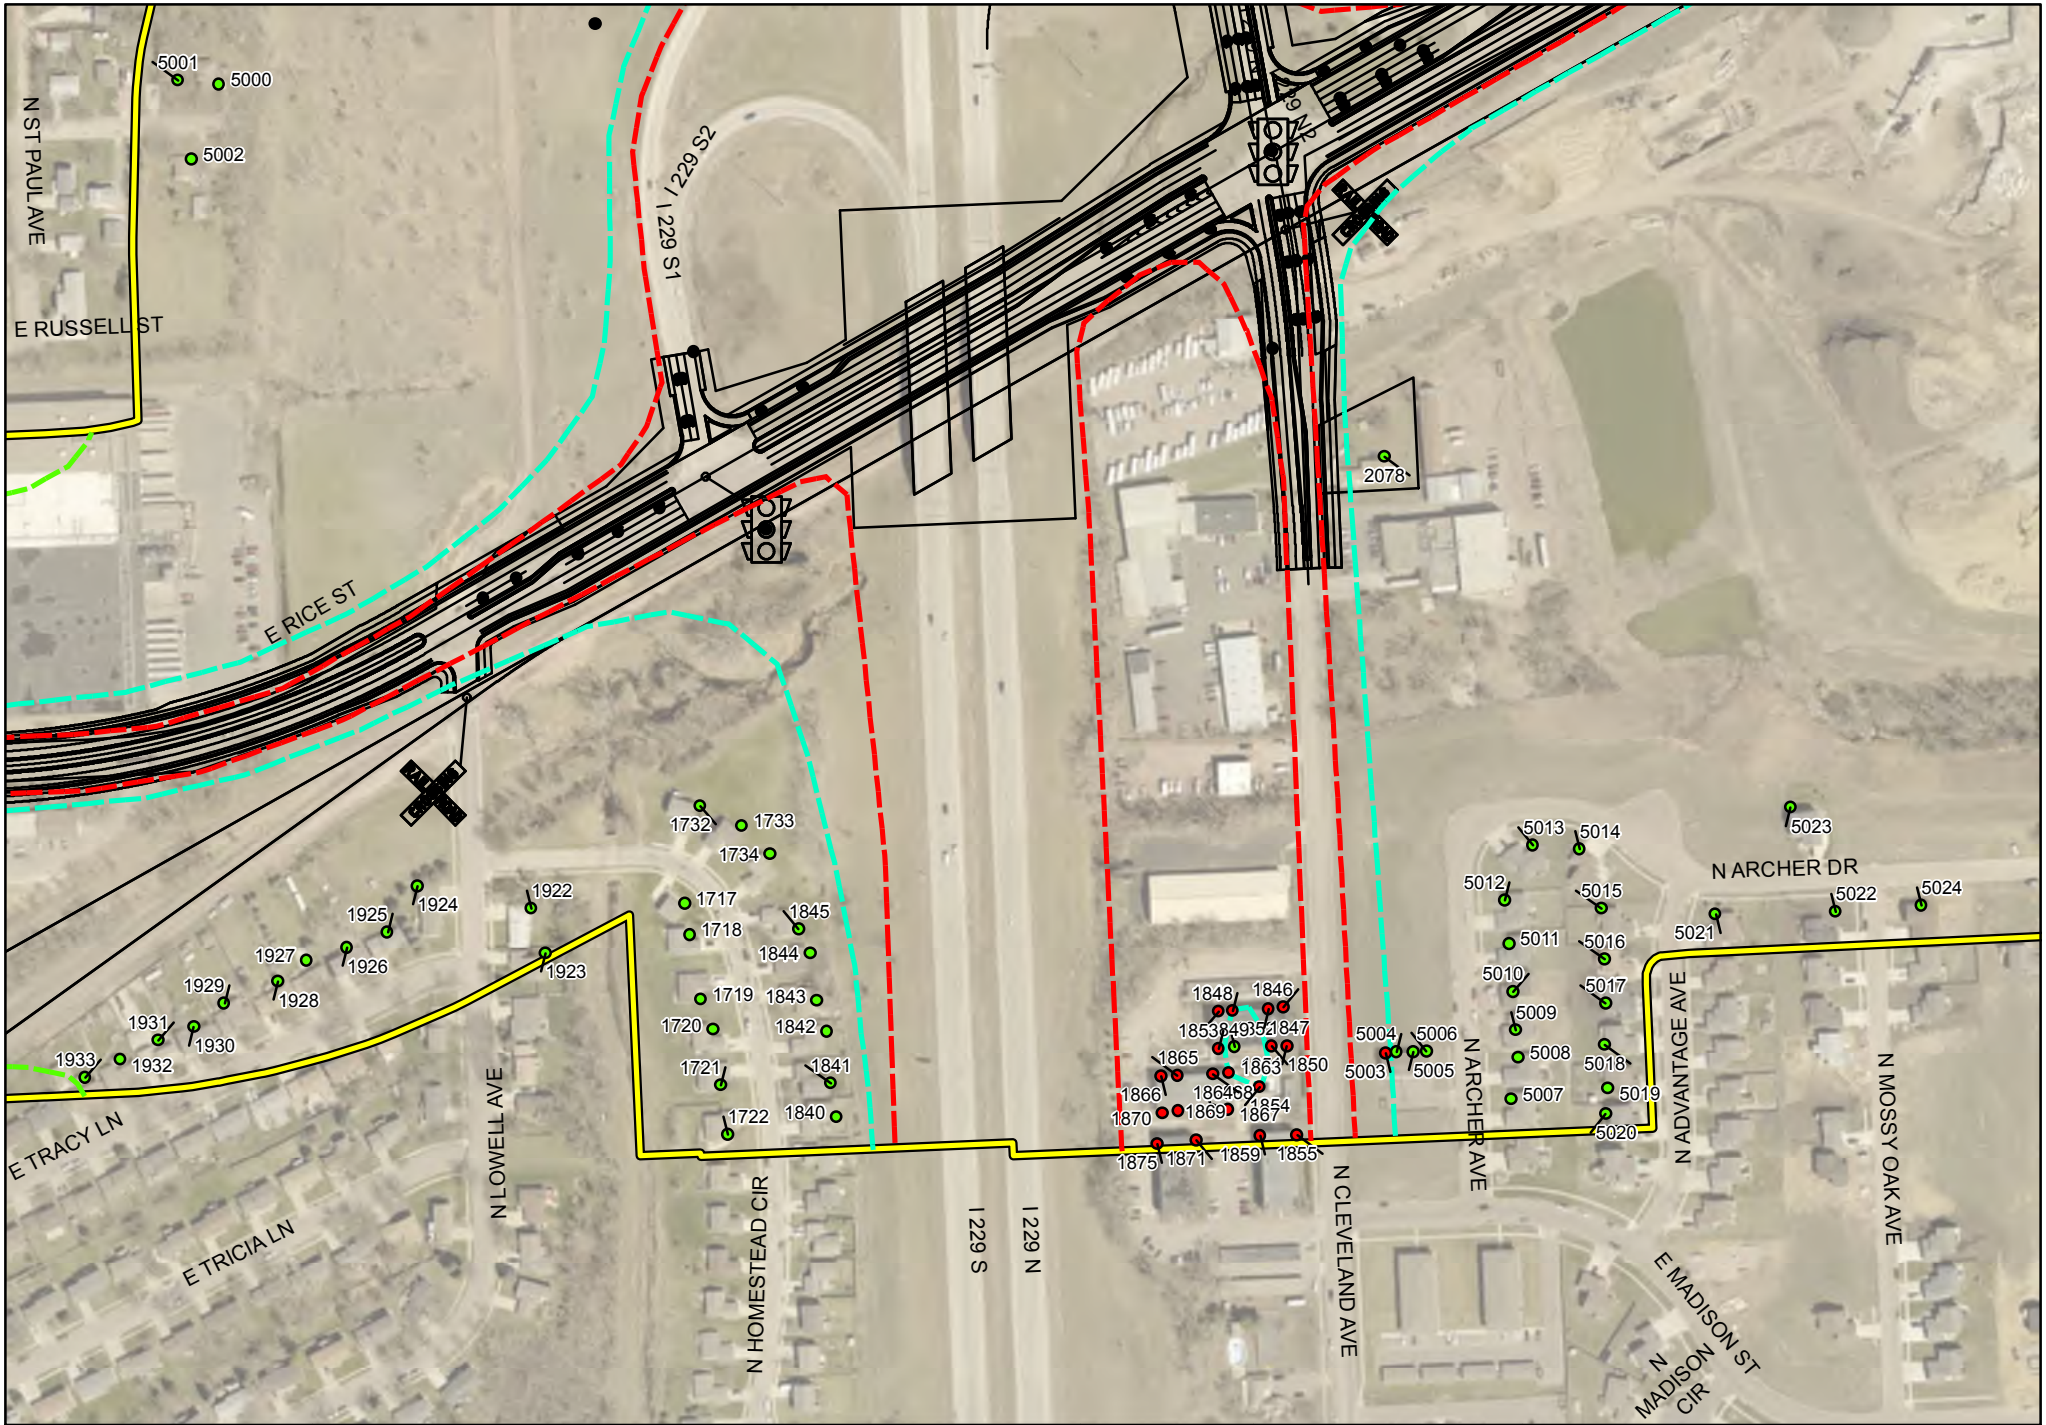


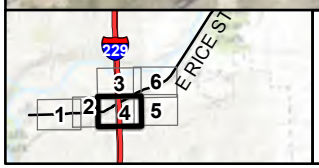

Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2 with Rice C-2


I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2 with Rice C-2

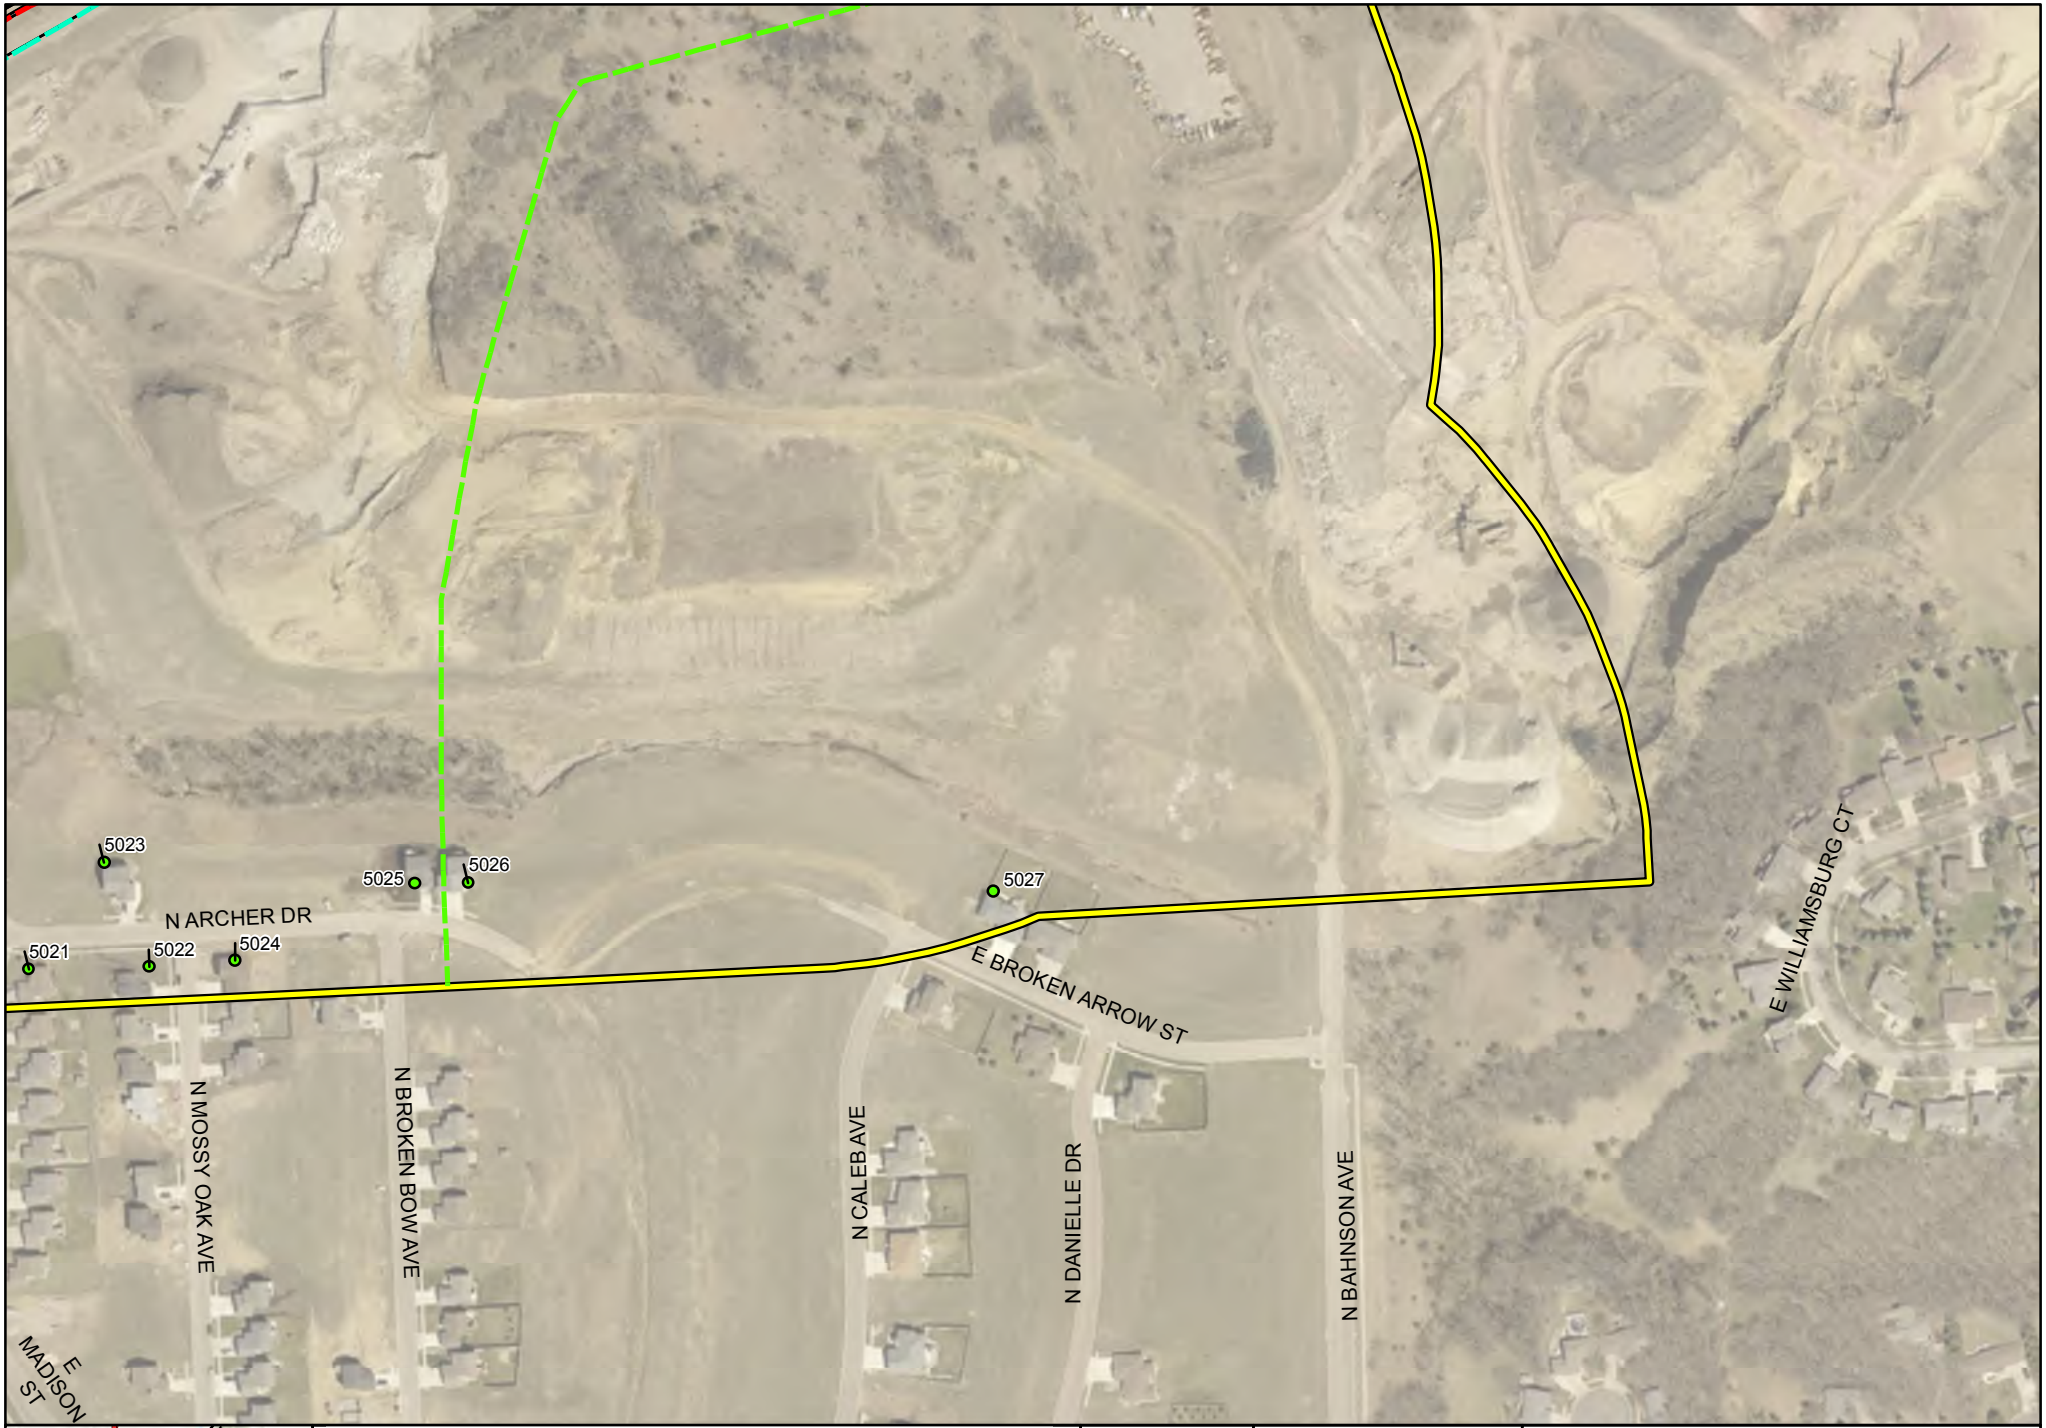



Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2 with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2 with Rice C-2

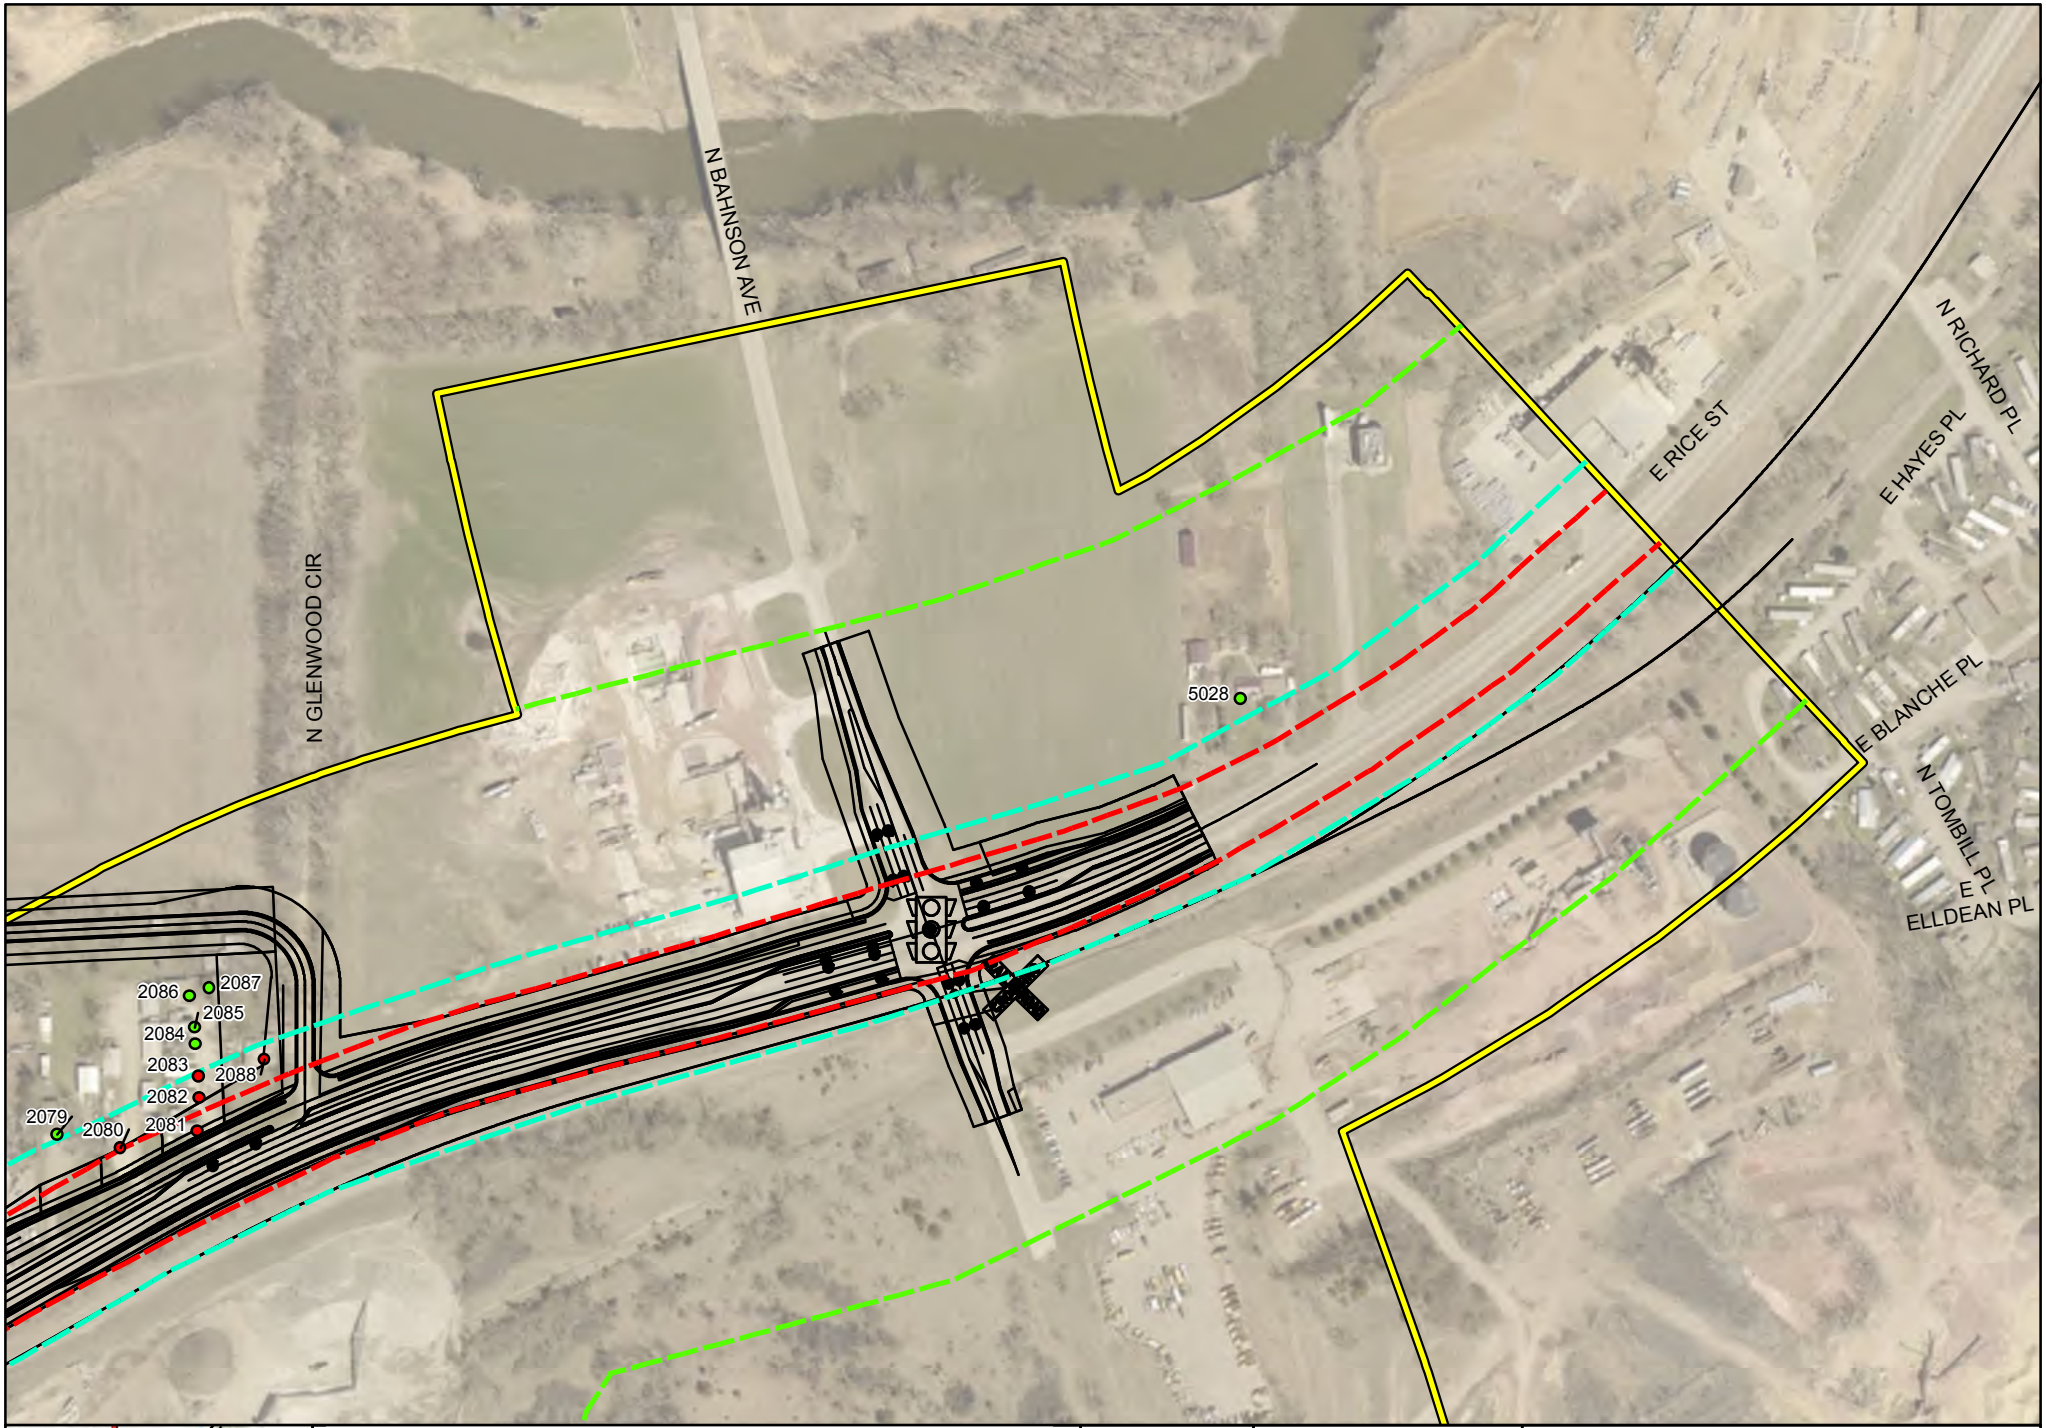
N BAHNSON AVE
N GLENWOOD CIR
E RICE ST
N RICHARD PL
E HAYES PL
E BLANCHE PL
N TOMBILL PL
E ELLDEAN PL
5028
2086
2087
2085
2084
2083
2088
2082
2081
2079
2080
229
1
2
3
4
5
6
E RICE ST
Legend
Non-Impacted Receptor
Impacted Receptor
Noise Monitoring Location
56 dBA Contour Line
66 dBA Contour Line
71 dBA Contour Line
Noise Study Area
Sub-Study 5 Concept Linework Alternative Rice-2 with Rice C-2
N
HDR
I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2 with Rice C-2

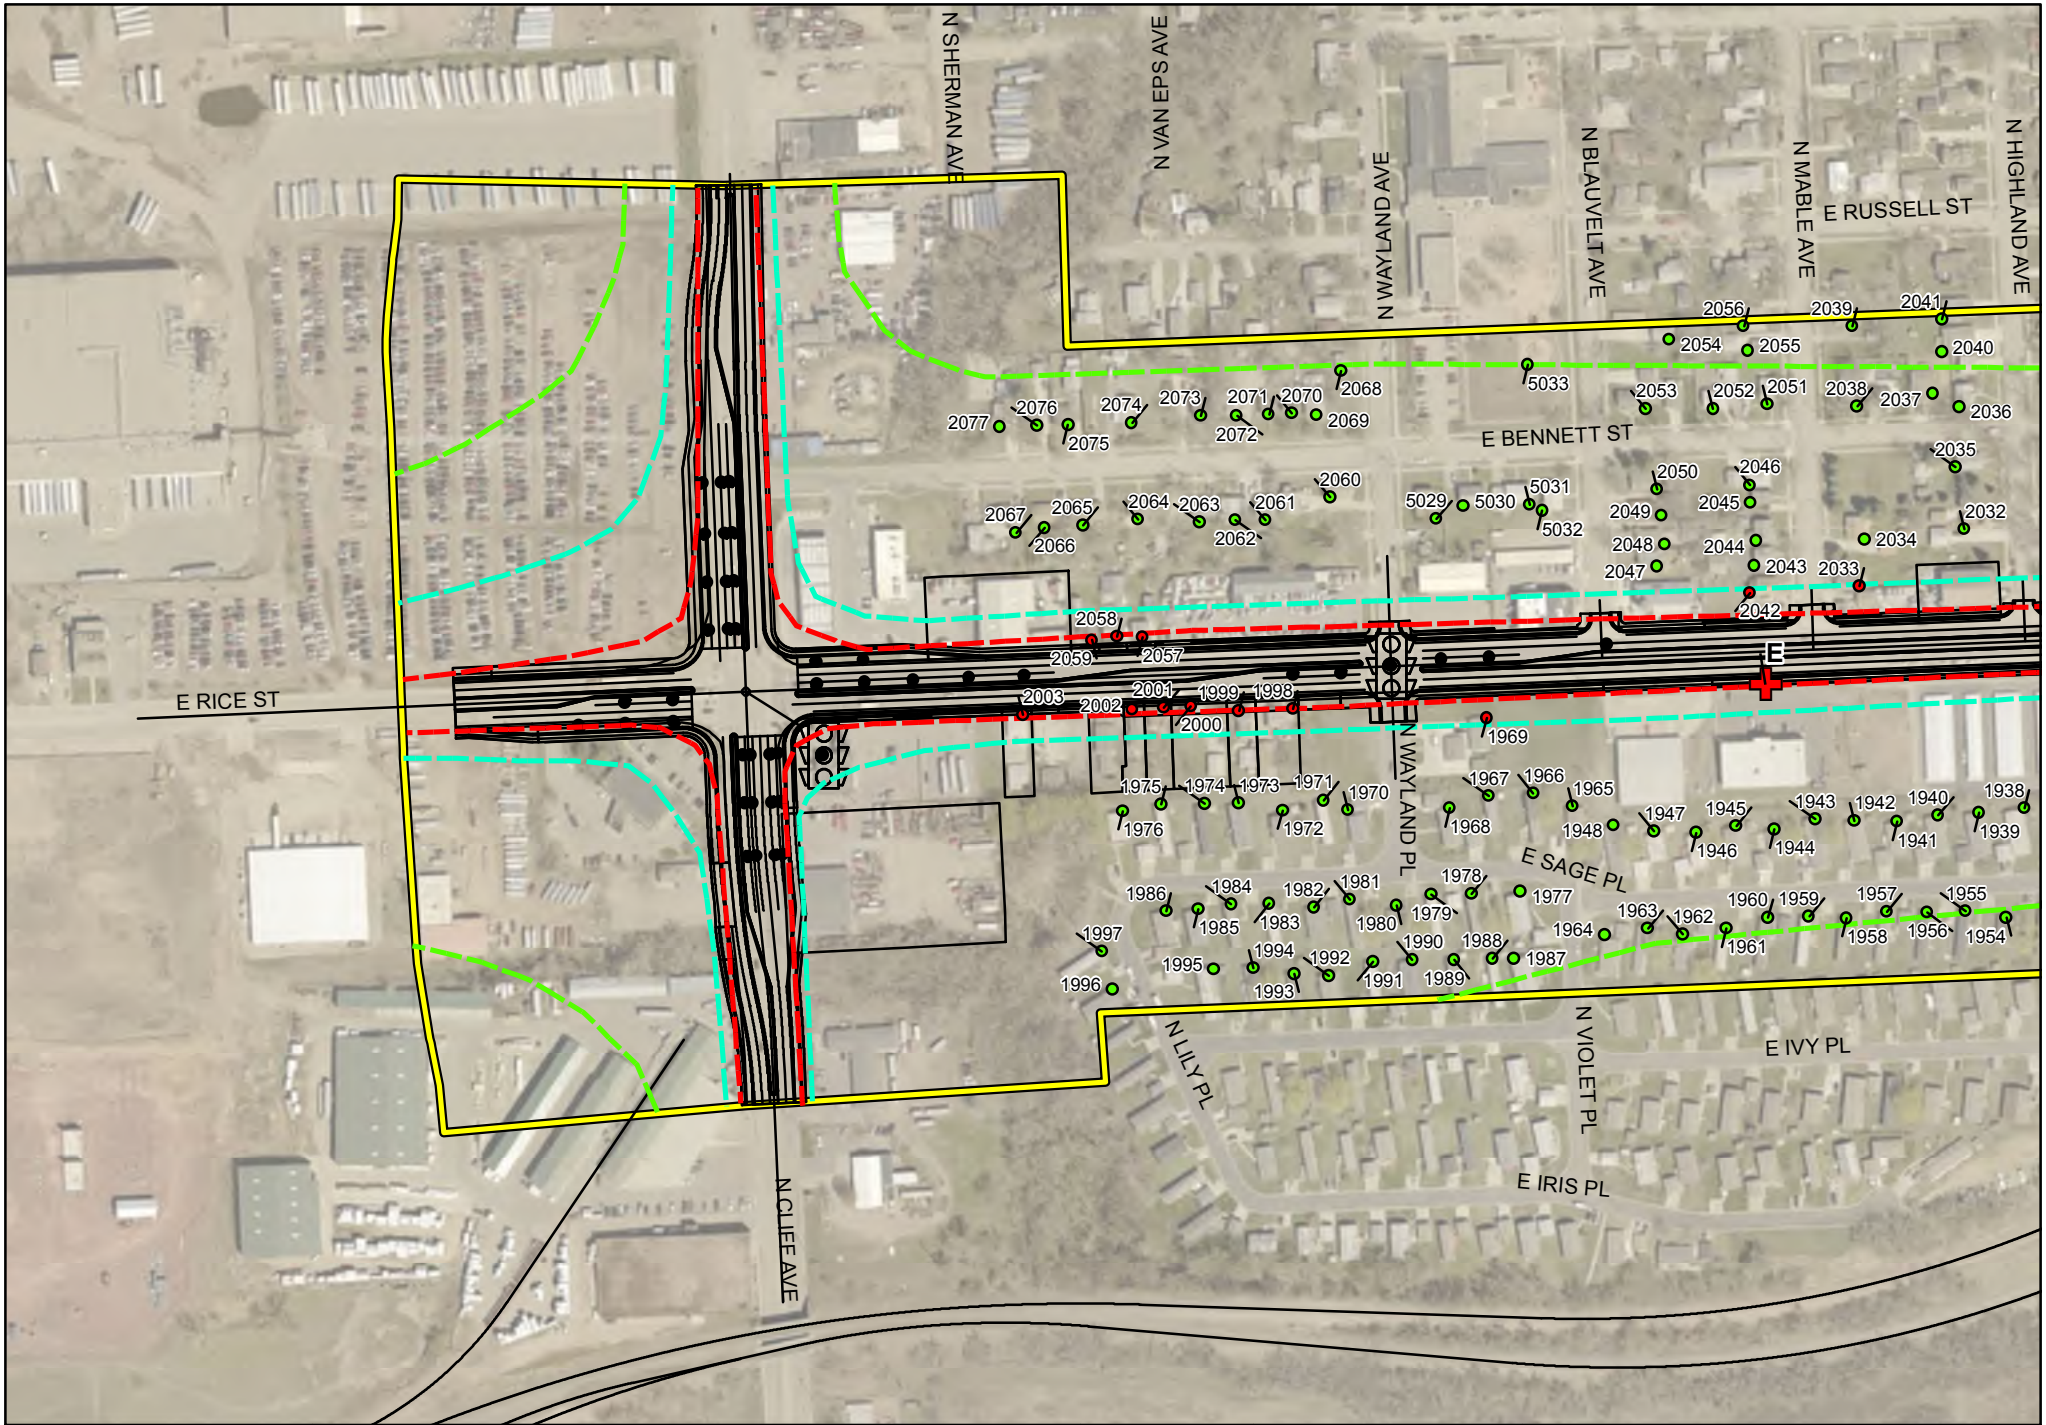


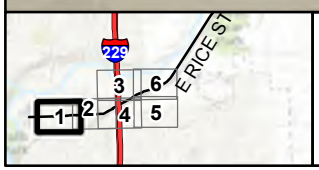



Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2a with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2a with Rice C-2

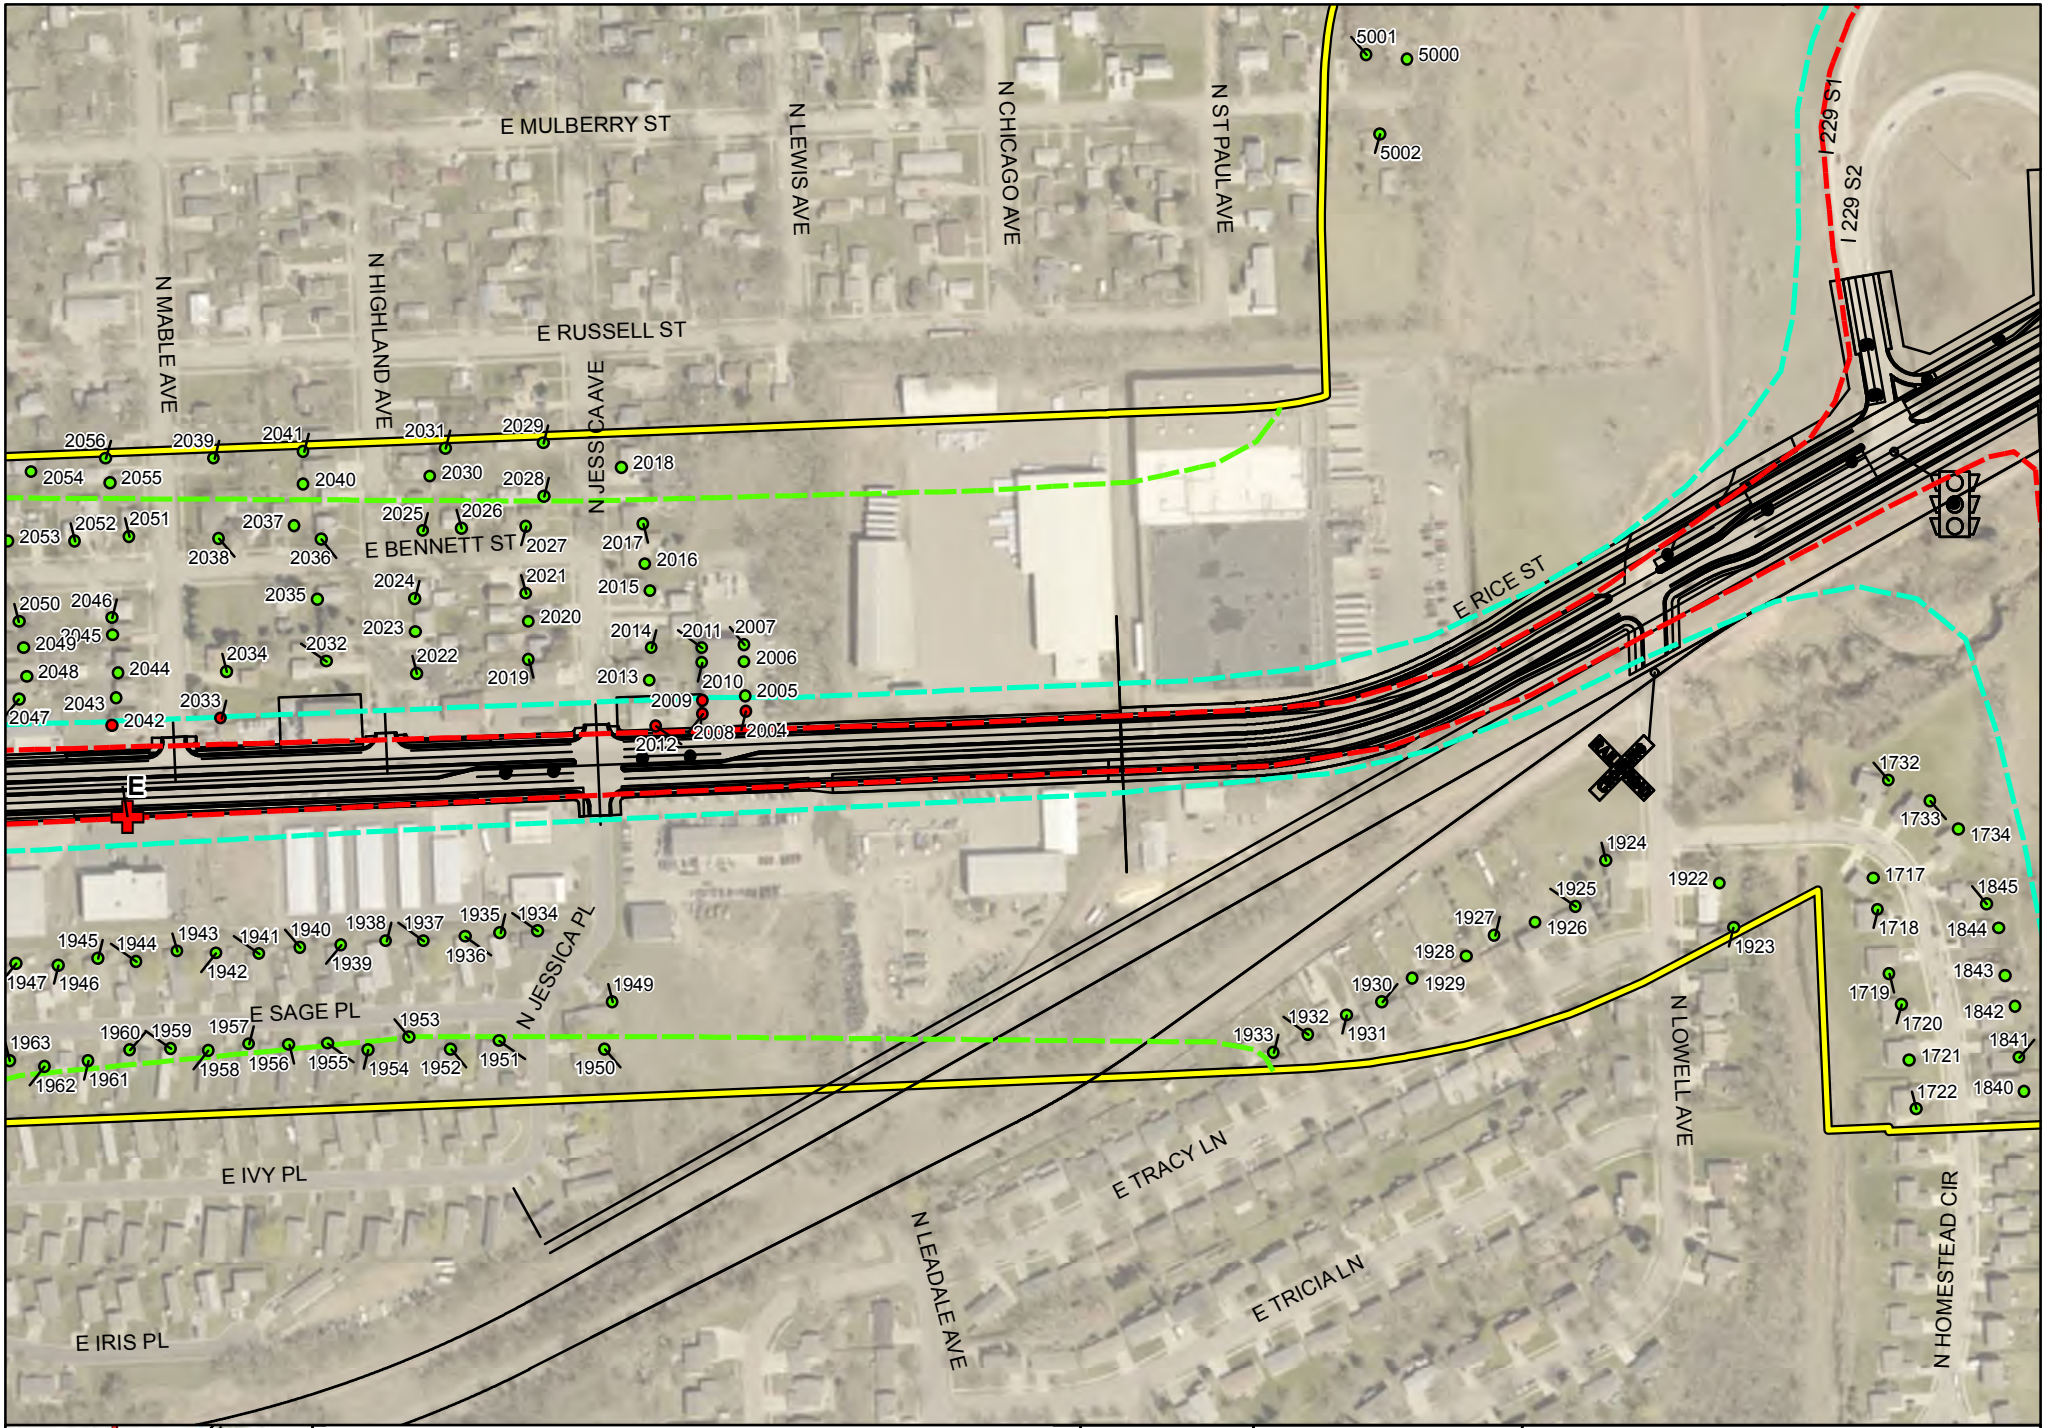
E MULBERRY ST
N LEWIS AVE
N CHICAGO AVE
N ST PAUL AVE
I 229 S1
I 229 S2
N MABLE AVE
N HIGHLAND AVE
E RUSSELL ST
N JESSICA AVE
E BENNETT ST
E RICE ST
E SAGE PL
N JESSICA PL
E IVY PL
E TRACY LN
N LEADALE AVE
E TRICIA LN
E IRIS PL
N LOWELL AVE
N HOMESTEAD CIR
5001
5000
5002
2056
2039
2041
2031
2029
2054
2055
2040
2030
2028
2018
2053
2052
2051
2037
2025
2026
2038
2036
2027
2017
2016
2050
2046
2024
2021
2035
2015
2049
2045
2023
2020
2014
2011
2007
2034
2032
2022
2006
2048
2044
2019
2013
2010
2005
2047
2043
2033
2009
2042
2008
2004
2012
E
1732
1733
1734
1924
1922
1717
1845
1925
1927
1926
1718
1844
1923
1928
1843
1930
1929
1719
1842
1720
1932
1931
1933
1721
1841
1722
1840
1945
1944
1943
1941
1940
1938
1937
1935
1934
1936
1939
1942
1947
1946
1949
1963
1960
1959
1957
1953
1962
1961
1958
1956
1955
1954
1952
1951
1950
Legend
Non-Impacted Receptor
Impacted Receptor
Noise Monitoring Location
56 dBA Contour Line
66 dBA Contour Line
71 dBA Contour Line
Noise Study Area
Sub-Study 5 Concept Linework Alternative Rice-2a with Rice C-2
I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2a with Rice C-2

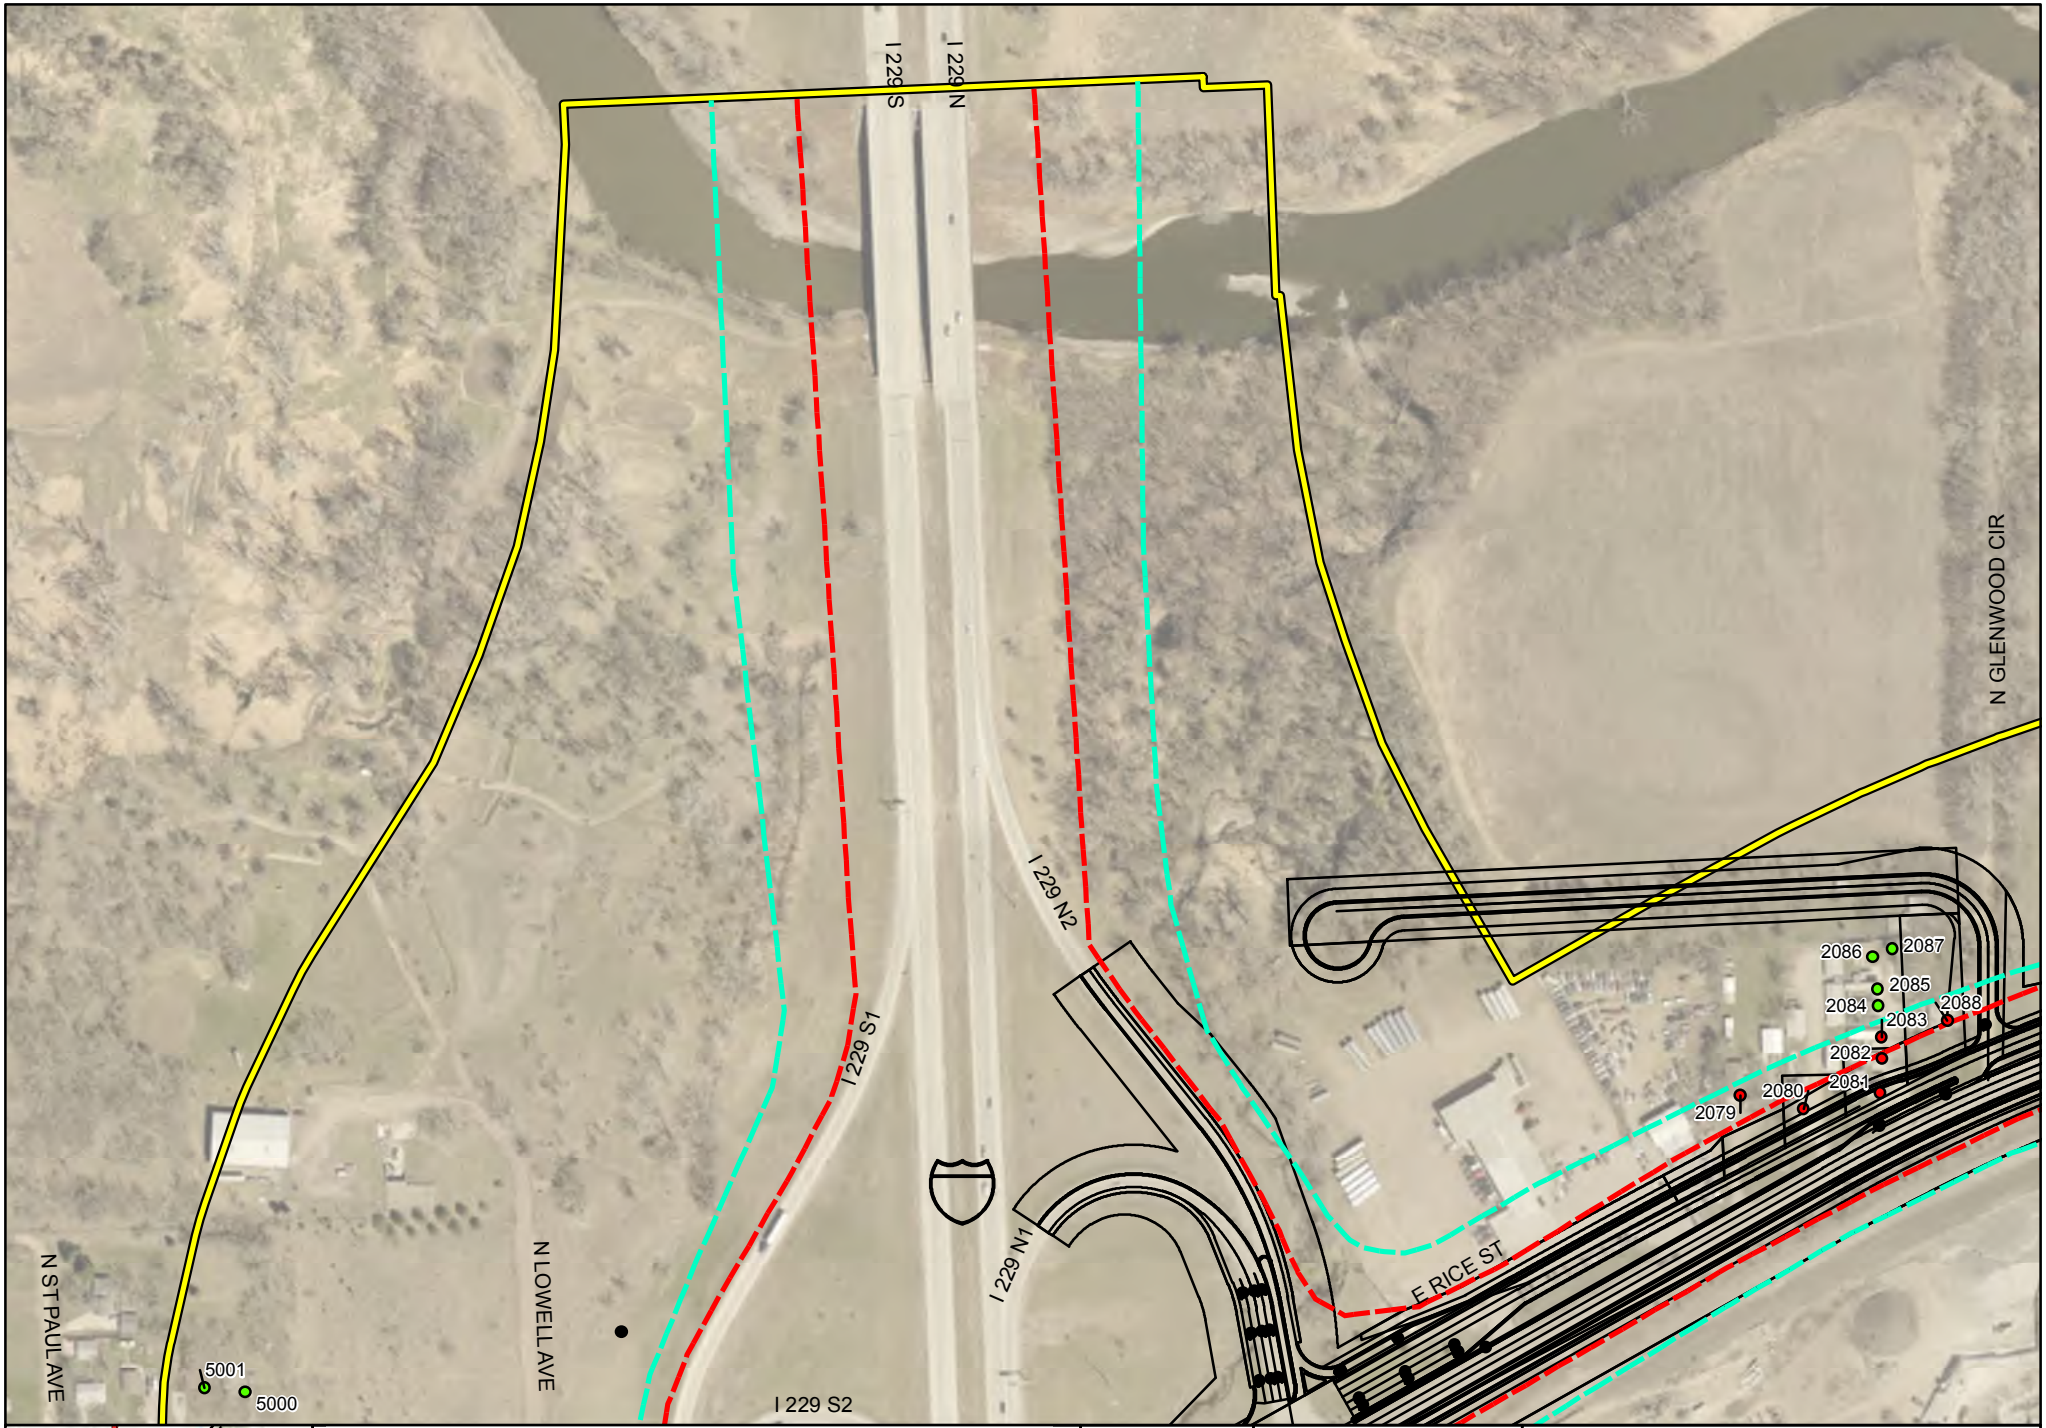


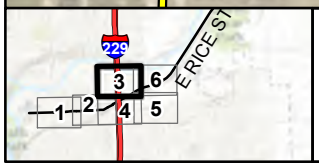


Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2a with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2a with Rice C-2

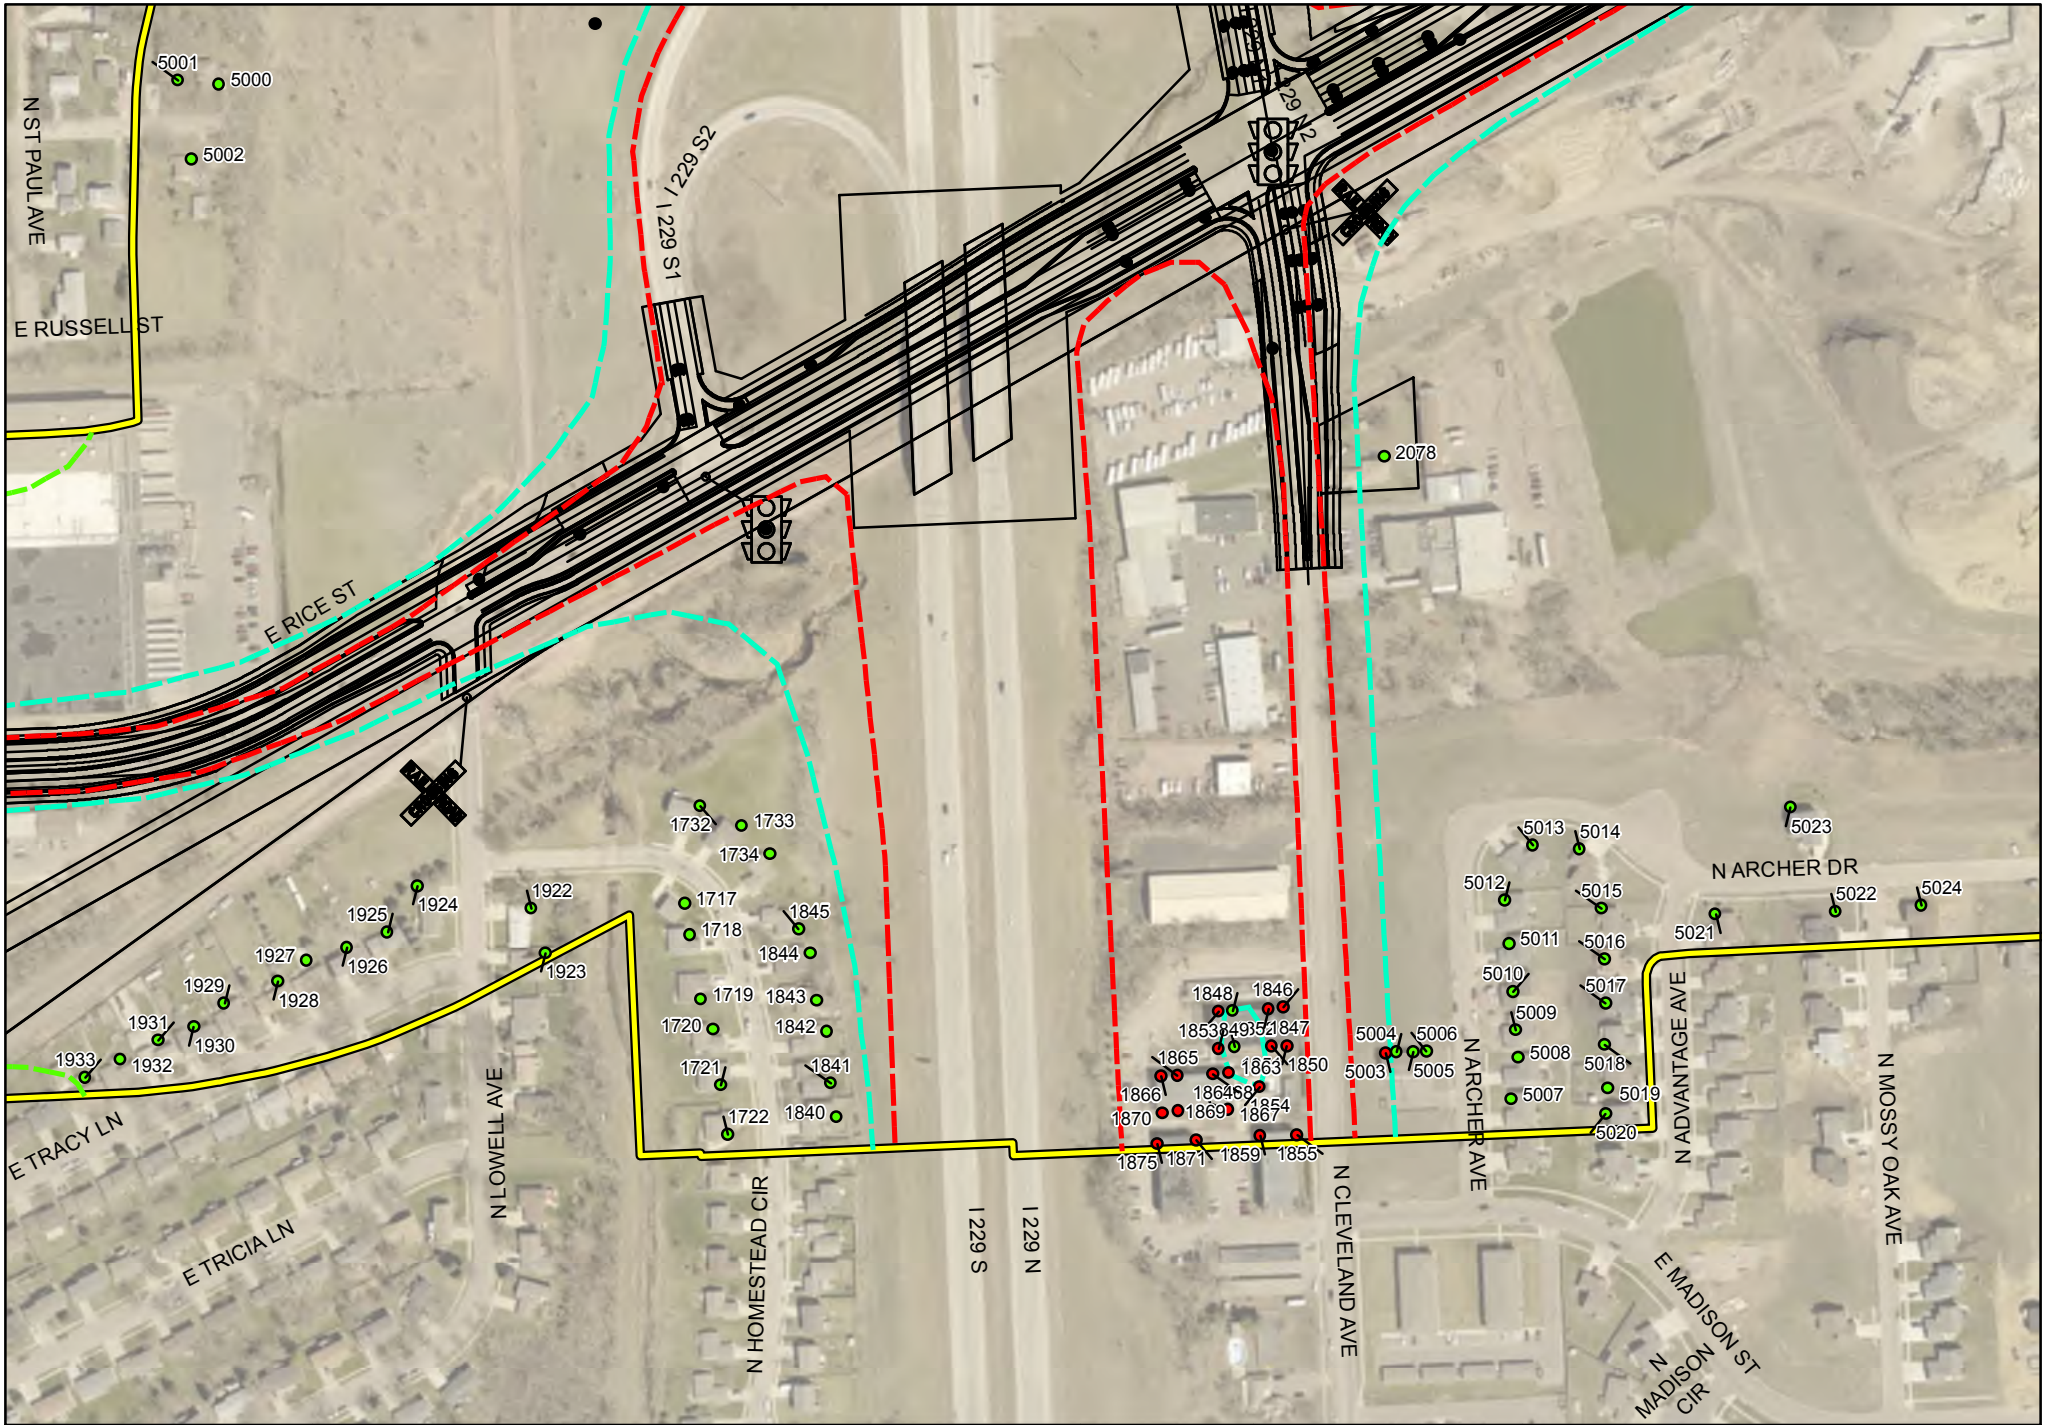

5001
5000
5002
N ST PAUL AVE
E RUSSELL ST
I 229 S1
I 229 S2
E RICE ST
2078
1732
1733
1734
1717
1718
1719
1720
1721
1722
1845
1844
1843
1842
1841
1840
1924
1922
1925
1926
1927
1923
1928
1929
1930
1931
1932
1933
E TRACY LN
E TRICIA LN
N LOWELL AVE
N HOMESTEAD CIR
I 229 S
I 229 N
1848
1846
1853
1849
1852
1847
1865
1863
1850
1866
1864
1868
1854
1870
1869
1867
1875
1871
1859
1855
5004
5006
5003
5005
N CLEVELAND AVE
N ARCHER AVE
5013
5014
5012
5015
5011
5016
5010
5017
5009
5008
5018
5007
5019
5020
5023
N ARCHER DR
5022
5024
5021
N ADVANTAGE AVE
N MOSSY OAK AVE
E MADISON ST
N MADISON CIR
Legend
Non-Impacted Receptor
Impacted Receptor
Noise Monitoring Location
56 dBA Contour Line
66 dBA Contour Line
71 dBA Contour Line
Noise Study Area
Sub-Study 5 Concept Linework Alternative Rice-2a with Rice C-2
I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2a with Rice C-2

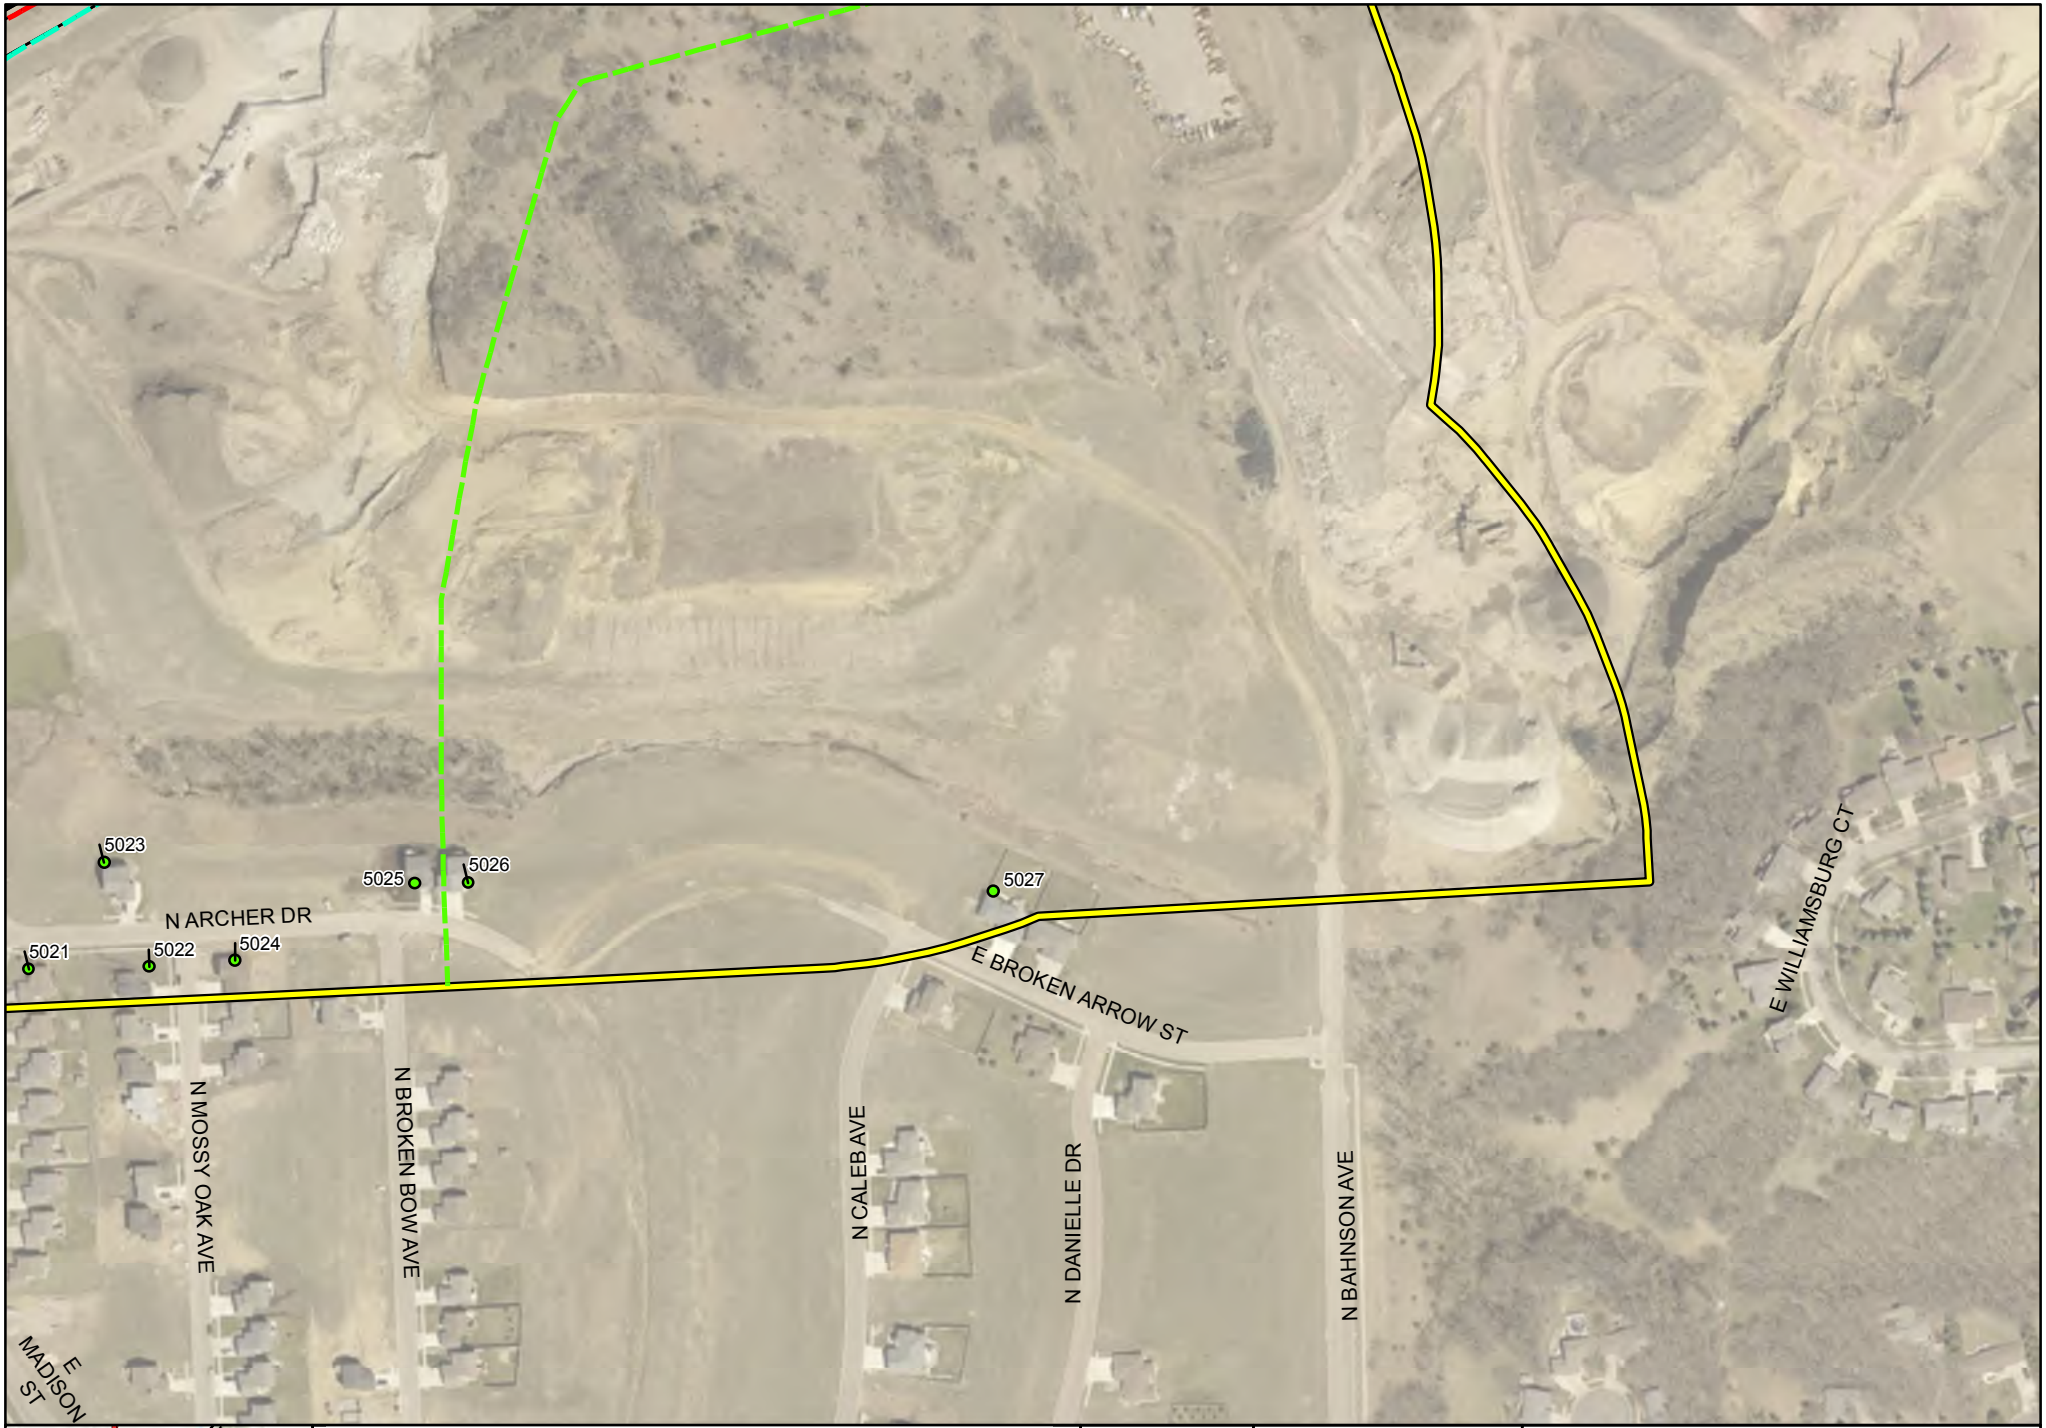



Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study Area
- Sub-Study 5 Concept Linework Alternative Rice-2a with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2a with Rice C-2

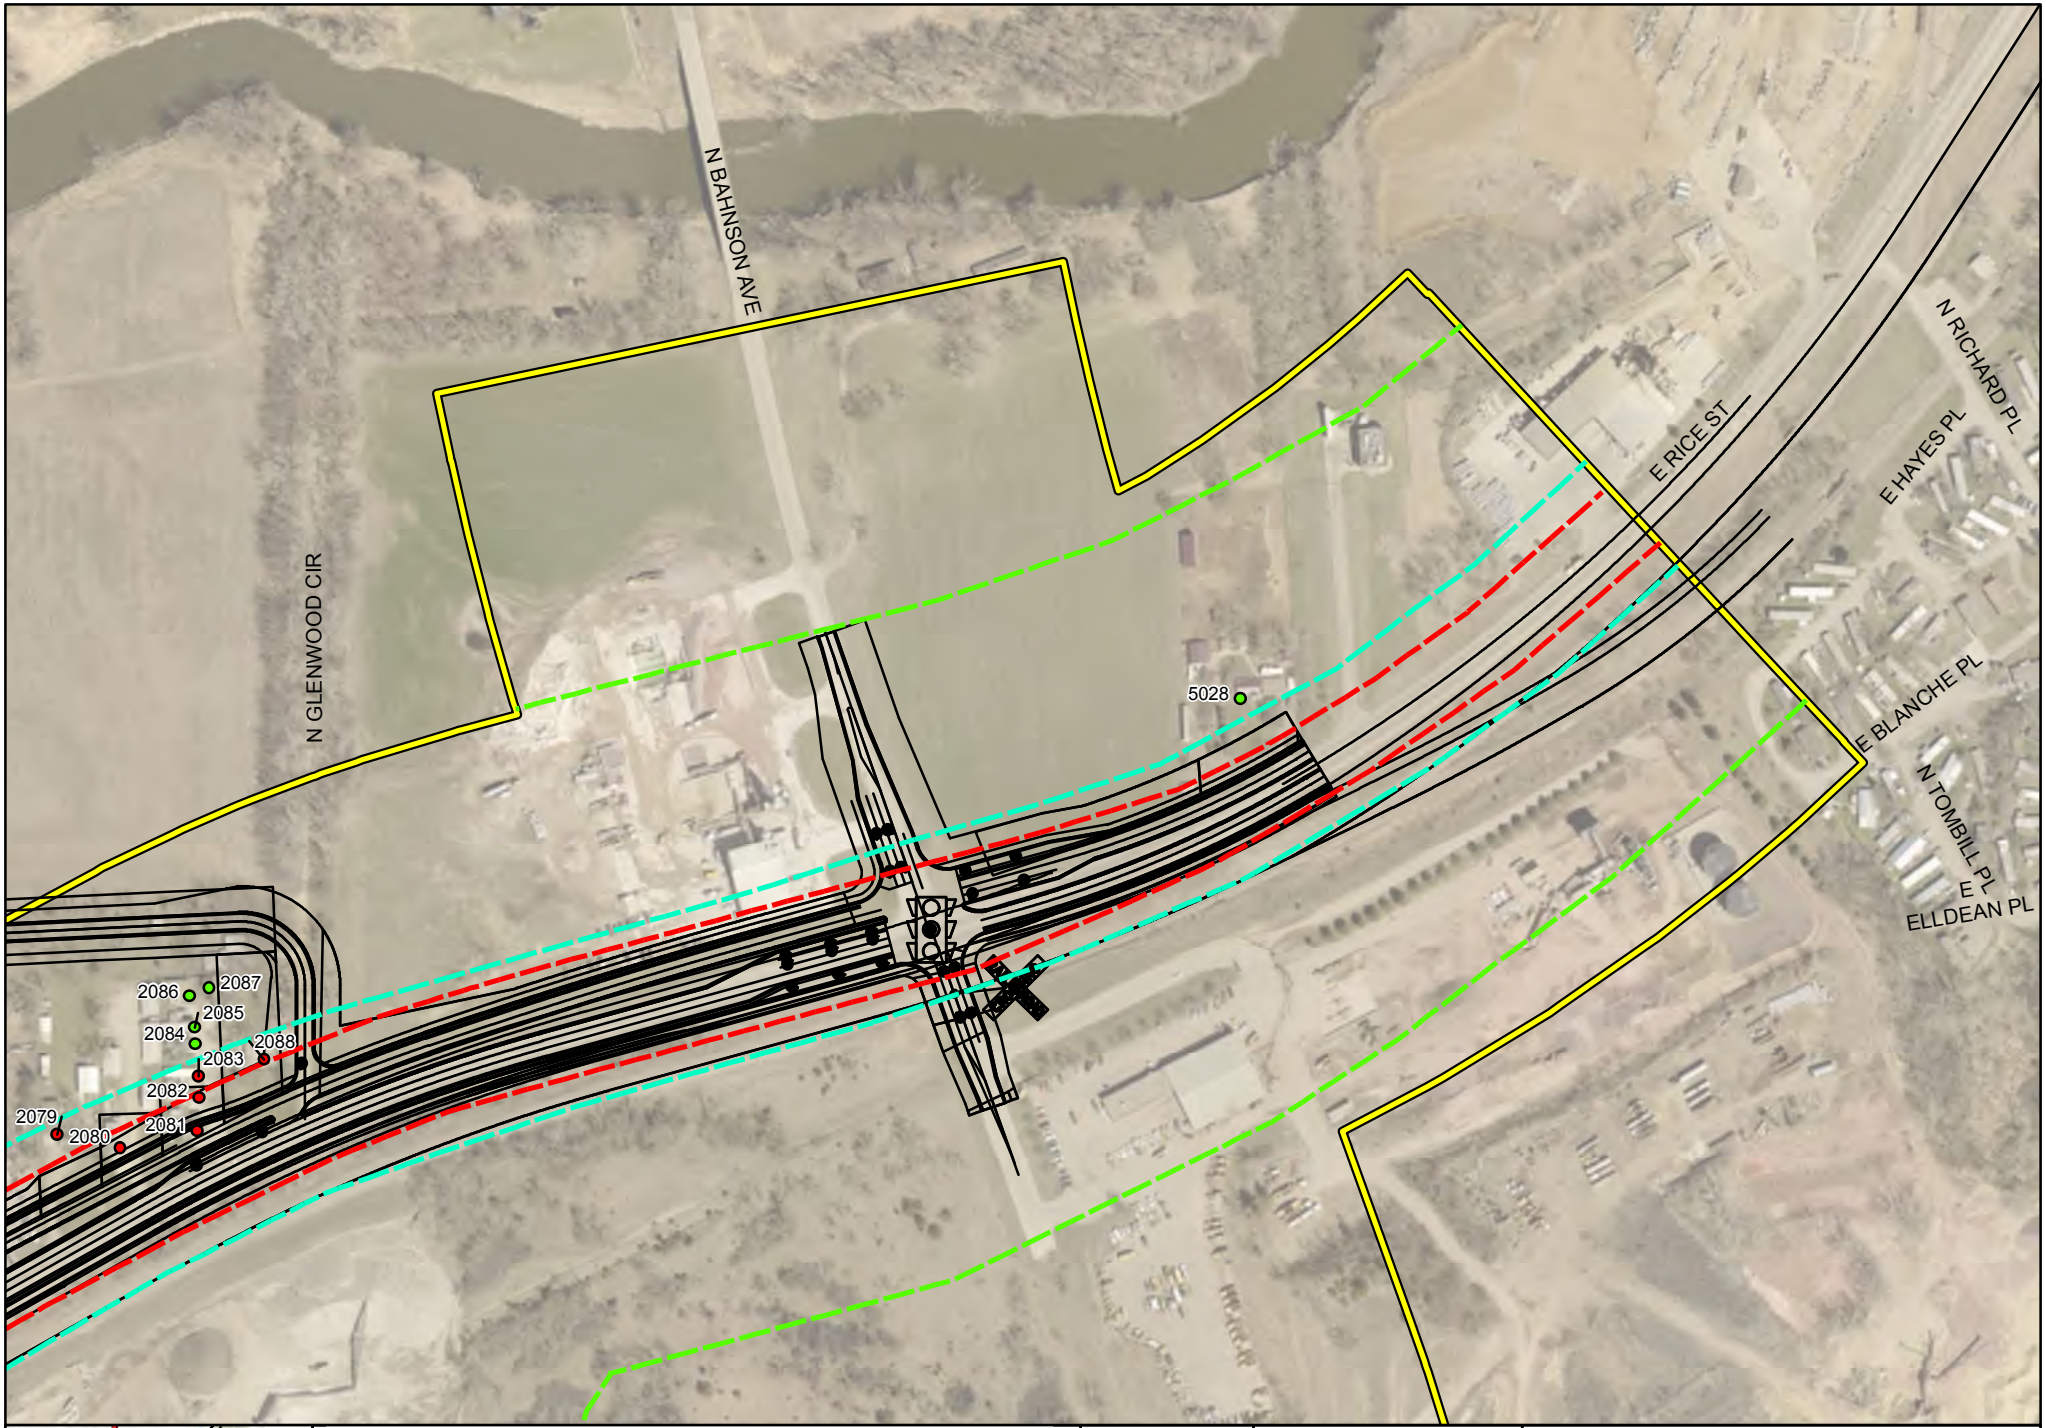
N BAHNSON AVE
N GLENWOOD CIR
E RICE ST
N RICHARD PL
E HAYES PL
E BLANCHE PL
N TOMBILL PL
E ELLDEAN PL
5028
2086
2087
2085
2084
2088
2083
2082
2079
2080
2081
229
1
2
3
4
5
6
E RICE ST
Legend
Non-Impacted Receptor
Impacted Receptor
Noise Monitoring Location
56 dBA Contour Line
66 dBA Contour Line
71 dBA Contour Line
Noise Study Area
Sub-Study 5 Concept Linework Alternative Rice-2a with Rice C-2
N
HDR
I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-2a with Rice C-2

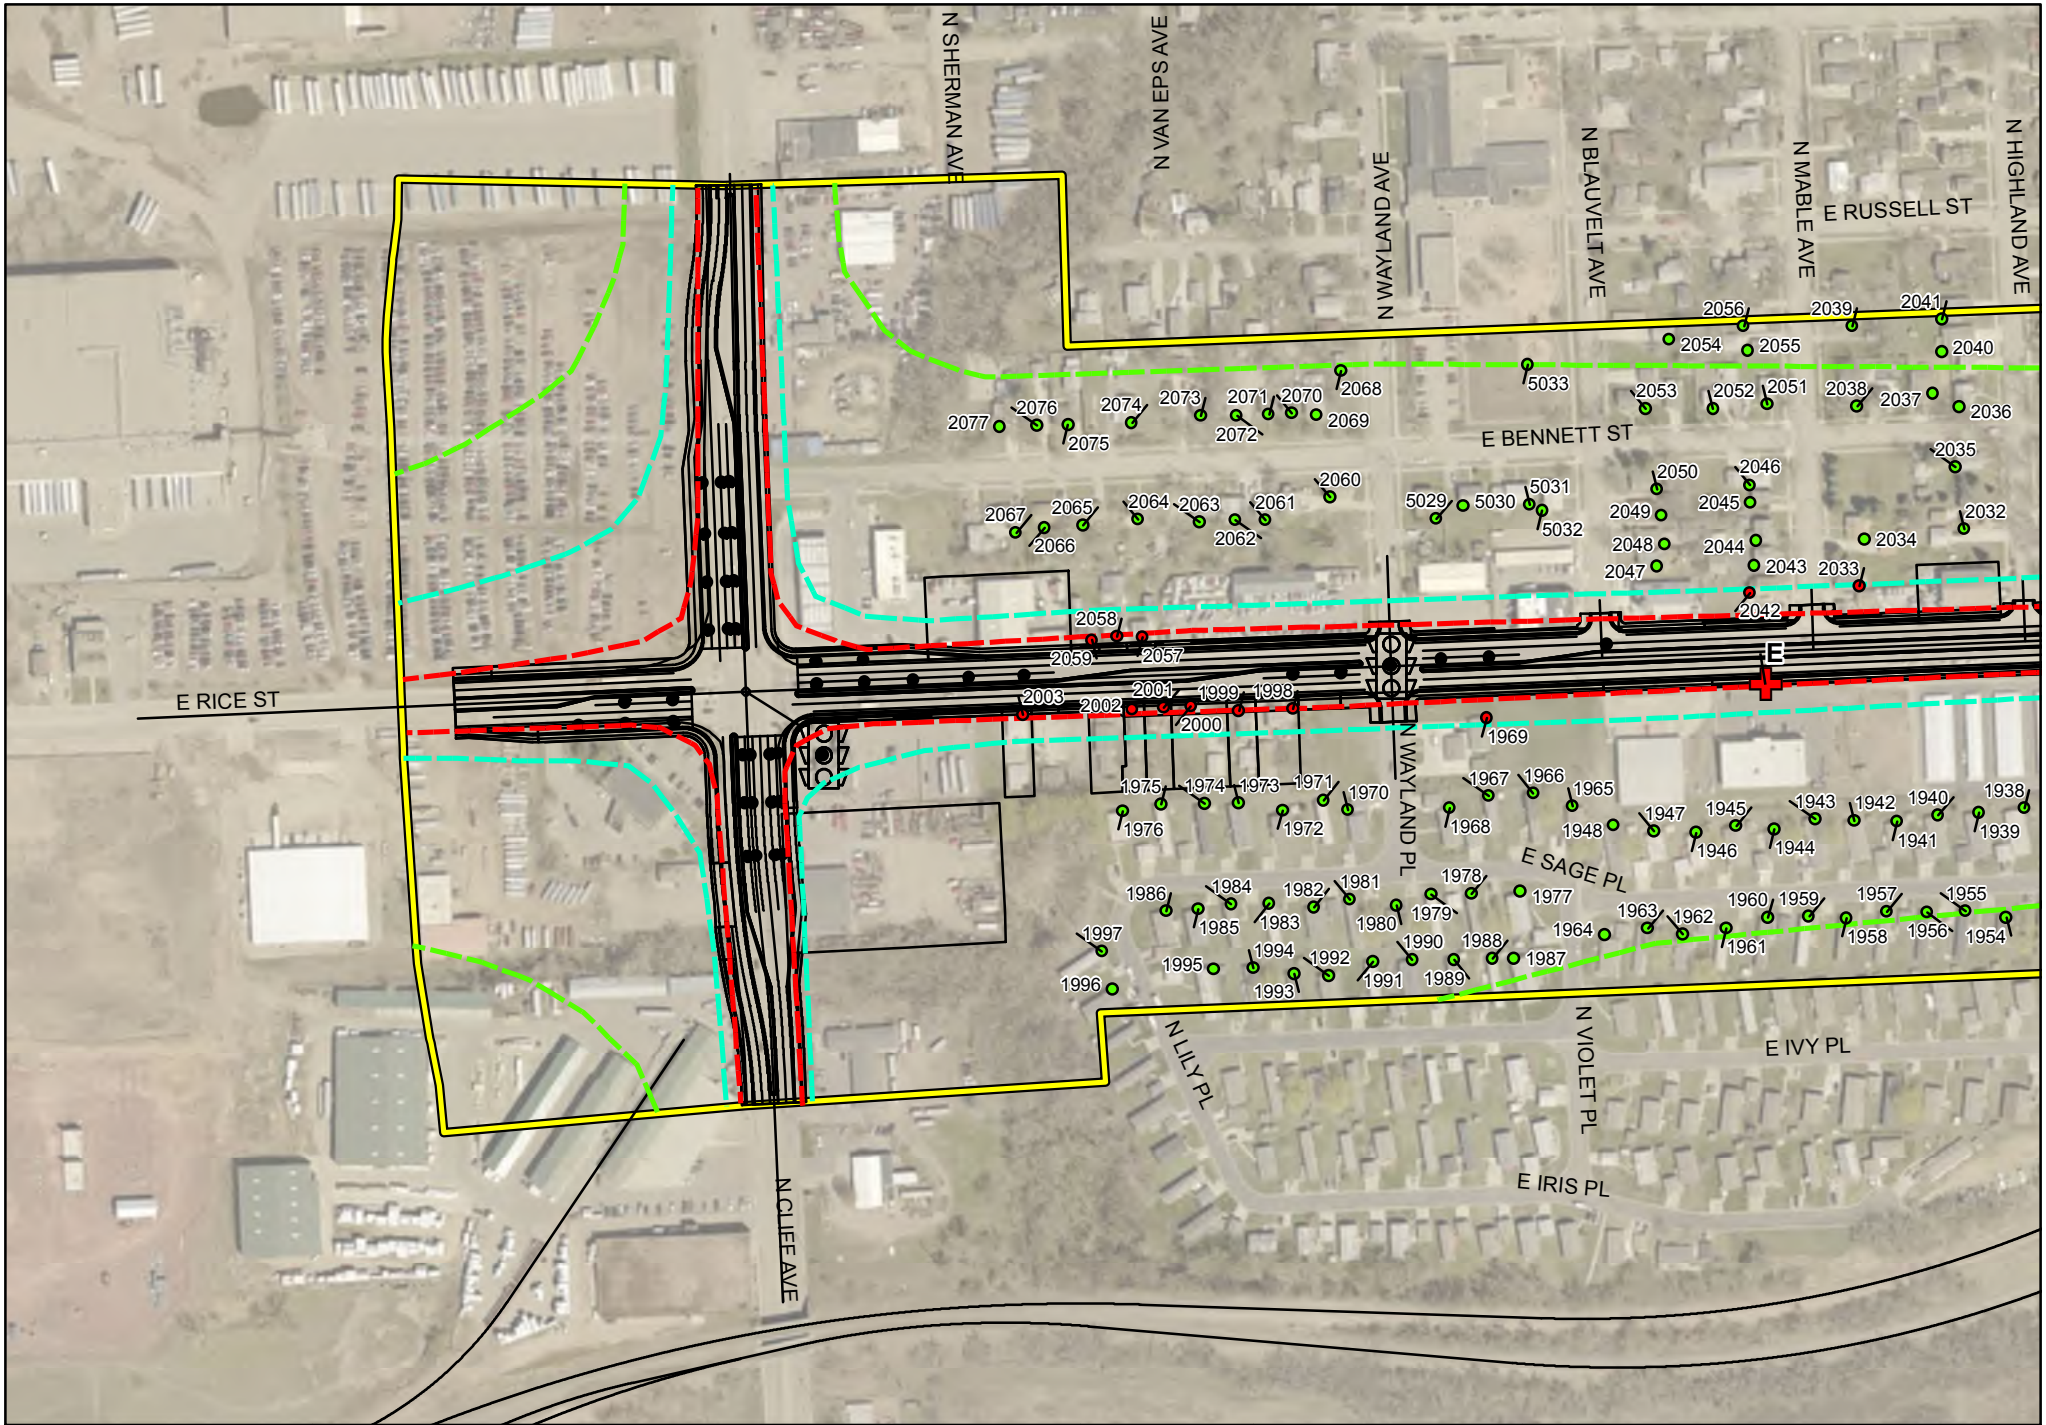


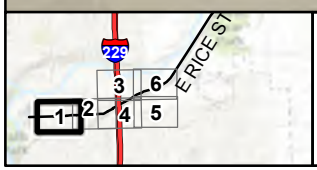


Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study
- Sub-Study 5 Concept Linework Alternative Rice-3C with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-3c with Rice C-2

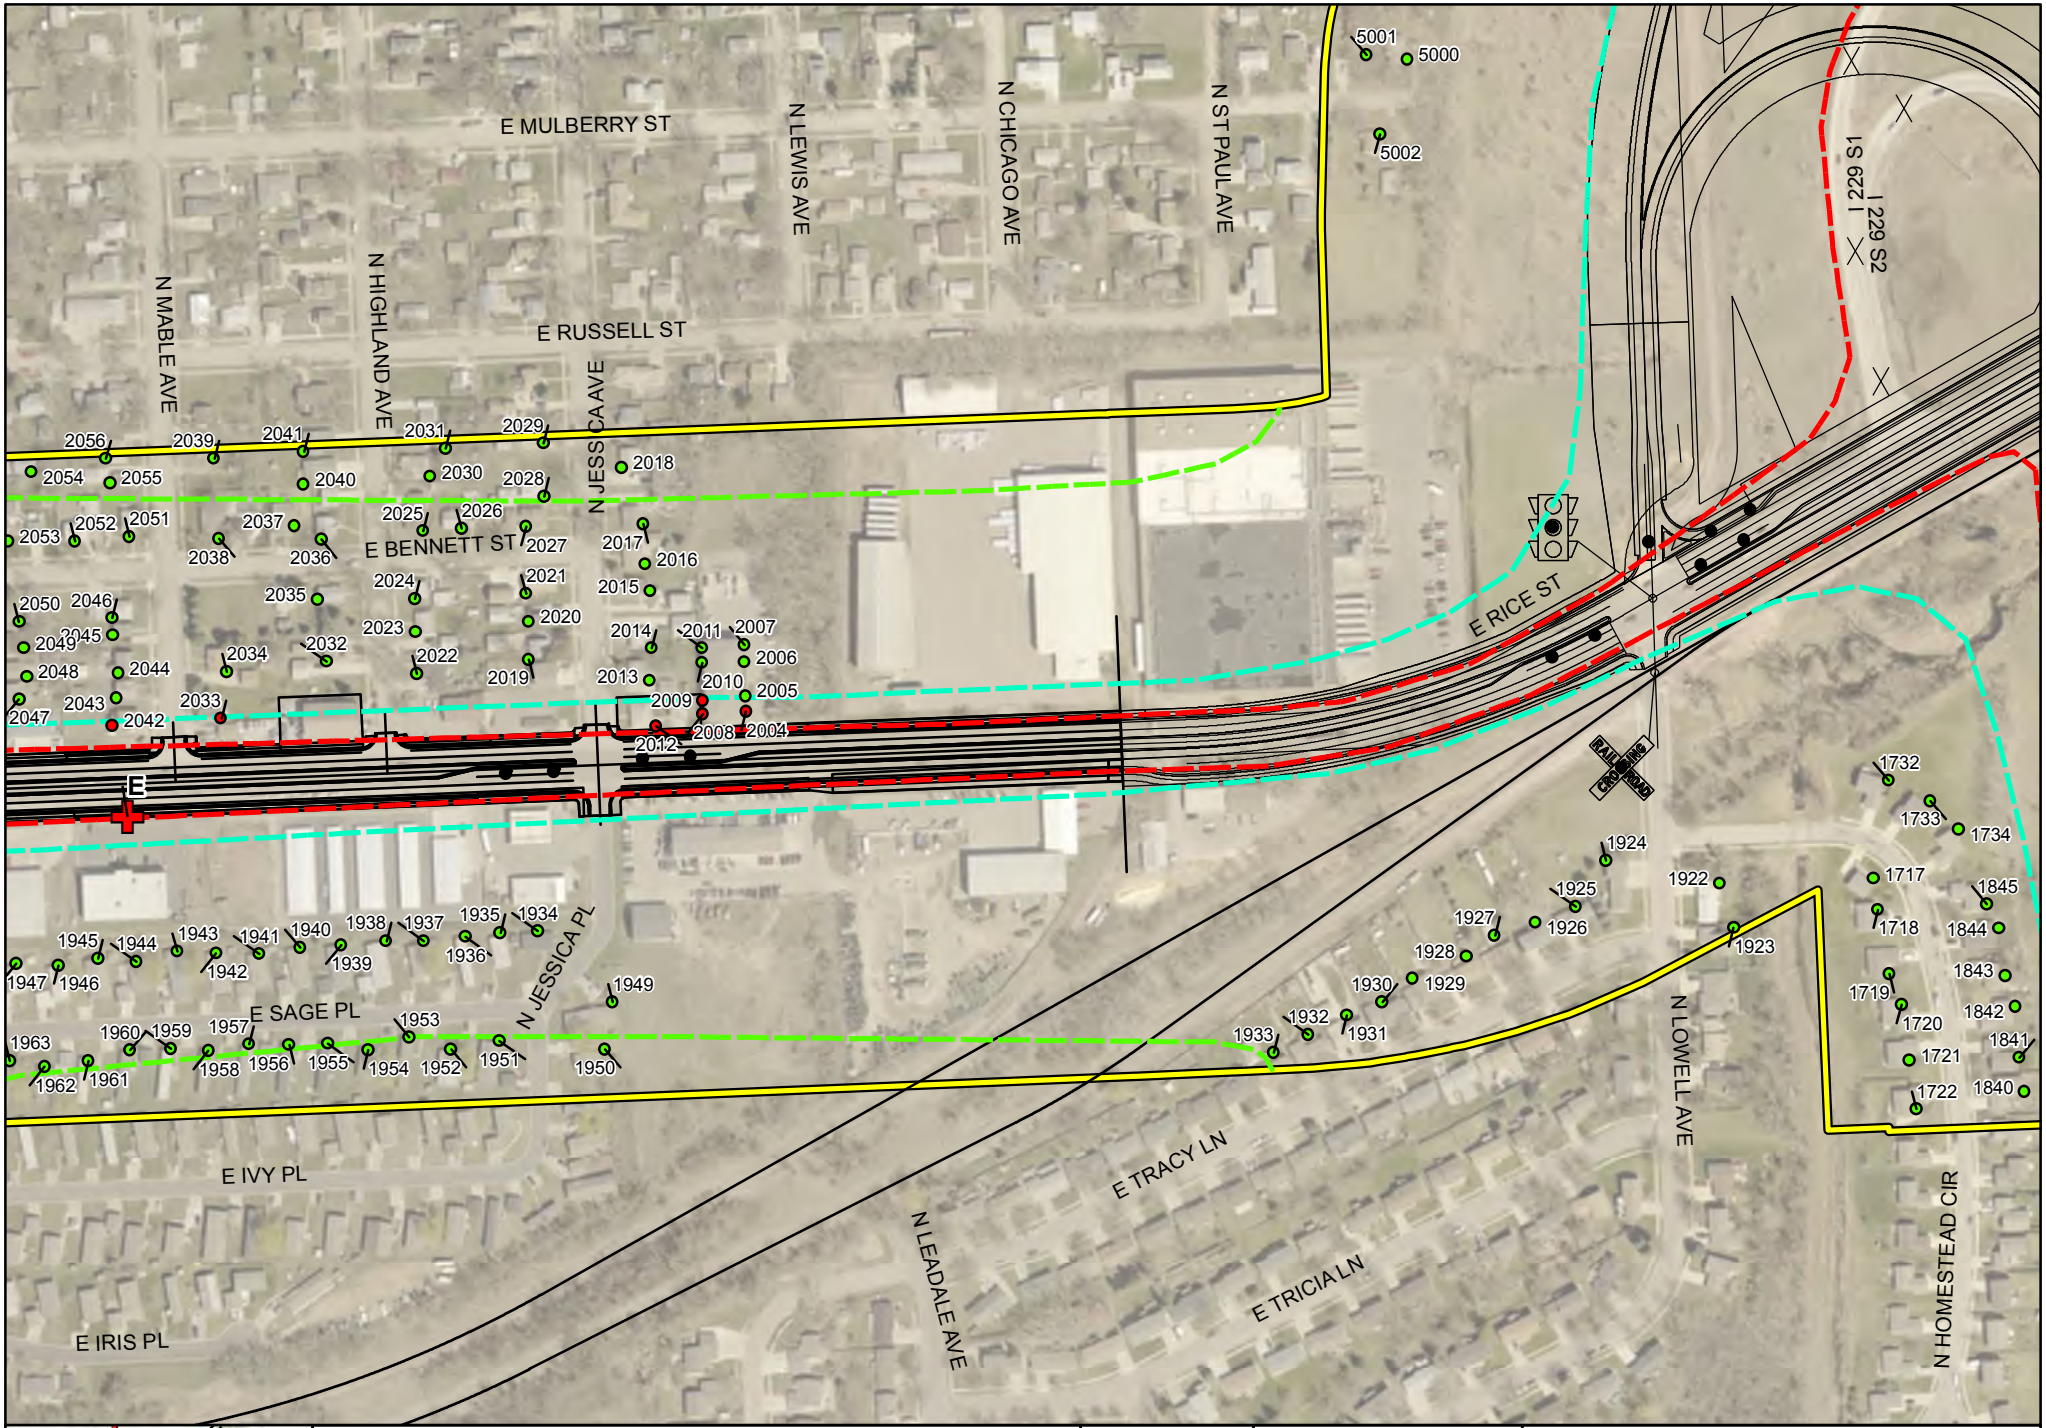


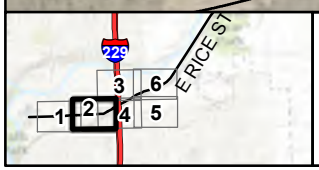


Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study
- Sub-Study 5 Concept Linework Alternative Rice-3C with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-3c with Rice C-2

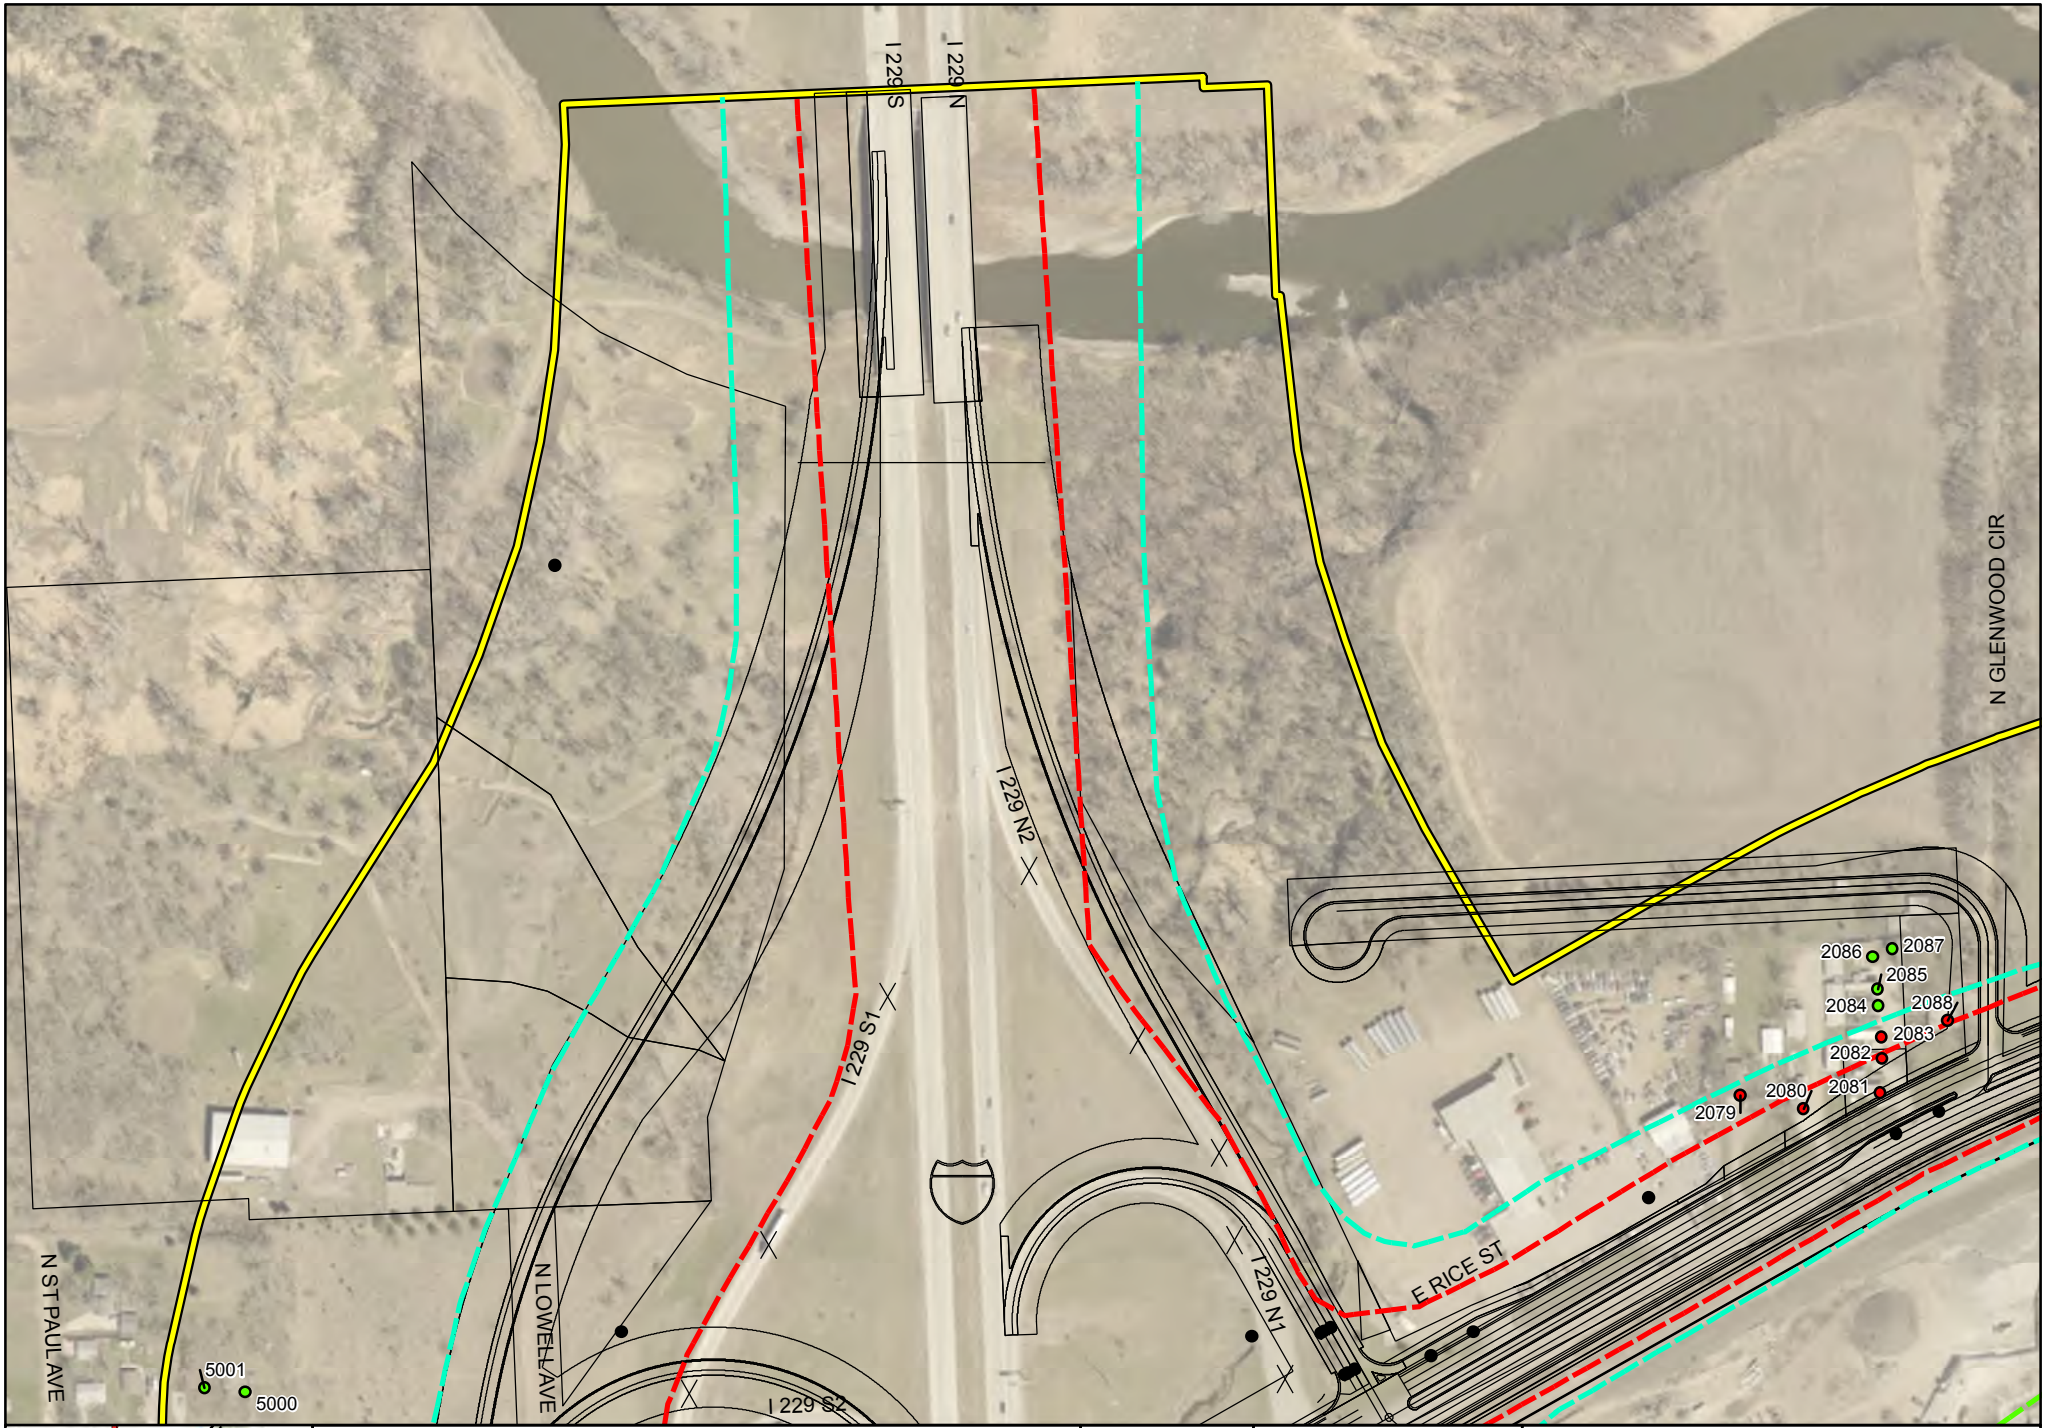


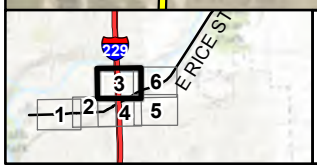


Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study
- Sub-Study 5 Concept Linework Alternative Rice-3C with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-3c with Rice C-2

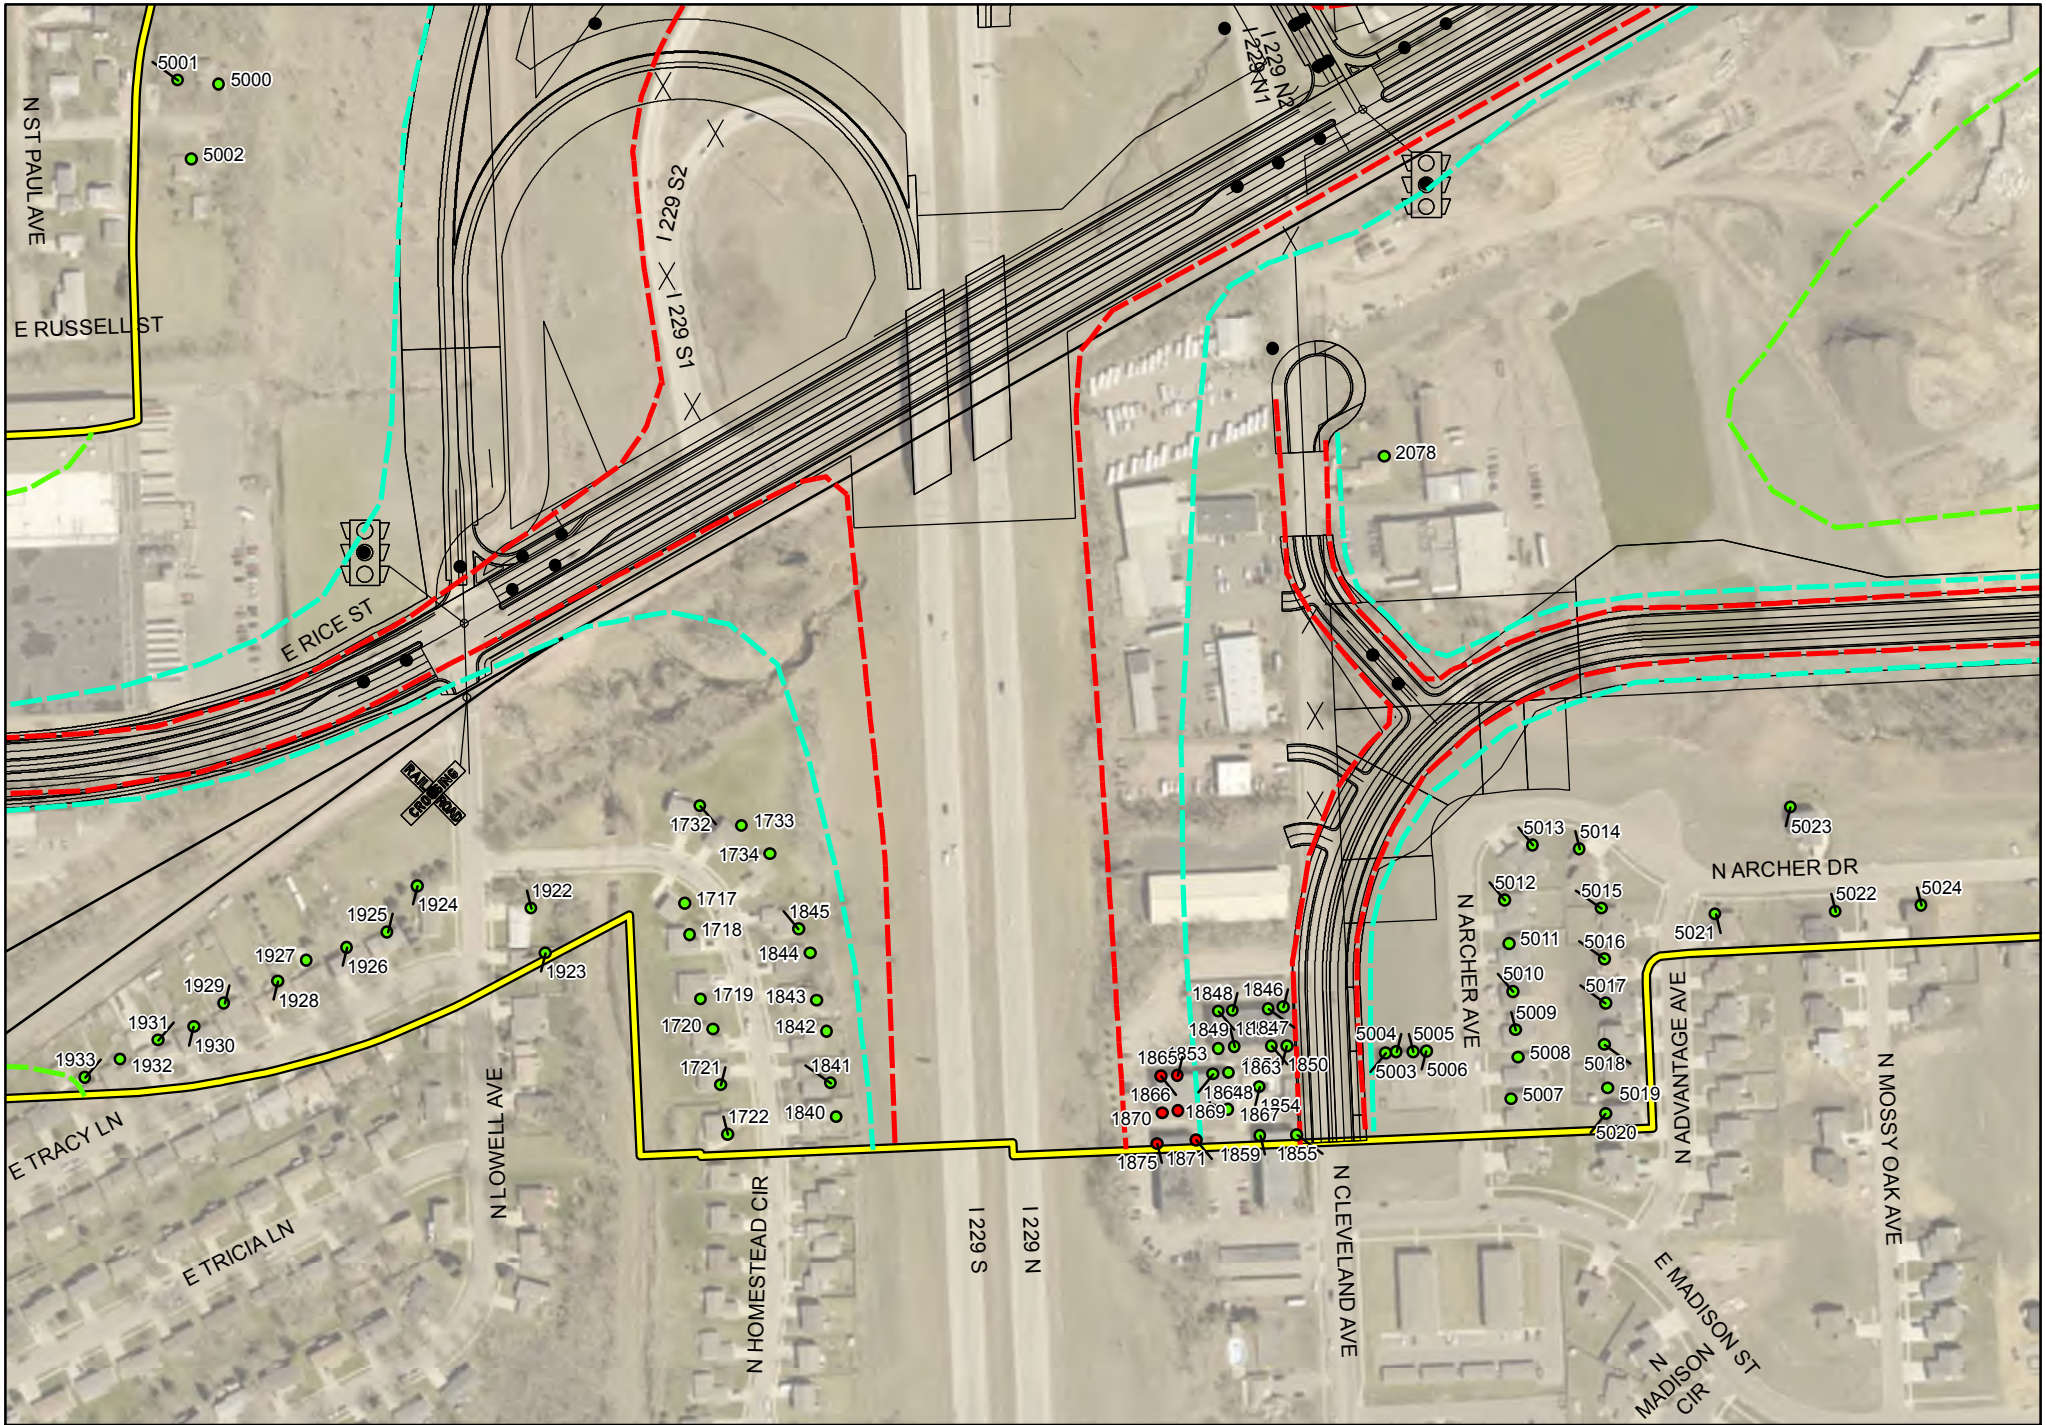

5001
5000
5002
N ST PAUL AVE
E RUSSELL ST
I 229 S2
I 229 S1
I 229 N2
I 229 N1
2078
E RICE ST
RAILROAD CROSSING
1732
1733
1734
1717
1718
1719
1720
1721
1722
1845
1844
1843
1842
1841
1840
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1922
1923
N LOWELL AVE
E TRACY LN
E TRICIA LN
N HOMESTEAD CIR
I 229 S
I 229 N
5013
5014
5012
5015
5011
5016
5010
5017
5009
5018
5008
5019
5007
5020
5023
N ARCHER DR
5022
5024
5021
N ARCHER AVE
N ADVANTAGE AVE
N MOSSY OAK AVE
1848
1846
1849
1847
1865
1853
1863
1850
1866
1864
1870
1869
1867
1854
1875
1871
1859
1855
5004
5005
5003
5006
N CLEVELAND AVE
E MADISON ST
N MADISON CIR
Legend
Non-Impacted Receptor
Impacted Receptor
Noise Monitoring Location
56 dBA Contour Line
66 dBA Contour Line
71 dBA Contour Line
Noise Study
Sub-Study 5 Concept Linework Alternative Rice-3C with Rice C-2
I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-3c with Rice C-2

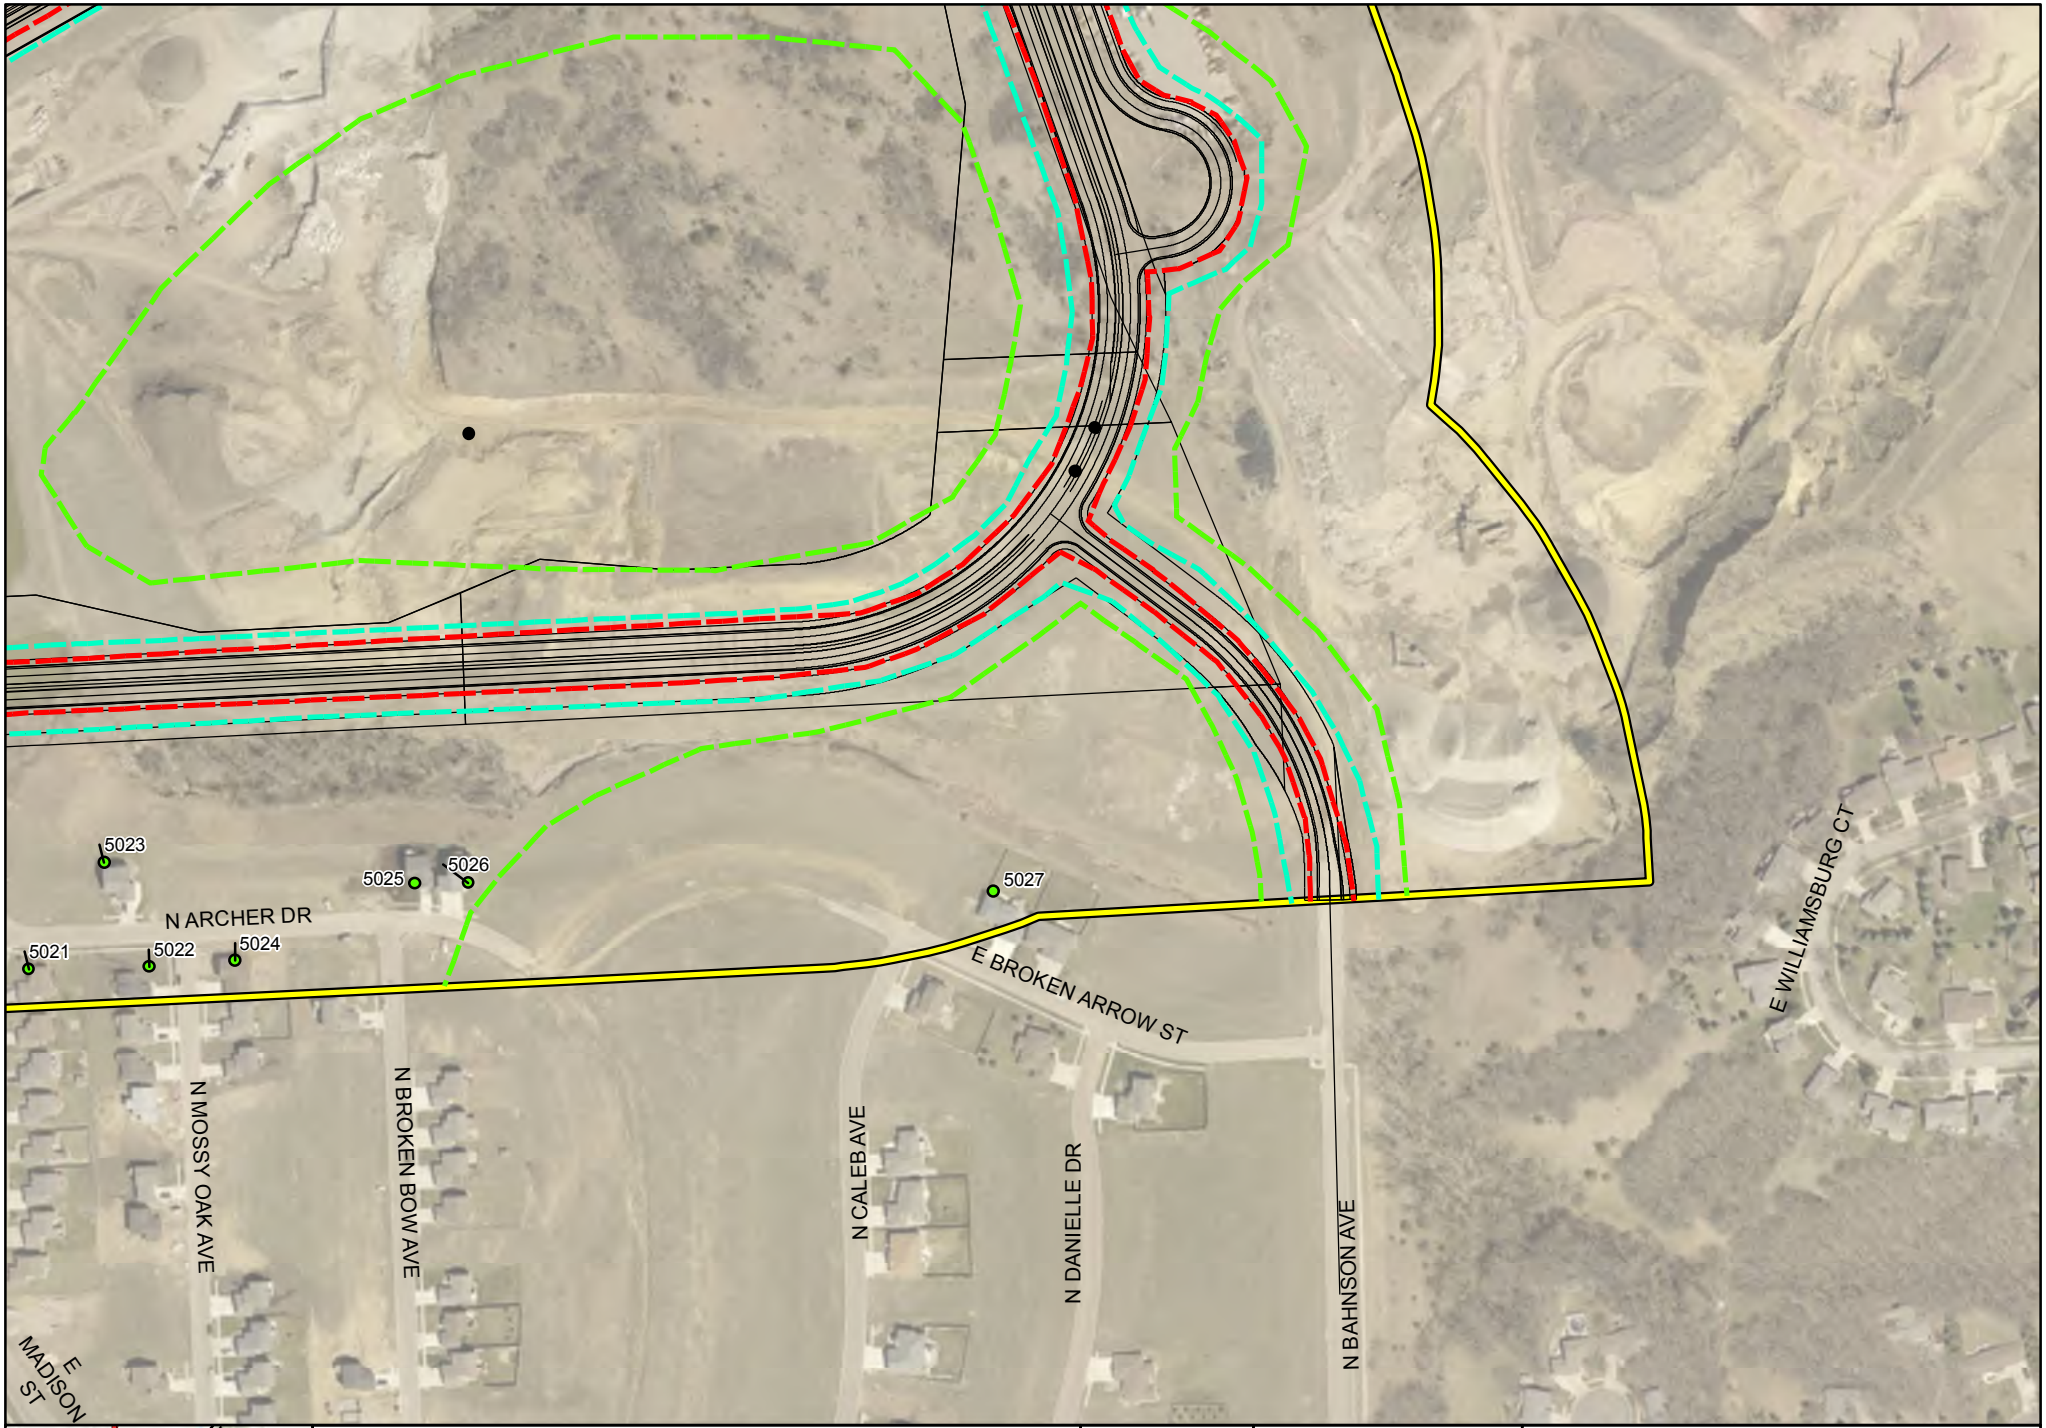


Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study
- Sub-Study 5 Concept Linework Alternative Rice-3C with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-3c with Rice C-2

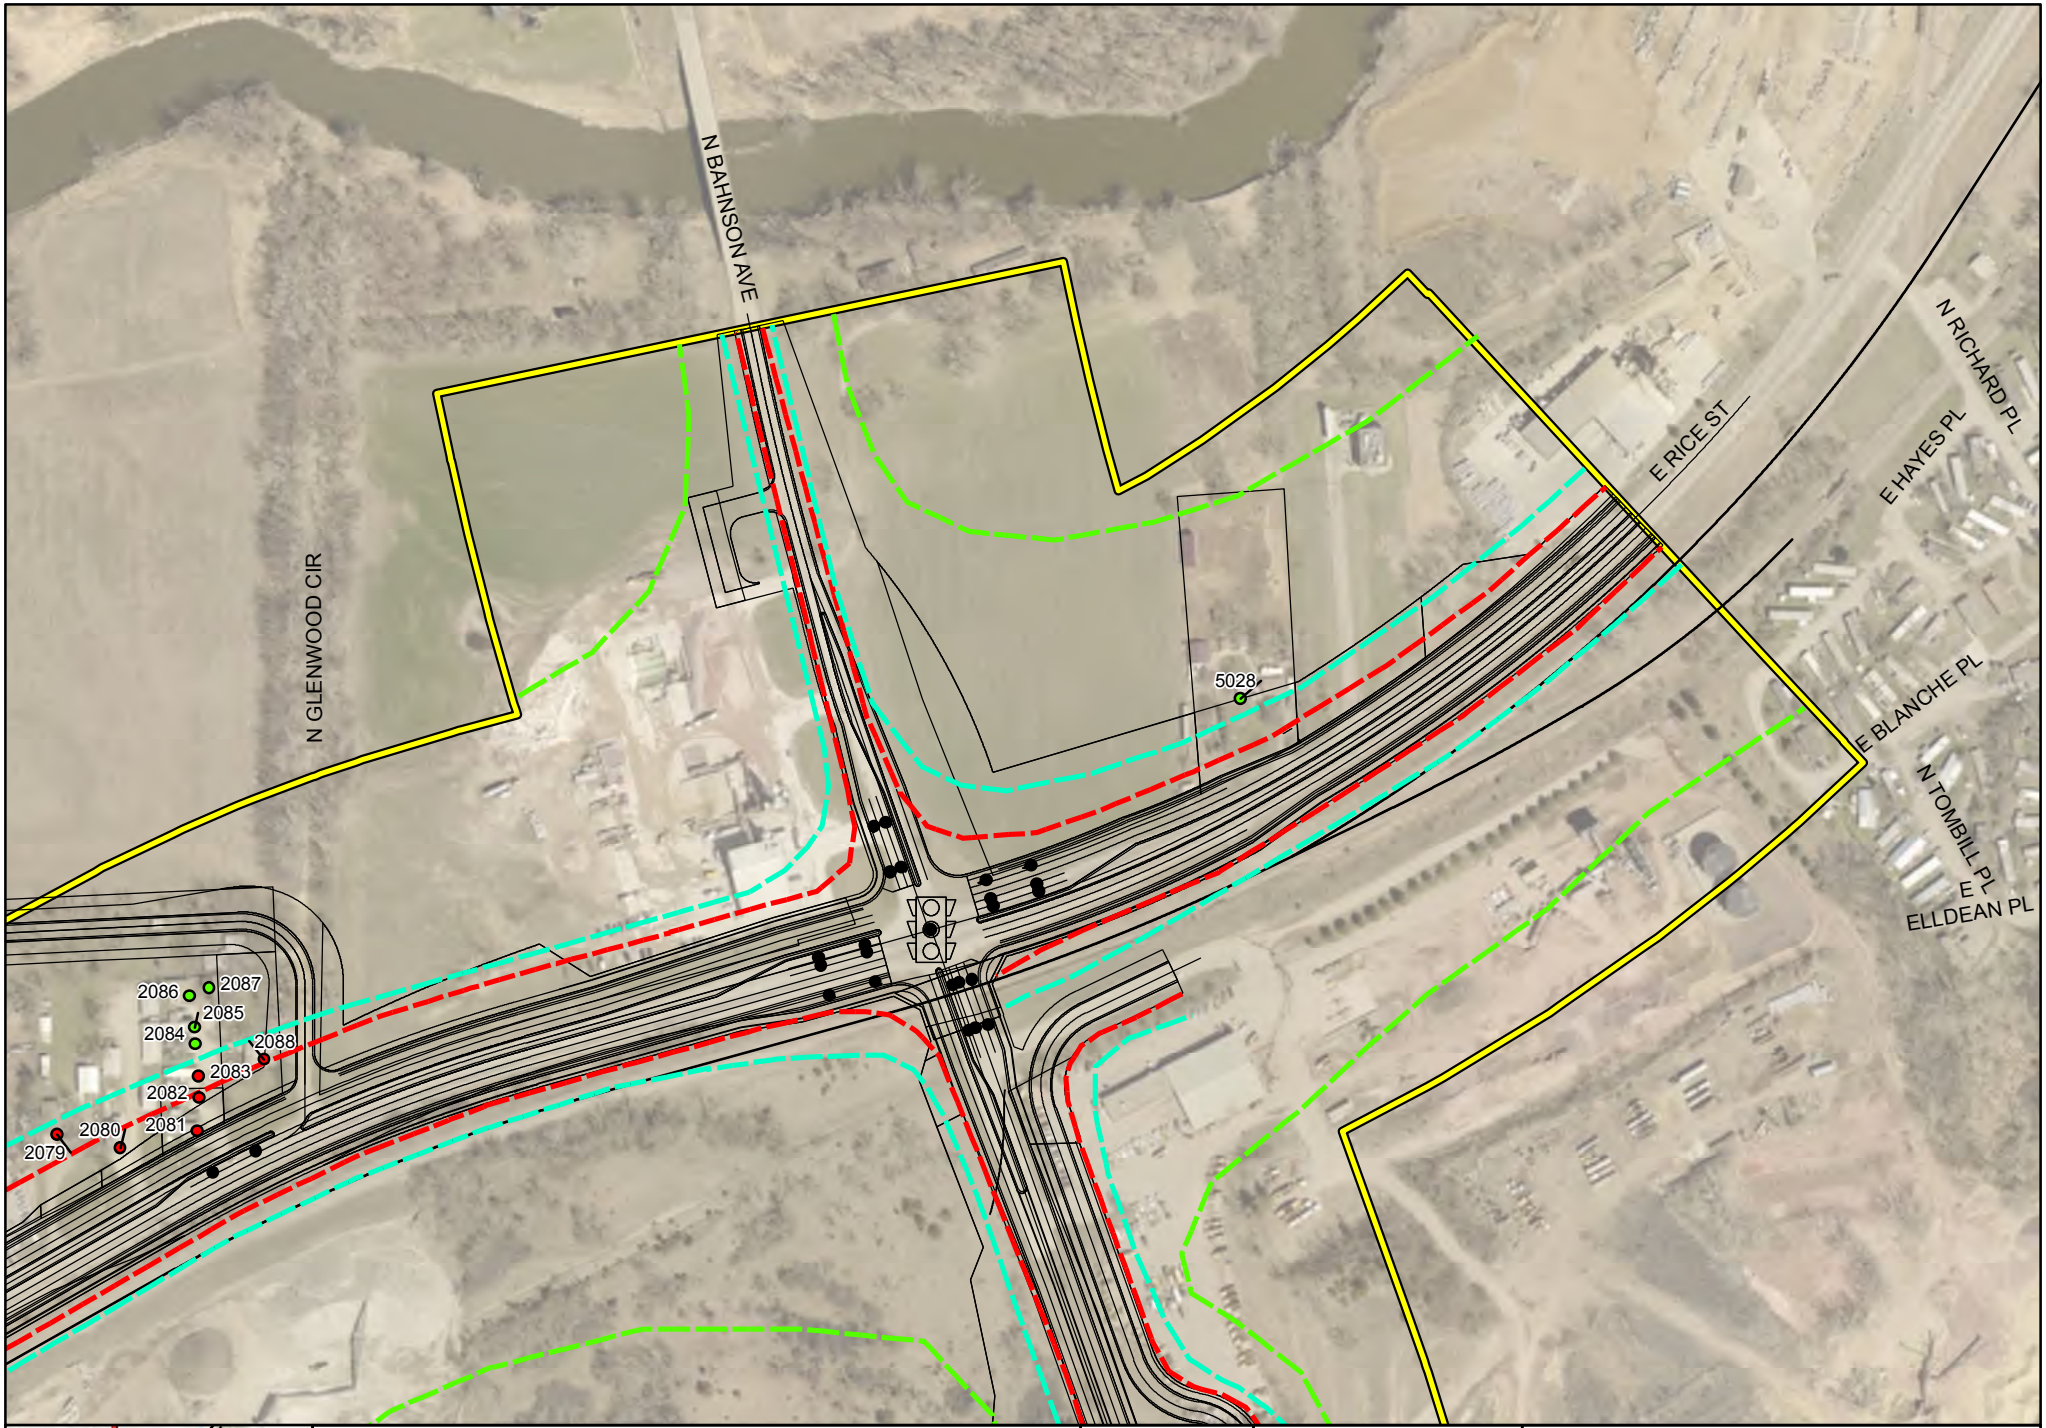

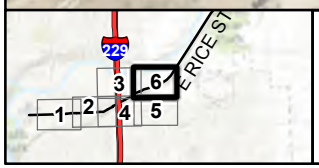

Legend

- Non-Impacted Receptor
- Impacted Receptor
- Noise Monitoring Location
- 56 dBA Contour Line
- 66 dBA Contour Line
- 71 dBA Contour Line
- Noise Study
- Sub-Study 5 Concept Linework Alternative Rice-3C with Rice C-2

I-229 Major Investment Corridor Study
Sub-Study #5
Noise Contour Figures
Proposed Alternative Rice-3c with Rice C-2

Appendix H. Public Involvement

The general public and public agencies were involved throughout the study process, with public meetings, landowner meetings, a website, and other techniques.

Public meetings

Public Meeting #1

The first Public Open House was held on October 30th, 2013. This meeting included an overview presentation describing the drivers of the I-229 Major Investment Corridor Study, types of findings the study will eventually result in, how to get/stay involved in the study, schedule, and next steps. Meeting notes, sign-in sheets, public comments, and PowerPoint slides from this open house can be found in the ***APPENDIX***.

Public Meeting #2

The second Public Open House meetings were held on June 1st and 2nd, 2015. A presentation at the meeting provided a summary of study efforts to date, including the 2035 No-Build peak hour level of service results, conceptual ideas for I-229 mainline and interchange improvements and next steps in the study. Meeting notes, sign-in sheets, public comments, and PowerPoint slides from this open house can be found in the ***APPENDIX***.

Cliff Avenue and Rice Street Public Meetings

The Cliff Avenue and Rice Street crossroad corridors were originally a part of the I-229 Corridor Study. During the development of the analysis of the potential concepts, it was determined to separate these corridors into their own sub-studies. The first Public Open House for these two corridors was held on June 22nd, 2016. A presentation at the meeting provided a summary of study efforts to date, including the 2035 No-Build peak hour level of service results, conceptual ideas for I-229 mainline and interchange improvements and next steps in the study. Meeting notes, sign-in sheets, public comments, and PowerPoint slides from this open house can be found in the ***APPENDIX***.

Public Meeting #3

The third Public Open House (and second for the Cliff Avenue and Rice Street crossroad corridors) was held on December 6th, 2016. A presentation at the meeting provided a summary of study efforts to date, including the alternative scenario evaluation results, alternative scenarios recommended for further consideration. Meeting notes, sign-in sheets, public comments, and PowerPoint slides from this open house can be found in the ***APPENDIX***.

Business/Landowner Group Meetings

Business/landowner group meetings were held on the following dates for the following sub-studies:

- I-229 Exit 3 (Minnesota Avenue) Crossroad Corridor Study
    - Stakeholder Meeting #1 – December 16th, 2014

- Stakeholder Meeting #2 – December 6th, 2016

- I-229 Exit 4 (Cliff Avenue) Crossroad Corridor Study
  - Stakeholder Meeting #1 – June 22nd, 2016
  - Stakeholder Meeting #2 – December 5th, 2016
- I-229 Exit 6 (10th Street) Crossroad Corridor Study
  - Stakeholder Meeting #1 – December 16th, 2014
  - Stakeholder Meeting #2 – December 5th, 2016
- I-229 Exit 7 (Rice Street) Crossroad Corridor Study
  - Stakeholder Meeting #1 – June 22nd, 2016
  - Stakeholder Meeting #2 – December 6th, 2016
- I-229 Exit 9 (Benson Road) Crossroad Corridor Study
  - Stakeholder Meeting #1 – December 15th, 2014
  - Stakeholder Meeting #2 – December 5th, 2016

All of the meetings were designed to allow landowners within the study area to discuss specific issues regarding their properties with study staff. In addition, several meetings were held with individual landowners where specific improvement options, and the associated impacts of those options, were discussed. Meeting notes, sign-in sheets, public comments, and PowerPoint slides from all the meetings can be found in the ***APPENDIX***.

Study Advisory Team

The Study Advisory Team, comprised of representatives of the Federal Highway Administration, South Dakota Department of Transportation, City of Sioux Falls, and the Sioux Falls Metropolitan Planning Organization, met periodically during the study to guide the study process and provide agency input. Members of the Study Advisory Team are shown in ***TABLE 1***.

Table 1. Study Advisory Team Members

NAME	AGENCY
Shannon Ausen	City of Sioux Falls – Public Works
Mike Behm	SDDOT – Project Development
Christina Bennett	SDDOT – Operations Support
Jeff Brosz	SDDOT – Transportation Inventory Management
Andy Vandel	SDDOT – Project Development (Safety)
Joel Gengler	SDDOT – Right of Way
Amber Gibson	Sioux Falls MPO
Kevin Goeden	SDDOT – Bridge Design
Steve Gramm	SDDOT – Project Development (Planning)
Heath Hoftiezer	City of Sioux Falls – Public Works
Mark Hoines	FHWA

Dave Huft	SDDOT – Research
Bruce Hunt	FHWA
Scott Jansen	SDDOT – Mitchell Region
Captain Alan Welsh	South Dakota Highway Patrol
Ryan Kerkvliet	Sioux Falls MPO – Citizens Advisory Committee
Tom Lehmkuhl	SDDOT – Project Development (Environmental)
Pete Longman	SDDOT – Road Design
Ron McMahon	FHWA
Paul Nikolas	SDDOT – Road Design
Brad Remmich	SDDOT – Project Development (Planning)
Craig Smith	SDDOT – Mitchell Region

Website

A study provided easy access to information and documents prepared as part of the study. The website address was: WWW.I229STUDY.COM



The website provided project updates throughout the course of the study.

The "***Get Involved***" page provided opportunity for website visitors to submit a project comment or question.



The "***Resources***" page included links to relevant ongoing transportation studies in the area, as well as previously written documents referred to as part of the I-229 MIS.



MPO Meetings

The study team met with the Sioux Falls MPO in November 2013 and May 2015. The meetings on November 13th and 14th, 2013 followed Public Meeting #1, and the meetings on May 20th and 21st, 2015 followed Public Meeting #2. The formal presentations given at these MPO meetings were the same meeting materials as discussed at the public meetings.

APPENDIX -

PUBLIC MEETING #1 – OCTOBER 30TH, 2013

- MEETING NOTES
- SIGN-IN SHEETS
- COMMENTS
- POWERPOINT SLIDES

HDR | ONE COMPANY *Many Solutions*™

Meeting Notes

Subject: I229 MIS Public Open House #1	
Client: SDDOT	
Project: I229 Corridor Study	Project No: 207030
Meeting Date: October 30th, 2013	Meeting Location: Sioux Falls Convention Center
Notes by: HDR	

Debrief Record: The following notes were provided by study participants to members of the study team during the meeting while reviewing the various open house displays.

1.) Many comments around providing better crossings for ped's and bike's along the I229 corridor. They find it very hard to get from one side to the other since most interchanges only have sidewalk on one side. Connections directly to the bike trail would be great.
2.) Several comments on how poor the 26th Street Interchange is and that the SB off/on ramp is so short it causes accidents and many people slide off of the road due to the tight SB on ramp curve.
3.) A few members heard a desire to finish the 49th Street extension as they believe it is long overdue.
4.) Interstate users believe that aux. lanes from 10th Street to 26th Street should be implemented soon.
5.) The interchange at 10th Street and the proximity of Cleveland Avenue is not good; this area doesn't work because one intersection backs up the other. Need to figure out something different at Cleveland.
6.) Many believe the I229 corridor needs to be 3 lanes in each direction to handle the traffic that we will see in the future.
7.) A few noted that placing a half interchange at 60th Street north would dramatically improve access to the industrial park and would reduce congestion at Benson Road.
8.) Folks from the SF Bike Club indicated that they would not use 10th Street as a bike route due to the driveway access. Rather have a route on 6th Street or 12th Street or both.
9.) Encourage the industrial park businesses to stagger shifts to reduce peaks in the traffic along the interstate.
10.) Maintain Access to businesses along Minnesota; don't place a median that will take away half of my traffic.
11.) Build the bridge over the BSR east of Hwy 11 on the 57th Street alignment so everyone doesn't have to enter the east side of the City on SD 42 which will reduce congestion on 10th Street.
12.) Lower the speed limit on I229 to 55 mph.
13.) Interested in the placement of variable speed limits on I229, have seen these in other locations and area easy to follow.
14.) SB on Ramp at 10th does not work well due to the structure in such close proximity.
15.) Summer mowing practices may need to be modified to insure grass is kept shorter to improve sight from ramp to interstate as vehicle merges with mainline from the on-ramp.
16.) Horizontal curves between 10th and 26th can be a problem during winter events.
17.) Conflicting comments heard regarding noise walls, some folks say they are needed and believe they need to be built soon and others felt that it would make their home "feel like a prison" to have a noise wall in their backyard and that the noise isn't that bad.
18.) An auxiliary lane is needed along SB I-229 between Louise Avenue and the I-29 NB ramp.
19.) On I-29, there needs to be a third lane / auxiliary lane between I-229 and 57th Street (Outside of Study Area).

20.) Need an interchange on I-29 @ 85th Street to allow for southern Sioux Falls to continue growing. (Outside of Study Area).
21.) Would like a crossing of I-229 for 33rd Street.
22.) Removing Yeager Road would be bad for 26th Street between I-229 and Cliff Avenue.
23.) There was concern over the elevation for the future 26th Street. There's also a "dip" in 26th Street at the old railroad bridge that they hope will be fixed with the new interchange.

6300 So Old Village Place
Suite 100
Sioux Falls, SD 57108

Phone (605) 977-7740
Fax (605) 977-7747
www.hdrinc.com

SIGN IN SHEET

Subject:	I-229 Major Investment Corridor Study – Public Open House #1
Client:	City of Sioux Falls / South Dakota Department of Transportation
Project:	PL 0100(87) 3616P, PCN 044K — Project No: 207030
Meeting Date:	Wednesday, Oct 30th, 2013 5:30 – 7:00 PM — Meeting Location: Sioux Falls Convention Center

Please print clearly. Thank you.

	NAME/REPRESENTING	ADDRESS	BEST CONTACT PHONE	E-MAIL
1	Chad Huwe / City of SF		367-8601	chuwe@siouxfalls.org
2	Manny Steele Dist 12		335-7036	bobmanny78@gmail.com
3	Nick Mentele		770-8856	nick mentele@yahoo.
4	Jim Estenson			
5	Stacy DuChene		221-2667	sduchene@hdrinc.com
6	Trent Swanson	100 N Phillips #901 SF SD 57104-6725	335-4962	Trents@cuttlerbuffum.com
7	Stephanie Logue	6300 S. Old Village Pl St	997-8104	Stephanie.logue@hdrinc.com
8	Allen Bindert	47120 85TH ST	605-368-2114	
9	Sandra Mallette	4705 Yellowstone	335-6596	
10	Rod Brown	6500 Tallgrass	357 4780	
11	Casey Lloyd	6904 S Westhills	376-5834	Casey@Lloydconstruction.com
12	Mary Schleuter	809 Day Ave	336-6874	
13	Mike Kurtz	924 W Cascade St	413-5874	
14	Rodney McClure	1800 W 22nd St	332-7290	
15				
16				
17				
18				
19				

SIGN IN SHEET

Subject:	I-229 Major Investment Corridor Study – Public Open House #1
Client:	City of Sioux Falls / South Dakota Department of Transportation
Project:	PL 0100(87) 3616P, PCN 044K — Project No: 207030
Meeting Date:	Wednesday, Oct 30th, 2013 5:30 – 7:00 PM — Meeting Location: Sioux Falls Convention Center

Please print clearly. Thank you.

	NAME/REPRESENTING	ADDRESS	BEST CONTACT PHONE	E-MAIL
1	Rich Schwanke VFW	3601 S Minnesota SF		Imbliss628@aol.com
2	Butch Haugen VFW	3601 S. Minn. SFSD	605-553-5518	bhaugen@gmail.com
3	Mike Behn SDDOT	700 E Broadway Pierre SD	605 773 4423	Michael.Behn@state.sd.us
4	Brad Remmich SDDOT	" "	605-773-3073	bradley.remmich@state.sd.us
5	Thomas Hein	6100 E Hein Place SF	605-361-8400	
6	Christina Bennett	Pierre SD 700 E Broadway Ave.	605-773-4759	christina.bennett@state.sd.us
7	Ross Harris	5525 Merle Hay Rd STE 200	515-278-2913	rharris@hrgreen.com
8	Steve Hoff	6300 S. Old Village Sioux Falls, SD	605-977-7740	steve.hoff@hdrinc.com
9	Kent Scribner	7505 S. Kiwanis, # 2444 SF, SD 57106	605-338-0966	akscrib@yahoo.com
10	Brad Hicks	609 S. Conklin SF SD 57103		
11	Bill Cool Kollis	3217 W. Zephyr Pl SF SD.		
12	Larry Karsten	2504 E. 19th	338-4760	
13	Chris Parsley	7001 W 66th	219-384-1507	CMPARSLEY@Gmail.com
14	Brent Hamilton	1301 S. Minnesota Ave	605-953-3618	
15	Jerry Jackie Nash	3105 Tricia Lane	605-338-1870	
16	Julie Christianson	1105 S Riverdale	605-338-3260	bigkahuna@sioux falls.net
17	Robert Leonhardt	2001 S Carolina Dr	605-321-5074	
18	Mark Miller	3908 S Dolly SF 57103		
19	Mark Haines	116 E. Dakota		

SIGN IN SHEET

Subject:	I-229 Major Investment Corridor Study – Public Open House #1
Client:	City of Sioux Falls / South Dakota Department of Transportation
Project:	PL 0100(87) 3616P, PCN 044K — Project No: 207030
Meeting Date:	Wednesday, Oct 30th, 2013 5:30 – 7:00 PM — Meeting Location: Sioux Falls Convention Center

Please print clearly. Thank you.

	NAME/REPRESENTING	ADDRESS	BEST CONTACT PHONE	E-MAIL
1	Steve Gramm	700 E Broadway Ave Pierre	605-773-6441	Steve.gramm@state.sd.us
2	Jim Stalzer	5909 W Bristol Dr	605-366-5874	rep.stalzer@state.sd.us
3	Russ Smith Gordon Smith	3500 E 60th St N 57104	605-940-4943	
4	Amber Gibson SECOG	500 N Weber Ave Ste 100 Sioux Falls SD 57104	605-367-5390	amber@secog.org
5	Mike Holm	1309 E Northern		mholm@cbinc.net
6	JOAN STOREN	3900 W Avera Dr	605 322-4573	JOAN.STOREN@AVERA.org
7	Dennis Weidmeyer	5510 Shadowood Pl.	605-351 0219	dweidmeyer@Lincolncounty SD.org
8	Josh Larson	2208 S Sheffield	605-205-0016	jgshadowood@hotmail.com
9	GEORGE HAHN	647 S. Main	360-6639	SF SD 57104
10	Angie Wulf	1600 S Gear Grove	335-1897	Angie.Wulf@SVTV.com
11	Glenda Broad	944 S. 17th Ave	940-6380	GRolstein@sio.midco.net
12	Phil Gundvaldson	1800 E. Arrowhead Rd	929-8190	phil@infrastructuredg.com
13	Robert Bohm	5600 S Dakota Ave	334 4220	robert.bohm@dakotabiltg
14	Mike Murphy / SF YMCA	2411 S. Carter Pl.	360-7414	camp@siouxfallsymca.org
15	Duane A.			duane@hss.com
16	Brian Ray	8404 Indian Hills Drive Omaha NE	402.399.1000	brian.ray@hdrinc.com
17				
18				
19				

SIGN IN SHEET

Subject:	I-229 Major Investment Corridor Study – Public Open House #1
Client:	City of Sioux Falls / South Dakota Department of Transportation
Project:	PL 0100(87) 3616P, PCN 044K — Project No: 207030
Meeting Date:	Wednesday, Oct 30th, 2013 5:30 – 7:00 PM — Meeting Location: Sioux Falls Convention Center

Please print clearly. Thank you.

	NAME	REPRESENTING	ADDRESS	BEST CONTACT PHONE	E-MAIL
1	Joel W Gaughan	SDDOT	700 E Broadway Ave, Pierre SD	605-773-3748	
2	Pete Longman	SDDOT	700 E Broadway Ave Pierre	605-773-6488	
3	Vicki Meirose		100 S Main Ave SFSD Sioux		
4	Rex Rolfing		SF-SD		
5	Gerald Tennissen		SF, SD		
6	James Unruh		HDR SF, SD		
7	Dan Tidball-cock		City of SF	367-8890	
8	Heath Hoftiezer		City of SF		
9	Jon Wiegand		HR Green		
10	Bill Moran		HR Green		
11	Cheryl Rath		SFSD		
12	Clint Kolda		7605 W. Reliance St SF		dakotacyclist@gmail.com
13	Steven		3300 Sunnymeade Cir SF		
14	Rick Kiley		1108 N. West Ave Sioux Falls	605-361-7785	kileyrs@dakotasafety.org
15	Ernie Otten		46787 273rd Ten.		
16	Tom Sweetman		PO Box 2320 SFSD 57101	605 366 5746	thomas.r.sweetman@gmail.com
17	Greg Boris		5915 S Westland	321-5514	
18			616 E. Wilmot Rd	376.4056	
19	Marshall Lavin		1710 S. Southeastern Ave	334-7979	glavins@sio.midco.net

SIGN IN SHEET

Subject:	I-229 Major Investment Corridor Study – Public Open House #1
Client:	City of Sioux Falls / South Dakota Department of Transportation
Project:	PL 0100(97) 3616P, PCN 044K — Project No: 207030
Meeting Date:	Wednesday, Oct 30th, 2013 5:30 – 7:00 PM — Meeting Location: Sioux Falls Convention Center

Please print clearly. Thank you.

	NAME/REPRESENTING	ADDRESS	BEST CONTACT PHONE	E-MAIL
1	Mary; Jack Mortenson	2116 S. Crestwood Rd	605.321.0509	mary@sparklight.org
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS
PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before Nov 8th, 2013 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

Very informational when asked questions while looking at the boards. Excited to see the progress take place

(optional)
Name: _____ Address: _____

Phone: _____ Email: _____

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS
PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before Nov 8th, 2013 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

(optional)
Name: Jim Stalzer

Address: 5909 W Bristol Dr 57106

Phone: 605-366-5874

Email: jim.stalzer@gmail.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS
PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before Nov 8th, 2013 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

Very informational when asked questions while looking at the boards. Excited to see the progress take place

(optional)
Name: _____ Address: _____
Phone: _____ Email: _____

Kjenstad, Jason

From: BlueMail@bluehost.com
Sent: Wednesday, October 16, 2013 3:05 PM
To: email@i229study.com
Subject: Message from BlueMail

Your BlueMail form has been completed, following are the results:

Field	Value
Name	Chris Parsley
Org	Falls Area Bicyclists, President
Address2	7001 W 66th St
CSZ	Sioux Falls, SD 57106
Phone2	319-389-1507
Email2	cmparsley@gmail.com
Study2	I-229 Corridor Study
Comments	According to item 2, consider that bicycles operate as vehicles and make sure that the I229 crossings are safe for bicyclists. I would also ask that a pedestrian crossing be considered from South Phillips over I229 and connecting to the multi use path on the other side.
redirect2	http://www.i229study.com/thank-you.html

Kjenstad, Jason

From: Chris Parsley <cmparsley@gmail.com>
Sent: Wednesday, October 30, 2013 5:33 PM
To: Kjenstad, Jason
Subject: I229 MIS

Some of my concerns involve getting pedestrians and bicyclists over I229 safely. I have not seen anything in the plan that addresses this issue.

Kjenstad, Jason

From: BlueMail@bluehost.com
Sent: Sunday, October 27, 2013 7:23 PM
To: email@i229study.com
Subject: Message from BlueMail

Your BlueMail form has been completed, following are the results:

Field	Value
Name	Jonathan Keill
Org	N/A
Address2	1515 S Glendale Ave
CSZ	Sioux Falls, SD 57105-1417
Phone2	(605) 321-2517
Email2	jjkeill@hotmail.com
Study2	I-229 Corridor Study
Comments	I've lived in Sioux Falls my whole life and am planning in the near future to relocate to the Twin Cities to attend a graduate program at the University of Minnesota in urban planning and design. After reviewing this study (as well as having seen the city and its traffic grow by leaps and bounds in the 25 years I've lived here), I have several ideas as to how we can possibly create new or reconfigure existing exits along the I-229 corridor. A few of these would require "hybrid" exits so-to-speak...but seeing how well the freeway systems work in the Twin Cities, I believe we would be able to maximize efficiency in traffic flow along the corridor for decades to come (not to mention a couple of ideas for the stretch of I-29 from I-229 to 41st St). These would provide increased access to the Empire/Empire East and the Interstate Crossing Business Park. I don't have professional software or anything with which I can already provide detailed plans...however, I would enjoy being able to meet with or talk to someone about my ideas and see if there is a plausibility aspect to them. Granted, I also am not very privy to things like costs or right-of-way, but having an analytical and mathematical mind, I feel I am able to see how things could be improved in a number of ways. I'd love to hear back from someone just to offer some proposals. Thank you for your time!
redirect2	http://www.i229study.com/thank-you.html

- Jason met w/ Jon Keill - showed ideas for on/off ramps to 57th near I229 Underpass
  - wants a connection for 69th to I29
  - nothing really new between Western and Rice
  - Interested in Benson - 60th - I229/I90 Junction

Kjenstad, Jason

From: Thomas Hein <theinmail@gmail.com>
Sent: Monday, November 04, 2013 9:38 AM
To: Kjenstad, Jason
Cc: Jeff R. Mindt; Shally Rogen; Brian Sather (gdentltd@hotmail.com); Eric & Mary Stormo (estormo@uswest.net)
Subject: I-229 Major Investment Corridor Study

Jason,
This email is in regards to your meeting on October 30th, 2013.
Please be advised that I own, with four other partners, the property call Minnesota Crossing located on the corner of 43rd and Minnesota Ave.
I am extremely concerned that you and your planning group are going to attempt to take our accesses away from the building located at 3508 S Minnesota Ave., just north of the Taylor Oil building.

I am hoping, with advance notice, your engineering team can design an appropriate exit on I-229 and Minnesota Ave so that you will be able to keep and maintain the integrity of my real estate access points. This real estate truly enhances its value because of the customers traveling south and approaching my strip mall as well as those customers coming from the South traveling North.
Lets make sure that we work toward the common goal of keeping both those access directions open from both north and south and not try to consider a median in the middle of the road way to eliminate 1/2 of our customer base.

Please be sure to forward all design concepts that you are discussing or considering so that we may include our input to find a win win solution.
I will watch for your reply and acknowledgement that you will provide me with all concept drawings that you are considering.

Thanks for your help in advance.
Tom Hein

Kjenstad, Jason

From: BlueMail@bluehost.com
Sent: Wednesday, November 06, 2013 5:06 PM
To: email@i229study.com
Subject: Message from BlueMail

Your BlueMail form has been completed, following are the results:

Field	Value
Name	Robin Solberg-Versluys
Org	
Address2	1205 S Gordon Dr
CSZ	Sioux Falls SD 57110
Phone2	605-331-5015
Email2	robin.versluys@gmail.com
Study2	I-229 Exit 9 (Benson Rd) Study
Comments	I work in the Industrial Park area and have noticed how bad the traffic is on East Benson getting on I229 South. I take E54th St N to Lewis Avenue then south to Benson. There are two lanes that turn left (east) on to Benson Rd off Lewis. However, there is approximately 1/2 mile for everyone from the two lanes to merge together into one lane to get onto I229 south. If someone is nice enough to let you in to the lane, you need to be very careful as the people in front of you are usually stopping for others that need to be let in. I can only imagine how many accidents or close calls there have been in this area. The second part of the problem is there is a street closer to the exit (Potsdam Ave) in which you have other people trying to get onto Benson. I think it would be more beneficial if there were two lanes to turn south onto I229 and merge prior to entering I229 (similar to the exit on the Benson and I29, and 12th and I29), and possibly a stop light on Potsdam to help those travelers get onto Benson. There are two lanes getting off of I229 onto Benson and i think the traffic would flow a lot better if the other side (south bound exit) would have two lanes also. Thank you, Robin Solberg-Versluys
redirect2	http://www.i229study.com/thank-you.html

Kjenstad, Jason

From: Mark Miller <mark.miller@sio.midco.net>
Sent: Sunday, November 17, 2013 9:56 AM
To: Kjenstad, Jason
Subject: I-229 Corridor Study

I live in south Sioux Falls and work by Sanford Research in northern Sioux Falls. I know the traffic well on 229. Traffic is solid during peak commute times. People are becoming more impatient and careless with their driving habits. I notice cars weaving between traffic, cutting off other drivers while jockeying for a better position for the Benson Road exit. That exit is overwhelmed during rush hours. Last week there was a accident on the ramp, causing traffic to backup in the 2 outside lanes of 229 all the way down to the Rice Street exit. The other problem is traffic merging on Benson to go south on 229. Again, impatient drivers and dangerous driving decisions.

Here are my suggestions:
- put in a half-diamond interchange at 229 and 60th Street N. This will alleviate the load on Benson tremendously. Without question this would be my first choice. It would be the most cost effective development to address the traffic congestion at Benson.
- widen 229 to four lanes. The reality is that traffic is bad now and is going to get worse as the north industrial parks continue to develop. Completing Hwy 100 is a long ways out and will not provide relief in time.

Kjenstad, Jason

From: BlueMail@bluehost.com
Sent: Sunday, December 01, 2013 7:52 PM
To: email@i229study.com
Subject: Message from BlueMail

Your BlueMail form has been completed, following are the results:


Field	Value
Name	Michael Christensen
Org	
Address2	1813 S Purdue Ave
CSZ	Sioux Falls, SD, 57106
Phone2	605-929-8923
Email2	mytzpyk@gmail.com
Study2	I-229 Corridor Study
Comments	Please include Cliff Ave in the study: because the Cliff Ave interchange is so similar to the Minnesota Ave interchange I am surprised that it is not being included in this study. I understand there may be vehicular factors that logically cause its exclusion, however the issues faced by pedestrians and bicyclists are the same as Minnesota Ave interchange. Consider bike & pedestrian crash data in your analysis, please. Minnesota Ave & Cliff Ave proximity to bike trail: please recognize and plan to include better movement or access from north of I-229 to the bike trail south of I-229. I-229 blocks a major path of desire for non-motorized access to the city's best and more frequently used park feature. Fix it. Add width to the outside lanes on Minnesota Ave. Add better sidewalk visibility and controls. Bridges: add pedestrian bridges over I-229 south from West Ave, south from Phillips Ave, and east from 35th St. Itâ€™s hard for me to believe justification exists for the pedestrian bridge west from Teem Drive over I-29 that doesnâ€™t exists for any of these three possibilities.
redirect2	http://www.i229study.com/thank-you.html

Kjenstad, Jason

From: BlueMail@bluehost.com
Sent: Monday, December 02, 2013 8:08 PM
To: email@i229study.com
Subject: Message from BlueMail

Your BlueMail form has been completed, following are the results:

Field	Value
Name	Art Holden
Org	
Address2	705 W Victory Ln
CSZ	Sioux Falls
Phone2	6053713928
Email2	art@thundergeeks.com
Study2	I-229 Corridor Study
Comments	Please take active transportation options seriously in this study. Investments in pedestrian and cycling infrastructure have been proven to increase property values, spur economic growth, and enhance public health. I think a pedestrian bridge on South Phillips toward Tomar park would connect a large portion of central Sioux Falls to the trail and park system. I believe this would be heavily used and very valuable to the citizens of Sioux Falls. Thank you for the opportunity to voice my opinions.
redirect2	http://www.i229study.com/thank-you.html

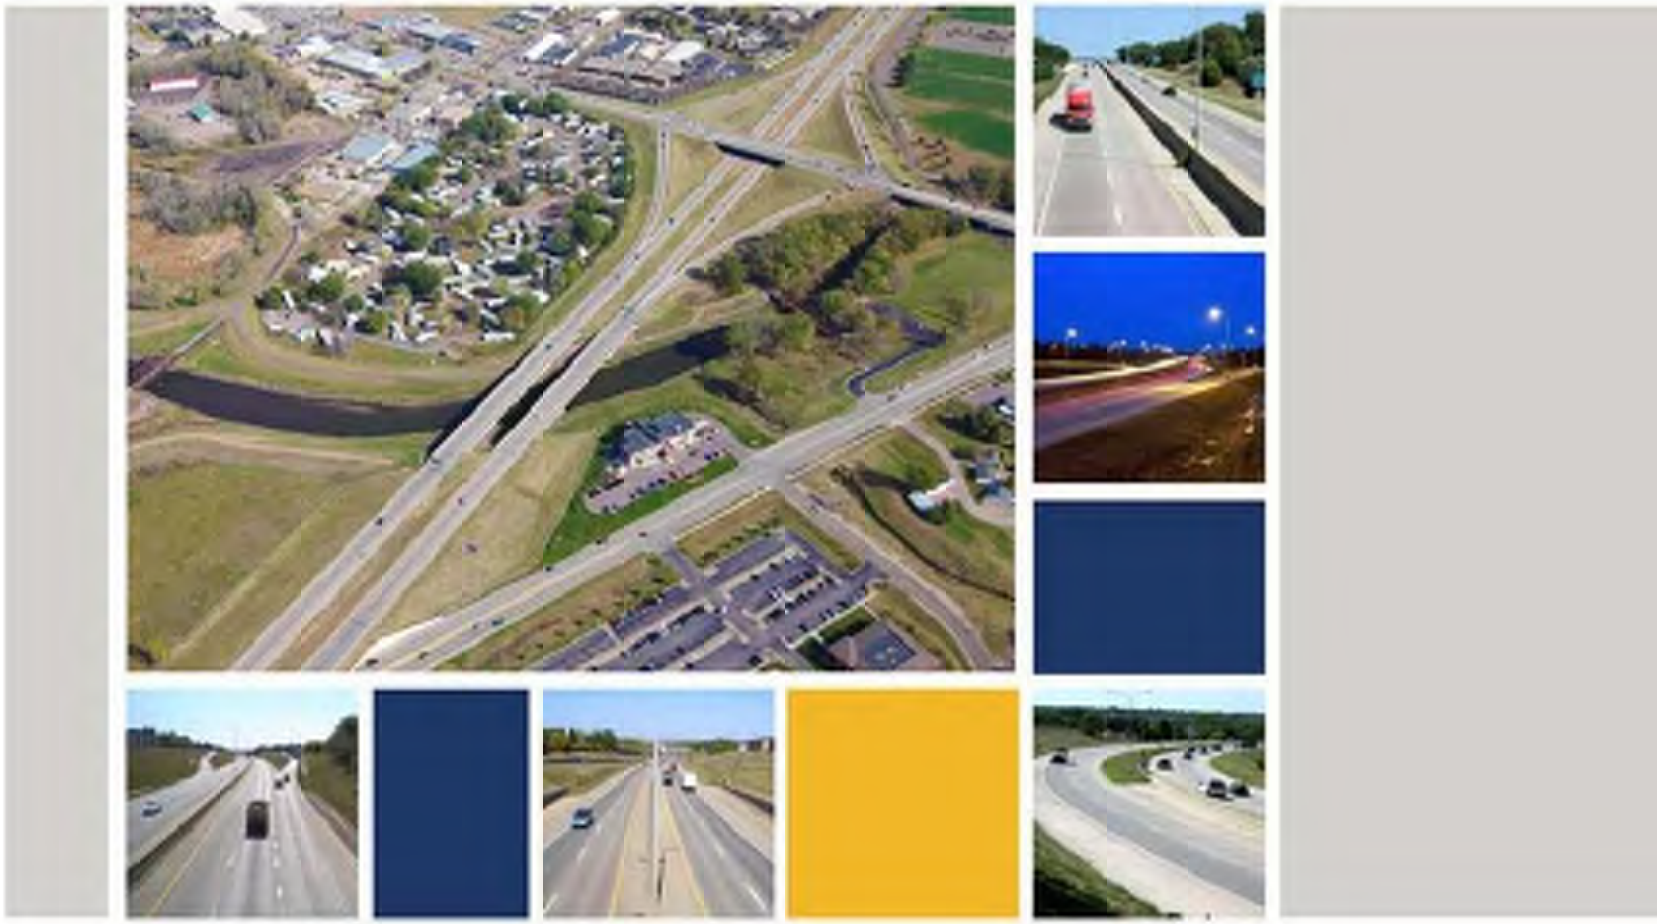

I-229 Major Investment Corridor Study
Public Open House
October 30th, 2013 – 5:30 pm to 7:00 pm

Study Advisory Partners

Advisory Agencies

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

Consultant Team

HDR Engineering, Inc.

HR Green, Inc.

CITILABS

airsage
The power of where and when

Primary Contacts

SDDOT Project Manager
Steve Gramm, PE
Project Development, Data Analysis Engineer
Steve.gramm@state.sd.us
Phone: 605-773-6641

City of Sioux Falls Project Manager
Shannon Ausen, PE
Traffic Engineering Division
sausen@siouxfalls.org
Phone: 605-367-8607

CONSULTANT - Public Involvement Lead
Jason Kjenstad, PE
HDR Engineering, Sioux Falls
Jason.Kjenstad@hdrinc.com
Phone: 605-977-7740

Study Area Map

I-229 Corridor Study


Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave

Exit 6 – 10th Street

Exit 9 – Benson Road

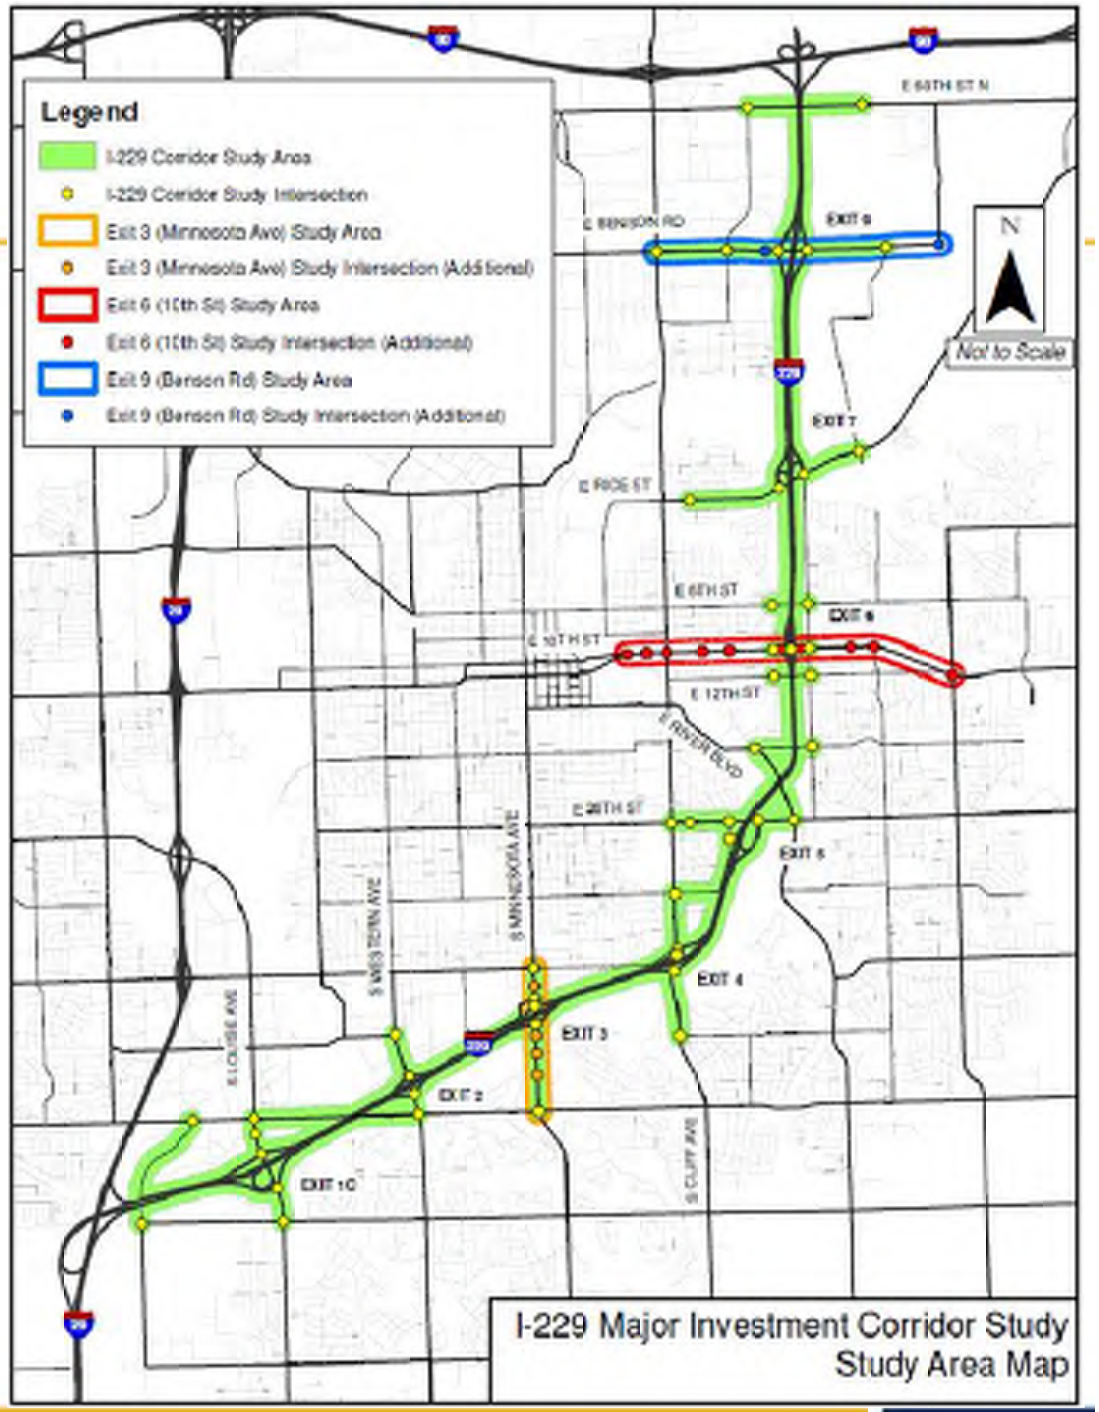

What is Driving this Study?

Louise Avenue Area – 1990's




Louise Avenue Area – 2010's



What is Driving this Study?

10th Street Area – 1990's

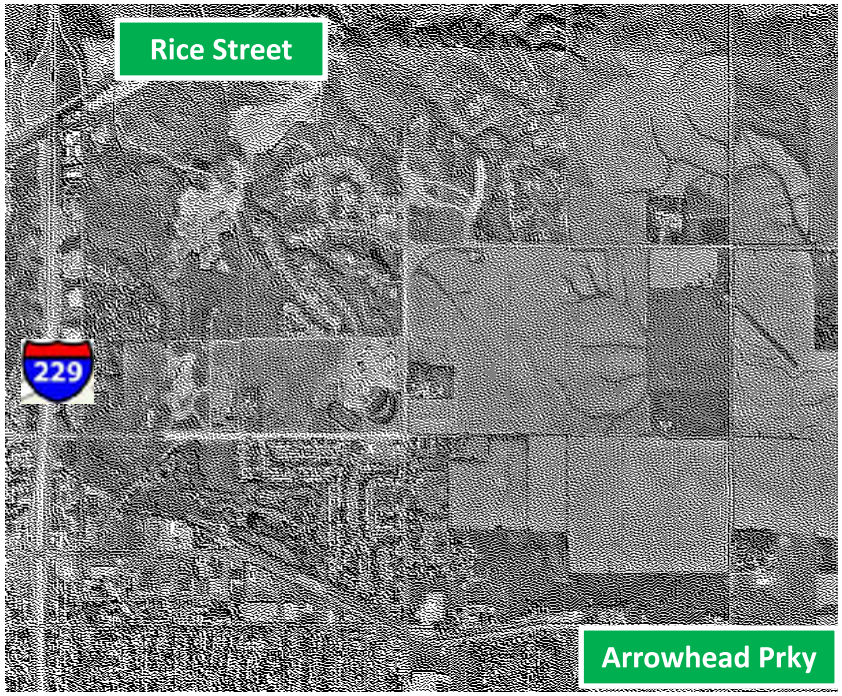


10th Street Area – 2010's



What is Driving this Study?


Benson Rd Street Area – 1990's

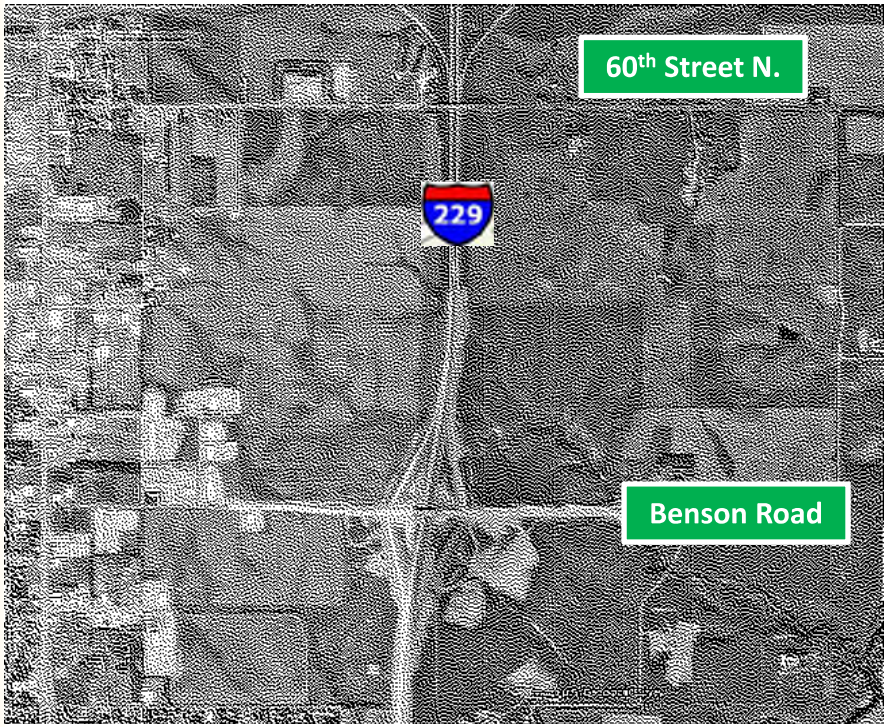

Benson Rd Street Area – 2010's




What is Driving this Study?

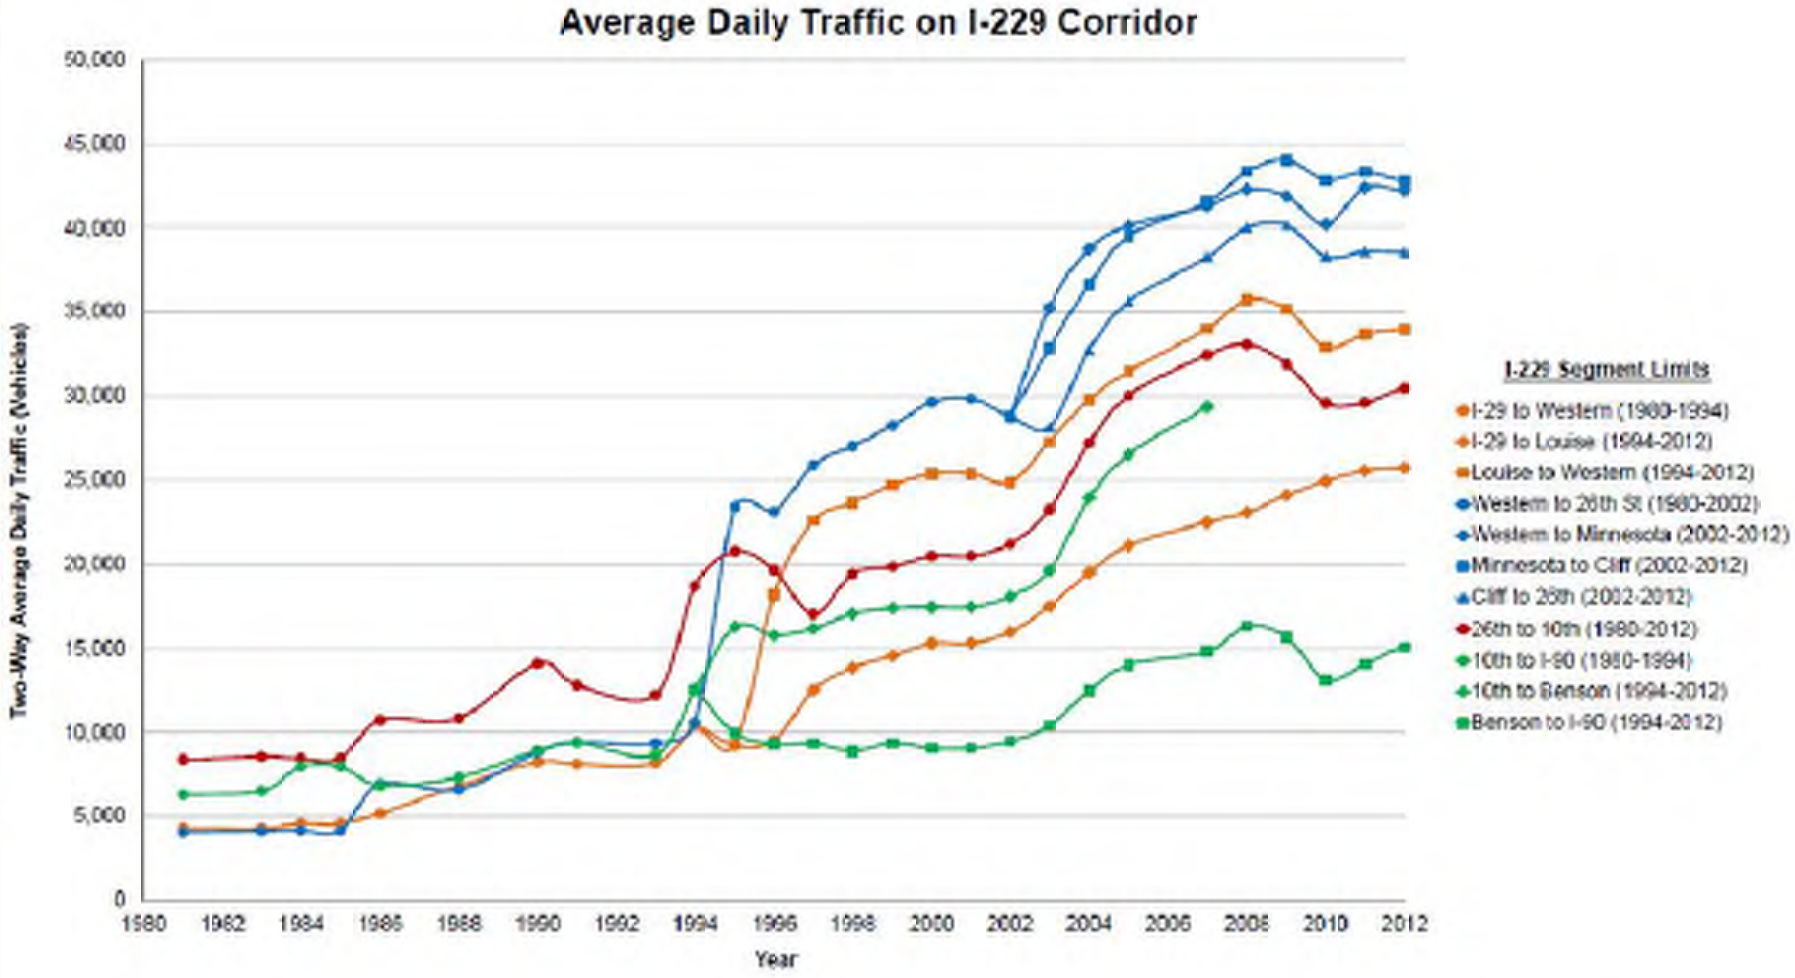

Historic Traffic Growth

What Should the Study Tell Us?

- **Traffic Capacity**

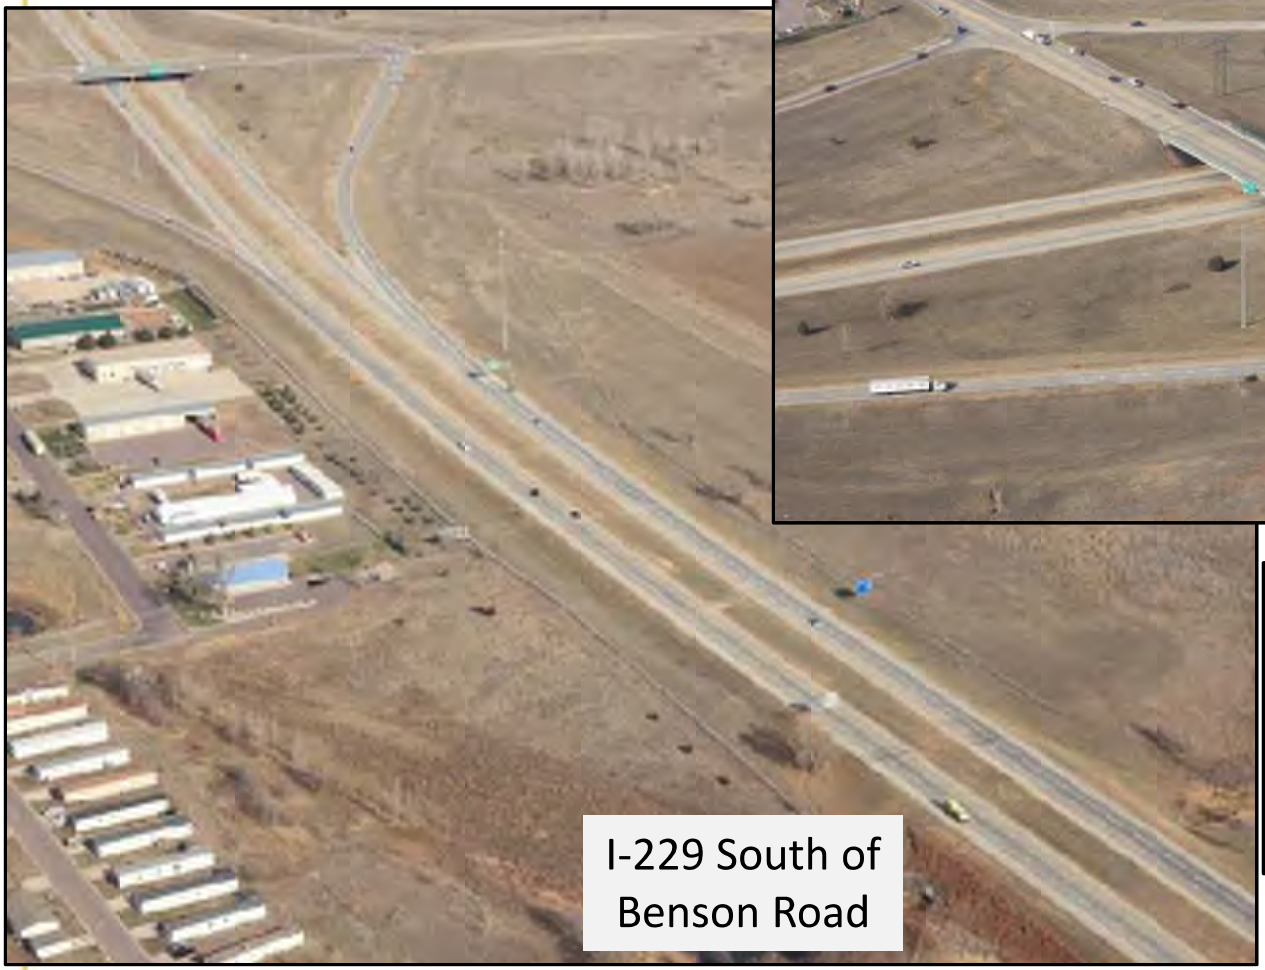

I-229 South of Benson Road




(Exit 9) Benson Road Interchange


Traffic Analysis Locations


- I-229 Mainline
- I-229 Ramps
- Interchange Intersections
- Crossroad Intersections

What Should the Study Tell Us?

- Traffic Capacity
- **Traffic Safety**

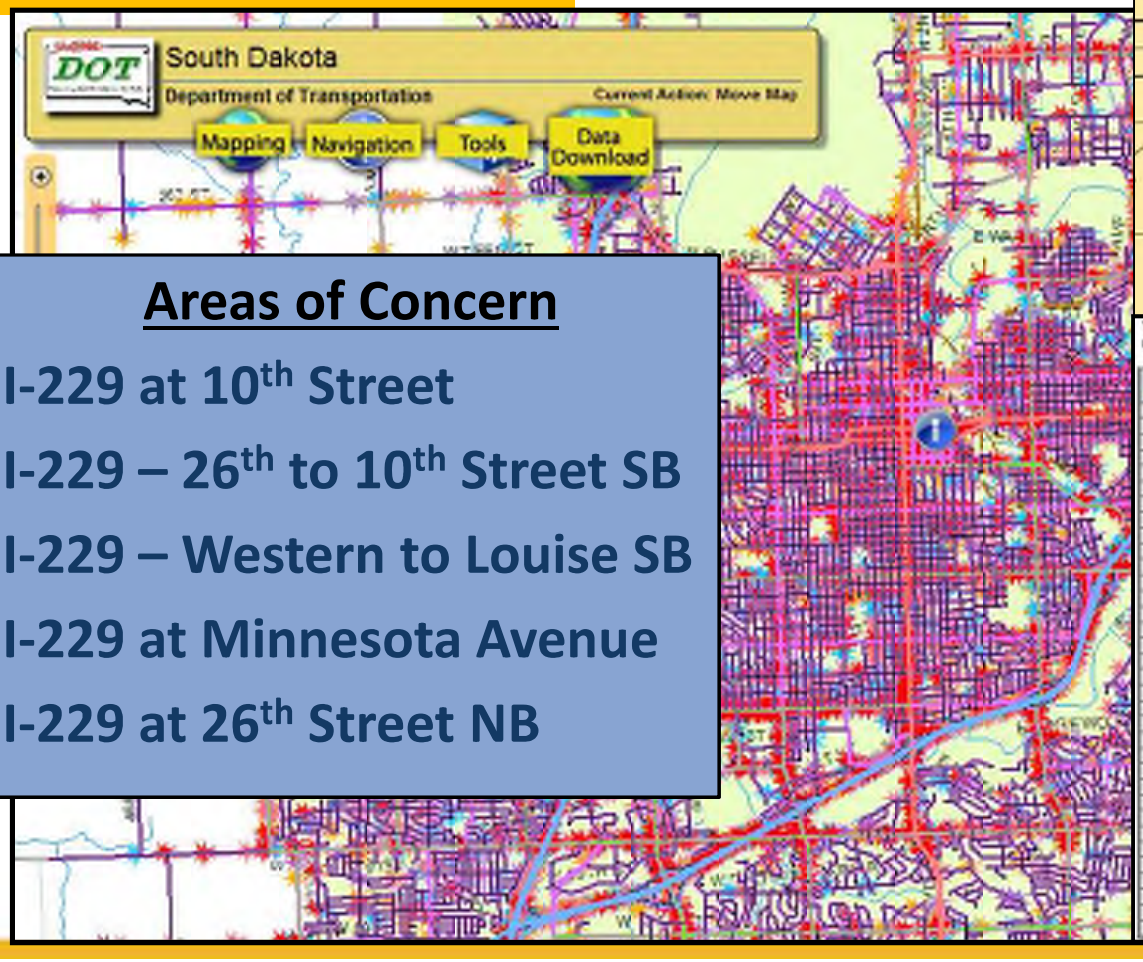

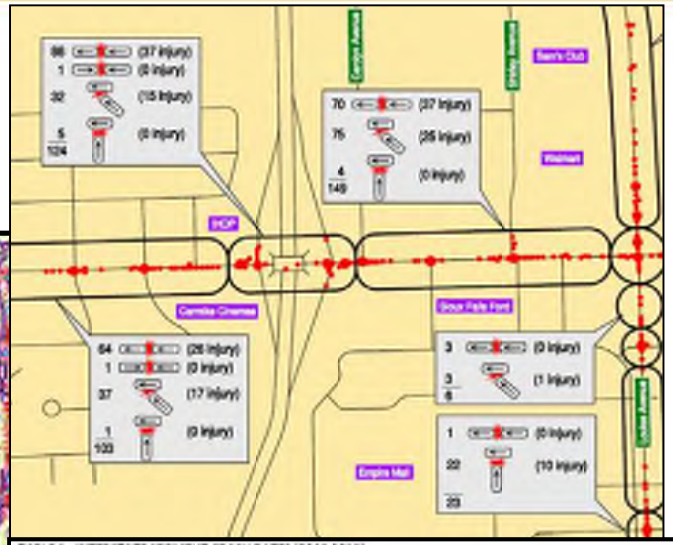

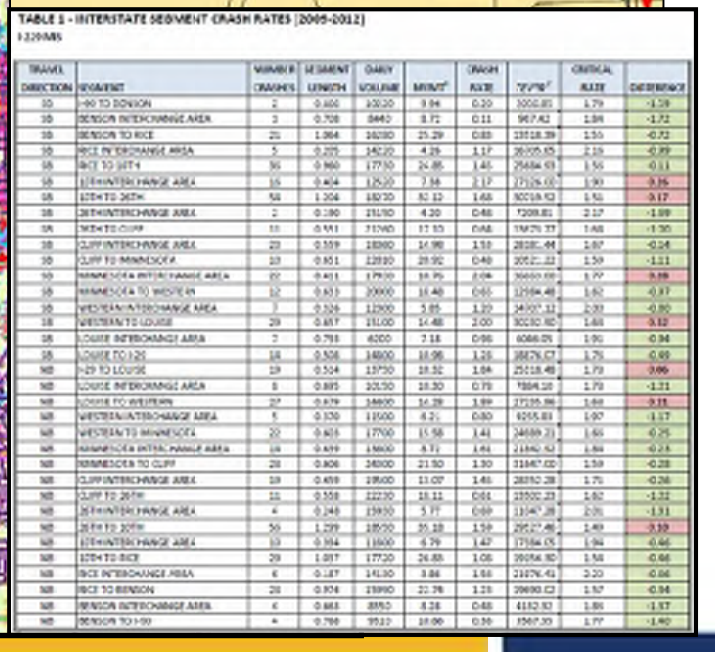

Areas of Concern

I-229 at 10th Street

I-229 – 26th to 10th Street SB

I-229 – Western to Louise SB

I-229 at Minnesota Avenue

I-229 at 26th Street NB

What Should the Study Tell Us?

- Traffic Capacity
- Traffic Safety
- **Incident Management**






Incident Management Study Goals

- Development of Base Mapping for Detours along I-229
- Begin discussions on Communication Activities

Traffic Incident Management Partners

- Law Enforcement
- Fire and Rescue
- Medical Services
- Public Safety Communications
- Traffic Information Media
- SDDOT, City of Sioux Falls, and others

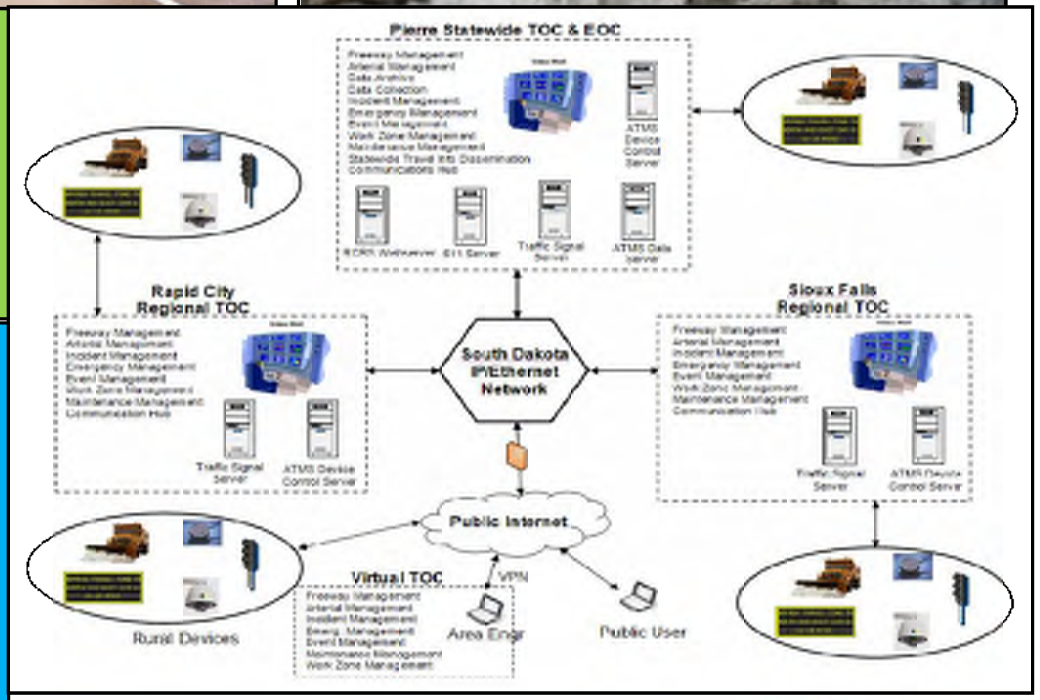


What Should the Study Tell Us?

- Traffic Capacity
- Traffic Safety
- Incident Management
- **Short & Long Term Planning**

Chart 5-P: MPO Community 2035 Growth Projections

Minnehaha County Population and Employment


City	No. of Employees 2008	Population 2008	Population 2010	Population-to-Employee Ration	No. of Employees 2035	Population 2035
Brandon	2,058	9,000	9,500	24.36%	4,889	19,500
Crooks	127	1,263	1,272	10.30%	285	2,800
Hartford	558	2,680	2,717	18.24%	935	5,000
Sioux Falls						270,000
Tea						200
Harrisburg						800

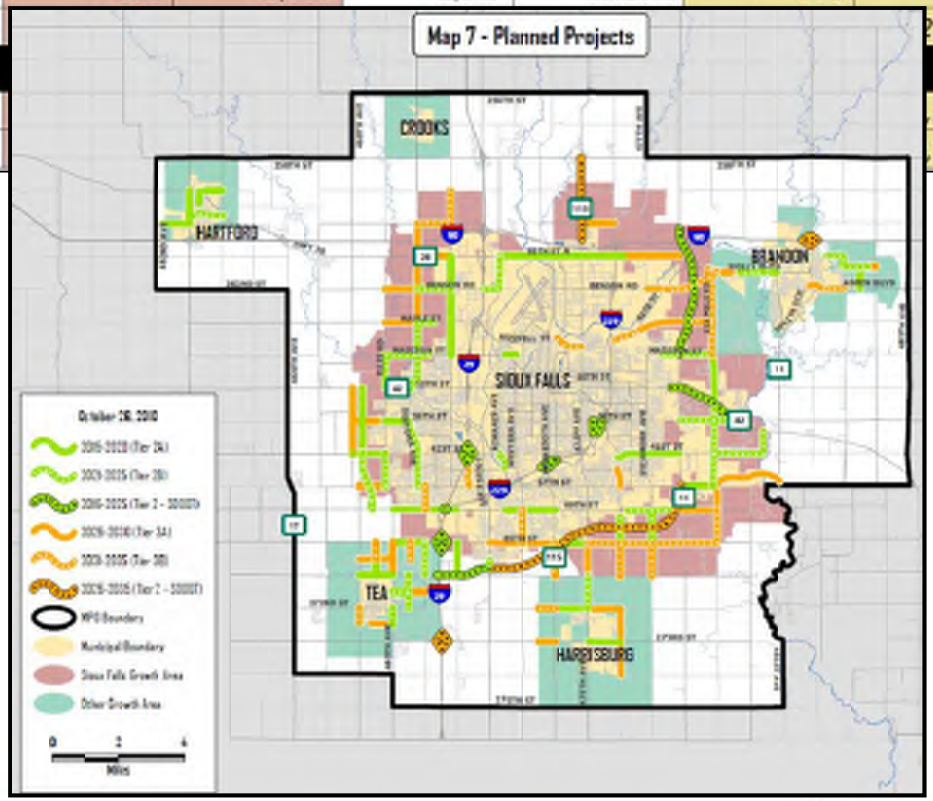




What Should the Study Tell Us?


- Traffic Capacity
- Traffic Safety
- Incident Management
- Short & Long Term Planning
- **Coordinated Implementation**

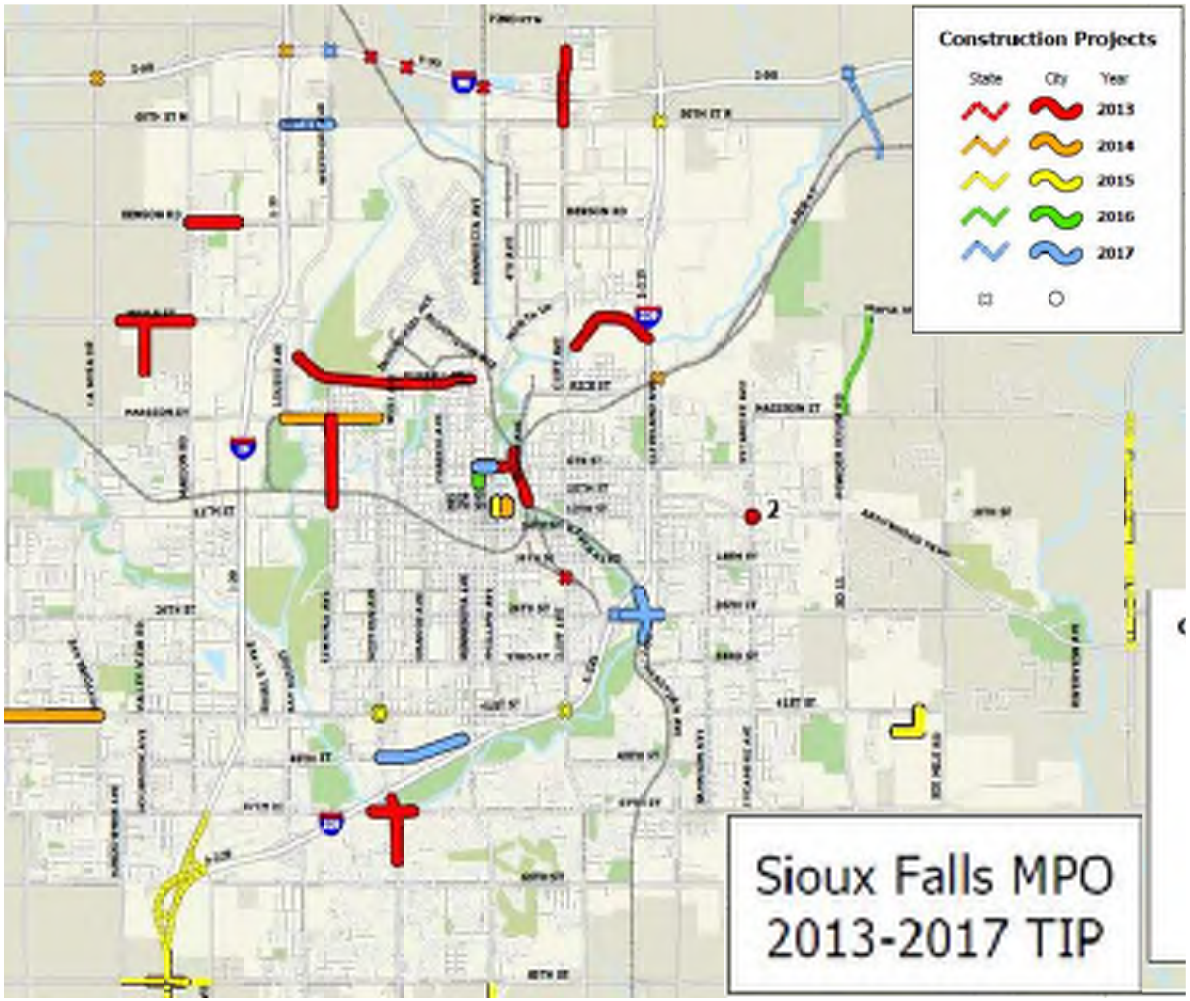


Why Additional Studies?

- Previous Planning Studies have indicated that Exit 3 (Minnesota Avenue), Exit 6 (10th Street), and Exit 9 (Benson Road) will need improvements along with possible crossroad corridor improvements.

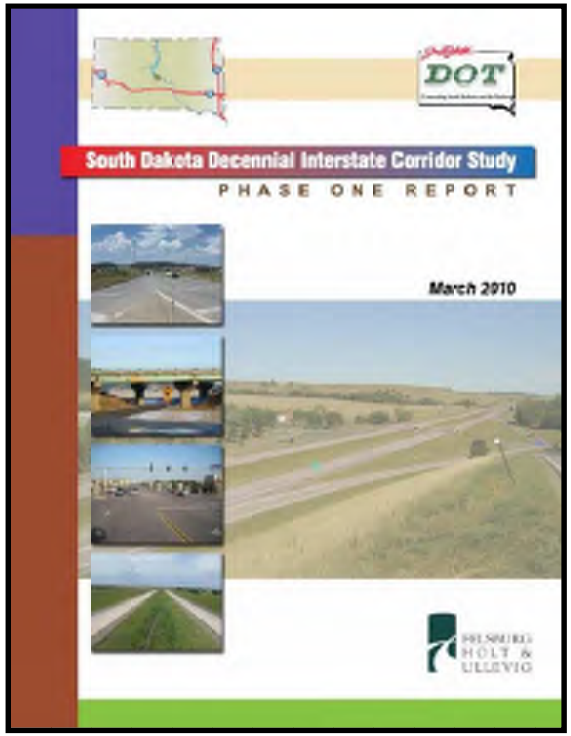

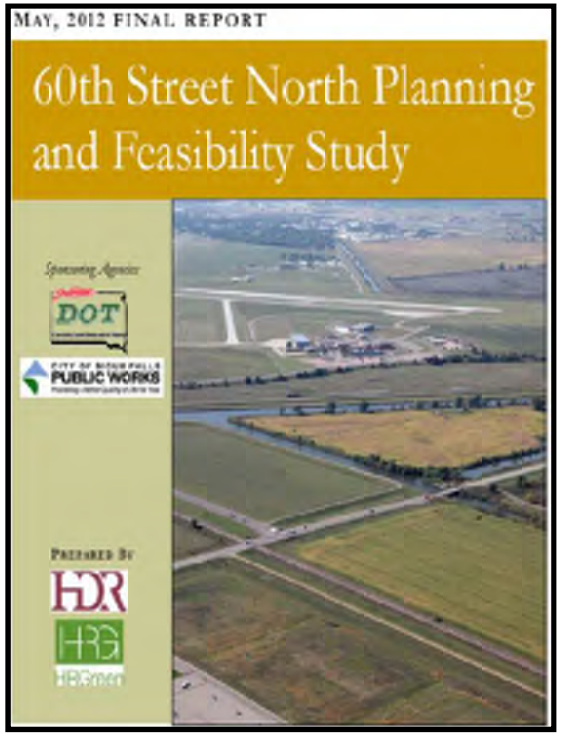

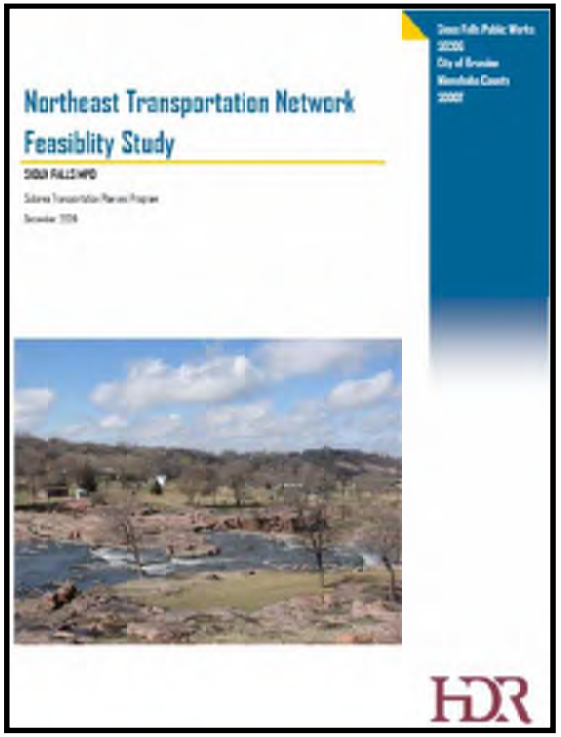

Exit 3 (Minnesota Avenue)

Crossroad Study Goals

- Reduce traffic congestion
- Evaluate interchange options
- Integrate plans for the 49th Street Extension with the interchange options developed
- Improve pedestrian and bike access to the Big Sioux River Pathway
- Improve safety for corridor users
- Improve vehicle safety to Yankton Trail Park








Exit 6 (10th Street)

Crossroad Study Goals

- Reduce traffic congestion
- Develop Corridor Growth Plan to meet traffic demands but minimizing impacts to developed properties
- Improve pedestrian mobility
- Improve safety for corridor users
- Identify improvements to the interchange as well as the 10th Street and Cleveland Ave intersection



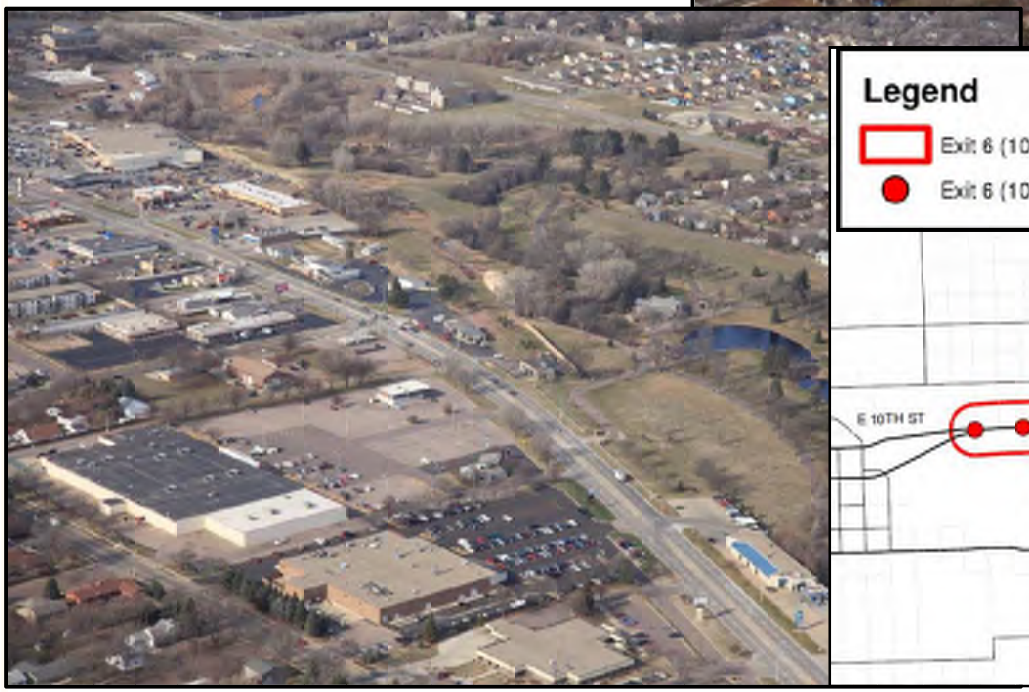



Exit 9 (Benson Road)

Crossroad Study Goals

- Reduce traffic congestion at NB on/off interchange ramp terminal
- Develop Corridor Growth Plan to meet traffic demands from development taking place east of I-229
- Improve pedestrian mobility
- Make recommendations to improve corridor intersections
- Develop interchange alternatives to meet future traffic demands









Other Study Activities?

- **Noise Data Collection**

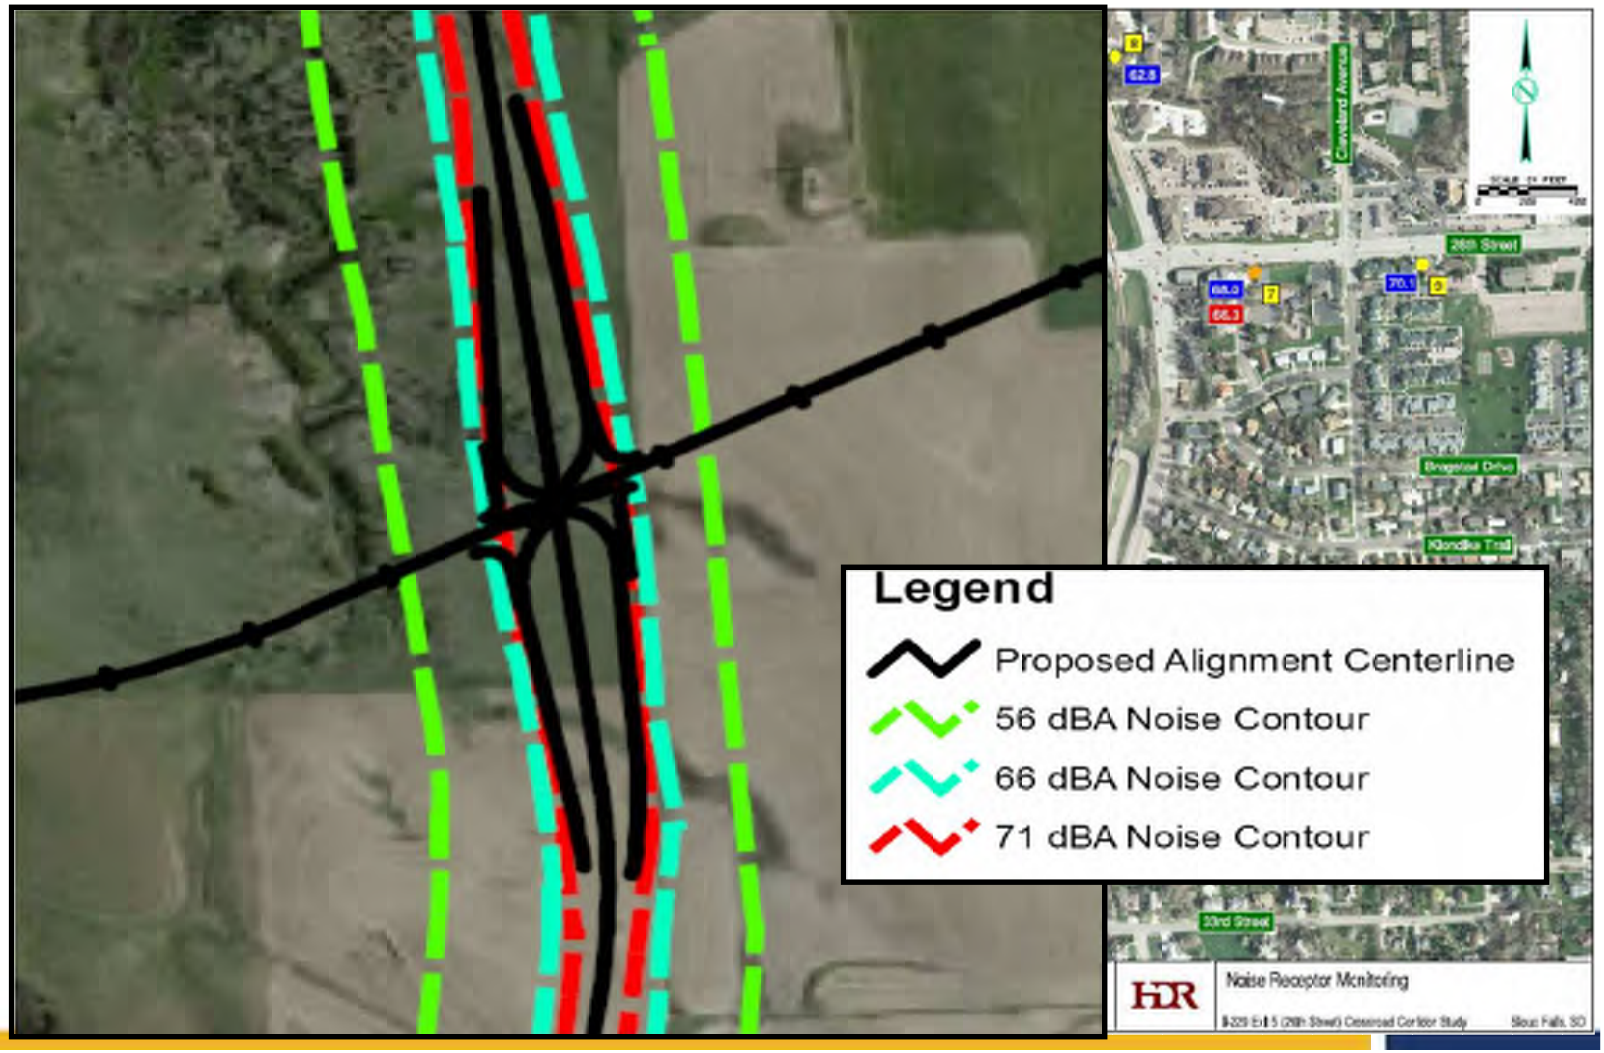

Other Study Activities?

- **Origin-Destination Study**

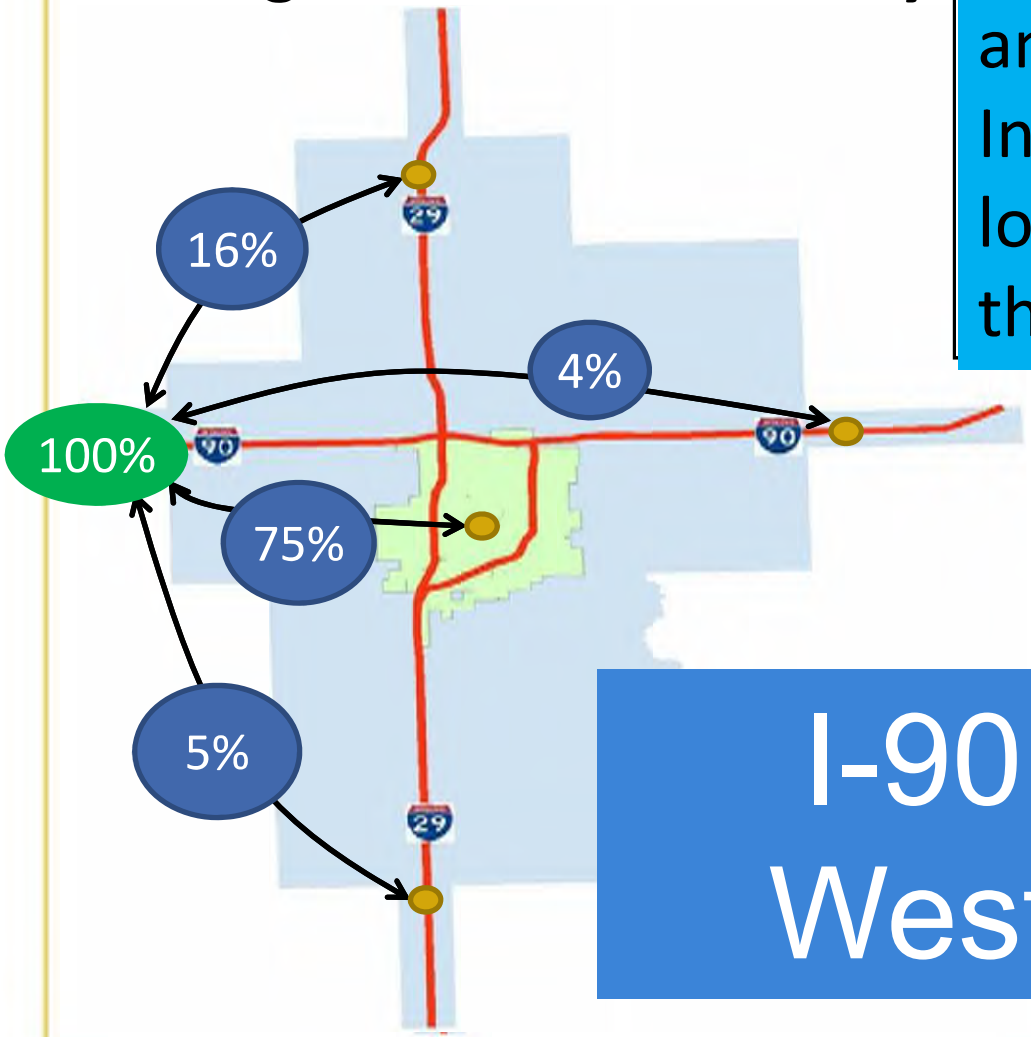


What is the amount of state and regional traffic on the Interstate system versus local traffic in and around the study area?

I-90 West

Methodology:
1.) Airsage collects signaling data from cell phone towers as your smartphone constantly communicates.
2.) This cell phone technology can locate a phone spatially at a given time of day.
3.) This data is being recorded 24 hours a day – 7 days a week.
4.) This "Technology" allows for anonymous and aggregated data meaning it only that knows that it is a phone, nothing more.
5.) Data sets are provided indicating time and location for us to determine travel demand *(keep in mind this is only a sample size of the overall population but allows us to estimate travel patterns better)*

Project Website

WWW.I229STUDY.COM

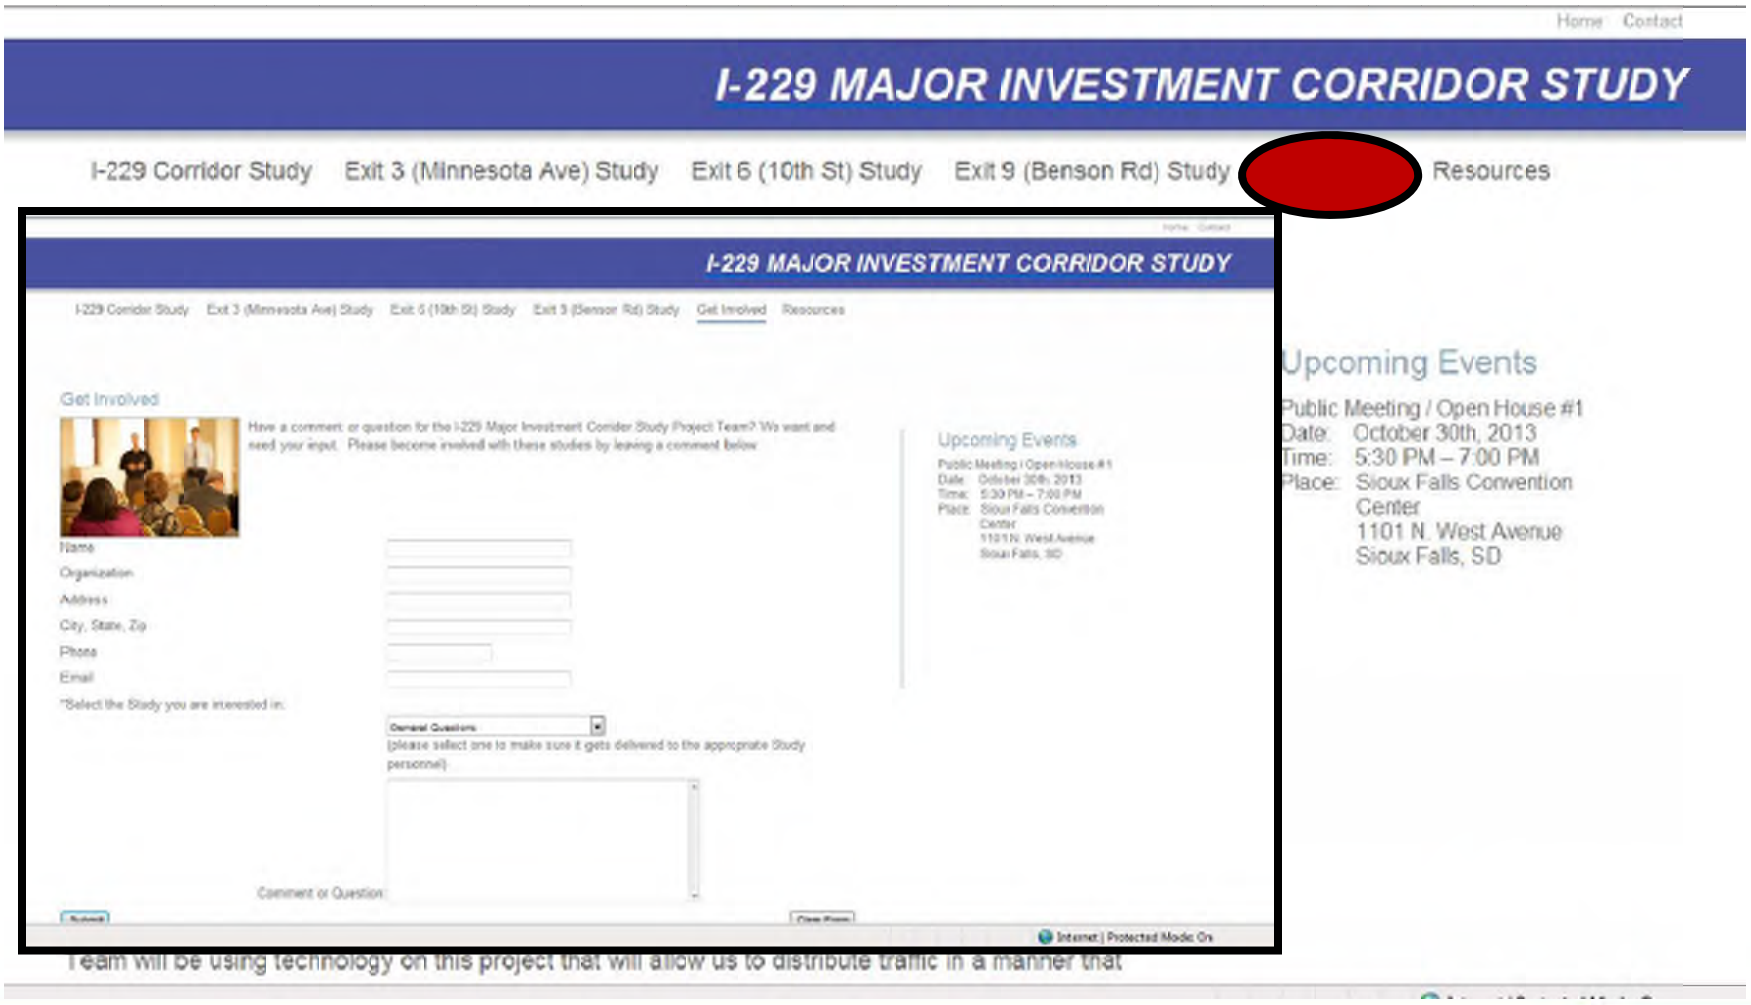

Project Schedule



TIMELINE OF EVENTS

YEAR 2013

April 2013 – Study Began

May / October 2013 – Data Collection & Traffic Model Building

October 30th, 2013 – *Public Open House #1*

November 2013 / March 2014 – Complete Traffic Assessment and Develop Alternatives for Improvements

YEAR 2014

March / April 2014 - *Public / Stakeholder Meetings*


April / July 2014 – Refine Alternatives & Produce Draft Reports

August 2014 – *Public Meeting (Final)*

October 2014 – Complete Study

Next Steps

(1.) Take public comments on concerns you have regarding I-229 Study Areas

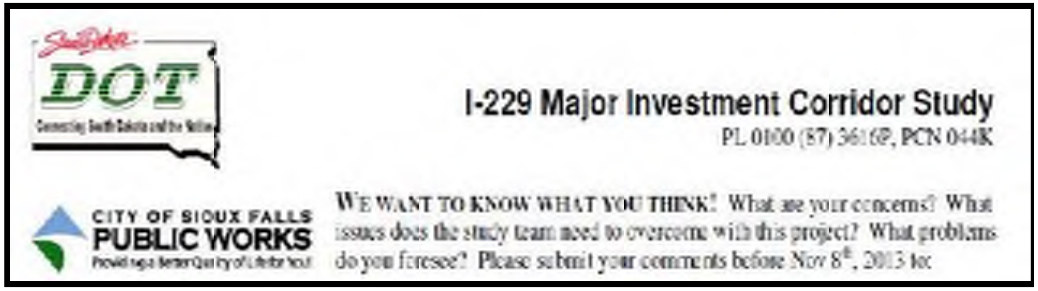

(2.) Complete Traffic Assessment and begin to develop base alternatives to mitigate the capacity issues identified



(3.) Begin noise monitoring along corridor this fall

Before You Leave Please…



SIGN IN SHEET

I-229 Major Investment Corridor Study – Public Open House #1

City of Sioux Falls / South Dakota Department of Transportation

PL 0130(87) 361NP, PCN 044K

Project No: 207030

Wednesday, Oct 30th, 2013 5:30 – 7:00 PM

Sioux Falls Convention Center

Please print clearly. Thank you.

	NAME/REPRESENTING	ADDRESS	BEST CONTACT PHONE	E-MAIL
1				
2				
3				
4				
5				
6				

Please Sign In!



I-229 Major Investment Corridor Study

PL 0100 (87) 361NP, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS

Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before Nov 8th, 2013 to:

Mail: HDR Engineering, Inc.
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: Jason.Kjenstad@hdrinc.com


Fax: 605-977-7747


(optional)
Name: _____ Address: _____

Phone: _____ Email: _____

Leave a Comment or Suggestion!!!!

Room Layout

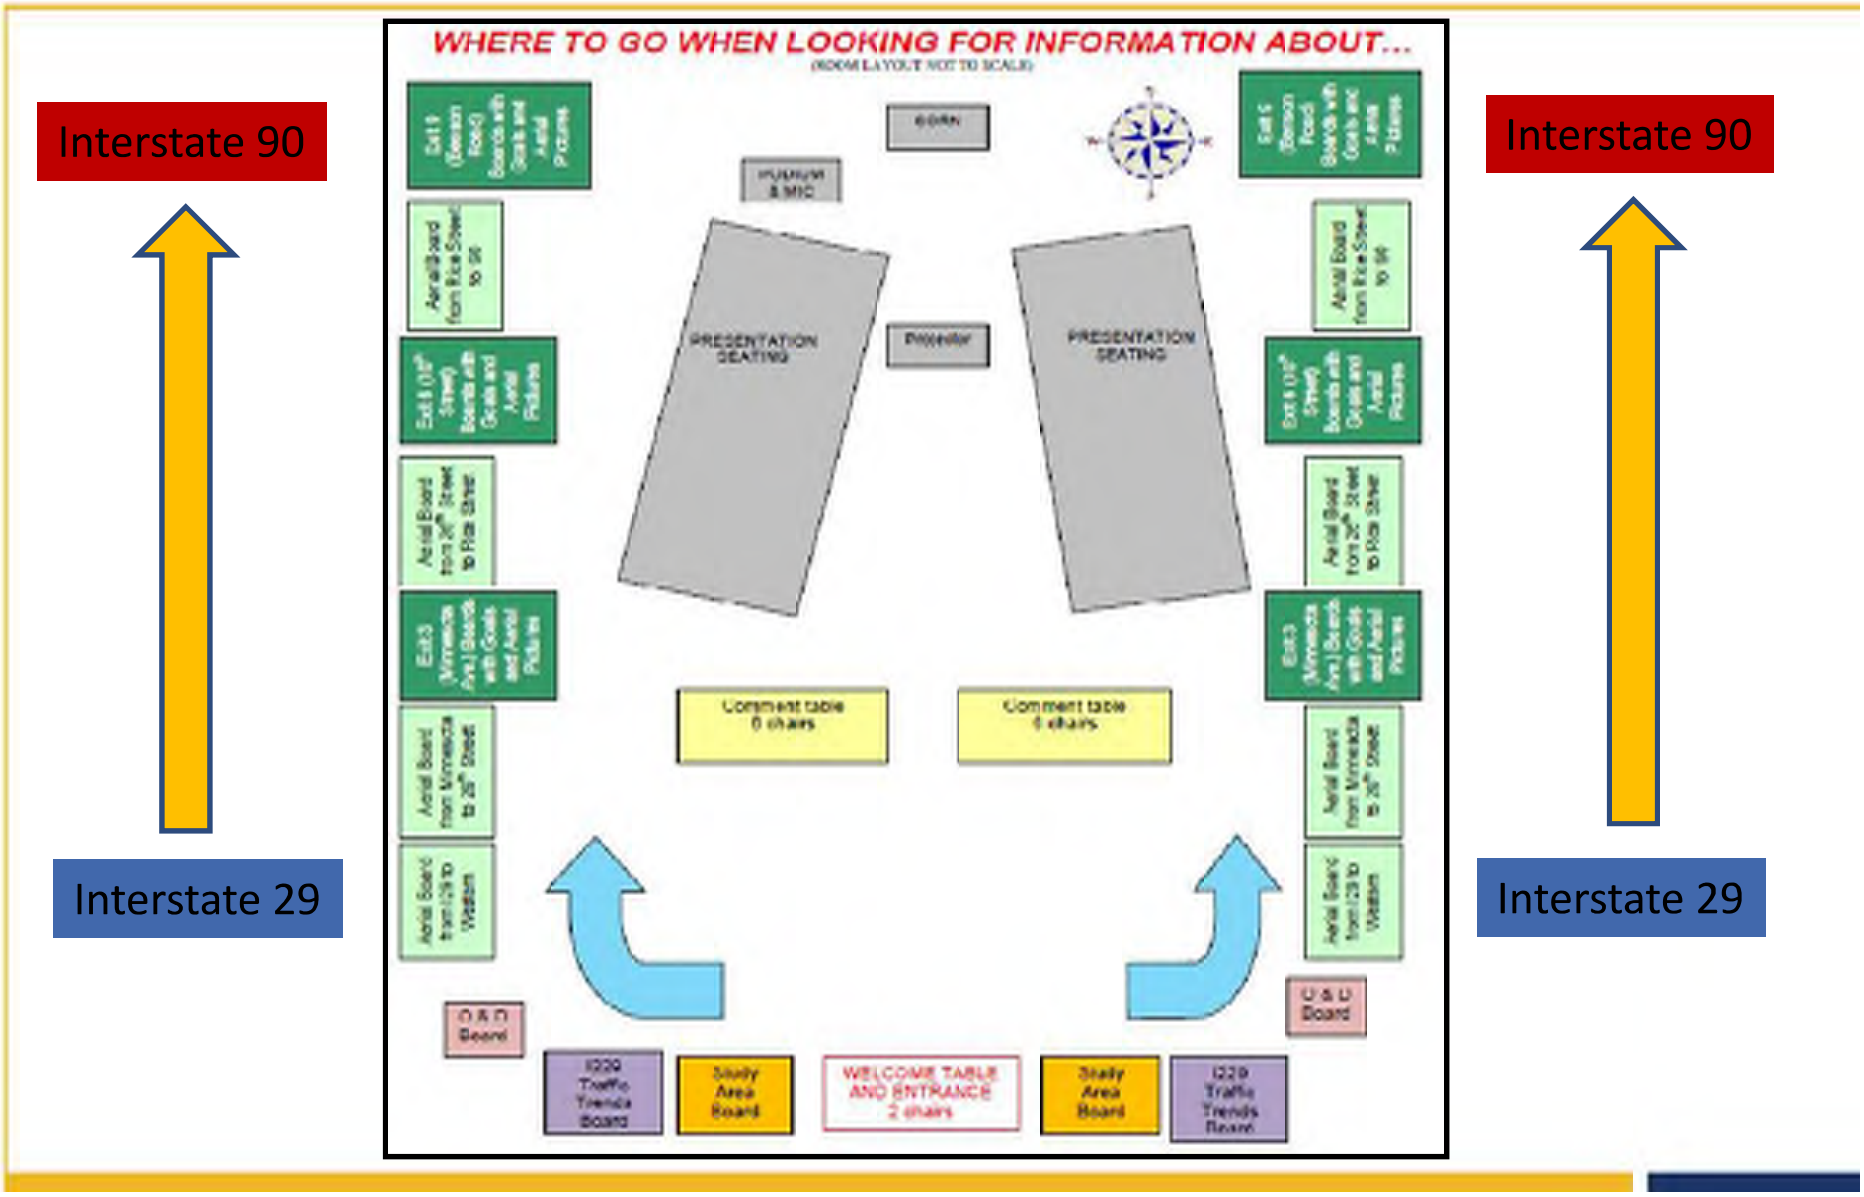
Interstate 90
Interstate 29
WHERE TO GO WHEN LOOKING FOR INFORMATION ABOUT...
(ROOM LAYOUT NOT TO SCALE)
Exit 9 (Benson Road) Boards with Goals and Aerial Pictures
Aerial Board from Rice Street to I-35
Exit 10 (Snelling Ave) Boards with Goals and Aerial Pictures
Aerial Board from 35W Street to Rice Street
Exit 3 (Minnesota Ave.) Boards with Goals and Aerial Pictures
Aerial Board from Minnesota to 35W Street
Aerial Board from I-35 to Watson
O & D Board
I-220 Traffic Trends Board
Study Area Board
WELCOME TABLE AND ENTRANCE 2 chairs
Study Area Board
I-220 Traffic Trends Board
O & D Board
Aerial Board from I-35 to Watson
Aerial Board from Minnesota to 35W Street
Exit 3 (Minnesota Ave.) Boards with Goals and Aerial Pictures
Aerial Board from 35W Street to Rice Street
Exit 10 (Snelling Ave) Boards with Goals and Aerial Pictures
Aerial Board from Rice Street to I-35
Exit 9 (Benson Road) Boards with Goals and Aerial Pictures
Comment table 6 chairs
Comment table 6 chairs
PRESENTATION SEATING
PRESENTATION SEATING
Presenter
PODIUM & MIC
SCRN
Interstate 90
Interstate 29

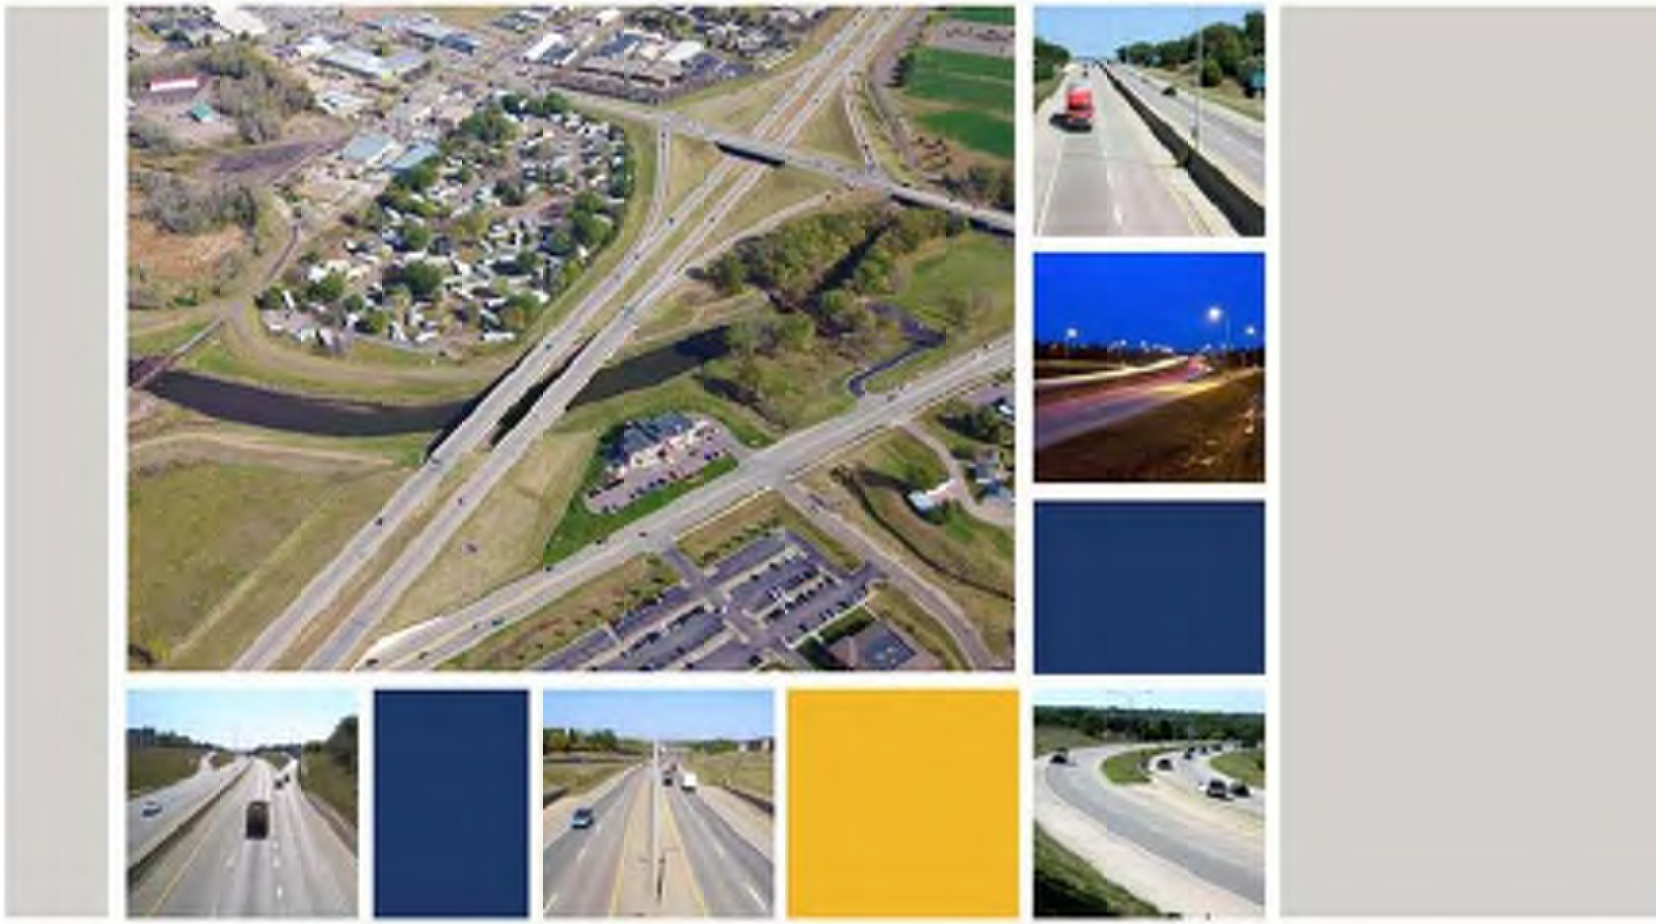

Thanks for Attending!

WWW.I229STUDY.COM

APPENDIX -

PUBLIC MEETINGS #2 – JUNE 1ST & 2ND, 2015

MINNESOTA AVENUE

JUNE 1ST, 2015

- SIGN-IN SHEETS
- POWERPOINT SLIDES
- MEETING NOTES (SEE END OF PUBLIC MEETINGS #2 APPENDIX)
- COMMENTS (SEE END OF PUBLIC MEETINGS #2 APPENDIX)

Note: actual attendance count was 53 people (including 15 women)

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3516P, PCN 044K **Project No.:** 207030

Meeting Date Monday June 1st, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Ray Kirlin	3209 S. Lincoln	334-2411	KIRLIN.r@dot.sd.gov
2	Pam + Steve	3000 S. Cunningham	332-6509	
3	Ron McMahon	116 E Dakota Ave, Pierre	776-1009	ron.mcmahon@dot.gov
4	John Shelso	2800 W 23rd St. SF, SD	605-951-2970	jhshelso@earthlink.net
5	Trent Swenson	1501 W Whitetail Dr		
6	Art Holden	705 W Victoryland SF 57108	605-371-3828	artholden67@gmail.com
7	Bruce Danielson	PO Box 4911 SF 57101		
8	Bob Fenton	3600 S Dakota	334-4220	robert.fenton@state.sd.us
9	Greg Ross	5415 S. Westward	321-5514	g boris@aol.com
10	David Heinold	205 S. Main Ave.	219-363-5968	d.heinold@gmail.com
11	Kevin Nyberg	730 W. 41st, 57105	605 3314088	KNyberg@Nybergsave.com
12	Shawn Hoover	606 E 21st St	332 5319	sah @ mtsr.net
13	GERALD TENNISSEN	808 JANE LANE SF, SD	366-1979	GERALD@bendercc.com
14	Kurt Griffin	605 E 21st 57105	782 6035	KJG-324@yahoo.com
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(67) 3618P, PCN 044K **Project No.:** 207030

Meeting Date Monday, June 1st, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Brad Remmich	SDDOT		
2	Craig Smith	SDDOT	995-3300	craig.smith@state.sd.us
3	Steve Gramm	SDDOT	773-6641	steve.gramm@state.sd.us
4	[illegible]		605-521-7831	[illegible]
5	Dave Rowe	Empire Bldg Cat	321-9823	[illegible]
6	Sara Bertsch	Argus Leader	605-331-0831	
7	Ben Wiegand	HR Green		[illegible]
8	Amber Fitzen	SFLOG	367-5390	amber@siouxfalls.org
9	KEVIN KRUEGER	BOEN & ASSOCIATES	336-0475	KEVINK@BOENASSOCIATES.com
10	James Unruh	HDR	977-7765	james.unruh@hdrinc.com
11	Trevor Pierson	5700 S Cliff Ave		Trevorhockey@Siouxlink.net
12	Gregg Johnson	6801 E. Split Rock Cir	332-8166	grjohnson@sio.midco.net
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3618P, PCN 044K **Project No.:** 207036

Meeting Date Monday, June 1st, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Jo Wahle			
2	Schmidt Stan Diana	2214 W Zephyr Pl. #1		Stan@ going beyond words. com
3	Kay Gollesch	LifeScape		kay.gollesch@lifescapesd.org
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PI 0100(87) 3618P; PCN 044K **Project No.:** 207080

Meeting Date Monday, June 1st, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Pete Longman	SDDOT	773-4488	pete.longman@state.sd.us
2	Jason Kjenstad	HDR	605-977-7955	jason.kjenstad@hdrinc.com
3	Christina Bennett	SDDOT	(605)773-4759	Christina.Bennett@state.sd.us
4	Paul Nikolas	SDDOT	60-367-5680	paul.nikolas@state.sd.us
5	Al Schoenemann	1801 W 50th St SF 57105	605 376 1189	al.schoenemann@schoenemann.com
6	Thomas Hein	6100 E Hein Place SF SD 57110	605-361-8400	Theinmail@gmail.com
7	Travis Dressen	SDDOT - SF Area	605. 367-5680	travis.dressen@state.sd.us
8	Ross Harris	HR Green 5525 Merle Hay Rd. Johnston, IA 50131	515-657-5263	rharris@hrgreen.com
9	Maureen Connolly	123 S Phillips Ave	605 929 8723	mconnolly@gmail.com
10	Audrey James	27002 Split Creek Ct	605.929-7514	audrey.james@bedinstate.net
11	Jon James	27002 Split Creek Ct Sioux Falls	605-366-5328	jonesd@bedinstate.net
12	Chris Bueseler	7001 W 66th St SF SD	319-389-1503	Compassworks@Gmail.com
13	Lori Buechene	310 S Southeastern Ave Sioux Falls SD	507 9005554	lbuechene@midcoast.net
14	West Valley Dale Frechlich	6 So Le Chateau SF, SD 57105	605-201-8810	dalefrechlich@gmail.com
15	Nancy Preston	5700 S. Chuck Drive		
16	Alex Canada	1501 N. 57th St	351-1620	alexcanada@sanfordhealth.org
17	Kathy & Jerry Phillips	5100 S. Swift Parkdr	940-2948	kphillips@yahoo.com
18				
19				
20				







Interstate 229 Major Investment Study

Exit 3 – Minnesota Avenue Sub-study

Informational Meeting
June 1st, 2015
5:00 pm to 7:00 pm

HDR

HRGreen

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Meeting will focus on:

Exit 3 – Minnesota Ave

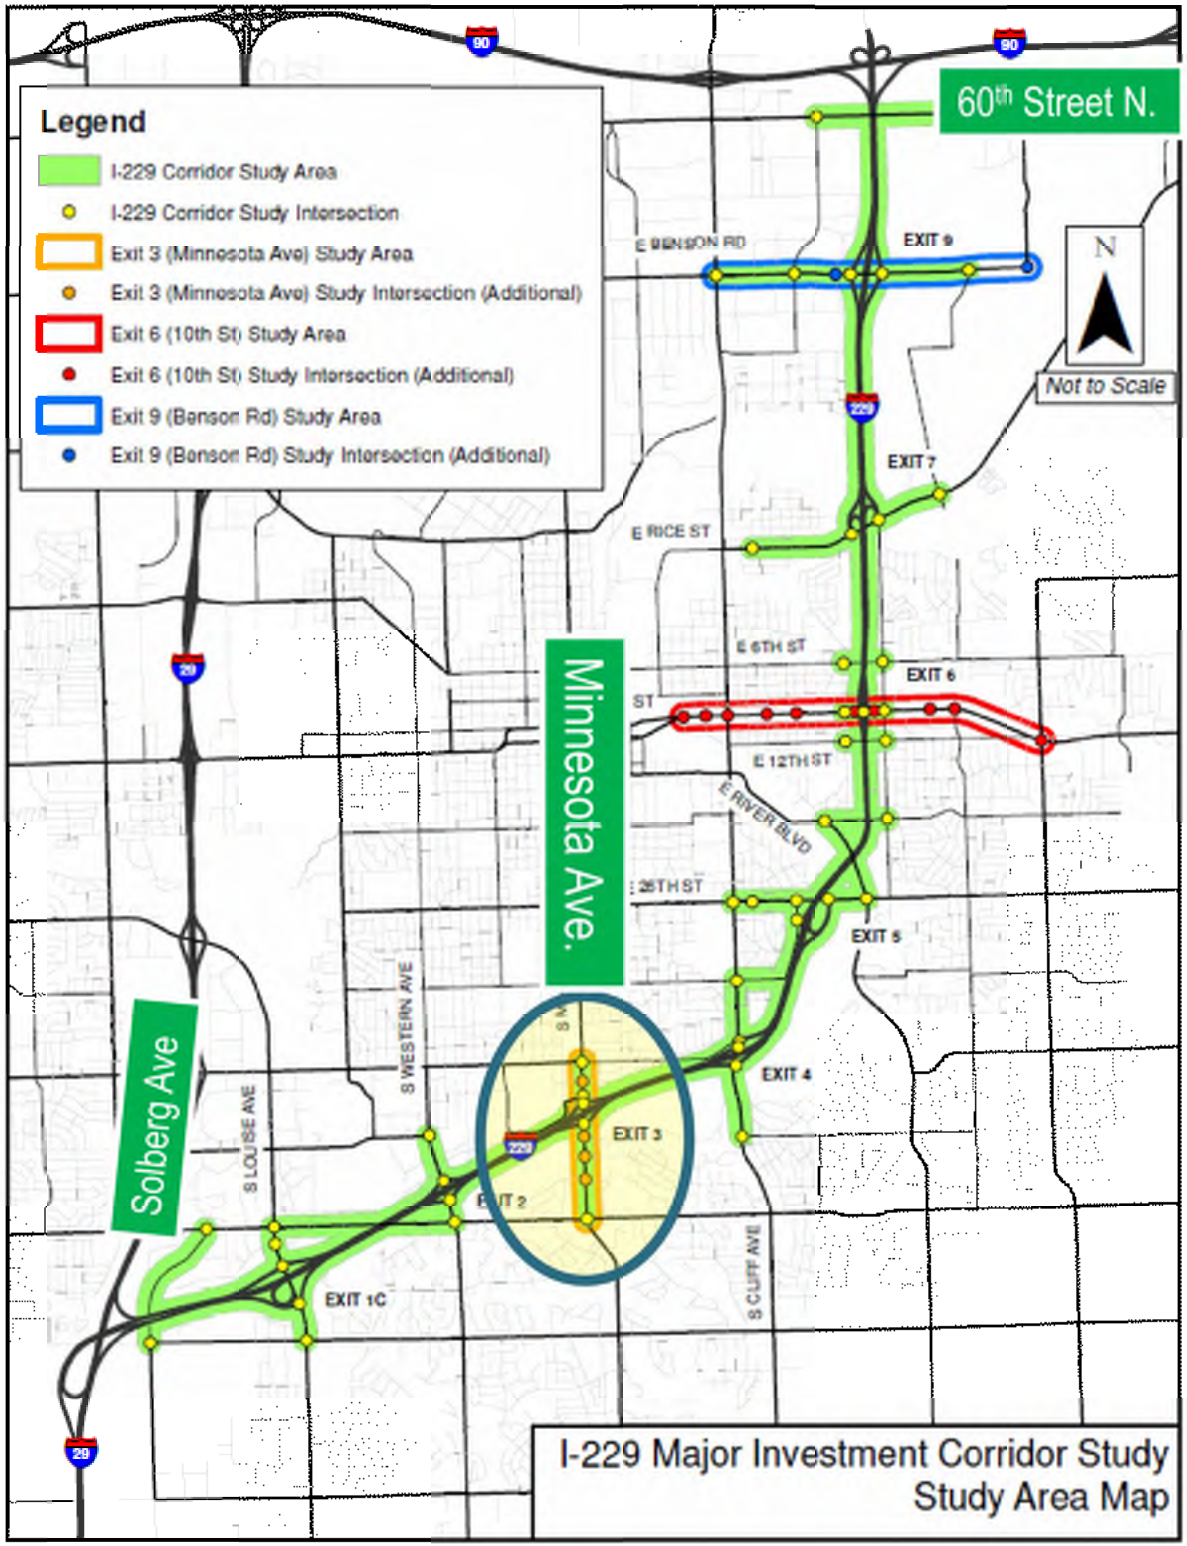

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)


Federal Highway Administration (FHWA)

Exit 3 (Minnesota Avenue) Crossroad Study Goals


- Reduce traffic congestion
- Evaluate interchange options
- Integrate plans for the 49th Street Extension with the interchange options developed
- Improve pedestrian and bike access to the Big Sioux River Pathway
- Improve safety for corridor users
- Improve vehicle safety to Yankton Trail Park





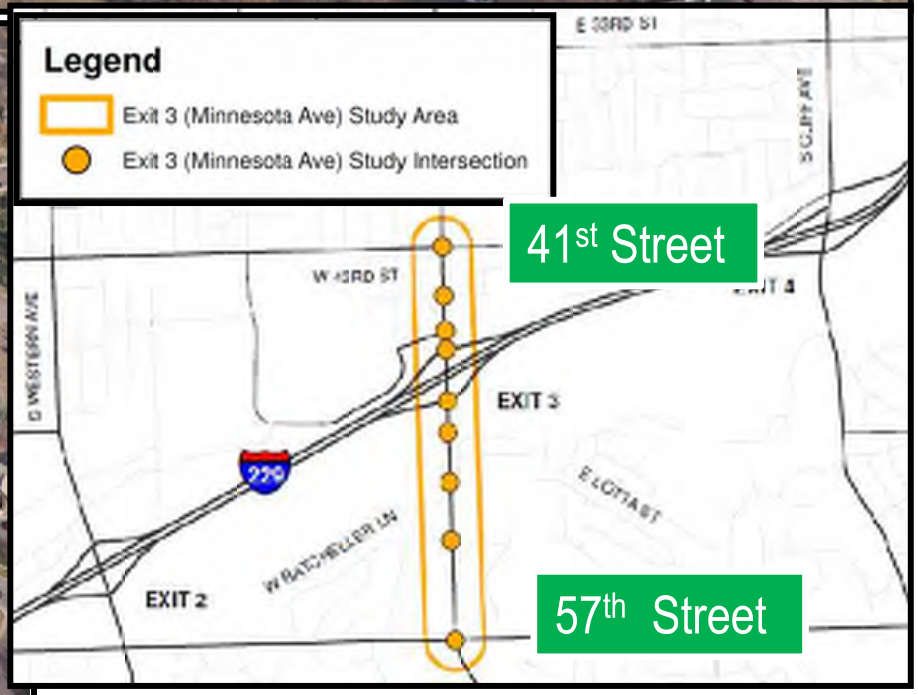

Minnesota Avenue Corridor Overview

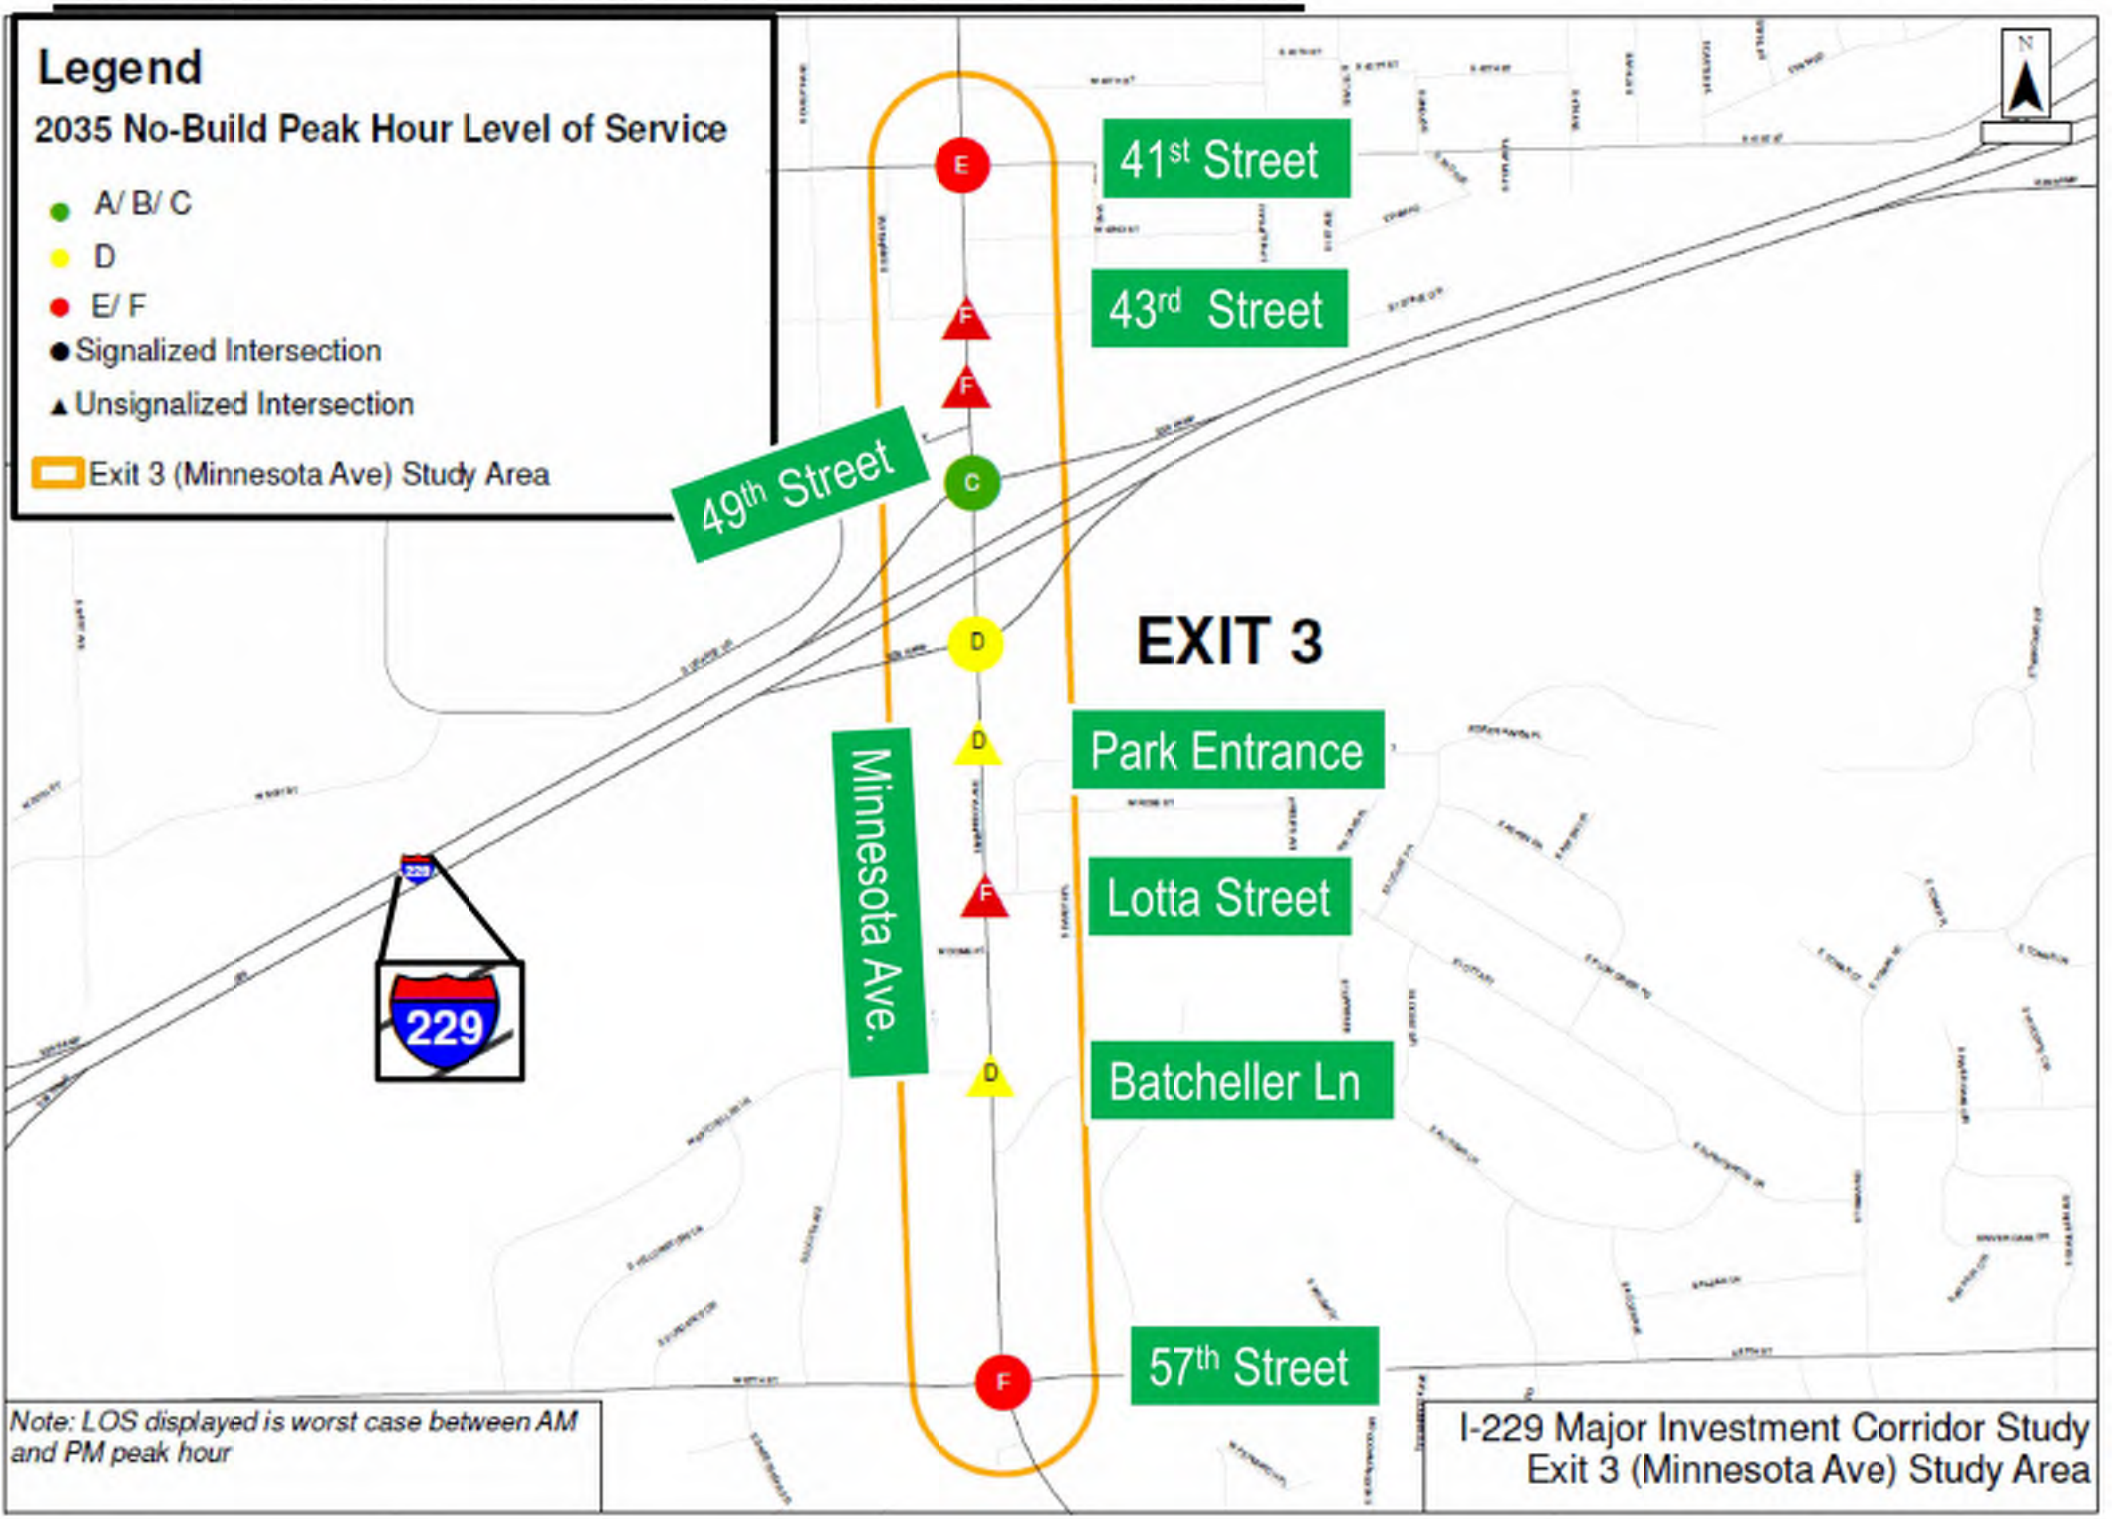


Minnesota Avenue Corridor Overview



Minnesota Avenue Corridor Overview




Minnesota Avenue Corridor Overview

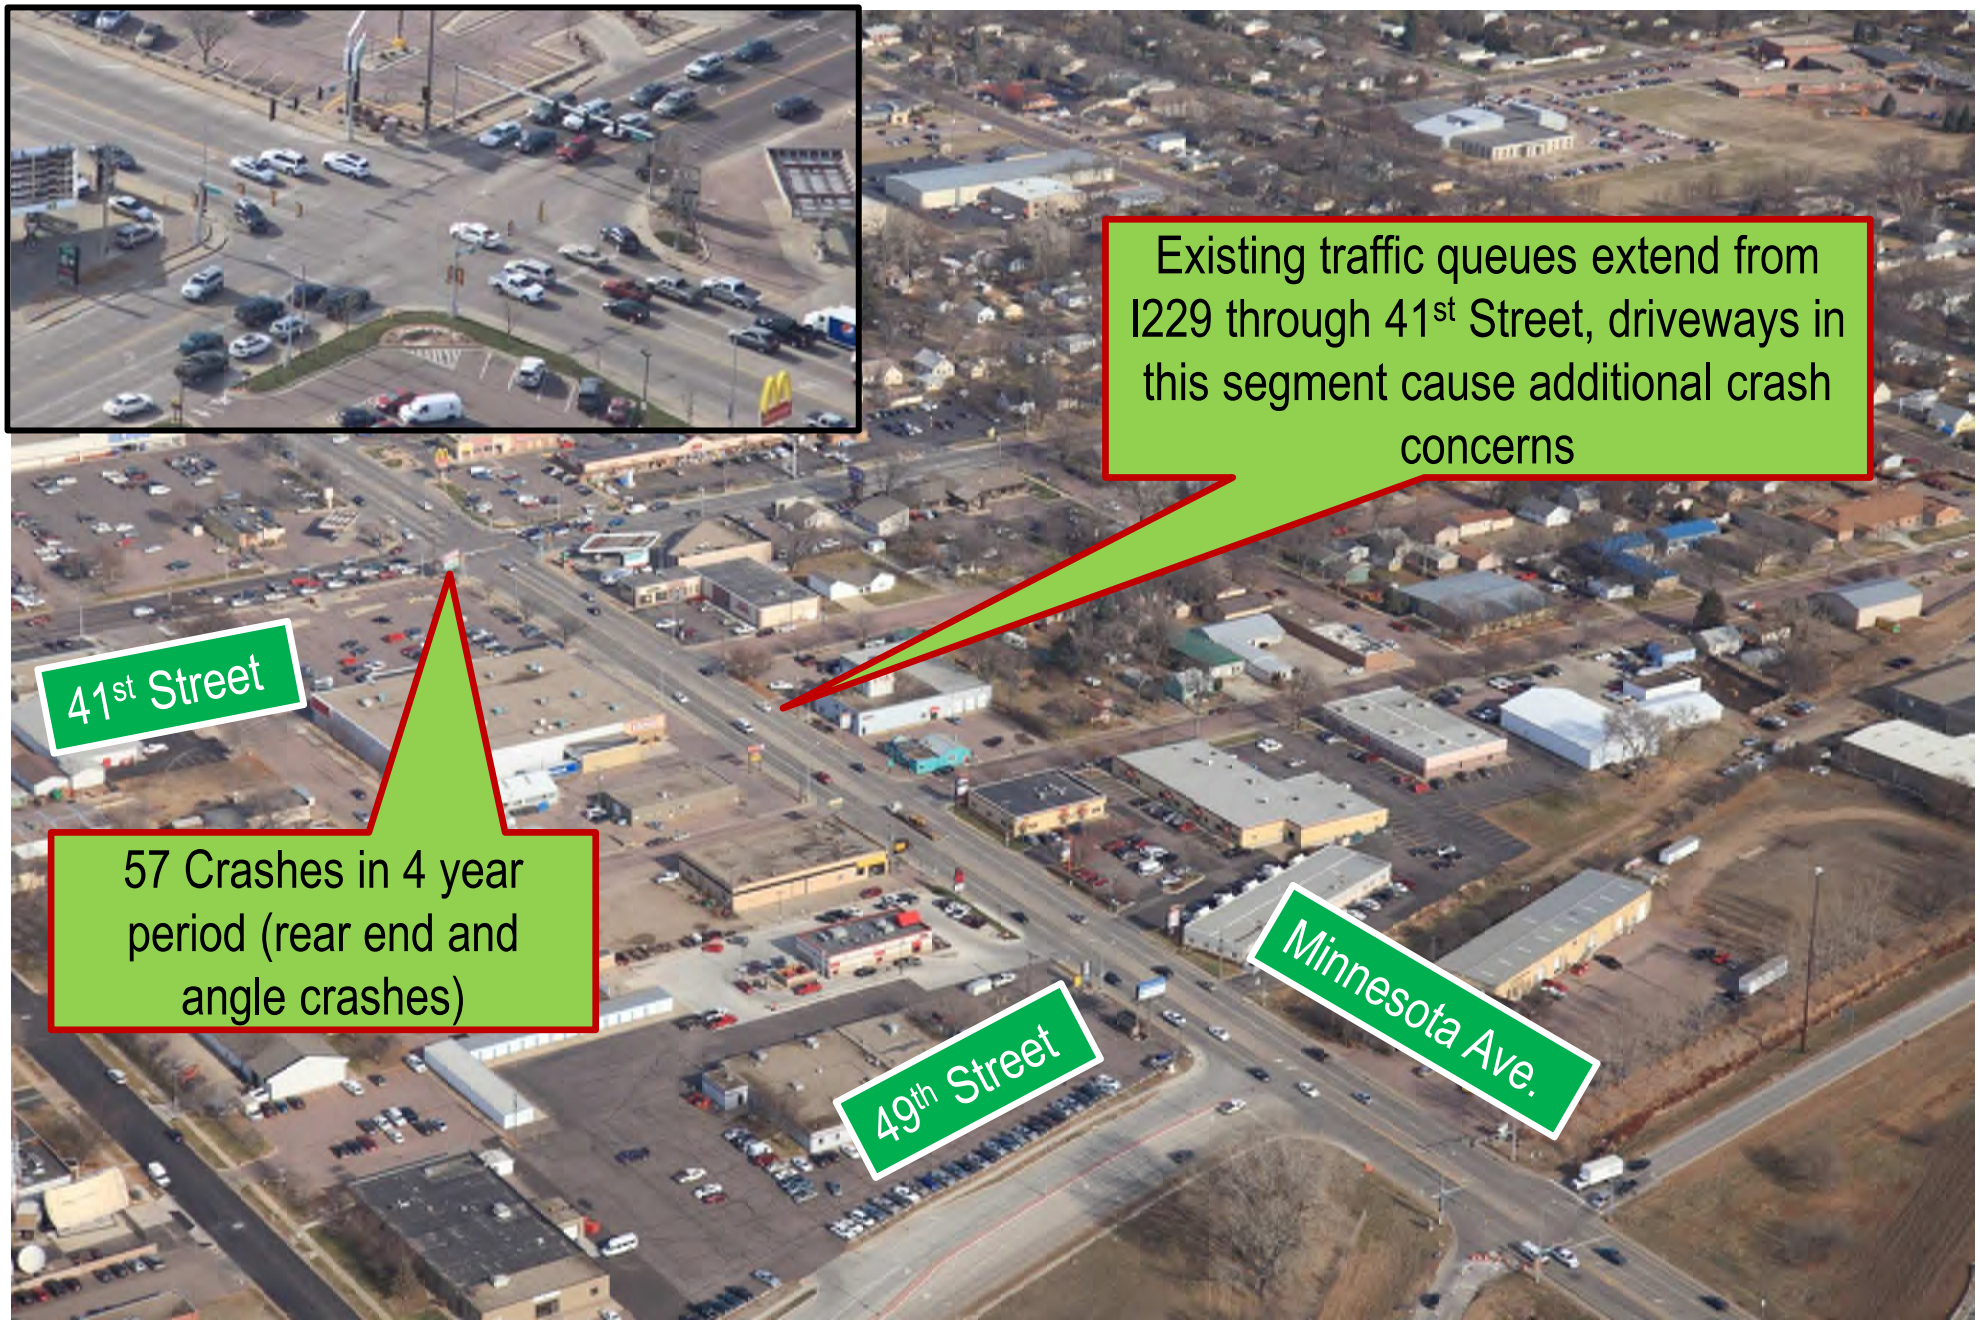


Conceptual Ideas for Minnesota Avenue

What you will be able to see tonight:


- 13 Interchange Conceptual Options
- 4 Corridor Options
- Access Changes to Yankton Trail Park
- Conceptual Options to improve safety

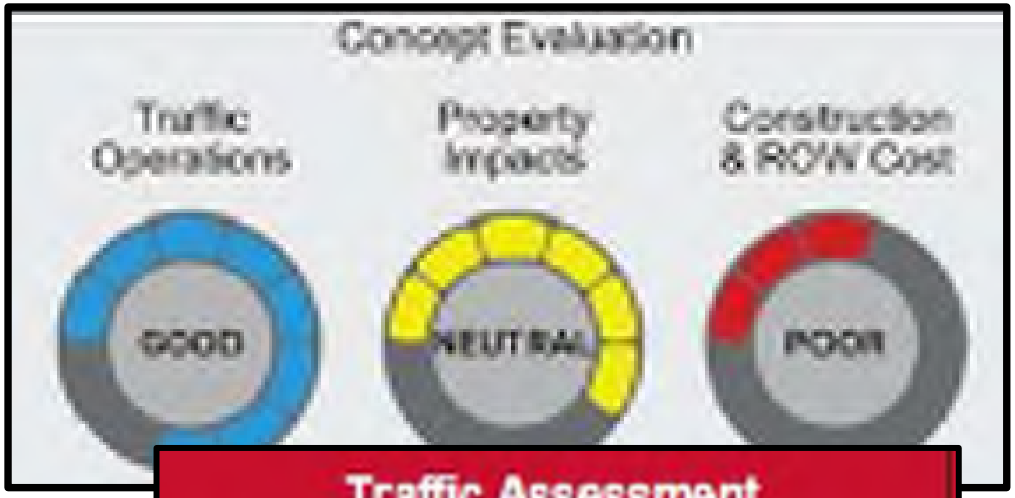

Minnesota Avenue / I-229 Interchange
Partial Clover Option

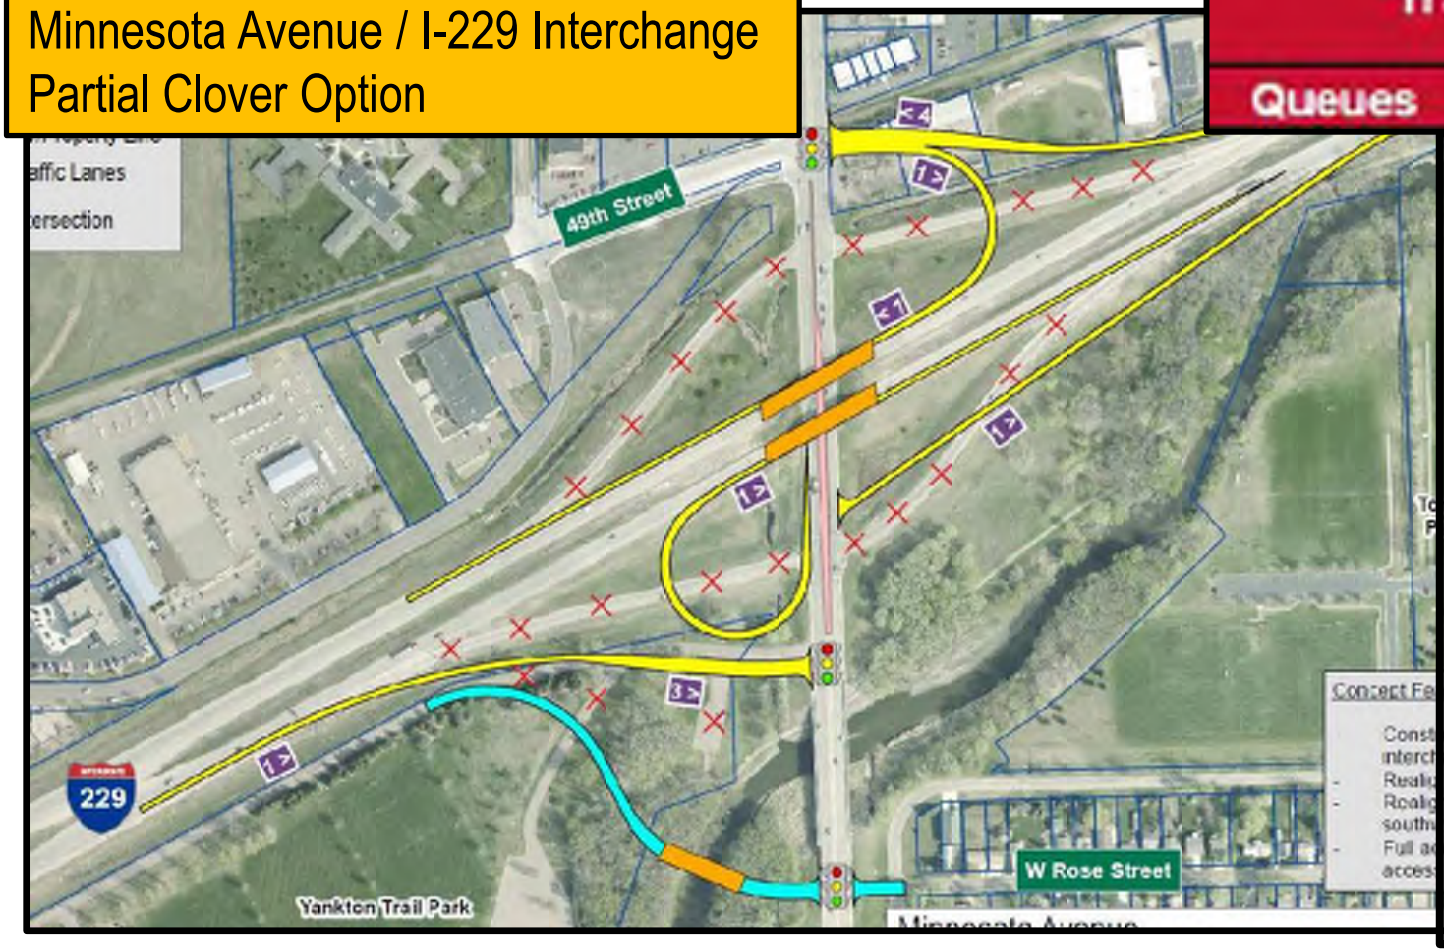

Traffic Assessment		
Queues	Delay	Travel Time

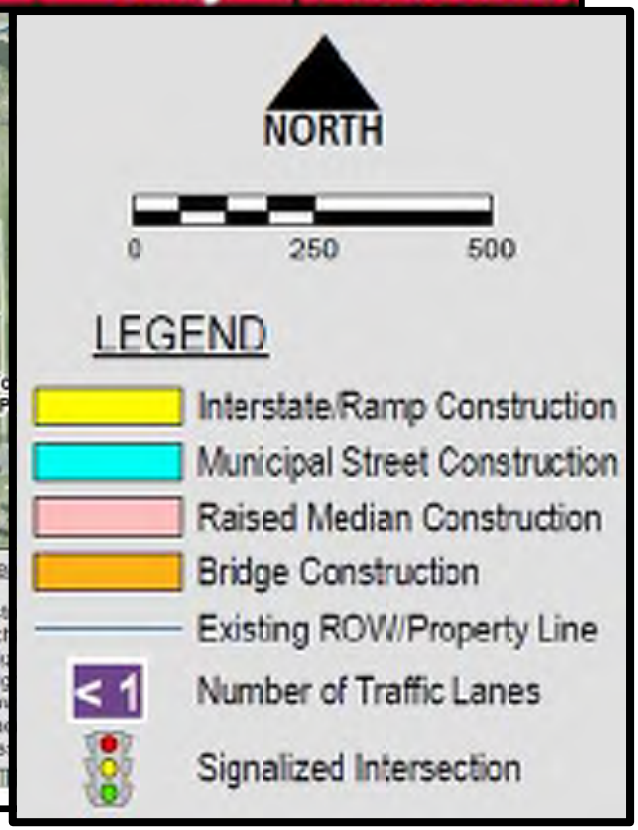


Conceptual Ideas for Minnesota Avenue


What you will be able to see tonight:

- 13 Interchange Conceptual Options
- 4 Corridor Options
- Access Changes to Yankton Trail Park
- Conceptual Options to improve safety



Minnesota Avenue – Raised Median with ¾ Movements when possible

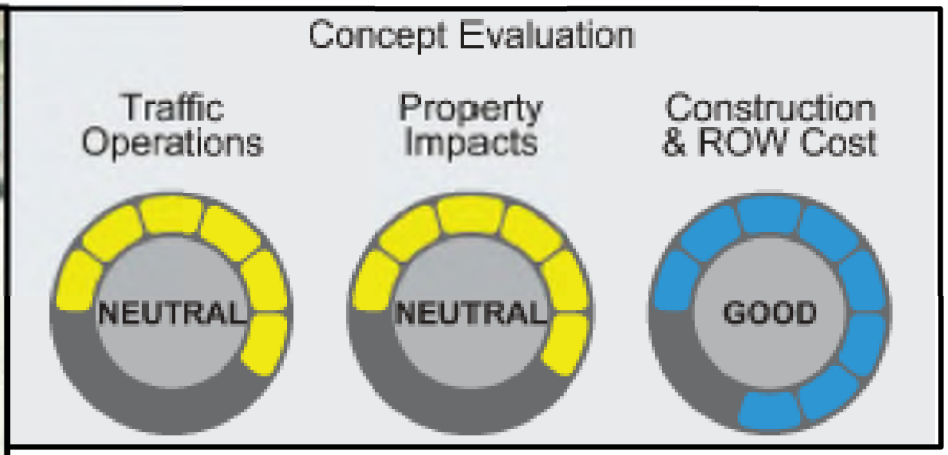

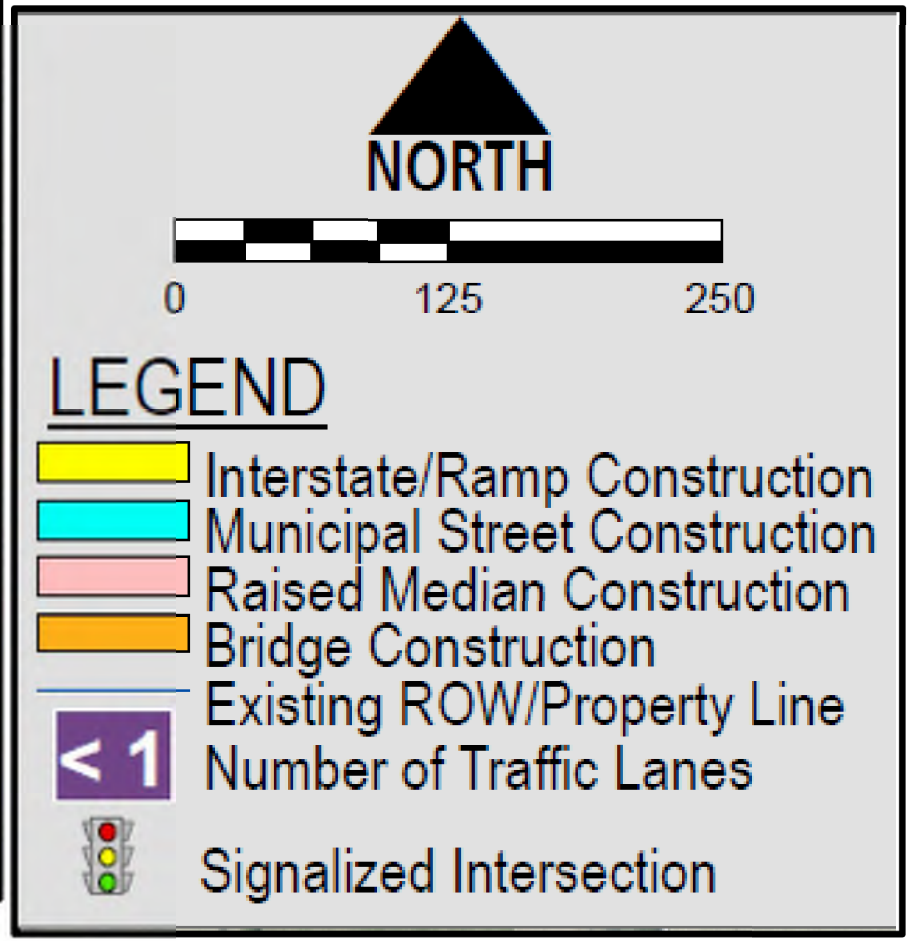

Next Steps for Minnesota Avenue



- **Finalize Composite Comparison Matrix**
  - Traffic Assessment
  - Environmental Screening
  - ROW Impacts
  - Overall Costs
  - Public Involvement Support
- **Complete additional Traffic Operations analysis on a reduced number of options based on the screening activities**
- **Develop Priority Phasing Plan for I-229 Corridor and Sub-Study Corridor**
- **Schedule and Conduct next public meeting**

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Ross Harris– HR Green, Inc.
515-657-5263 or rharris@hrgreen.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 3 – Minnesota Avenue Sub-Study

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

10TH STREET

JUNE 1ST, 2015

- SIGN-IN SHEETS
- POWERPOINT SLIDES
- MEETING NOTES (SEE END OF PUBLIC MEETINGS #2 APPENDIX)
- COMMENTS (SEE END OF PUBLIC MEETINGS #2 APPENDIX)

Note: actual attendance count was 31 people (including 8 women)

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for 10th Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(67) 36162, PCN 044K **Project No.:** 207030

Meeting Date Monday, June 1st, 2015 7:30 PM **Meeting Location.** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Amber Bibson	SECOG	(605) 367-5390	amber@secog.org
2	BPAB Regular	SDDOT		
3	Greg Bork	5415 S Western SF		
4				
5	Travis Dressen	SDDOT - SF Area	605.367.5880	travis.dressen@state.sd.us
6	CHUCK GUSTAFSON	705 E. 10th ST SF SD	332-1000	CGUSTAFSON@MRC.COM
7	Heath Peter		721 776 1976	greasupus@siouxfalls.org
8	Rob Rahm	3600 S Dale Rd	605 334 4726	robert.rahm@ci.sioux falls.sd.us
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for 10th Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3615P, PCN 041K **Project No.:** 207030

Meeting Date Monday, June 1st, 2015 7:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Pete Langman	SDDOT	773-6488	pete.langman@state.sd.us
2	Steve Gramm	SDDOT	773-6441	Steve.gramm@state.sd.us
3	Paul Nikoles	SDDOT	367-5780	paul.nikolesoshkosh.sd.us
4	Colin Moriarty	Cage Bros	336.118	cmoriarty@cagebrothers.com
5	Robert Anderson	840 S. Day	339-6900	—
6	Lodermeier Family LLC Barbara Anderson	840 S. Day SP 57103	338-6900	amandad840@aol.com
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for 10th Street Sub-Study


Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3818P, PCN 044K **Project No.:** 207030

Meeting Date Monday, June 1st, 2015 7:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Tom Kelly	Gage Brothers	6 605 376 8150	
2	Dave Nelson	3413 Southern Cir.	366-7708	
3	Jason Kjerstad	HDR	605-977-7140	jason.kjerstad@hdrinc.com
4	Mark Ilsen	101 S Cleveland	605-338-6271	mcilsen@siouxfalls.org
5	Ron McMahon	116 E Dakota Ave Sioux Falls	605-376-1009	[illegible]@dot.gov
6	Christina Bennett	SDDOT	605-773-4759	Christina.Bennett@state.sd.us
7	Gary Busselman	7201 E Madison ST SF SD 57110	605-351-5001	gary@garybuss.com
8	Edith Smith	Gage Brothers	6033261180	esmith@gagebrothers.com
9	Sharon Fix	101 S. Cleveland Ave	(605)338-8151	fixs@siouxfalls.org
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

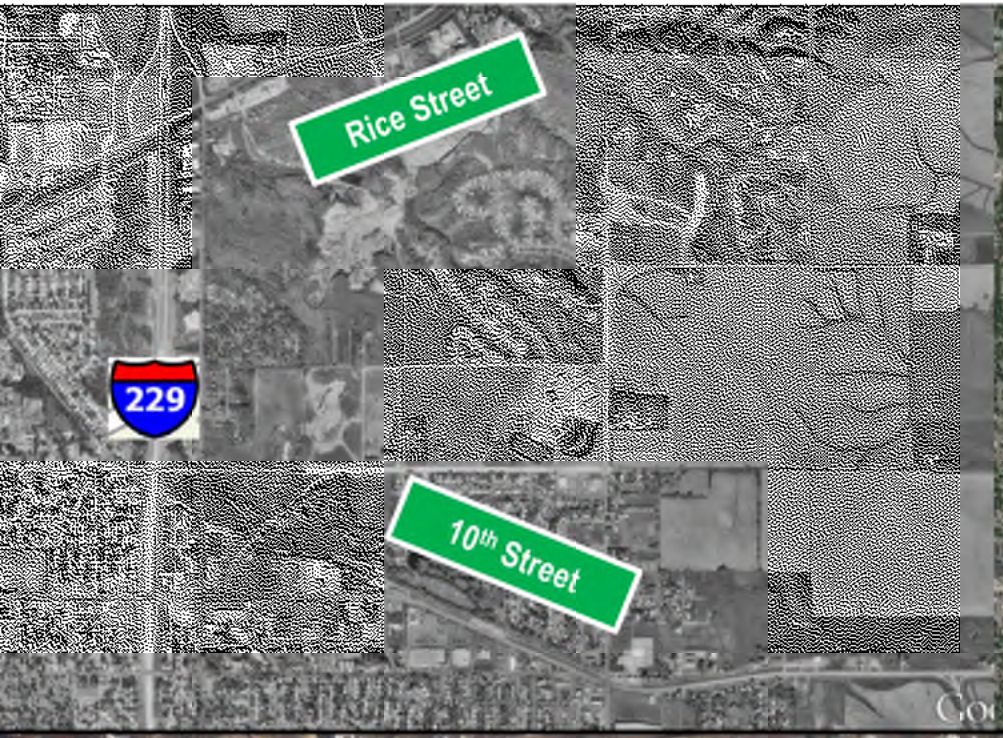





Interstate 229 Major Investment Study

Exit 6 – 10th Street Sub-Study

Informational Meeting
June 1st, 2015
7:30 pm to 9:00 pm

HDR

HRGreen

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Meeting will focus on:

Exit 6 – 10th Street

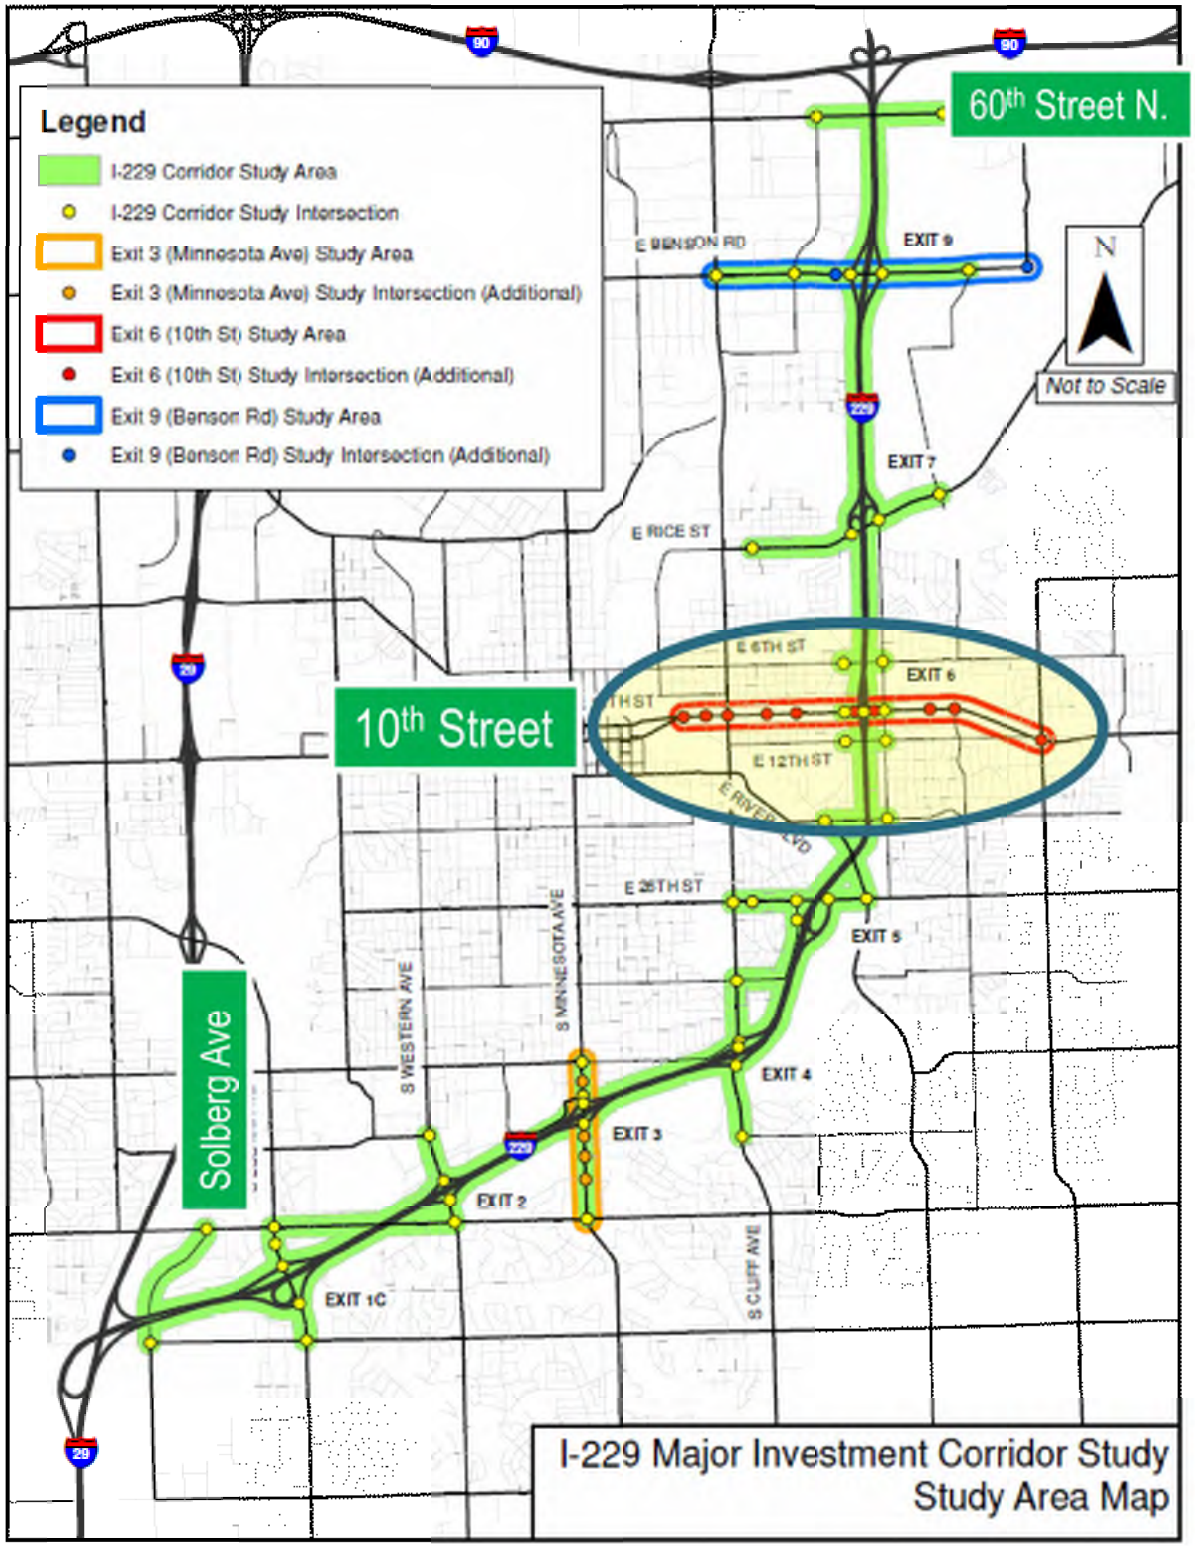

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

Exit 6 (10th Street) Crossroad Study Goals


- Reduce traffic congestion
- Develop Corridor Growth Plan to meet traffic demands but minimizing impacts to developed properties
- Improve pedestrian mobility
- Improve safety for corridor users
- Identify improvements to the interchange as well as the 10th Street and Cleveland Ave intersection








10th Street Corridor Overview

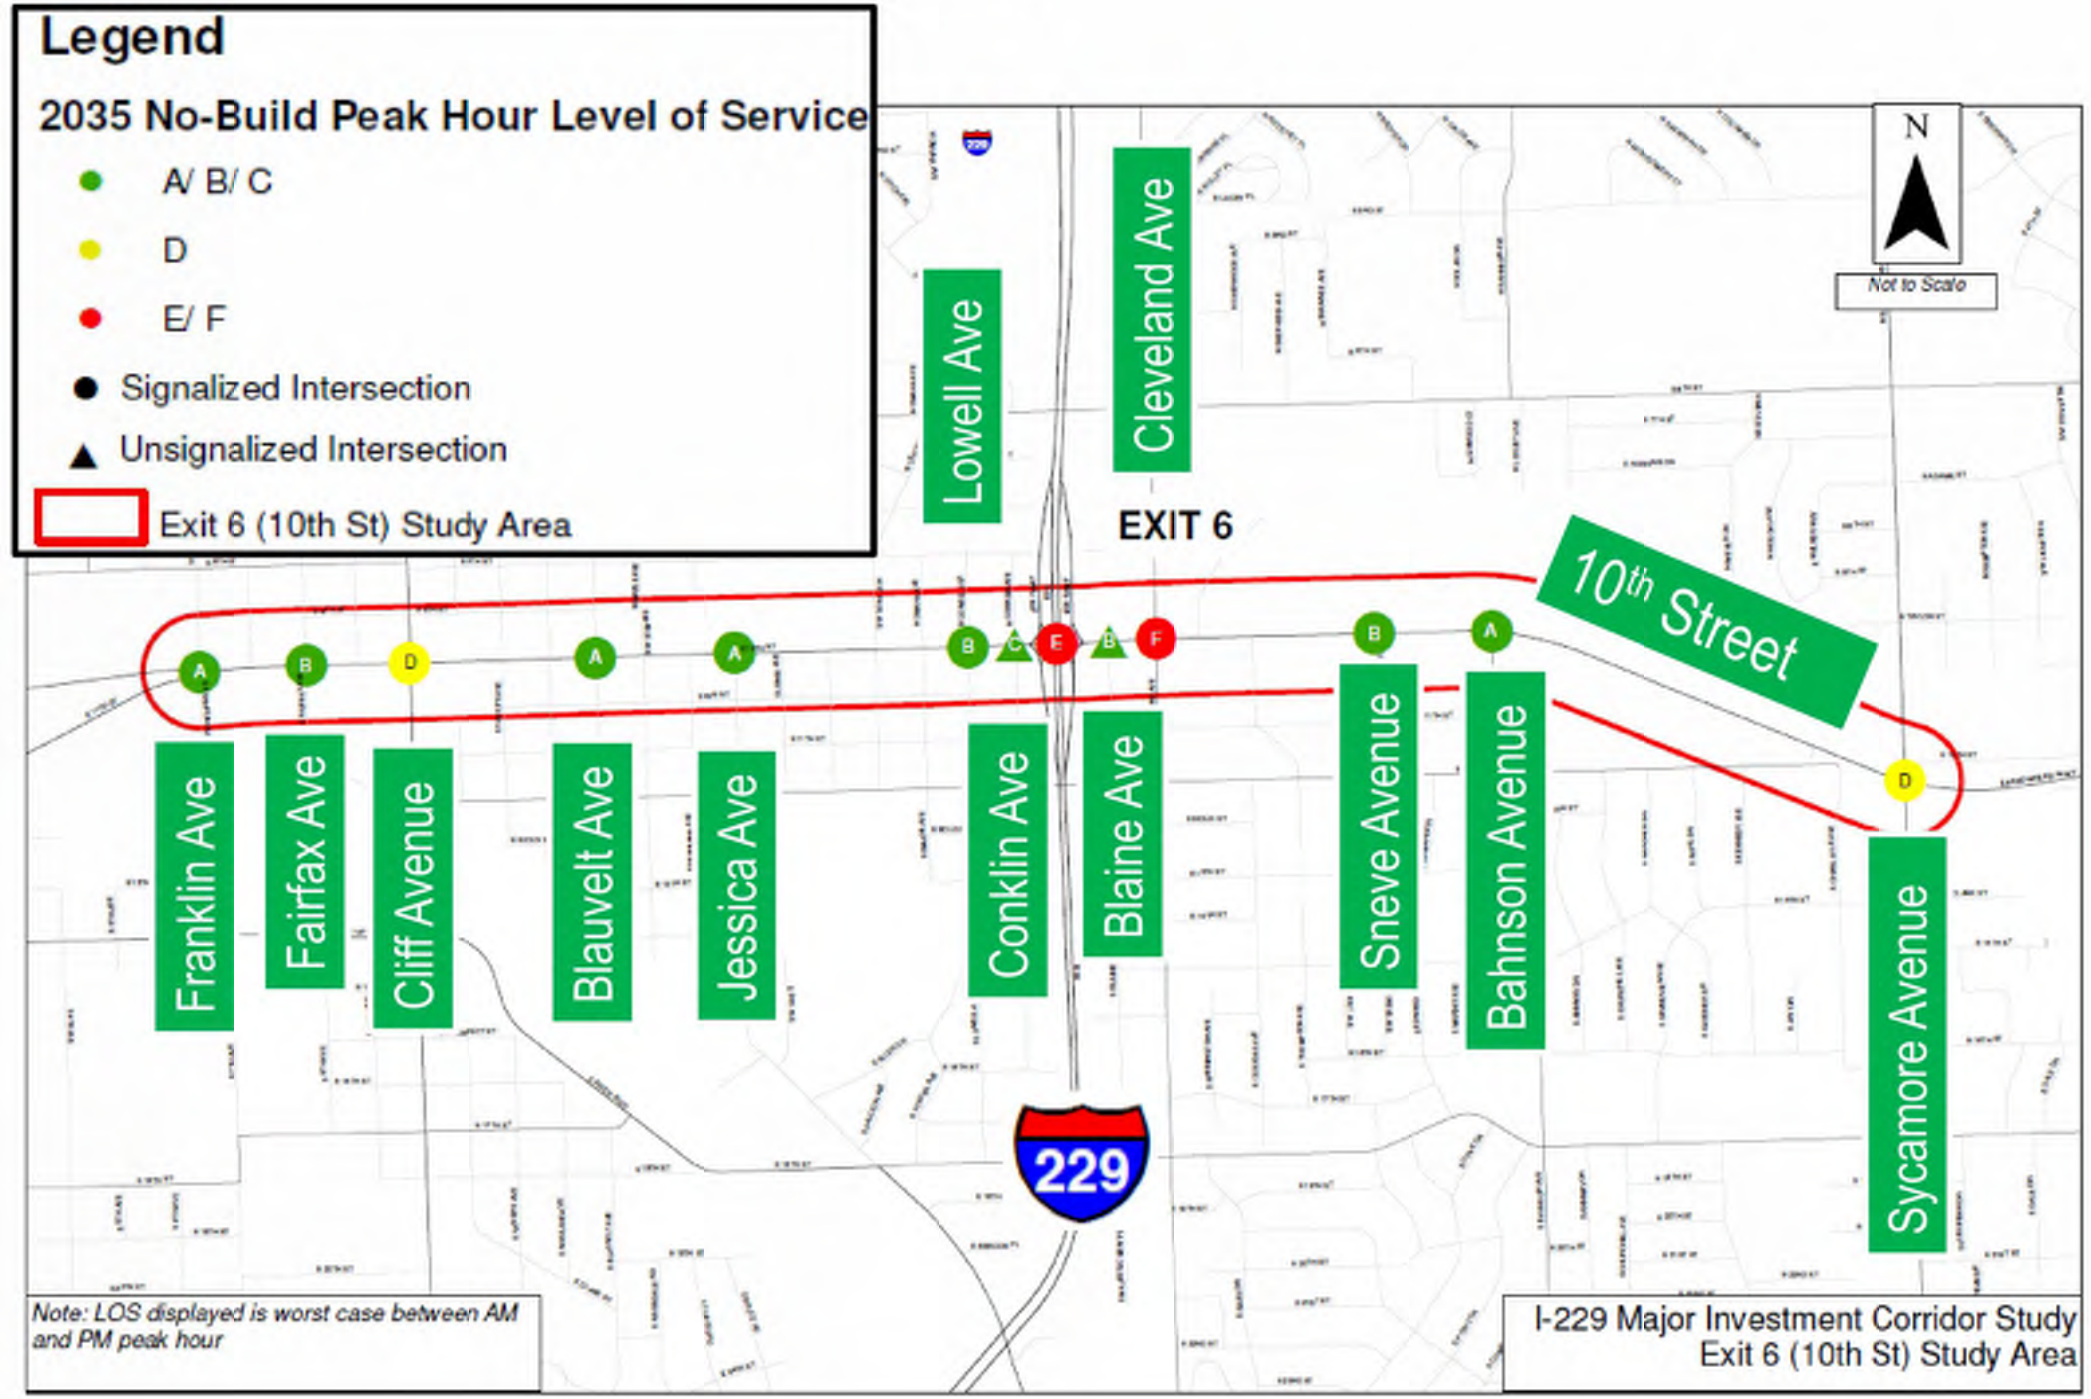

10th Street Corridor Overview

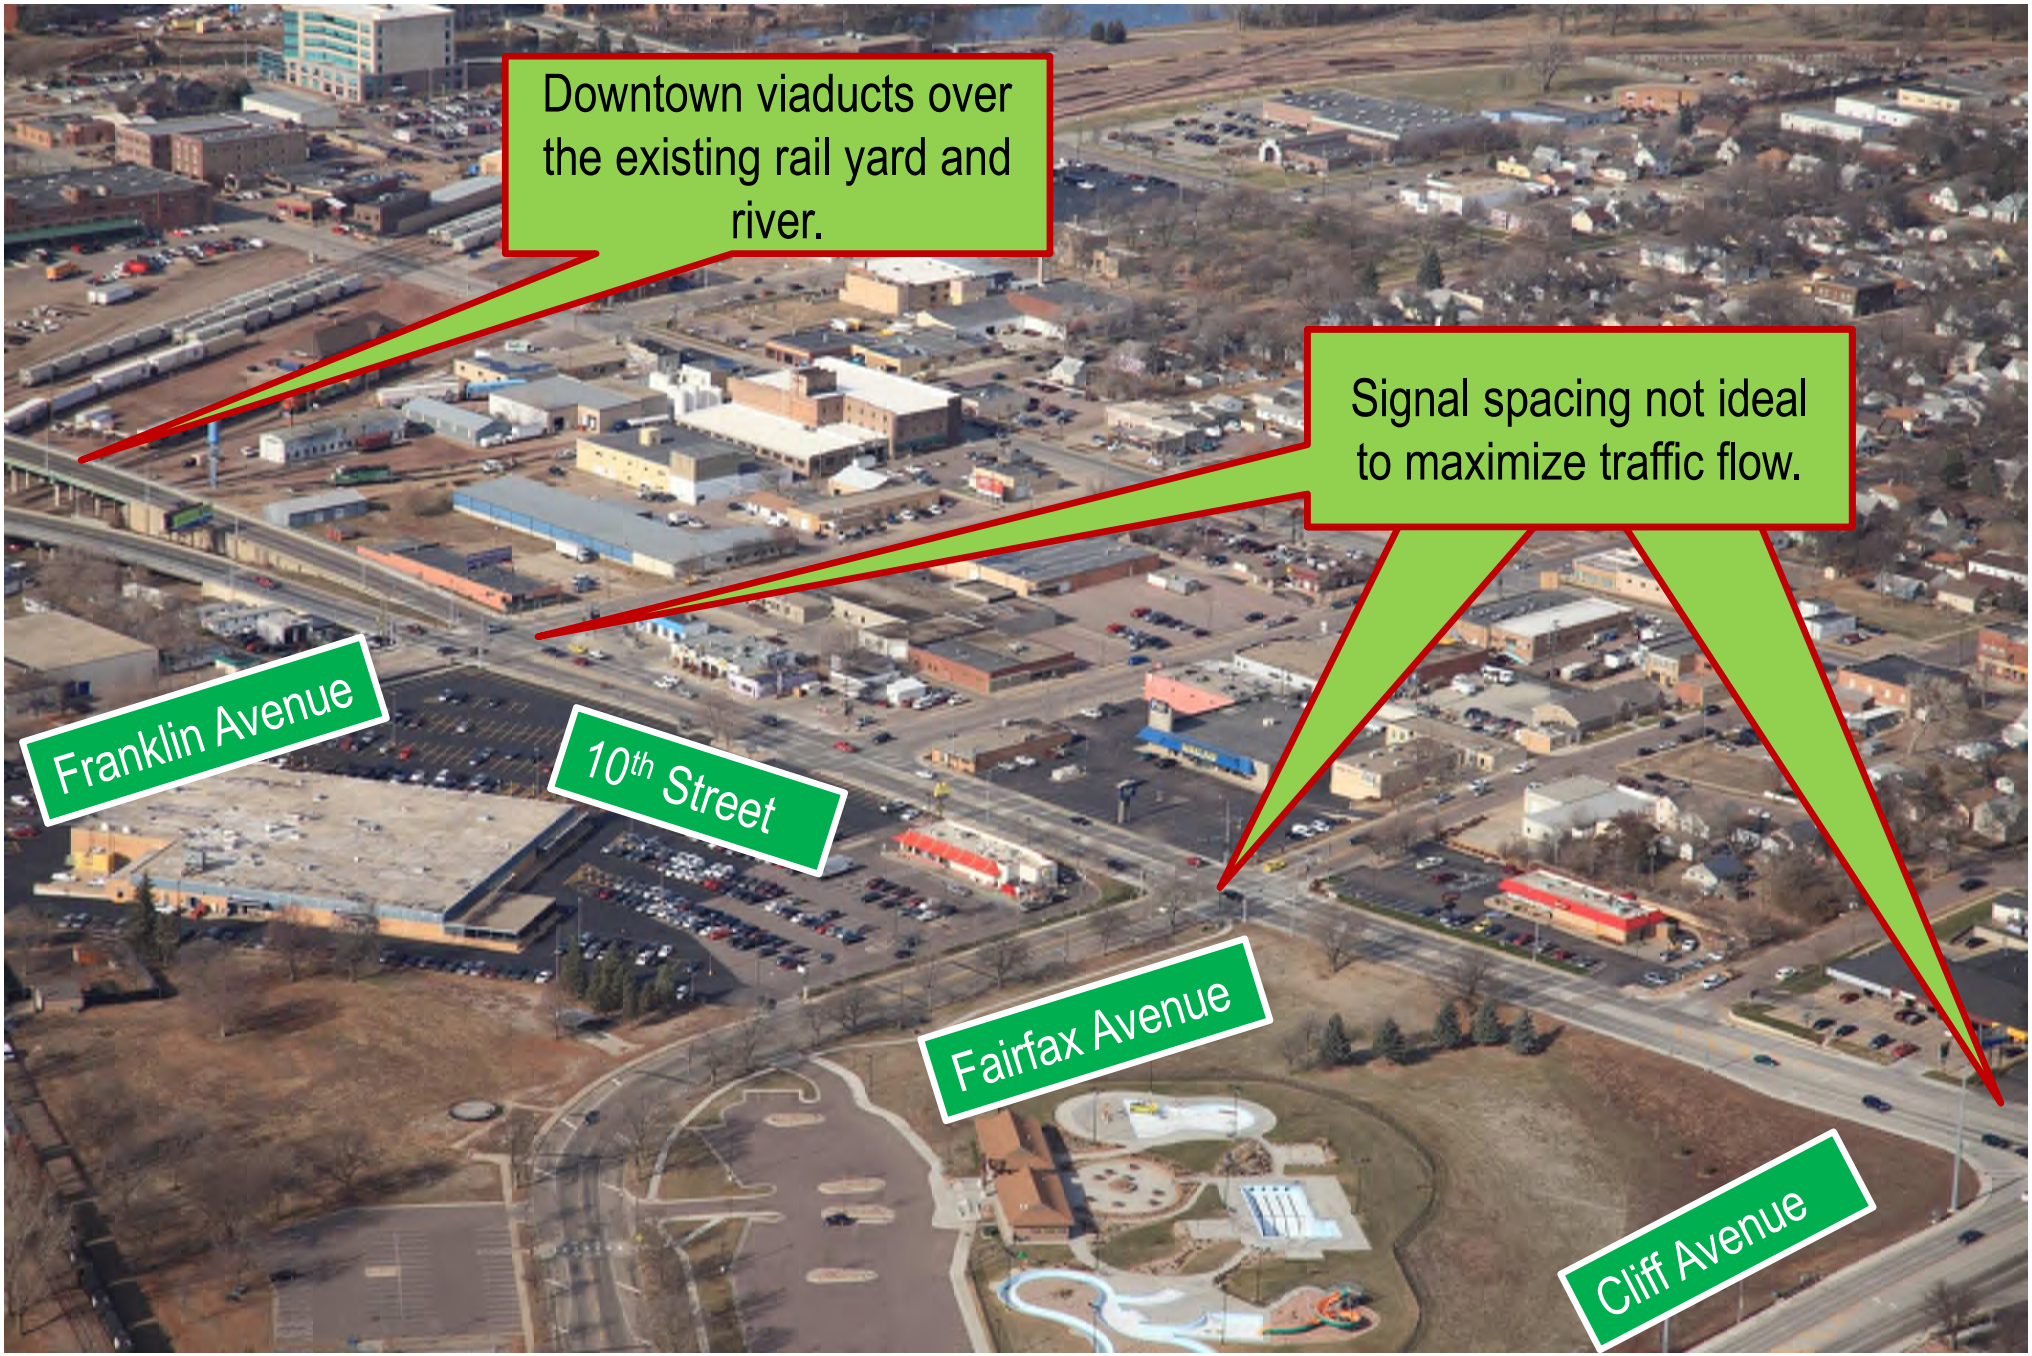

10th Street Corridor Overview




10th Street Corridor Overview




10th Street Corridor Overview



10th Street Corridor Overview

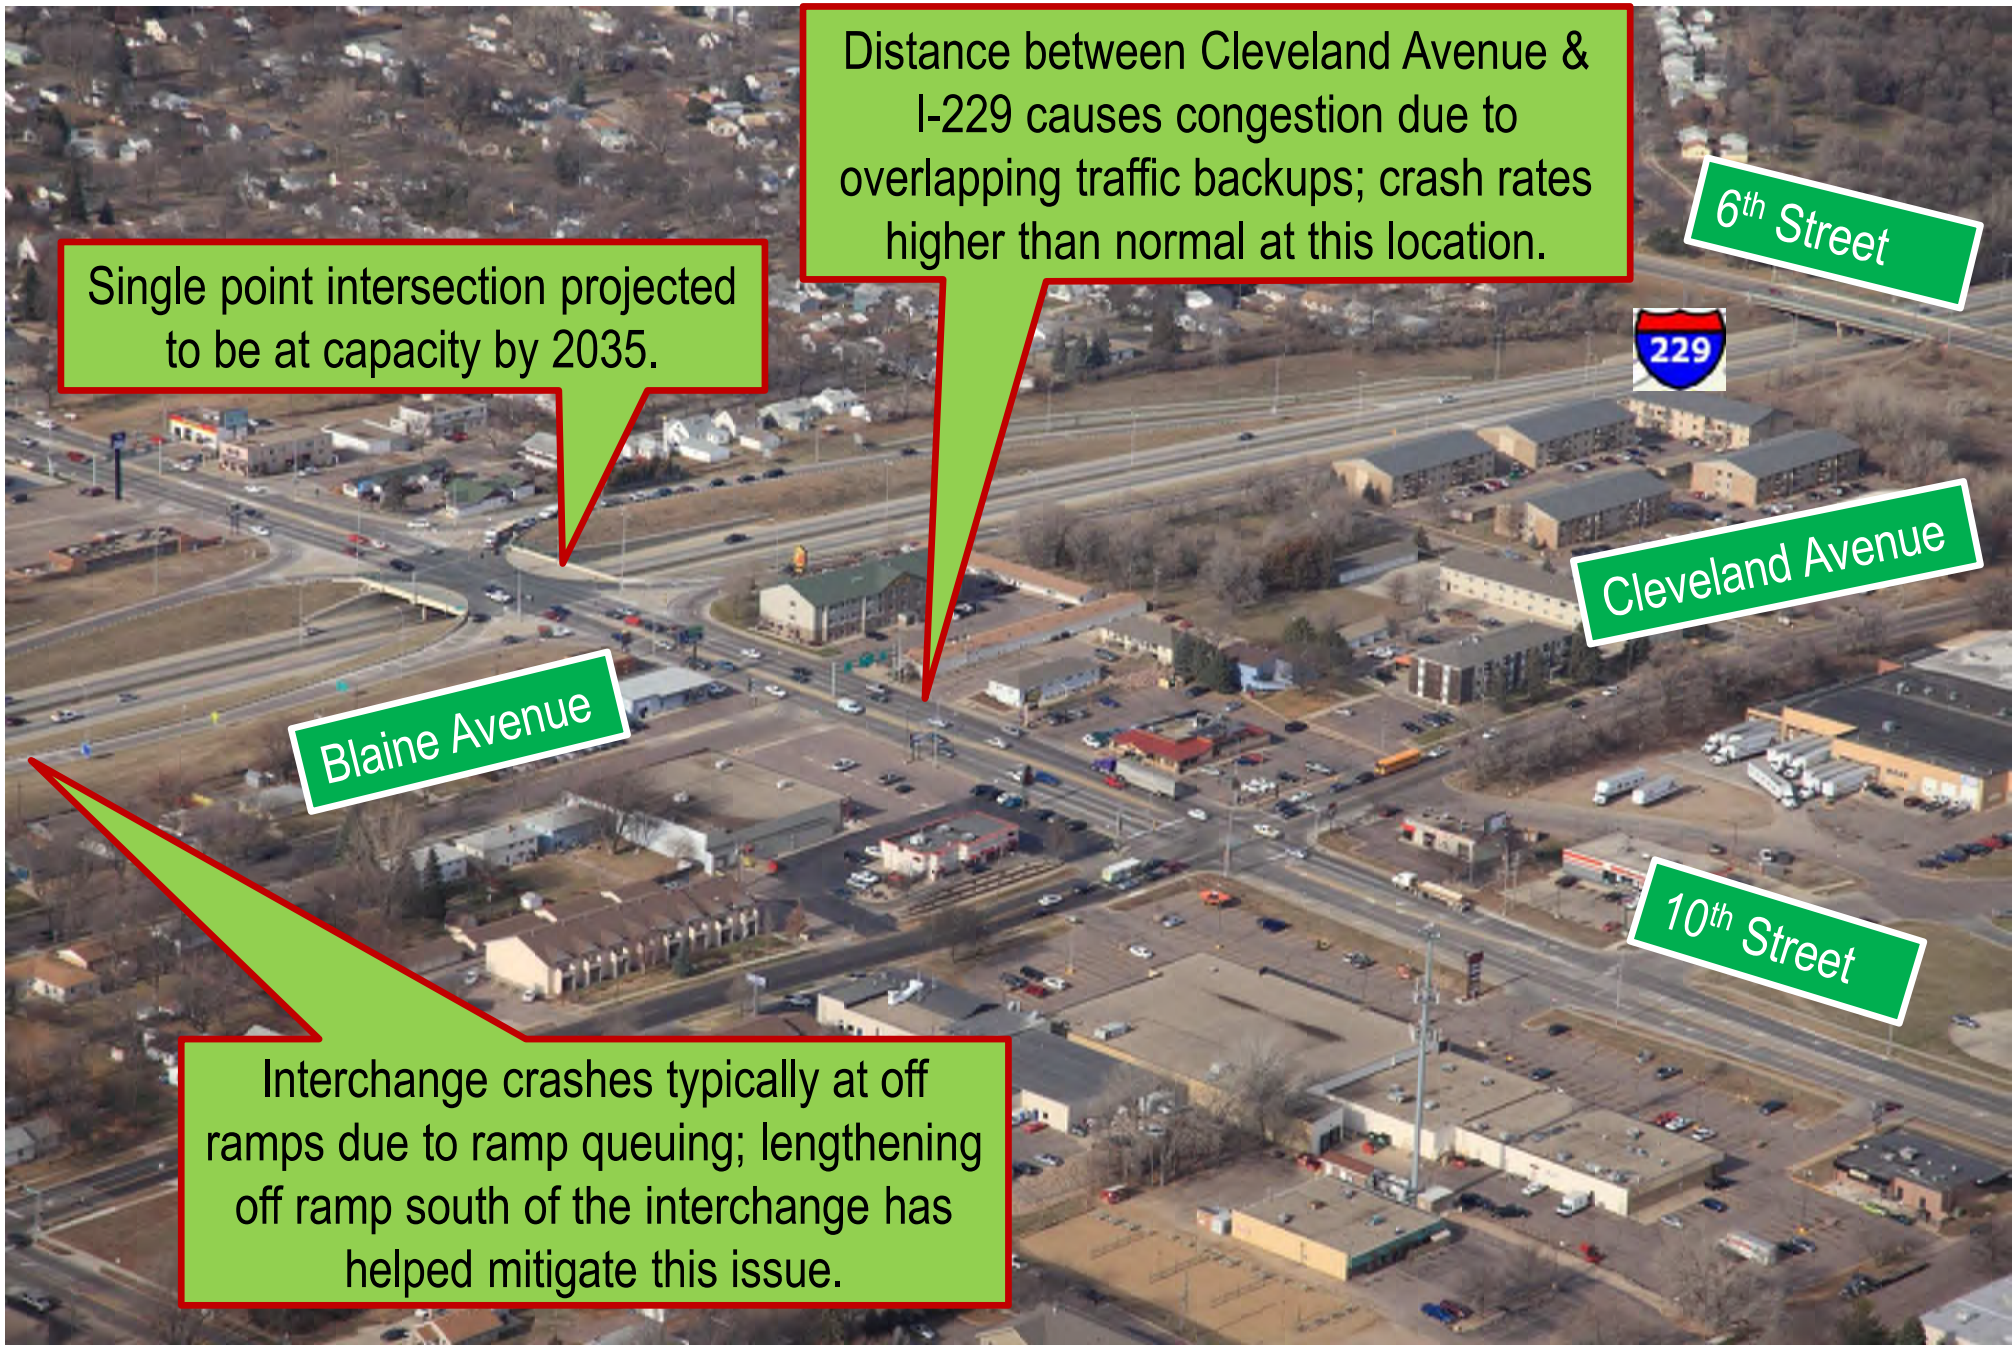


10th Street Corridor Overview

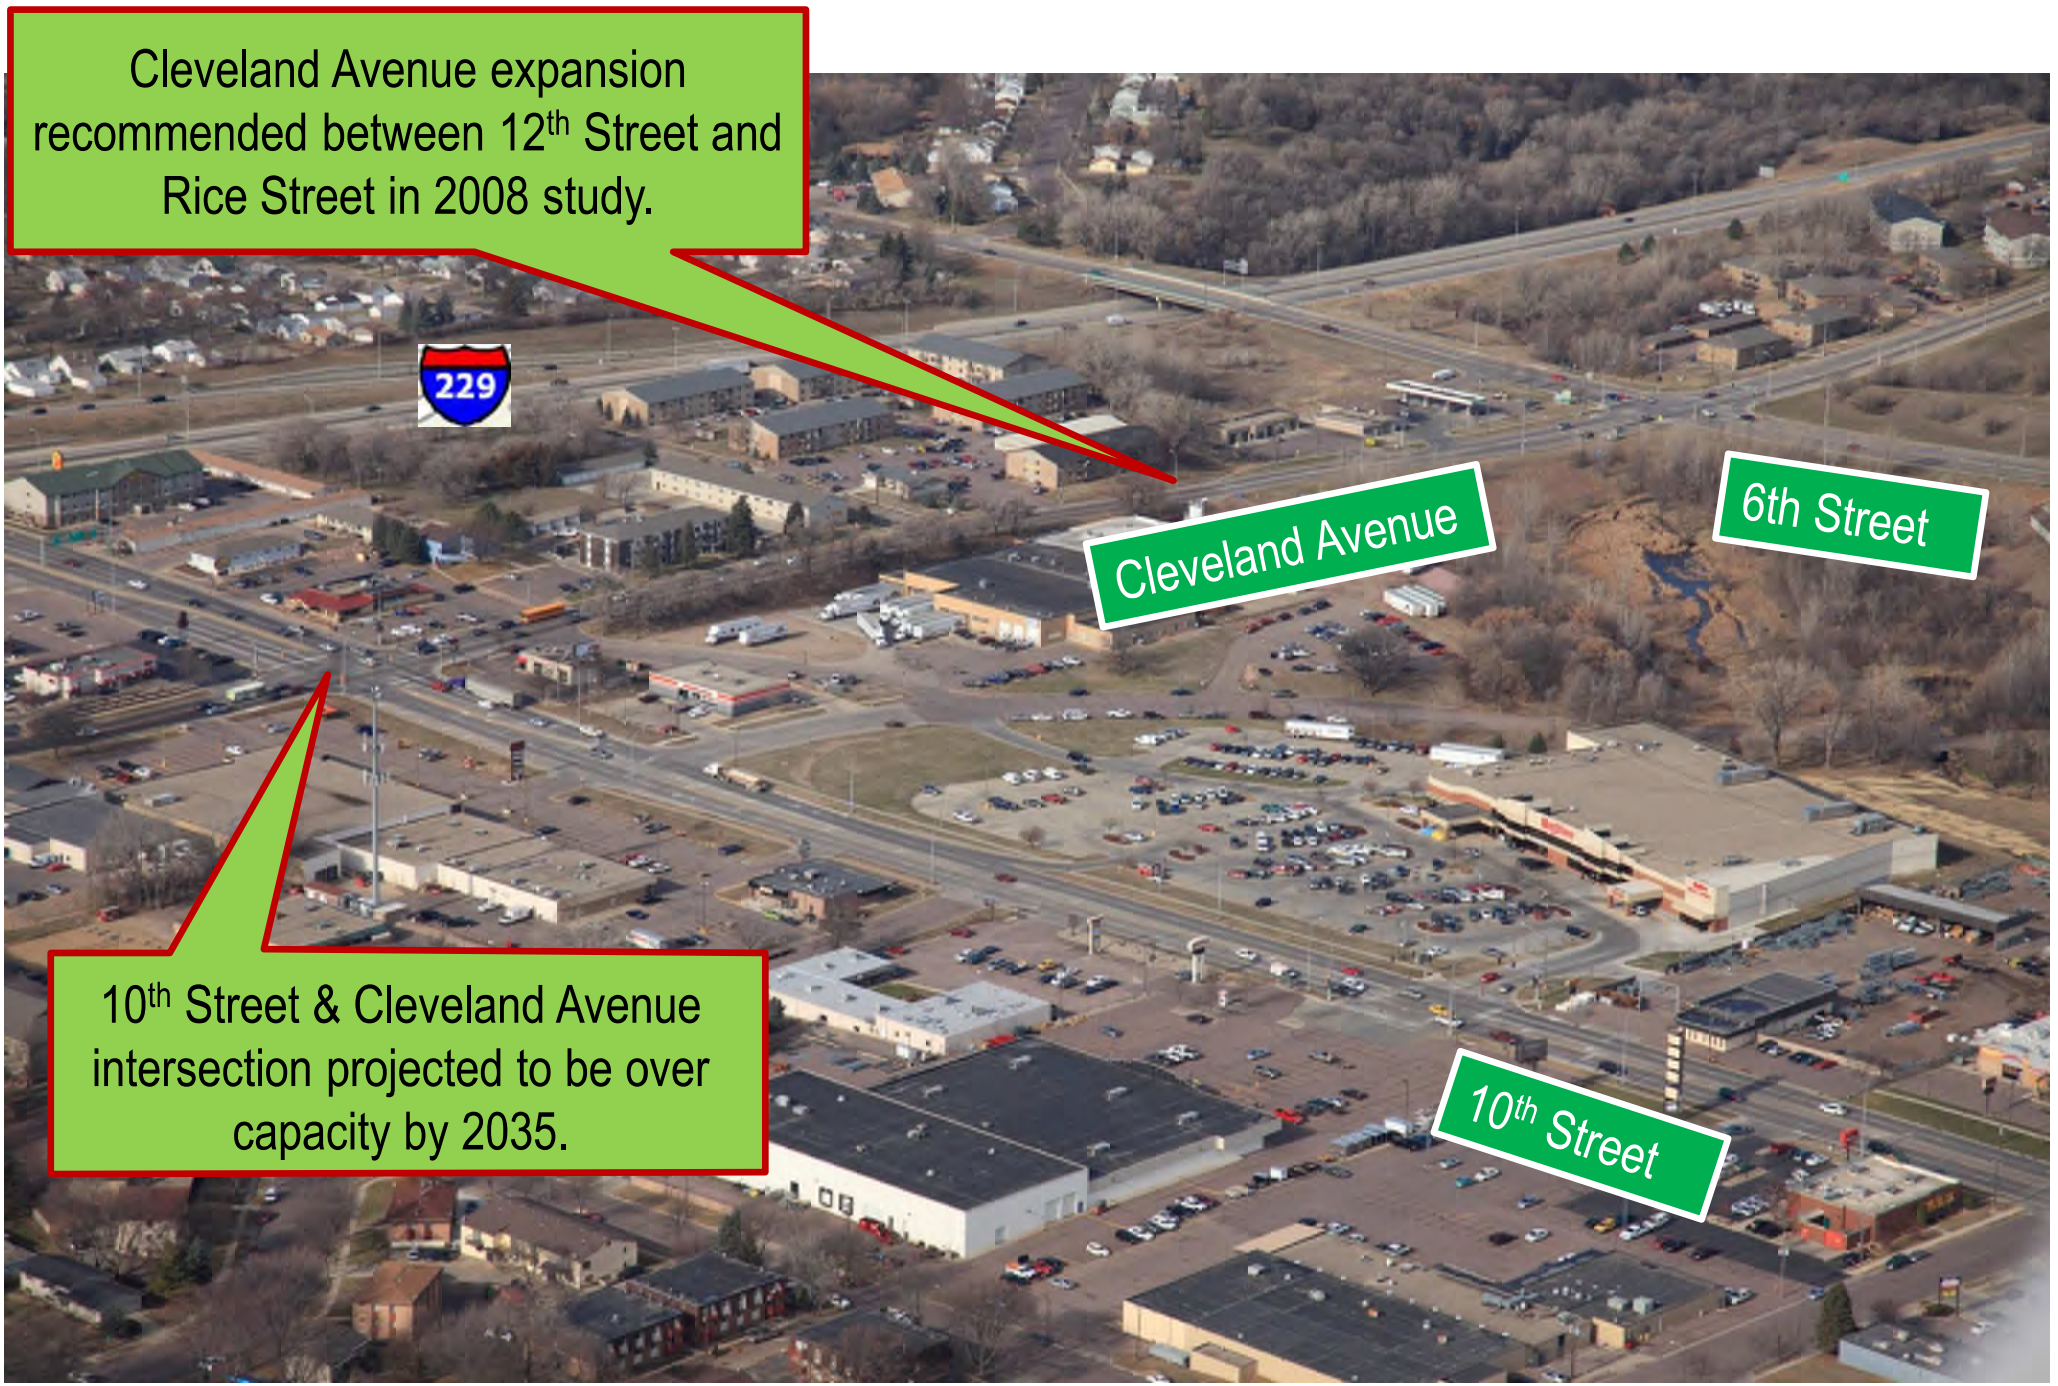

10th Street Corridor Overview




10th Street Corridor Overview

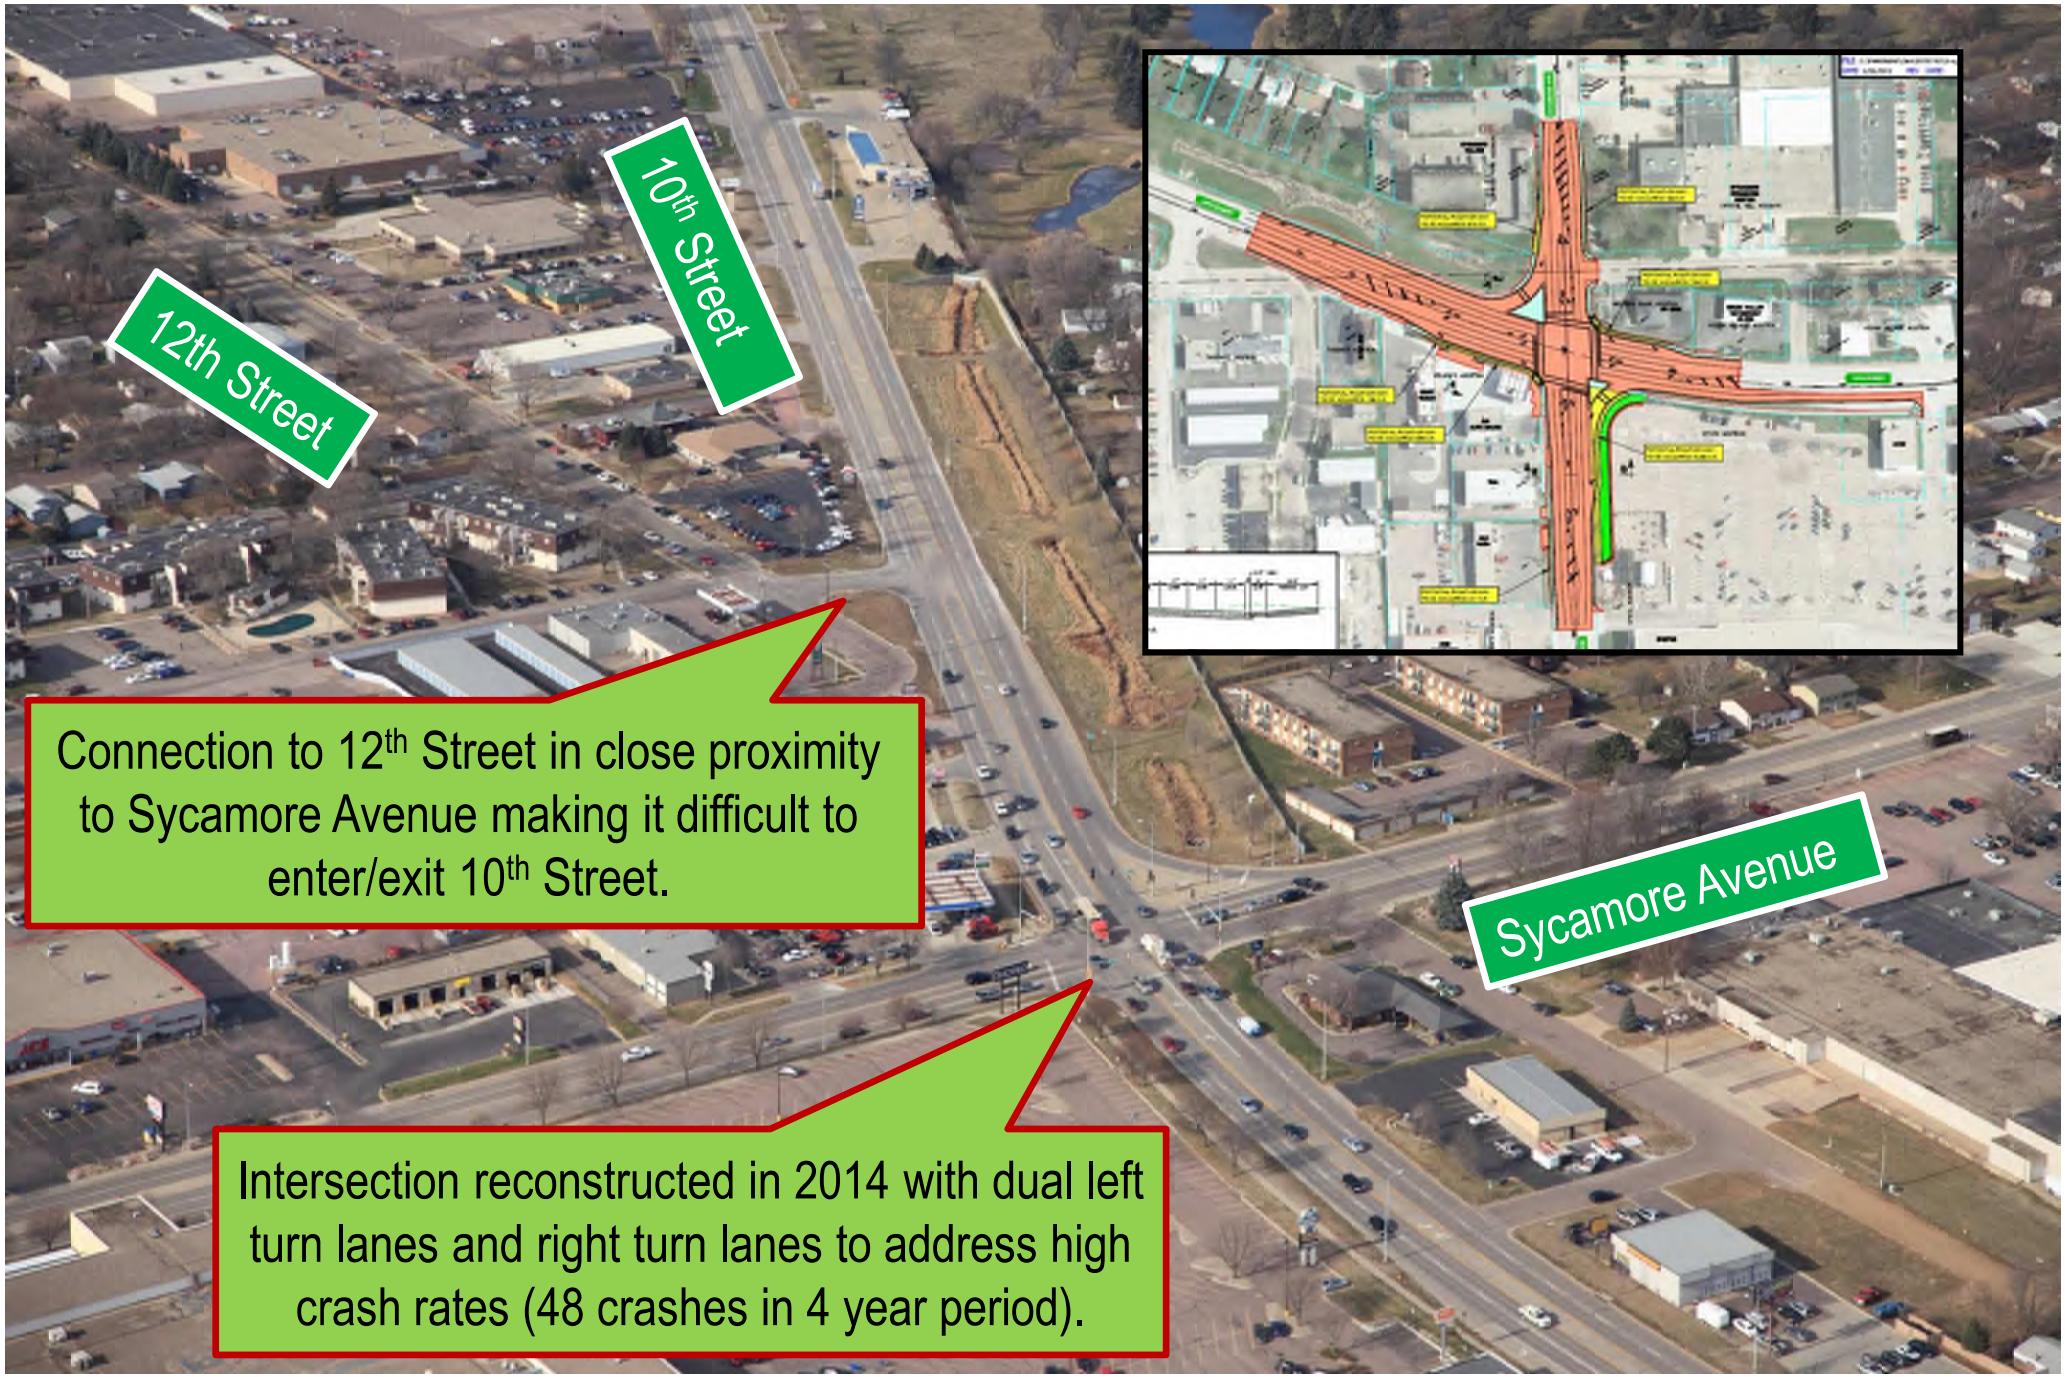


Conceptual Ideas for 10th Street Corridor

What you will be able to see tonight:

- 8 Interchange Conceptual Options
- 4 Corridor Options
- Median Changes or Driveway Closures to Improve Safety

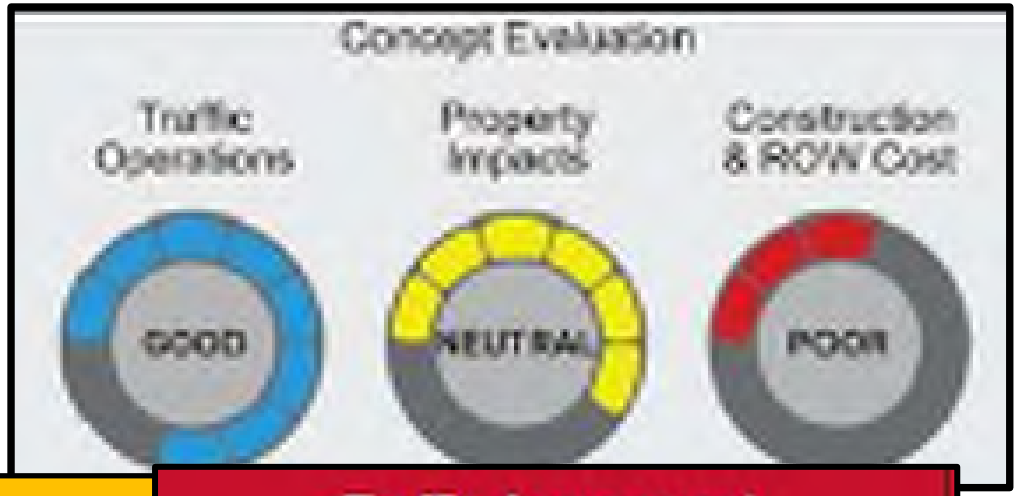


10th Street / I-229 Interchange Diverging Diamond Option

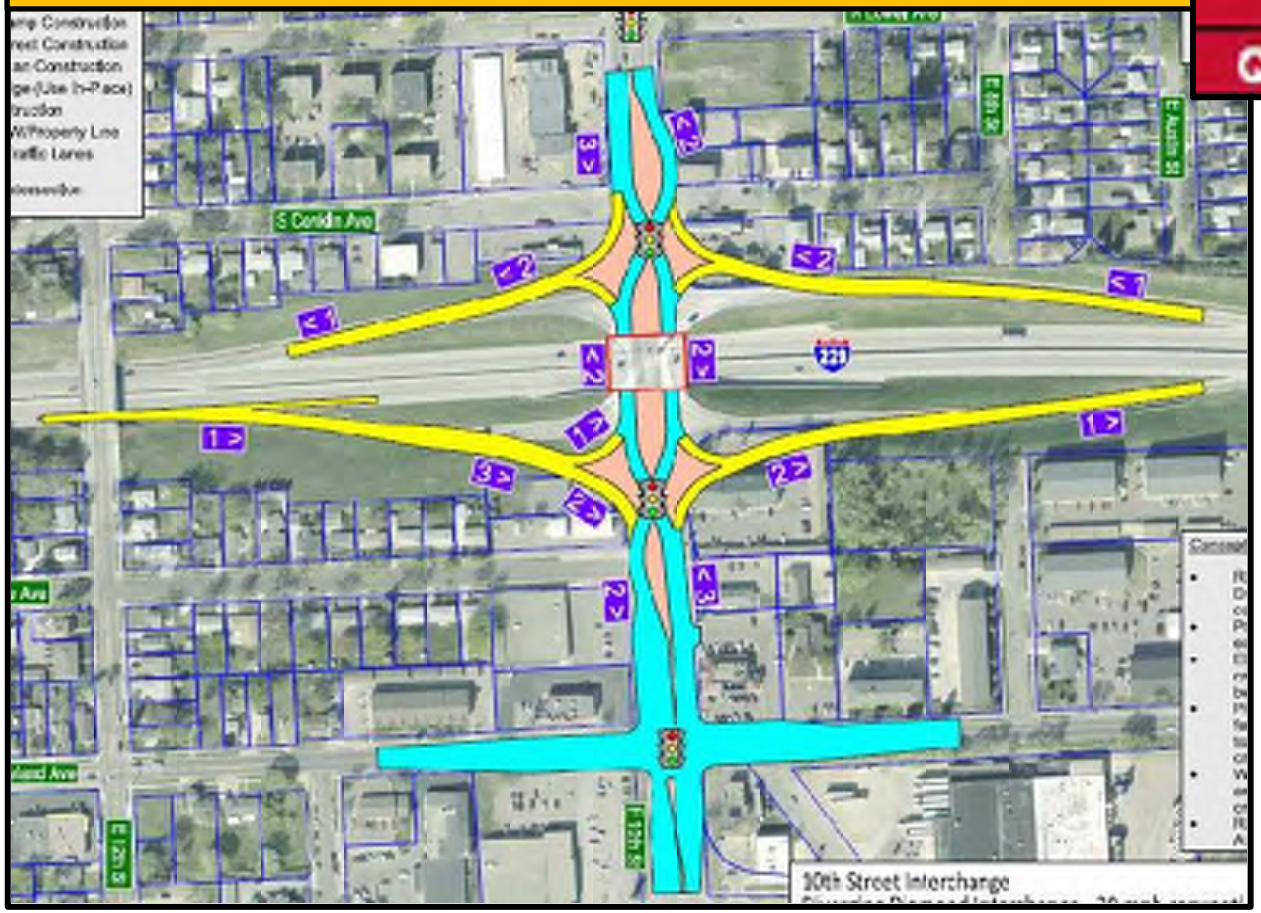

Traffic Assessment


Queues	Delay	Travel Time

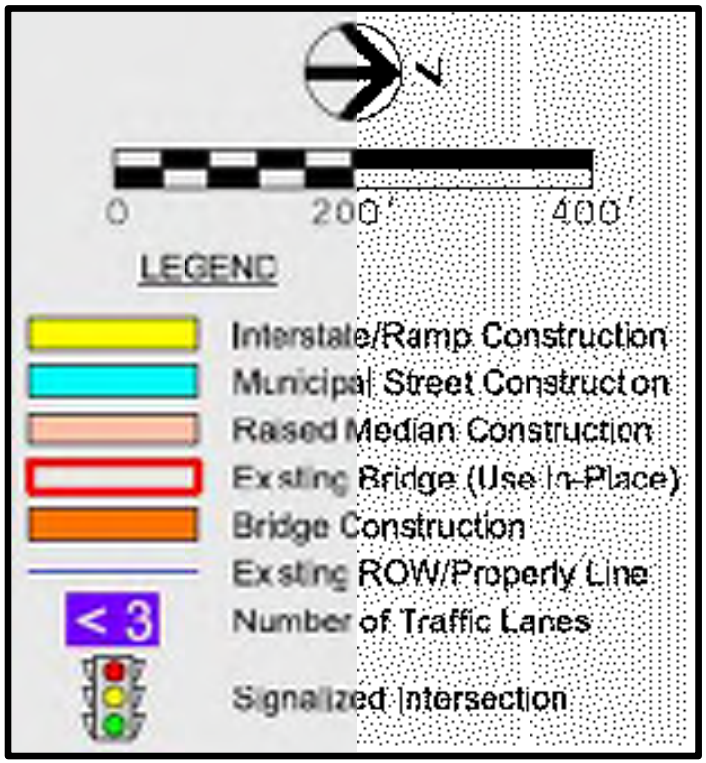


Conceptual Ideas for 10th Street Corridor

What you will be able to see tonight:

- 8 Interchange Conceptual Options
- 4 Corridor Options
- Median Changes or Driveway Closures to Improve Safety

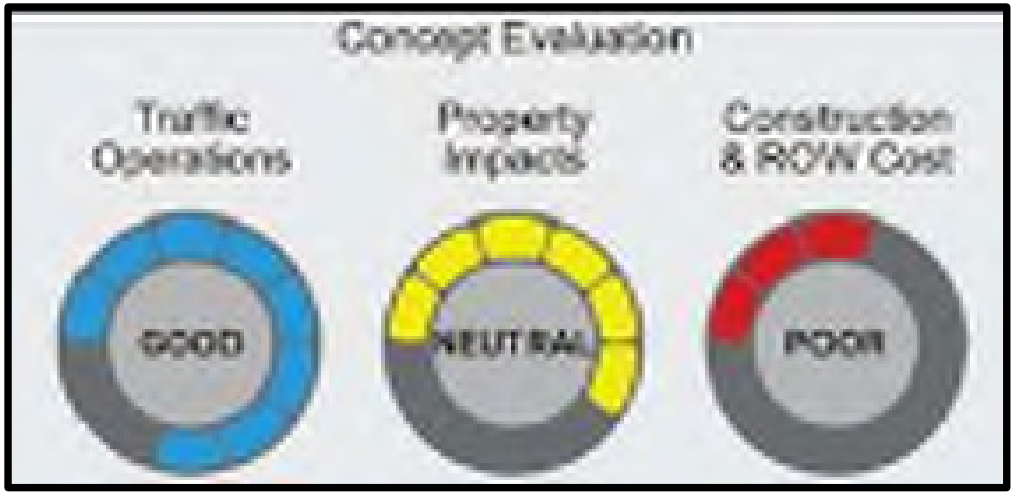

10th Street Median Divided 4 Lane Roadway Option

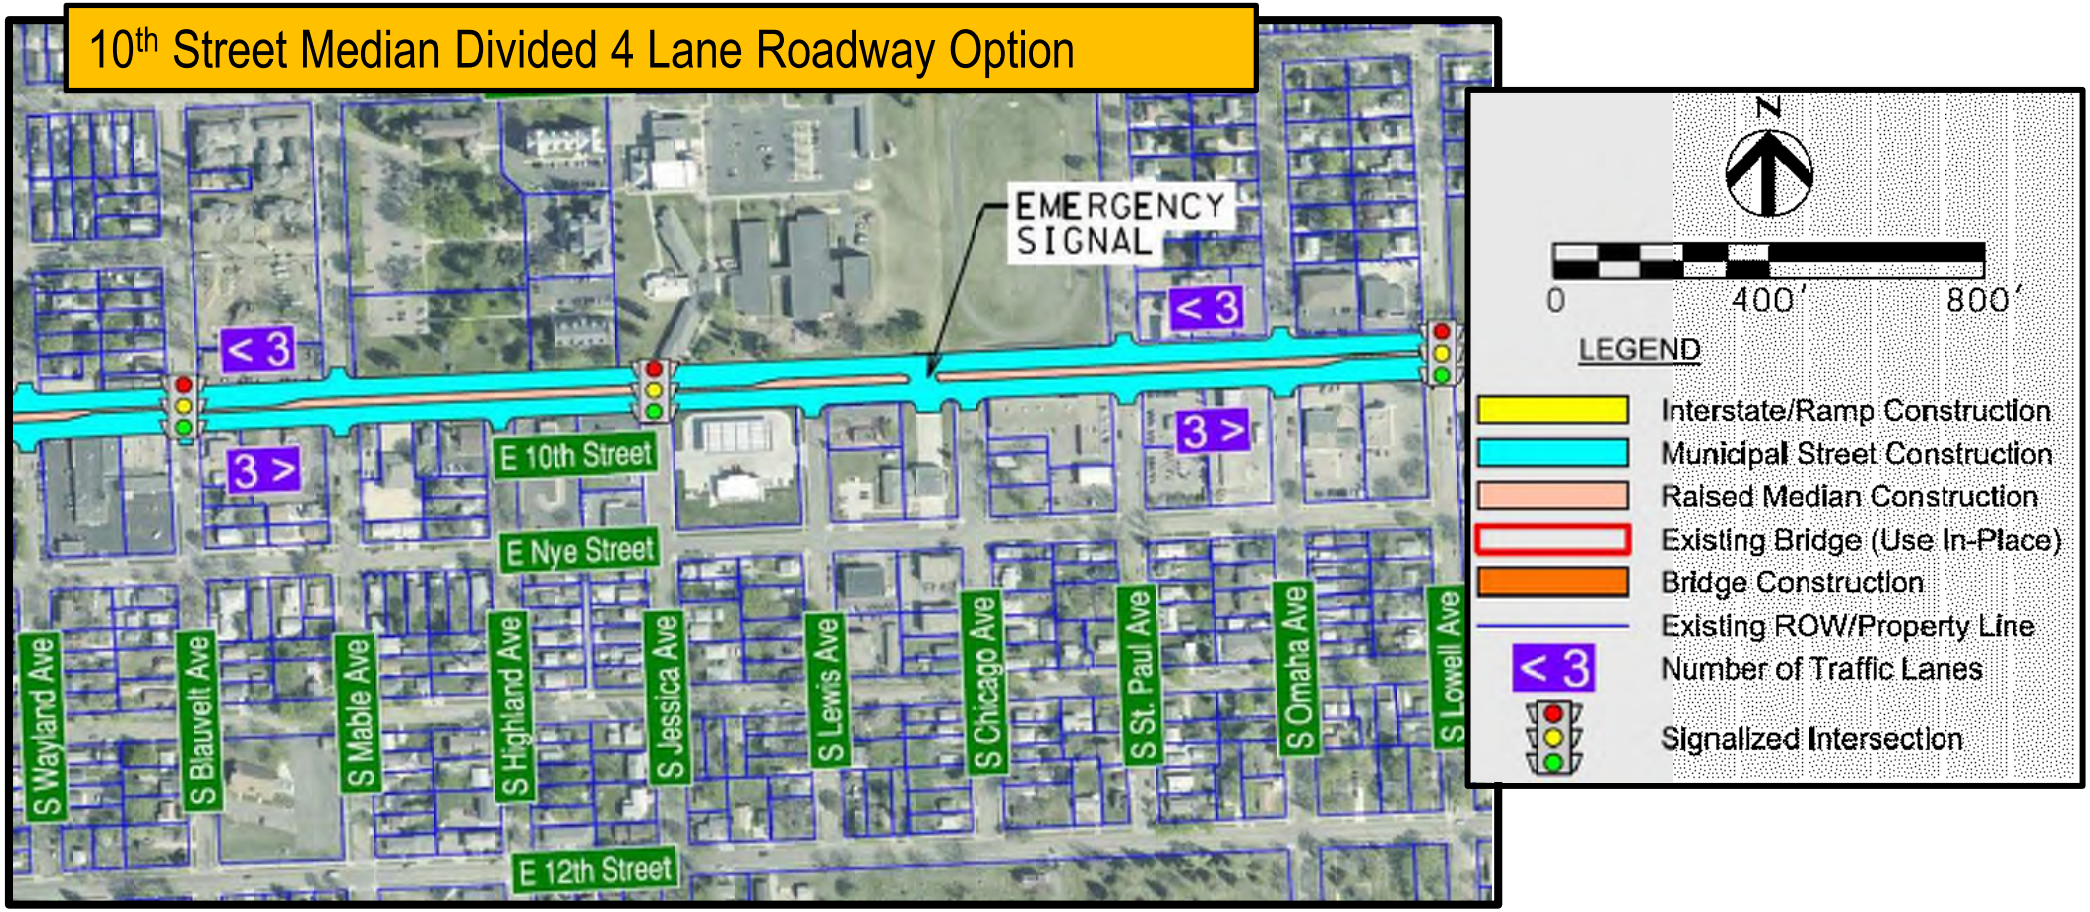

Next Steps for 10th Street



- **Finalize Composite Comparison Matrix**
  - Traffic Assessment
  - Environmental Screening
  - ROW Impacts
  - Overall Costs
  - Public Involvement Support
- **Complete additional Traffic Operations analysis on a reduced number of options based on the screening activities**
- **Develop Priority Phasing Plan for I-229 Corridor and Sub-Study Corridor**
- **Schedule and Conduct next public meeting**

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Chris Malmberg – HDR Engineering, Inc.
402-399-4959 or chris.malmberg@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 6 – 10th Street Sub-Study

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

BENSON ROAD

JUNE 2ND, 2015

- SIGN-IN SHEETS
- POWERPOINT SLIDES
- MEETING NOTES (SEE END OF PUBLIC MEETINGS #2 APPENDIX)
- COMMENTS (SEE END OF PUBLIC MEETINGS #2 APPENDIX)

Note: Actual attendance count was 20 people (including 6 women)

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Benson Road Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3618P, PCN 644K **Project No.:** 207030

Meeting Date Tuesday, June 2nd, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Pete Lengyel	SD DOT	773-6488	pete.lengyel@state.sd.us
2	Ron McMahon	FHWA	776-1009	ron.mcmahon@dot.gov
3	Sara Bertsch	Argus Leader		sbertsch@argusleader.com
4	Kay Gollesch	Lifescape	[illegible]	kay.gollesch@lifescapelandscape
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Benson Road Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PI: 0100(67) 3618P, PCN 044K **Project No.:** 207030

Meeting Date Tuesday, June 2nd, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Amber Gibson	SECOG	605-367-5892	amber@siouxfalls.org
2	Dave Brickhouse	Benesch Cambridge	605 728-5900	dbrock@benderco.com
3	Travis Dressen	SDDOT - SF Area	605-367-5180	travis.dressen@state.sd.us
4	Kurt Griffin	[illegible]	812 603 5	kgf-32/@yahoo.com
5	Ryan Kvalen	Sioux Falls	521-7076	
6	Jason Kjerstad	HDR	605-977-7240	jason.kjerstad@hdrinc.com
7	Rush Smith	3500 E 60th St N	605-940-4943	
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for Benson Road Sub-Study


Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 301CP, PCN 044K **Project No.:** 207030

Meeting Date Tuesday, June 2nd, 2015 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Christina Bennett	SDDOT	605-773-4759	Christina.Bennett@state.sd.us
2	Chad Hartman	Sioux Falls	605-334-3204	Chad.hartman@mycitysprings.com
3	Rick Vander Haar	3408 N Ashton Ave	605-306-1111	ecole@midconetwork.com
4	Steve Gramm	SDDOT	773-6441	Steve.gramm@state.sd.us
5	Shannon Schultz	Minnehaha County H.D.	367-4316	sschultz@minnehahacounty.org
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

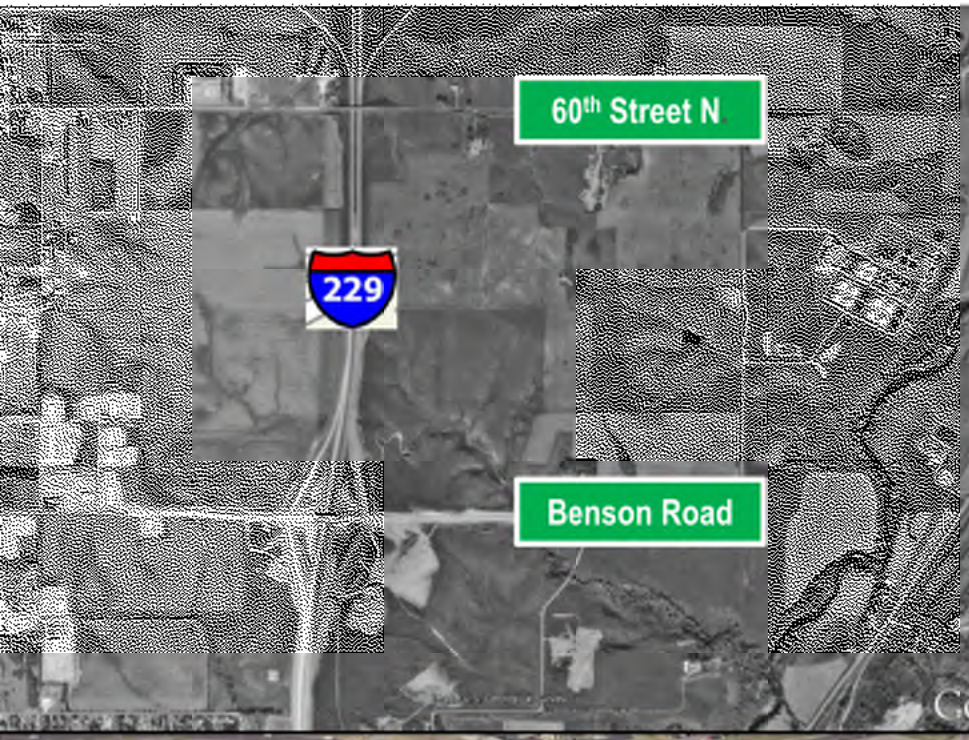





Interstate 229 Major Investment Study

Exit 9 – Benson Rd Sub-Study

Informational Meeting
June 2nd, 2015
5:00 pm to 6:30 pm

HDR

HRGreen

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Meeting will focus on:

Exit 9 – Benson Road

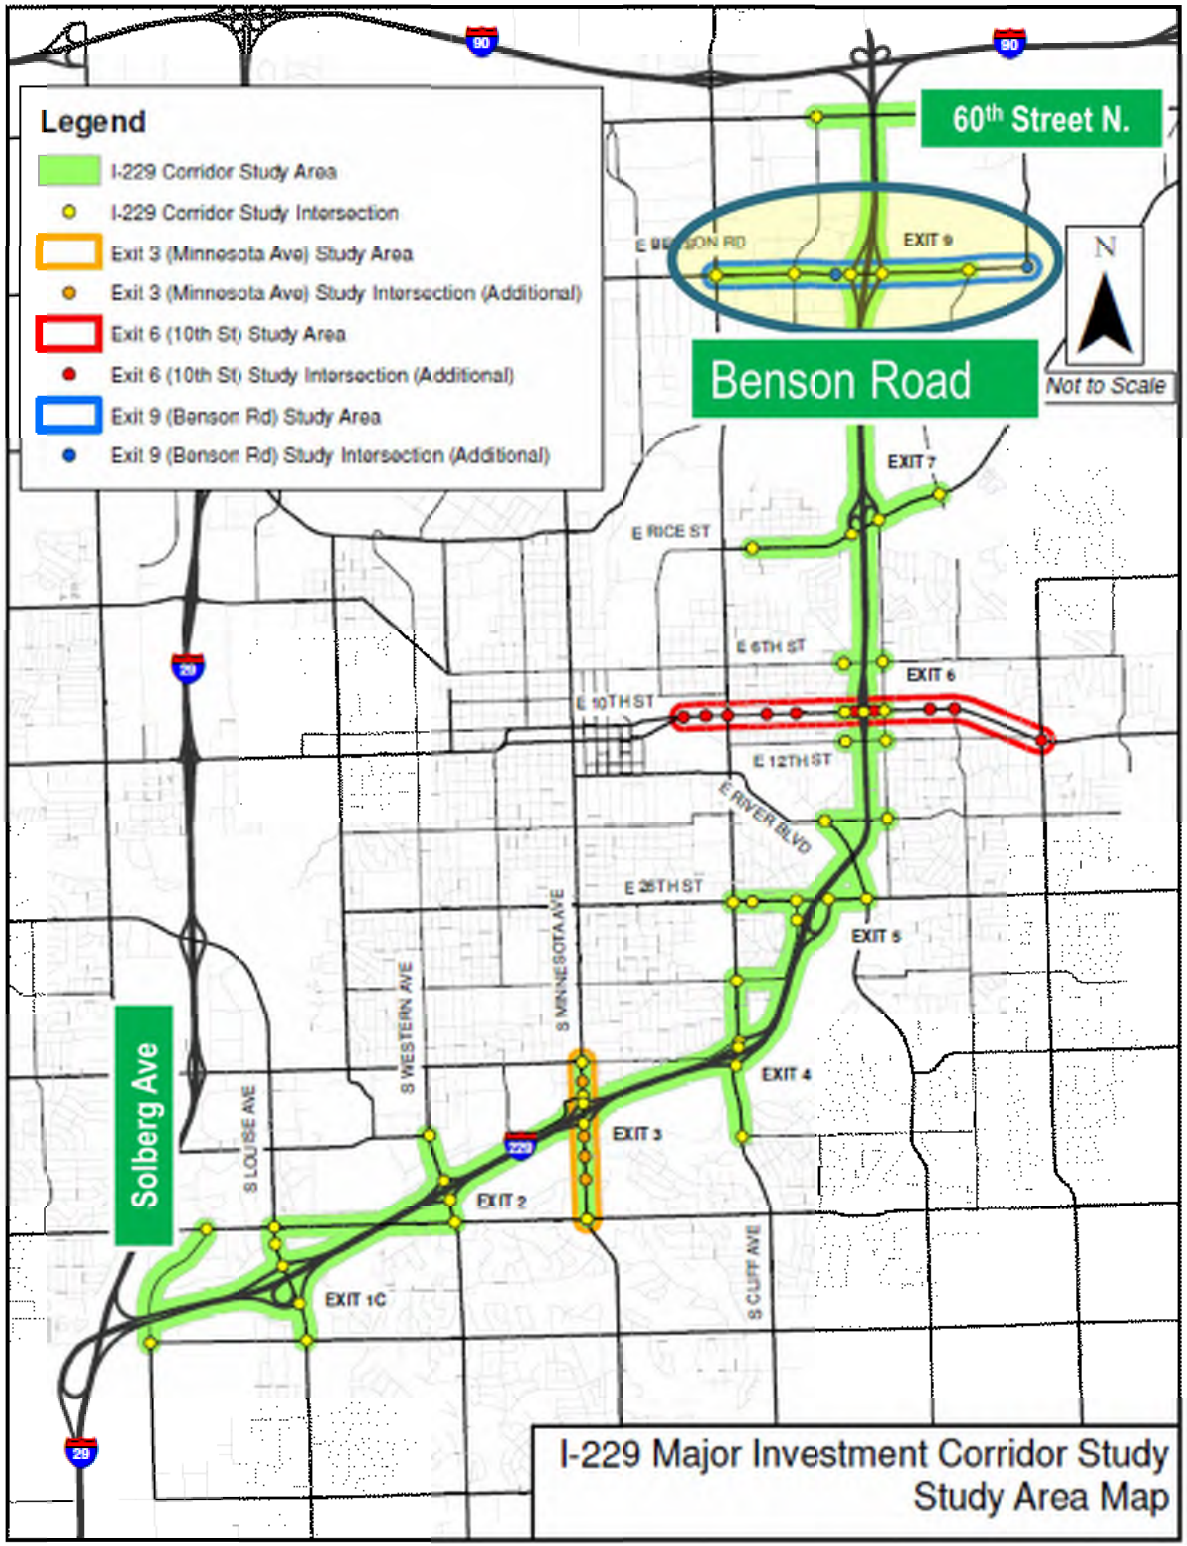

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

Exit 9 (Benson Road) Crossroad Study Goals


- Reduce traffic congestion at NB on/off interchange ramp terminal
- Develop Corridor Growth Plan to meet traffic demands from development taking place east of I-229
- Improve pedestrian mobility
- Make recommendations to improve corridor intersections
- Develop interchange alternatives to meet future traffic demands









Benson Rd Corridor Overview

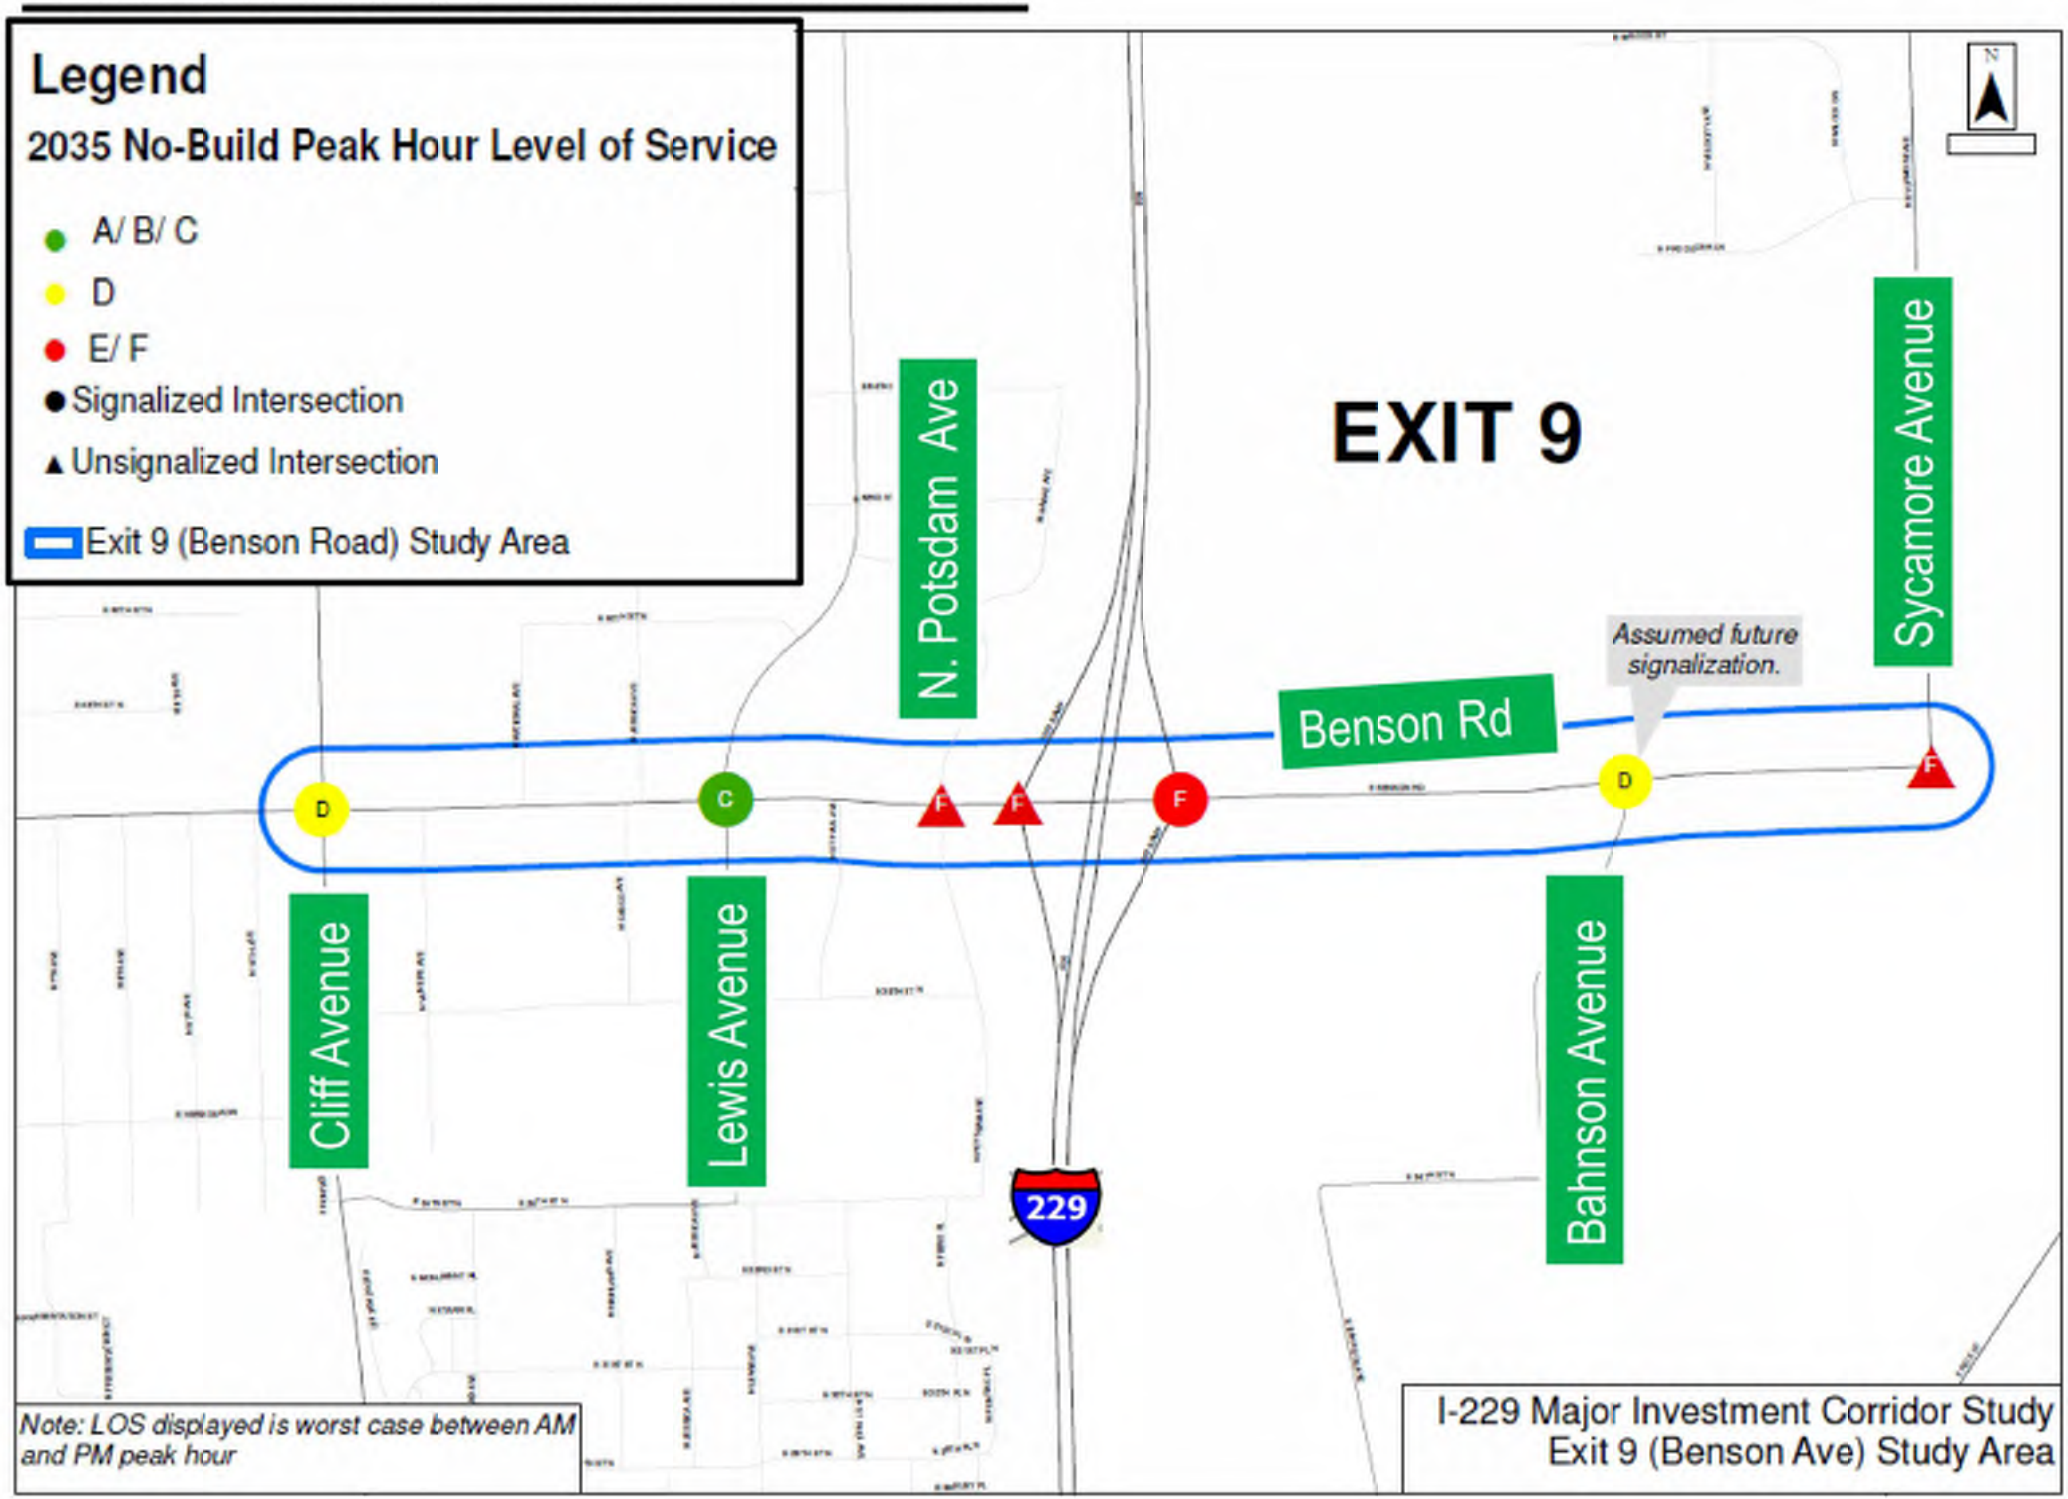


Benson Rd Corridor Overview

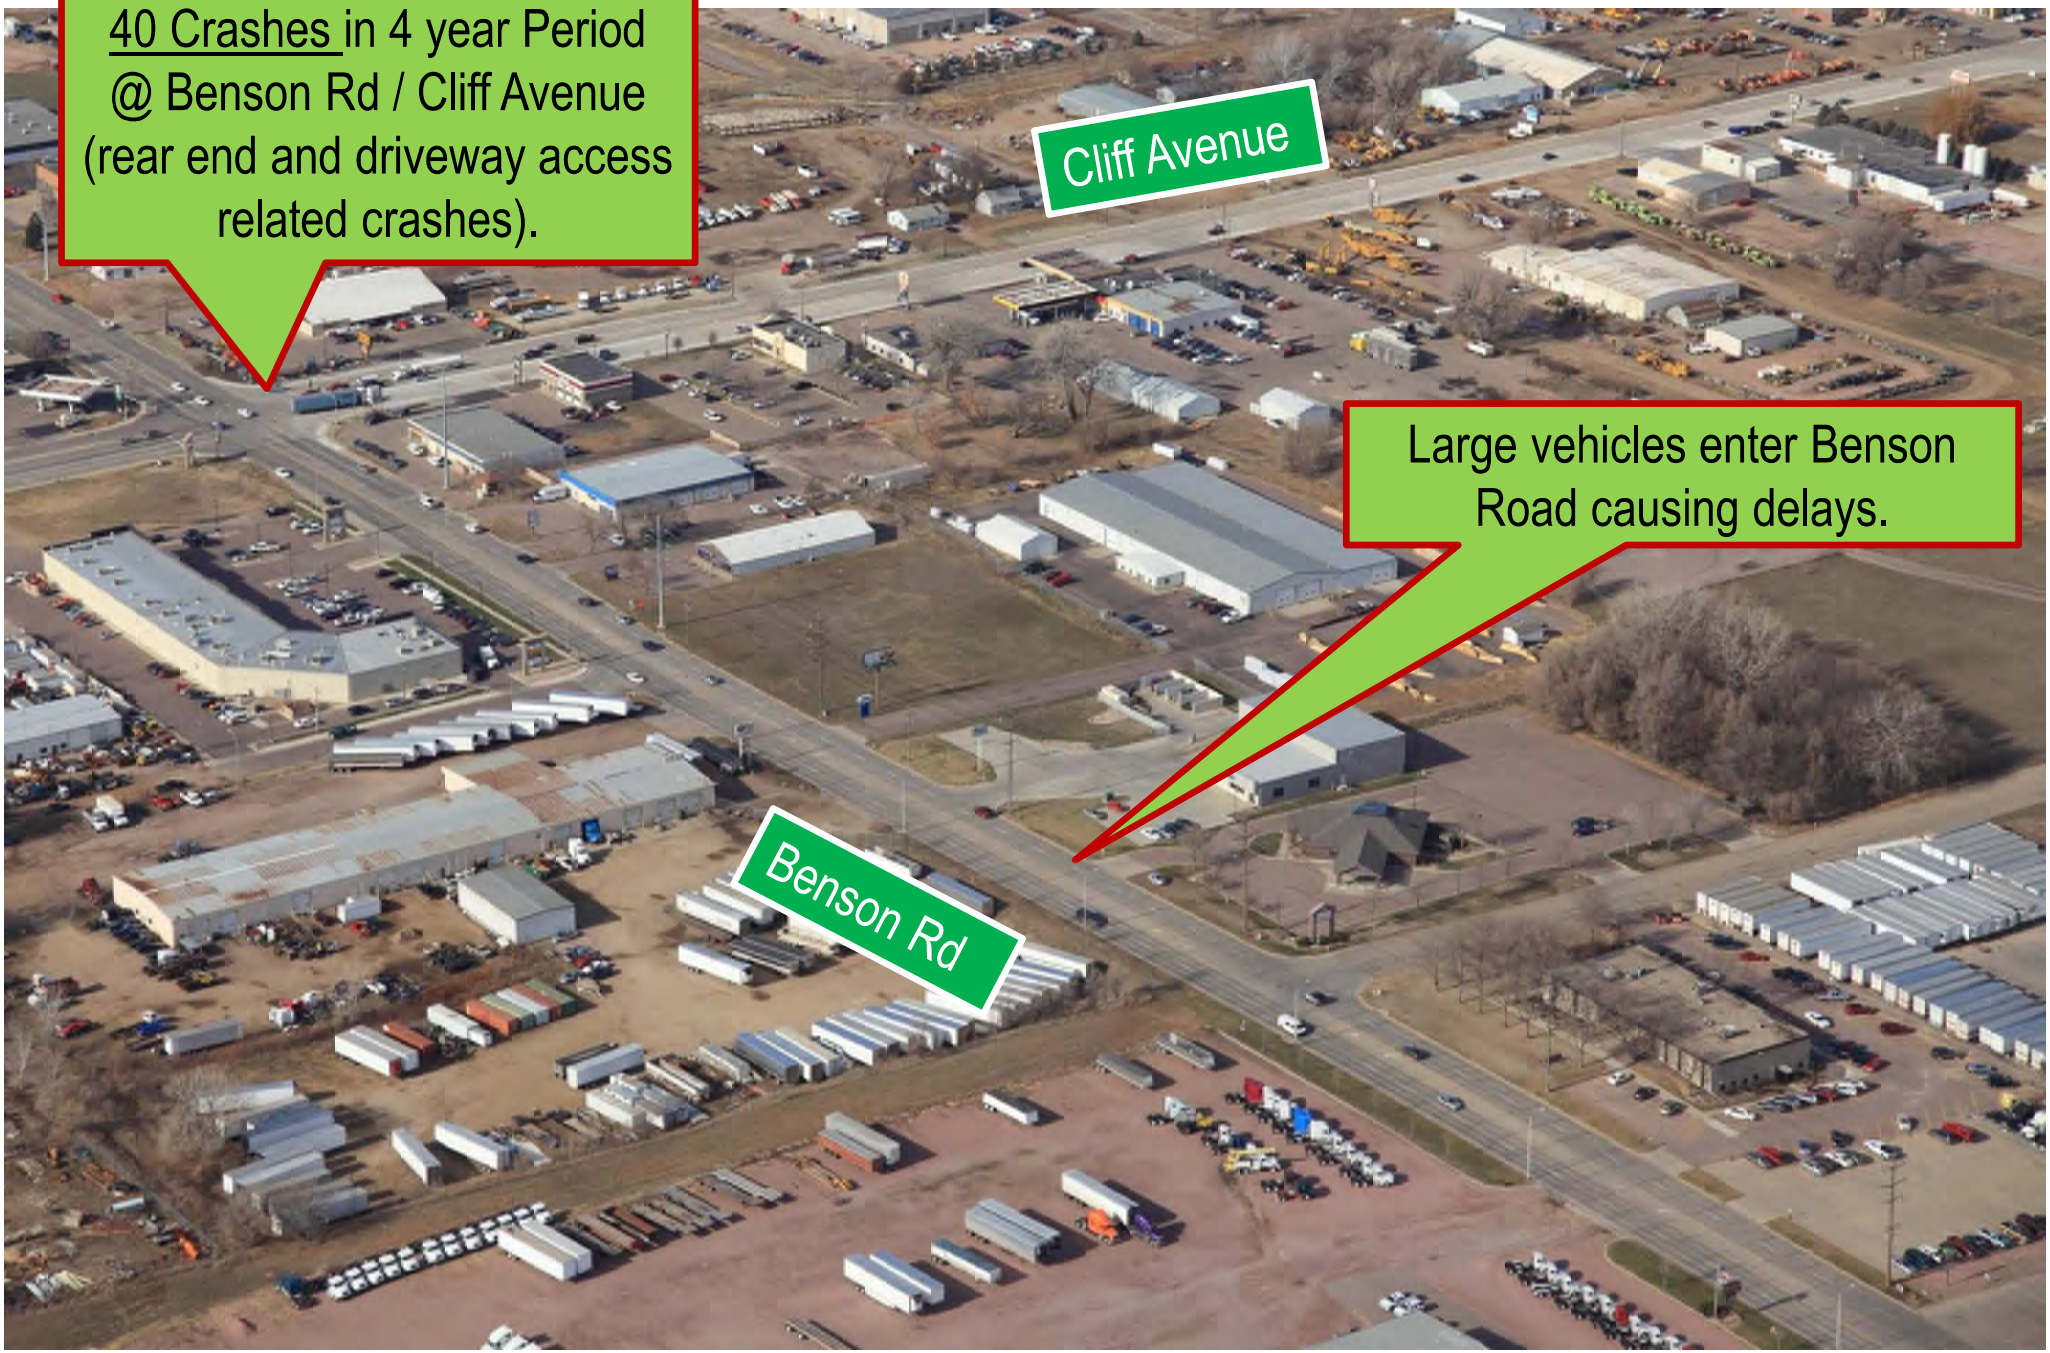


Benson Rd Corridor Overview

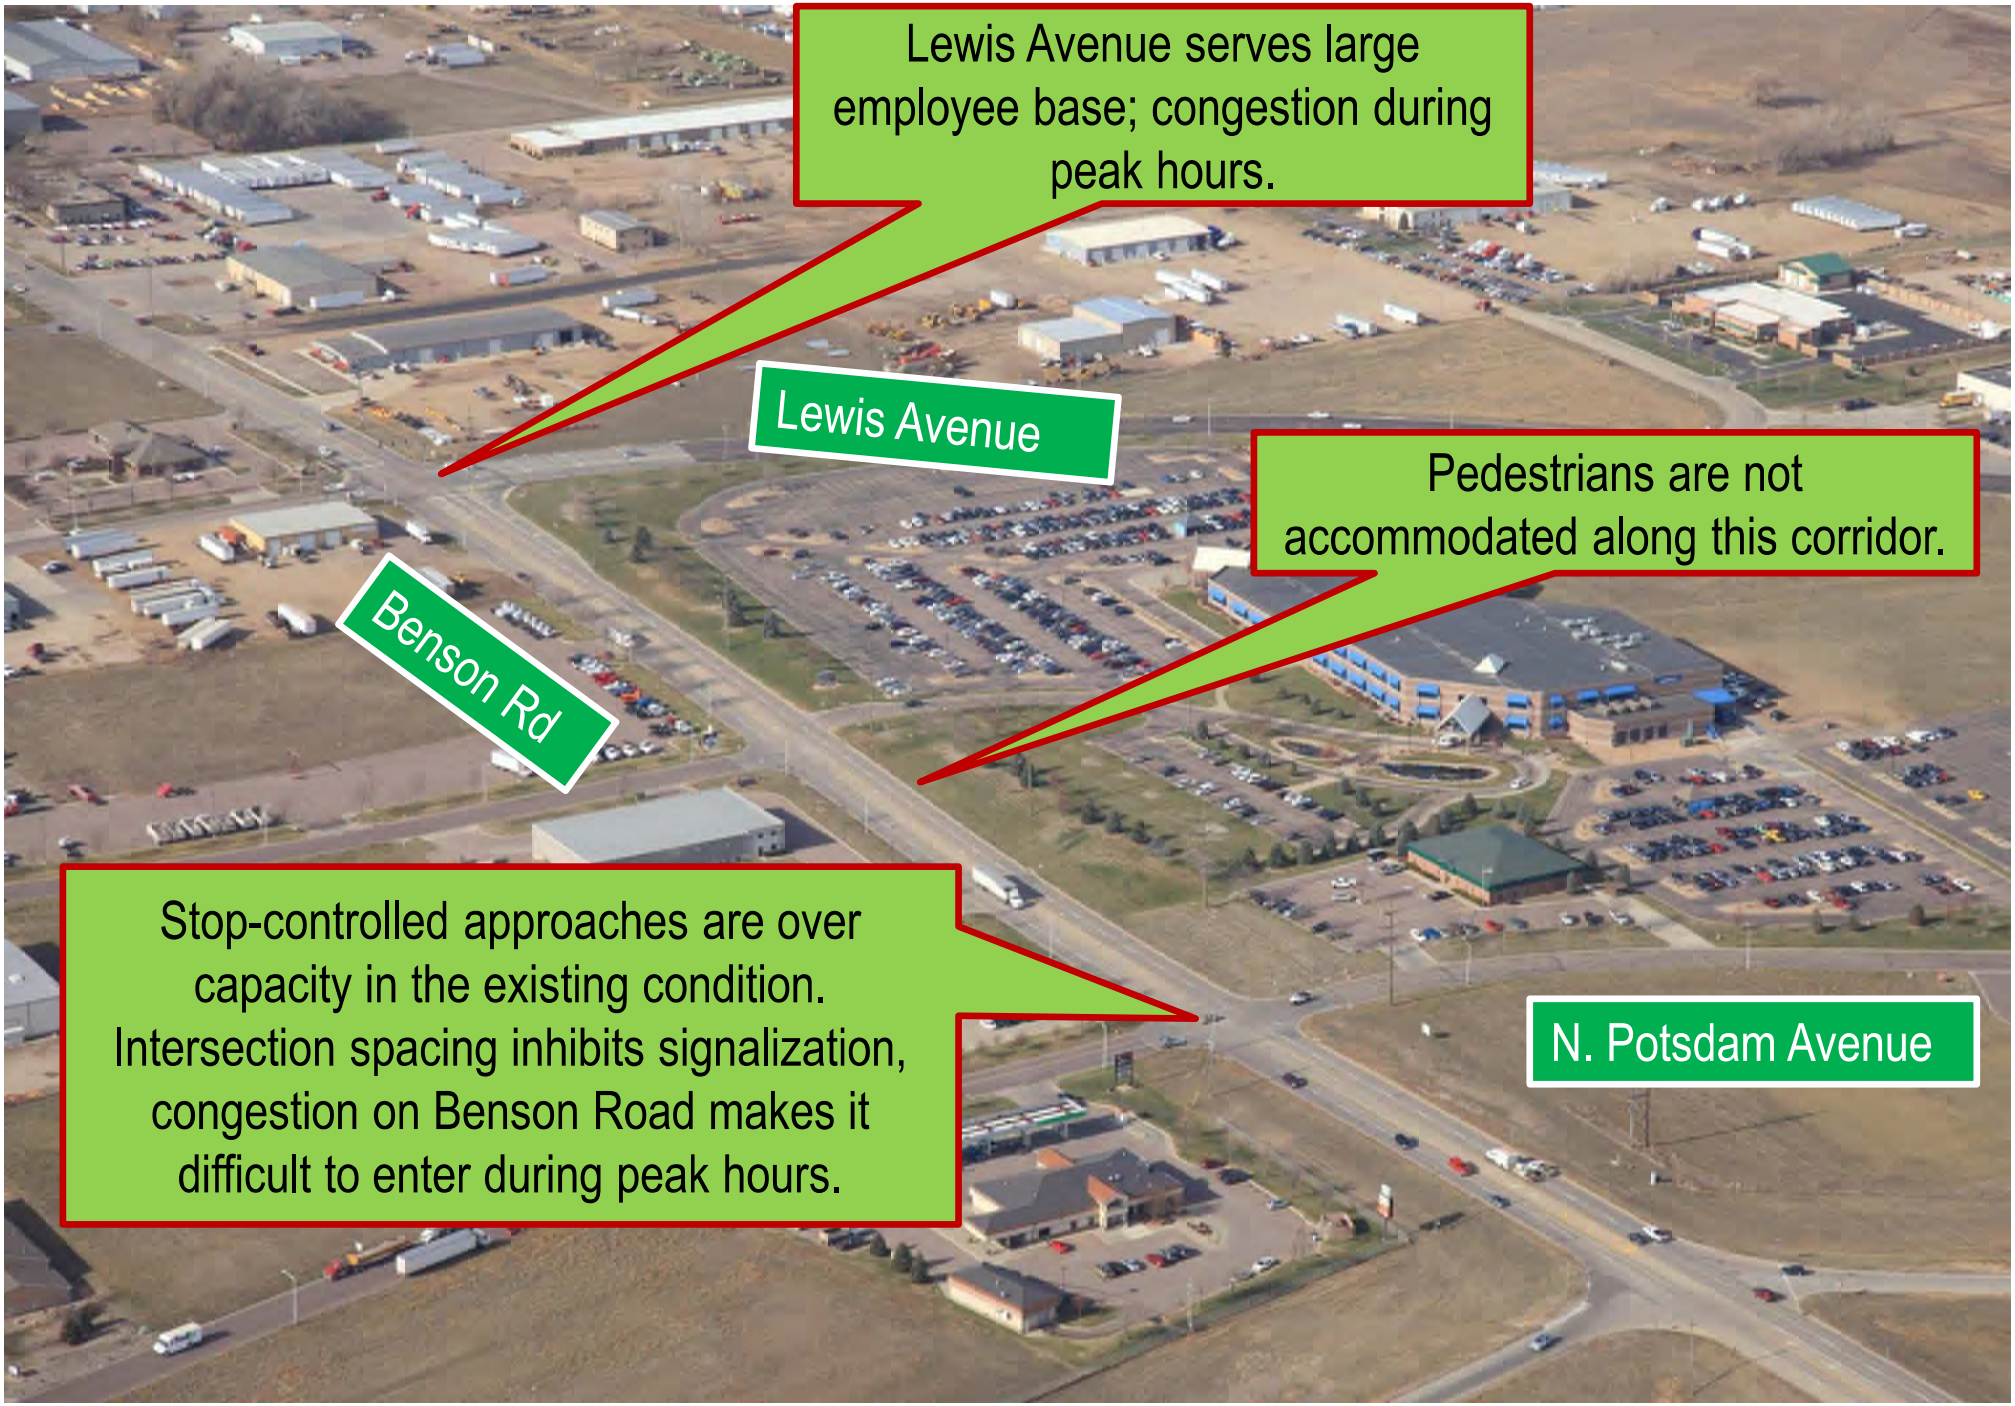

Benson Rd Corridor Overview

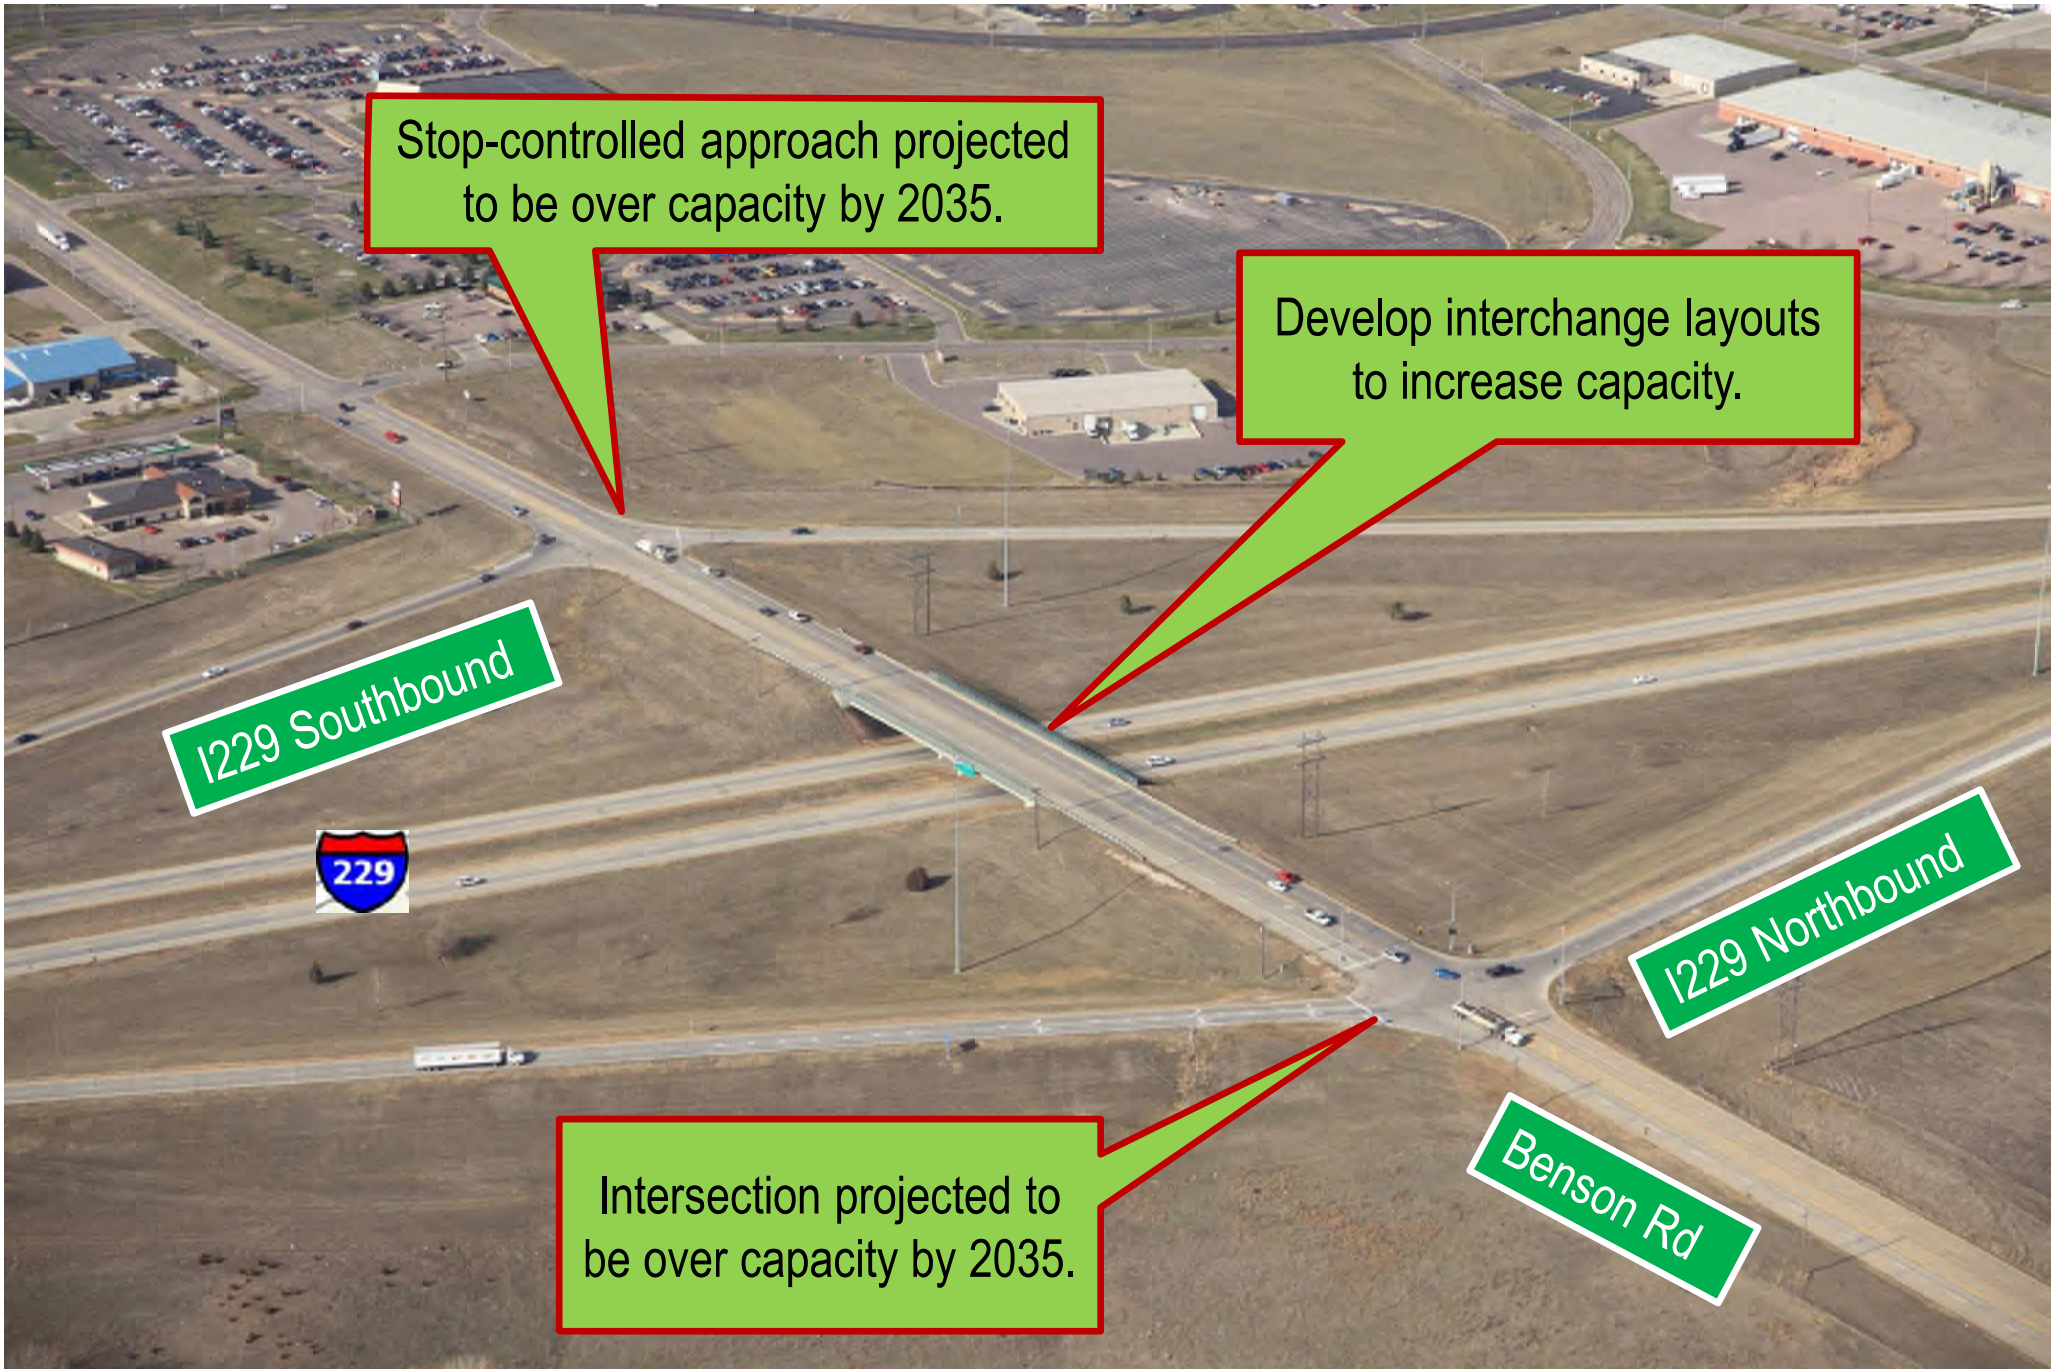


Benson Rd Corridor Overview

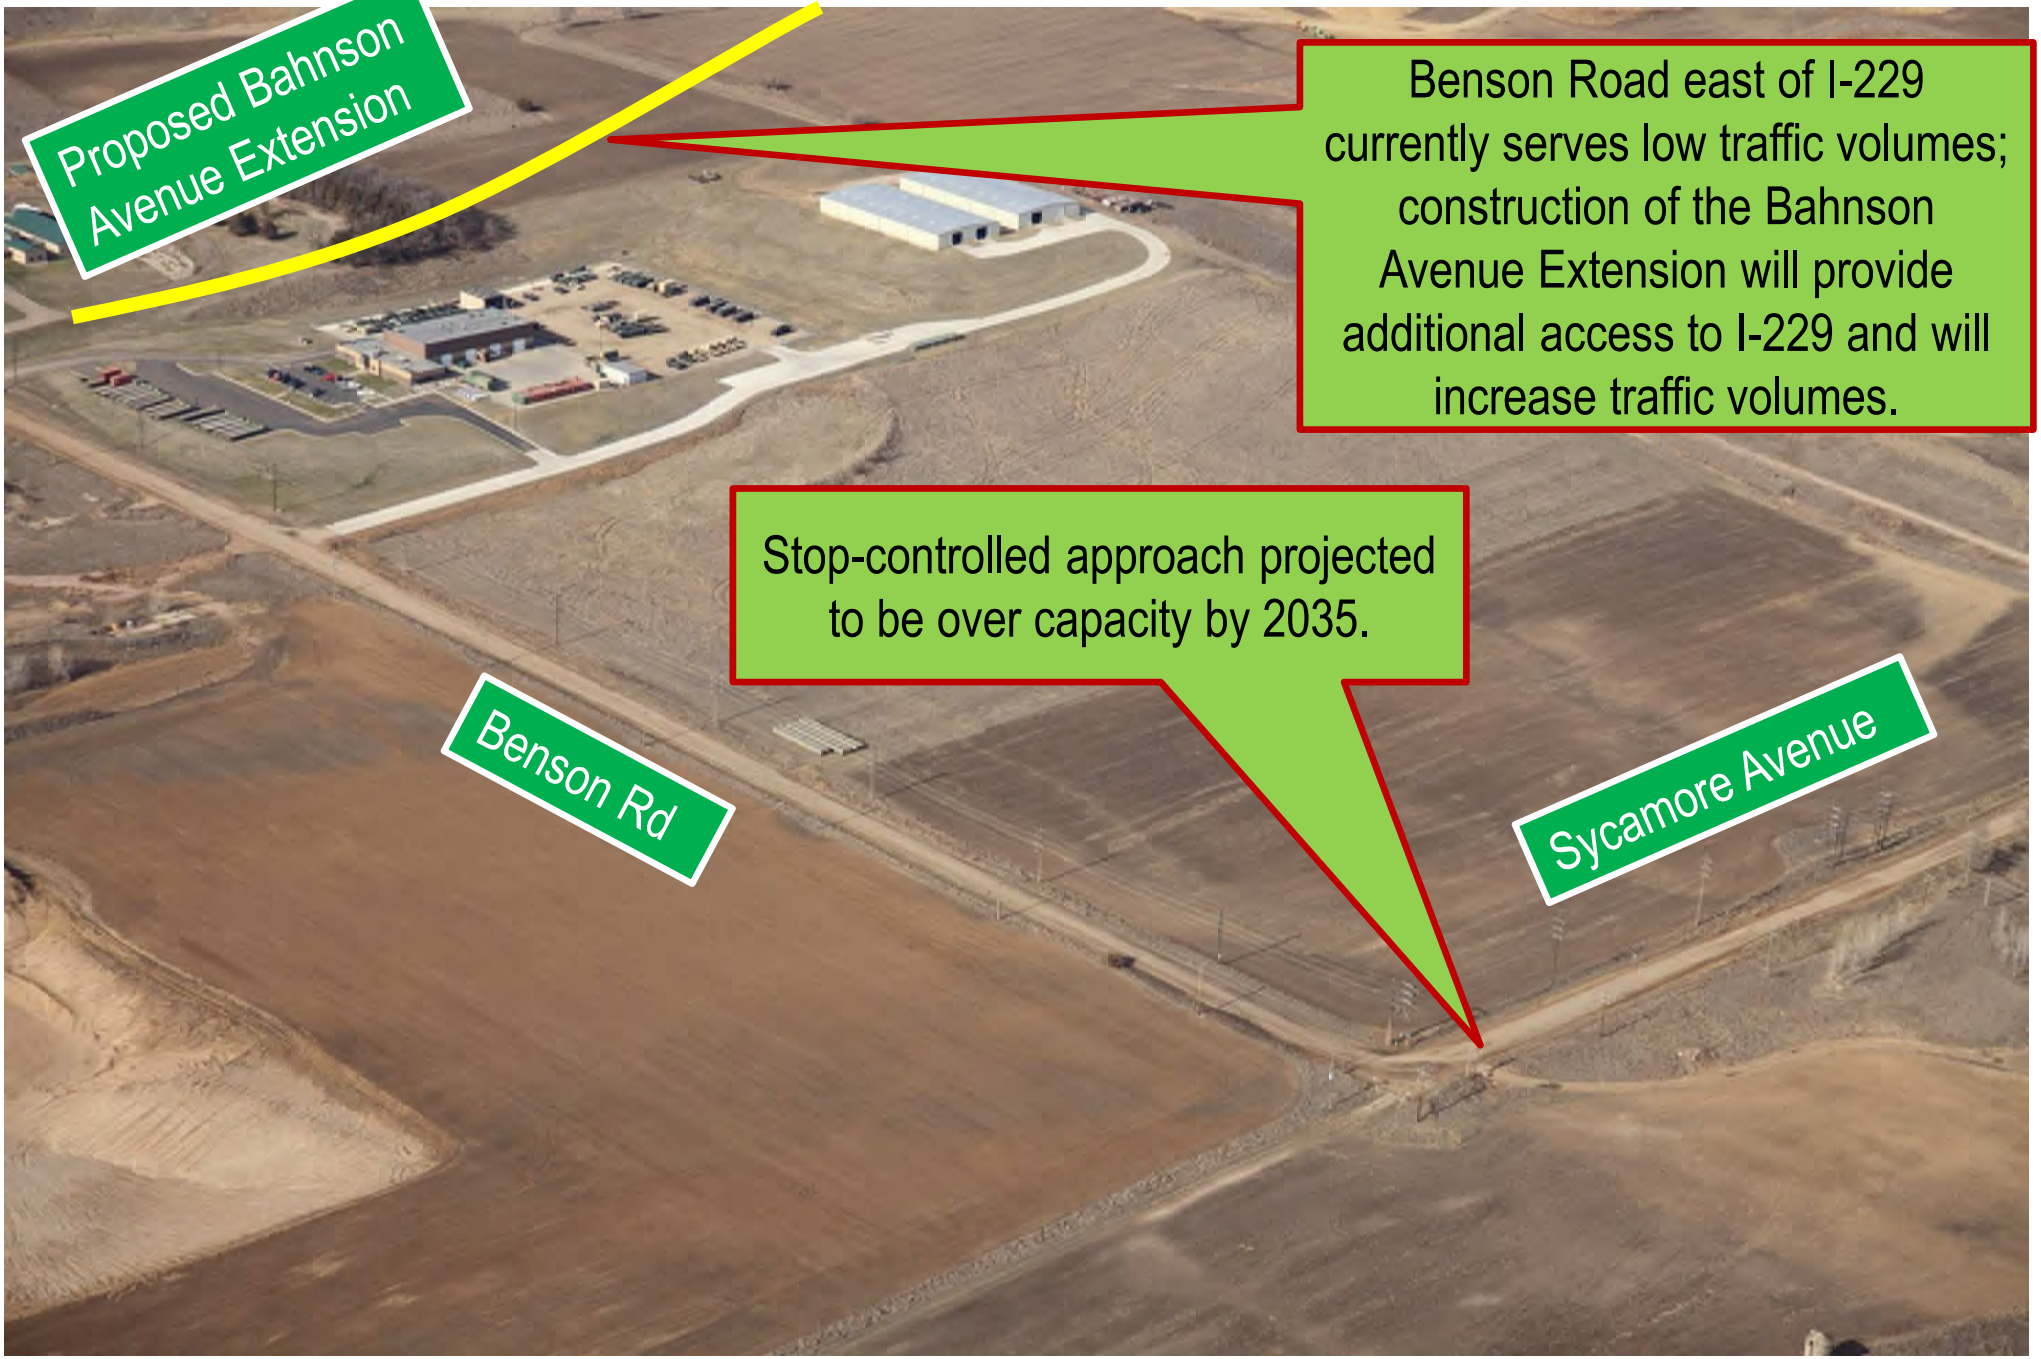

Conceptual Ideas for Benson Road

What you will be able to see tonight:


- **4 Interchange Conceptual Options**
- **1 Corridor Option**

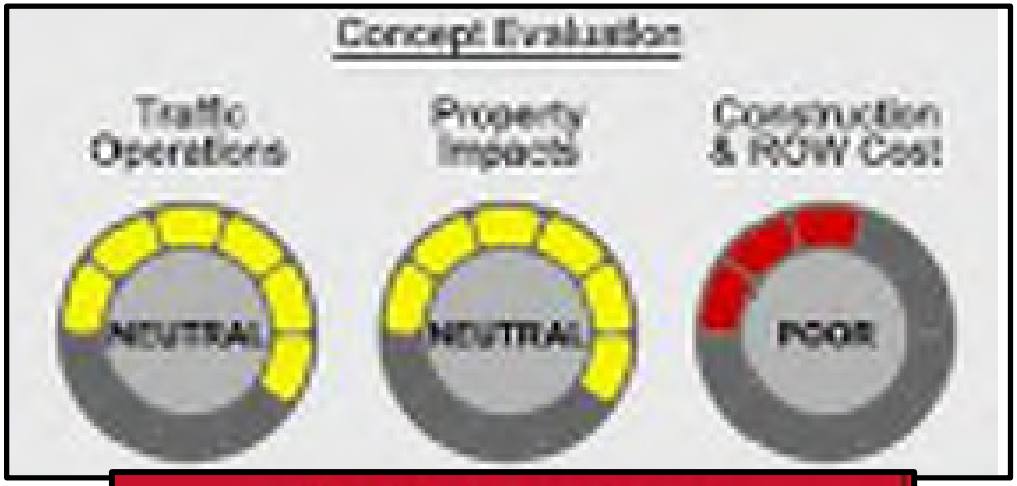


Traffic Assessment

Queues	Delay	Travel Time

Benson Road / I-229 Interchange Folded Diamond Option

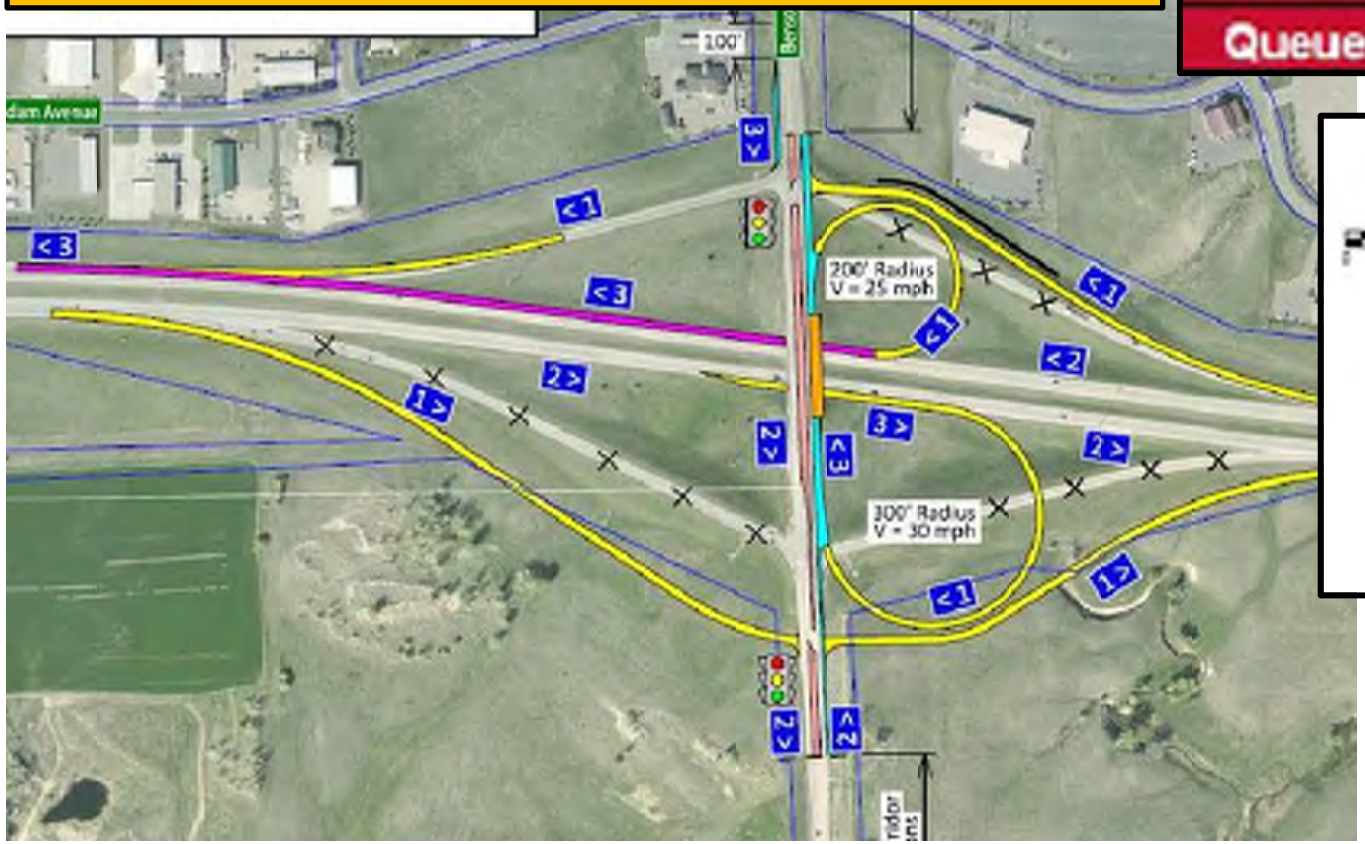


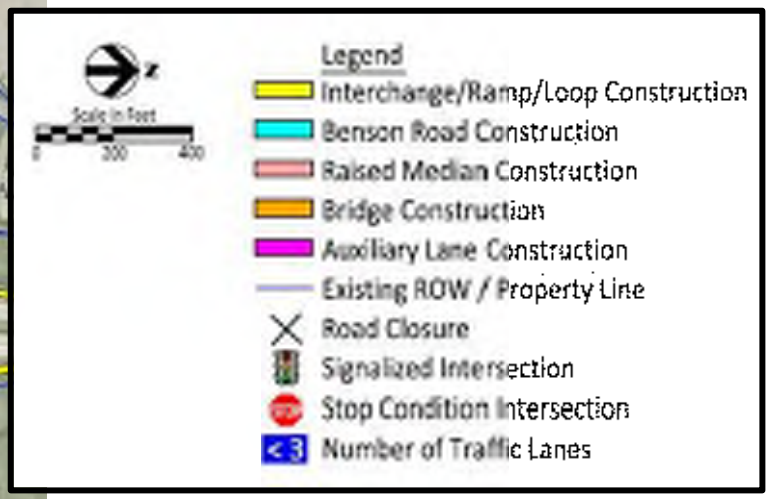

Conceptual Ideas for Benson Road

What you will be able to see tonight:


- **4 Interchange Conceptual Options**
- **1 Corridor Option**

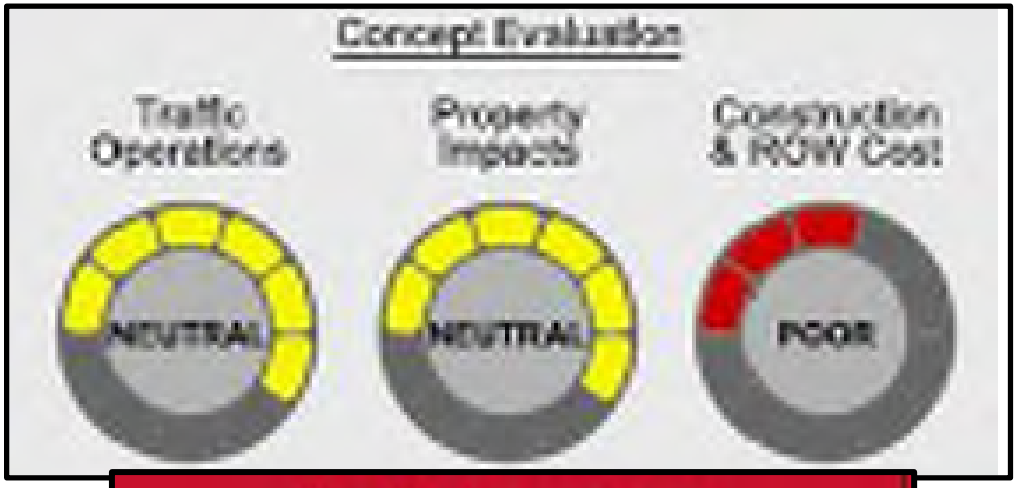

Traffic Assessment

Queues	Delay	Travel Time

Benson Road Median Divided Section from Lewis to I-229

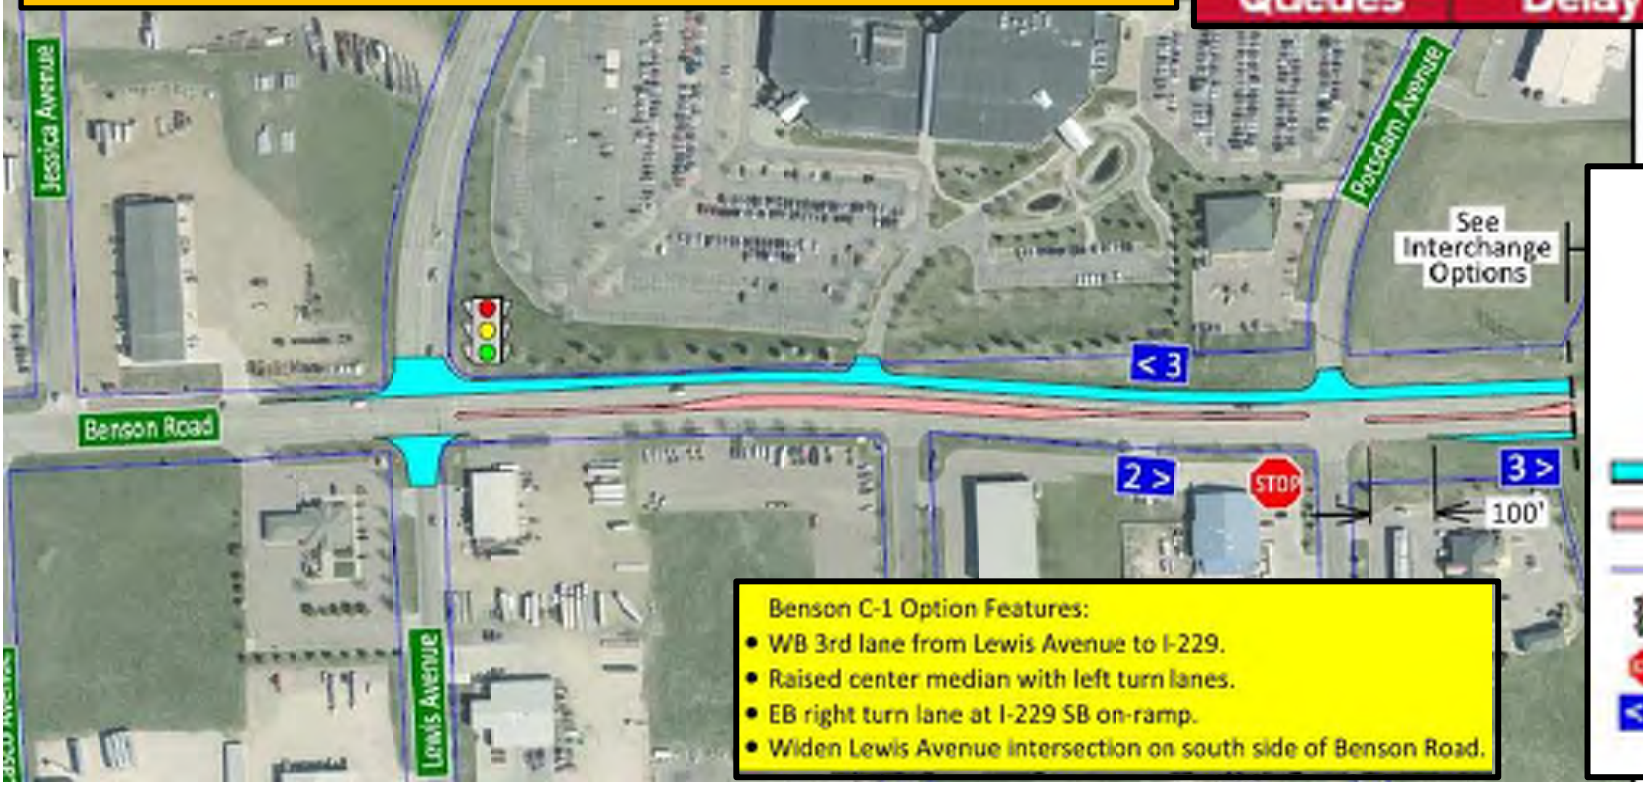



Next Steps for Benson Rd

- **Finalize Composite Comparison Matrix**
  - Traffic Assessment
  - Environmental Screening
  - ROW Impacts
  - Overall Costs
  - Public Involvement Support




- **Complete additional Traffic Operations analysis on a reduced number of options based on the screening activities**

- **Develop Priority Phasing Plan for I-229 Corridor and Sub-Study Corridor**

- **Schedule and Conduct next public meeting**

WWW.I229STUDY.COM

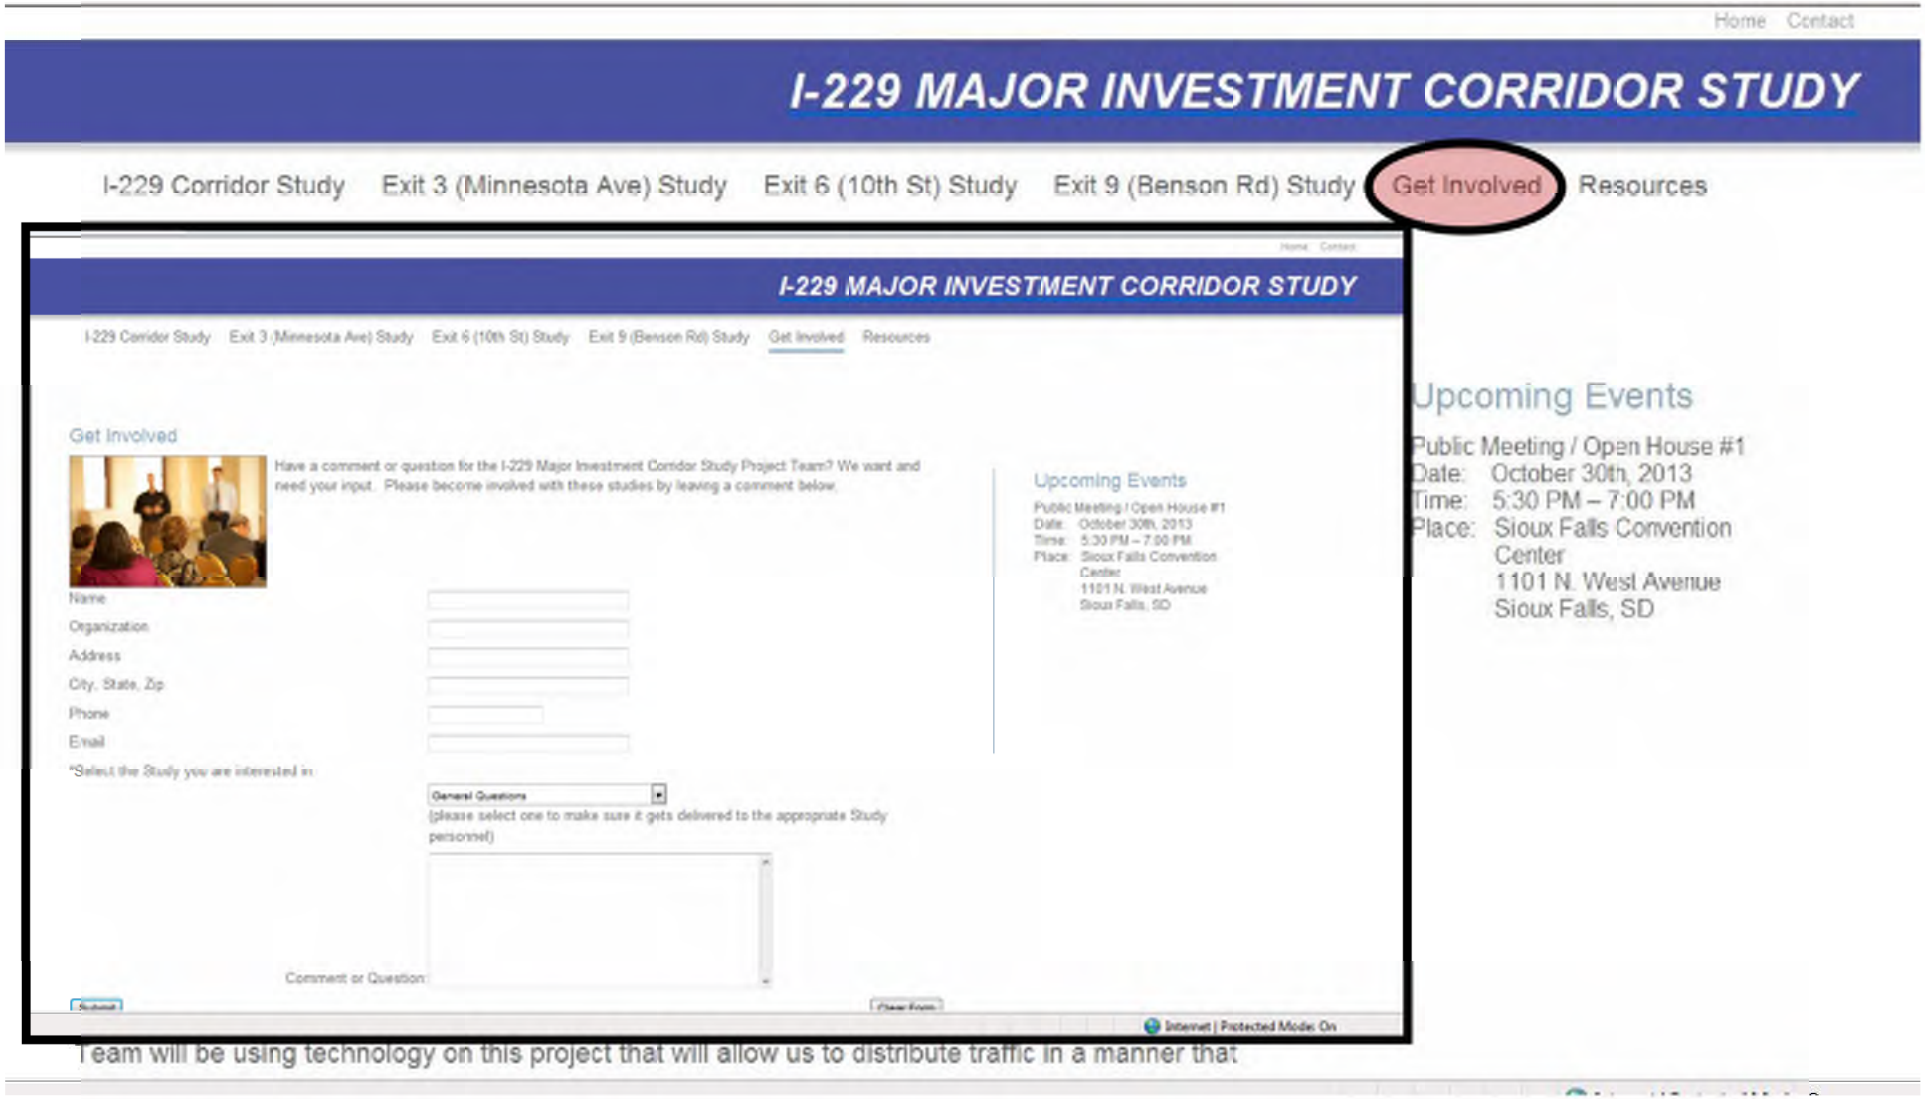

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

James Unruh – HDR Engineering, Inc.
605-977-7740 or james.unruh@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 9 – Benson Rd Sub-Study

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

I-229 MAINLINE

JUNE 2ND, 2015

- SIGN-IN SHEETS
- POWERPOINT SLIDES
- MEETING NOTES (SEE END OF PUBLIC MEETINGS #2 APPENDIX)
- COMMENTS (SEE END OF PUBLIC MEETINGS #2 APPENDIX)

Sign In Sheet

Note: Actual Attendance count was 18 people (including 7 women)

Subject I-229 Major Investment Corridor Study – Informational Meeting for I-229 Mainline Sub-Study 1

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3515P PCN 044K **Project No.:** 207030

Meeting Date Tuesday, June 2nd, 2015 7:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Steve Gramm	SDDOT 700 E. Broadway	773-4641	steve.gramm@state.sd.us
2	Amber Gibson	SECOG	367-7910	amber@secog.org
3	Jo Wahle			
4	Jason Kjentvet	HDR	605-977-7746	
5	James Hanson	HDR		
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Informational Meeting for I-229 Mainline Sub Study 1

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 36 6P; PCN 044K **Project No.:** 207030

Meeting Date Tuesday, June 2nd, 2015 7:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Ron McMahon	FHWA	776-1009	ron.mcmahon@dot.gov
2	PETE LONGMUIR	SD DOT	773-6488	pete.longmuir@state.sd.us
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







Interstate 229 Major Investment Study

Mainline I-229 Sub-Study 1

Informational Meeting
June 2nd, 2015
7:00 pm to 8:30 pm

HDR


HRGreen

© 2014 HDR, all rights reserved.

Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

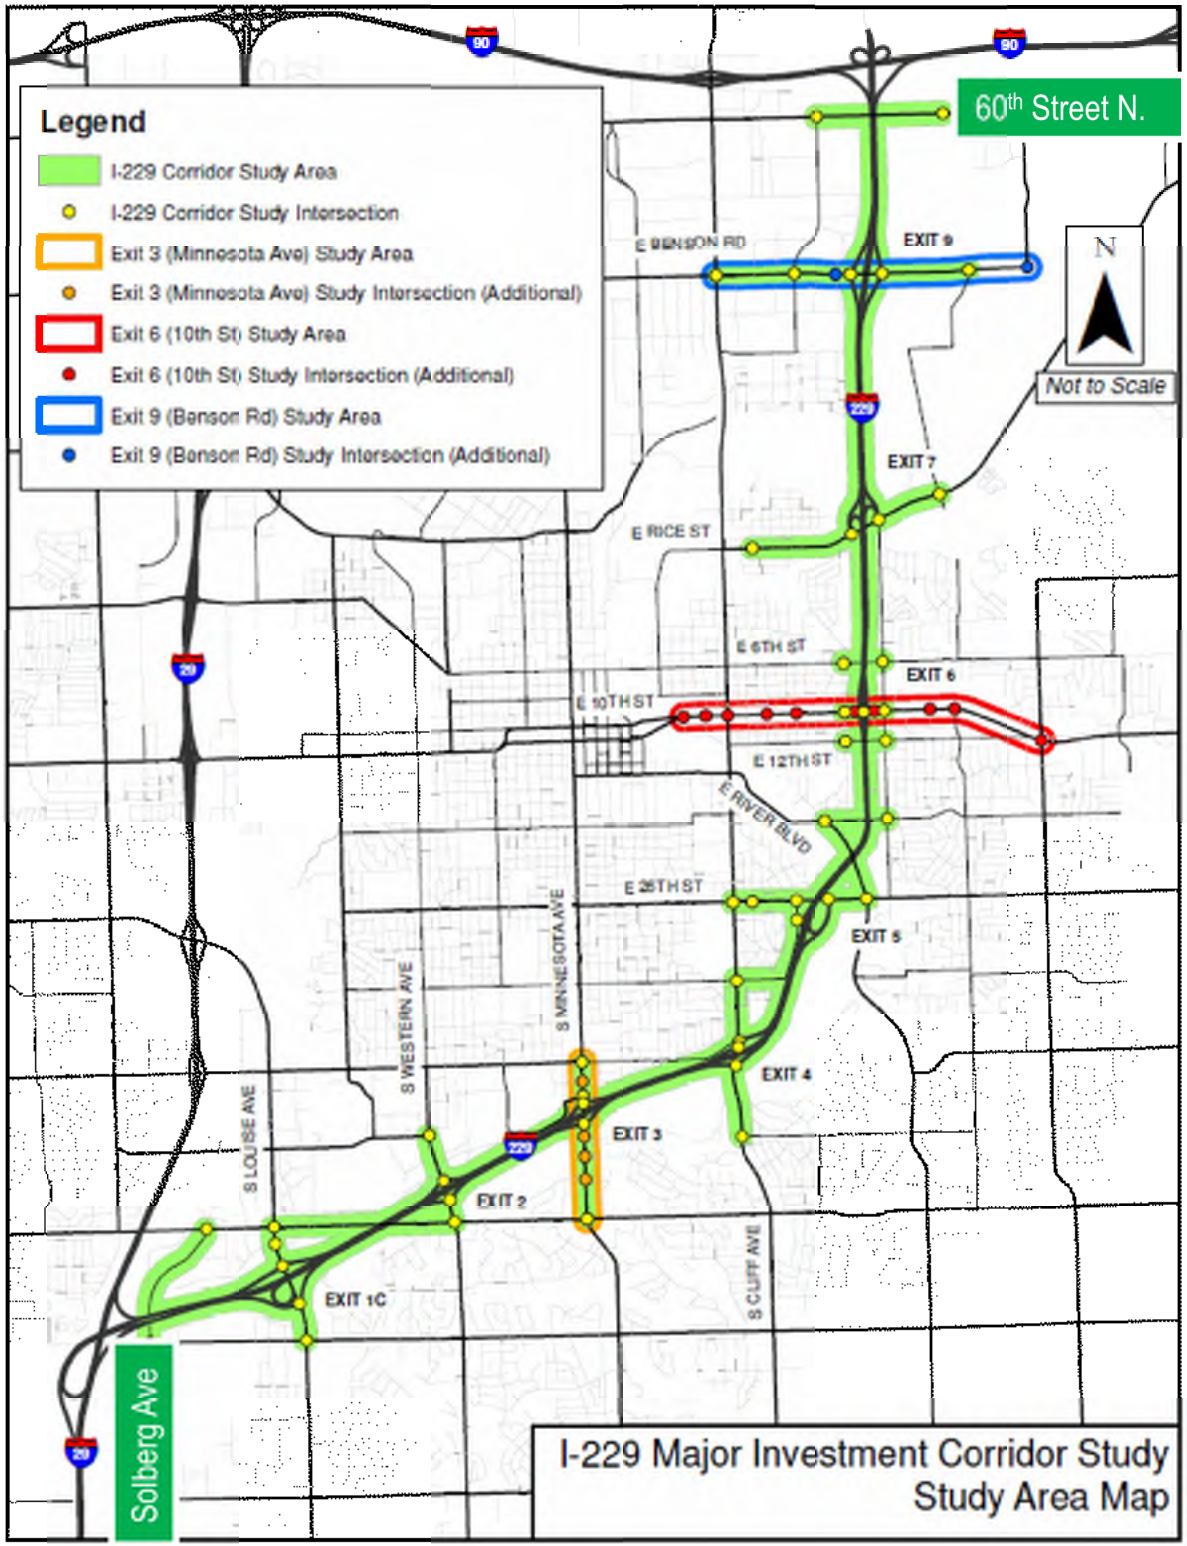

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)


South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)


I-229 Corridor Overview

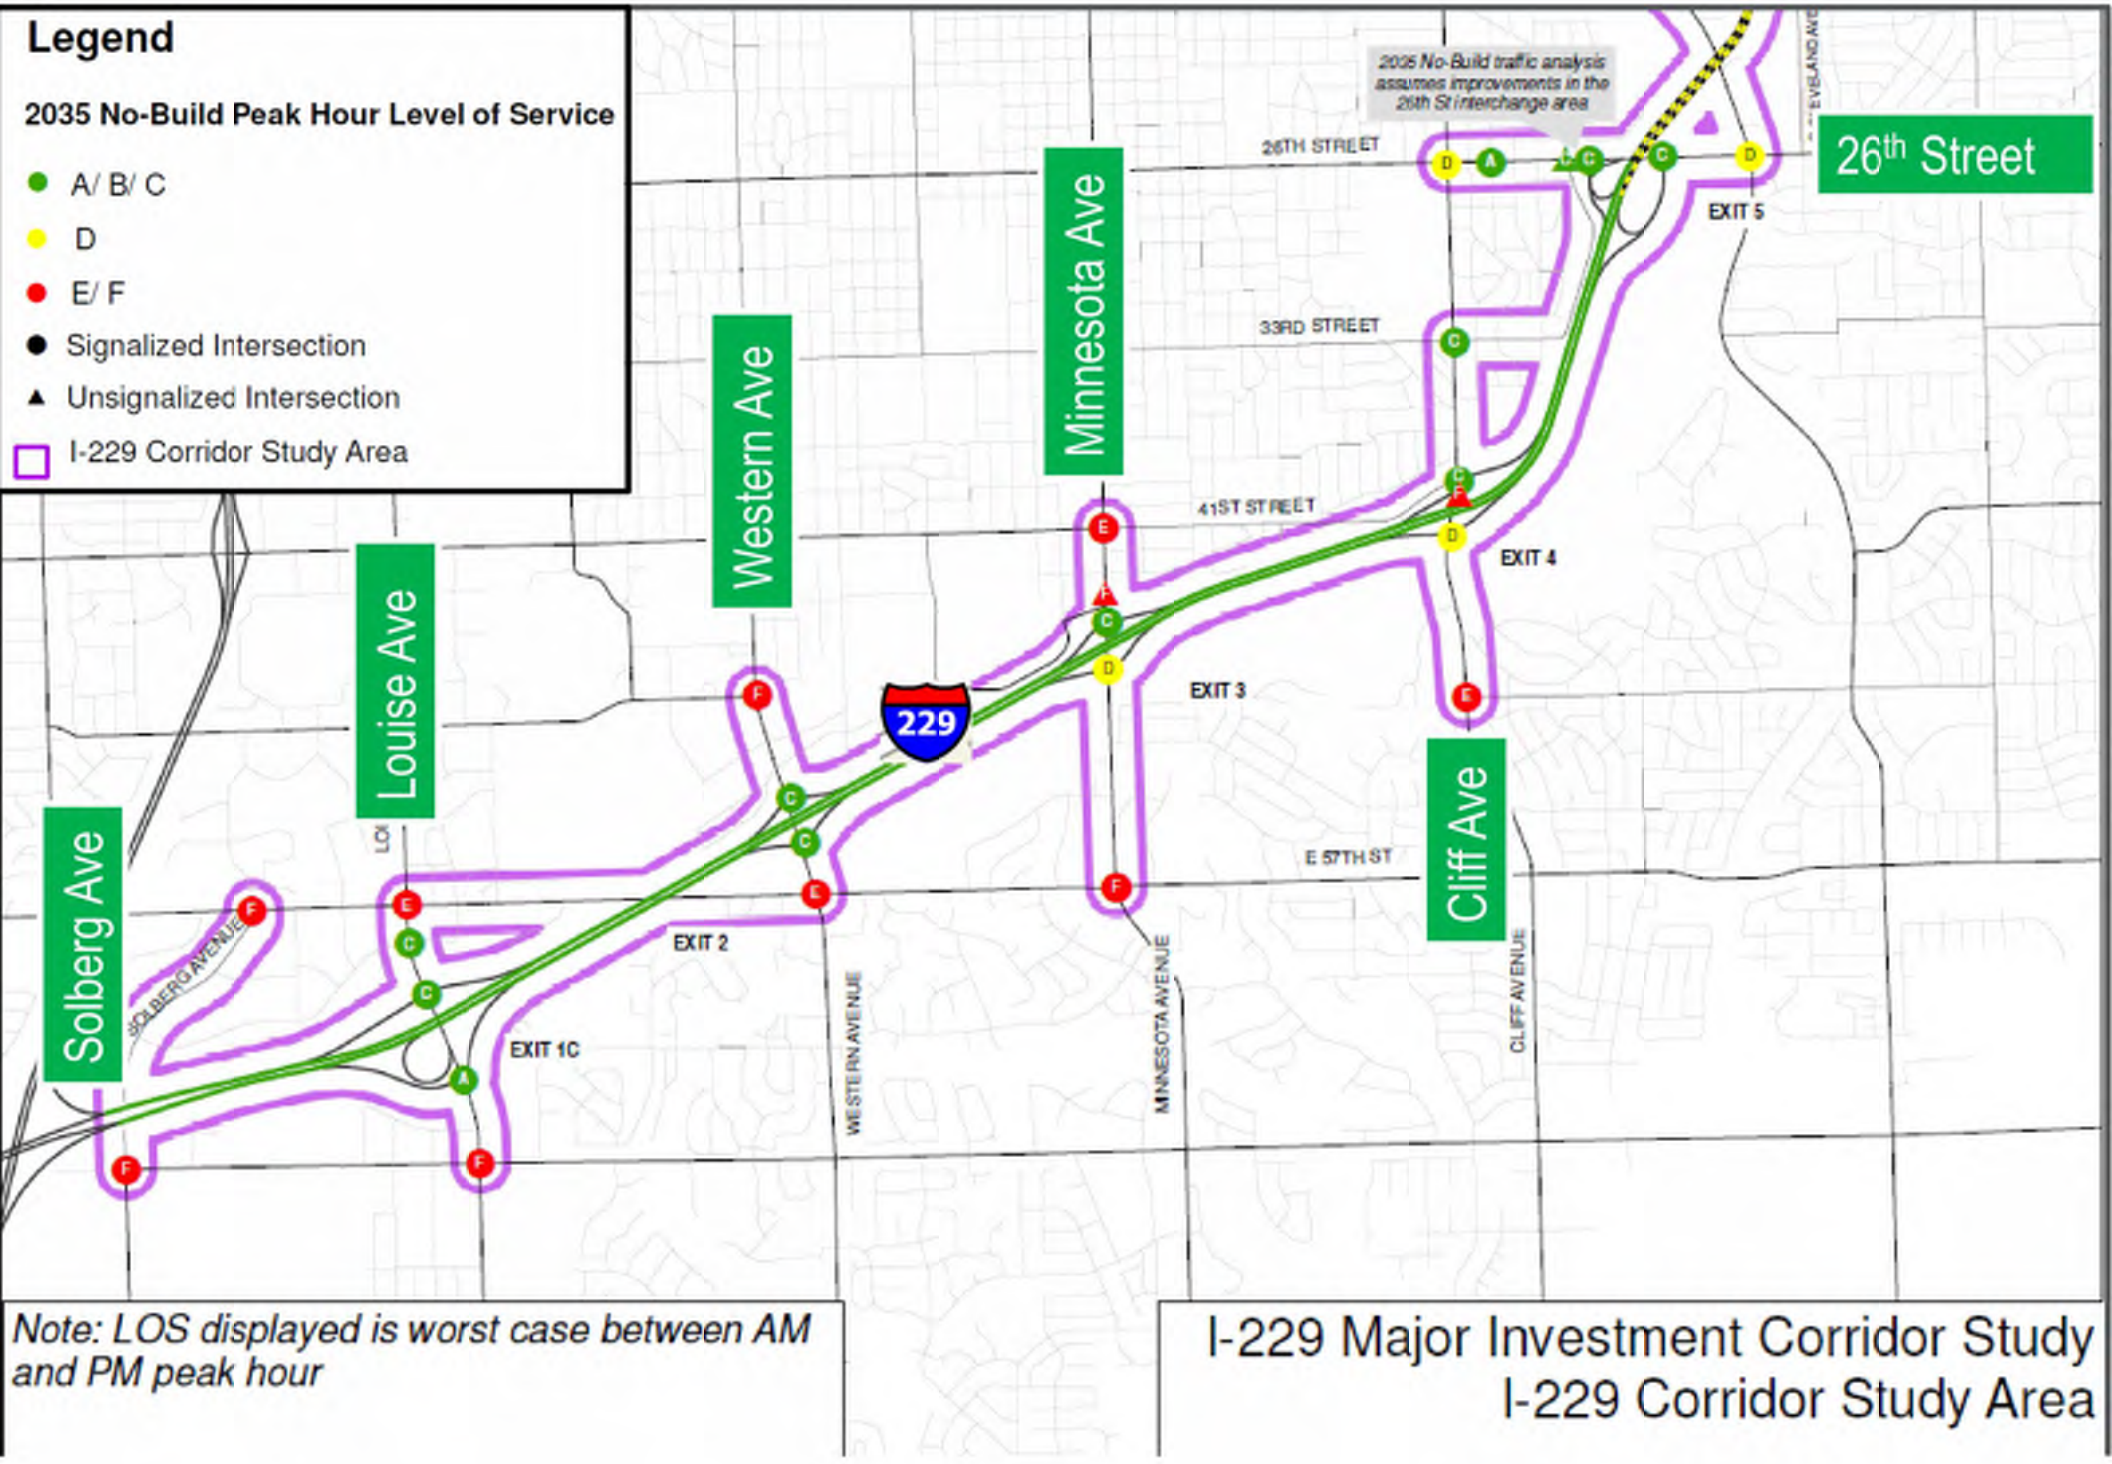

Note: LOS displayed is worst case between AM and PM peak hour

I-229 Major Investment Corridor Study
I-229 Corridor Study Area


I-229 Corridor Overview

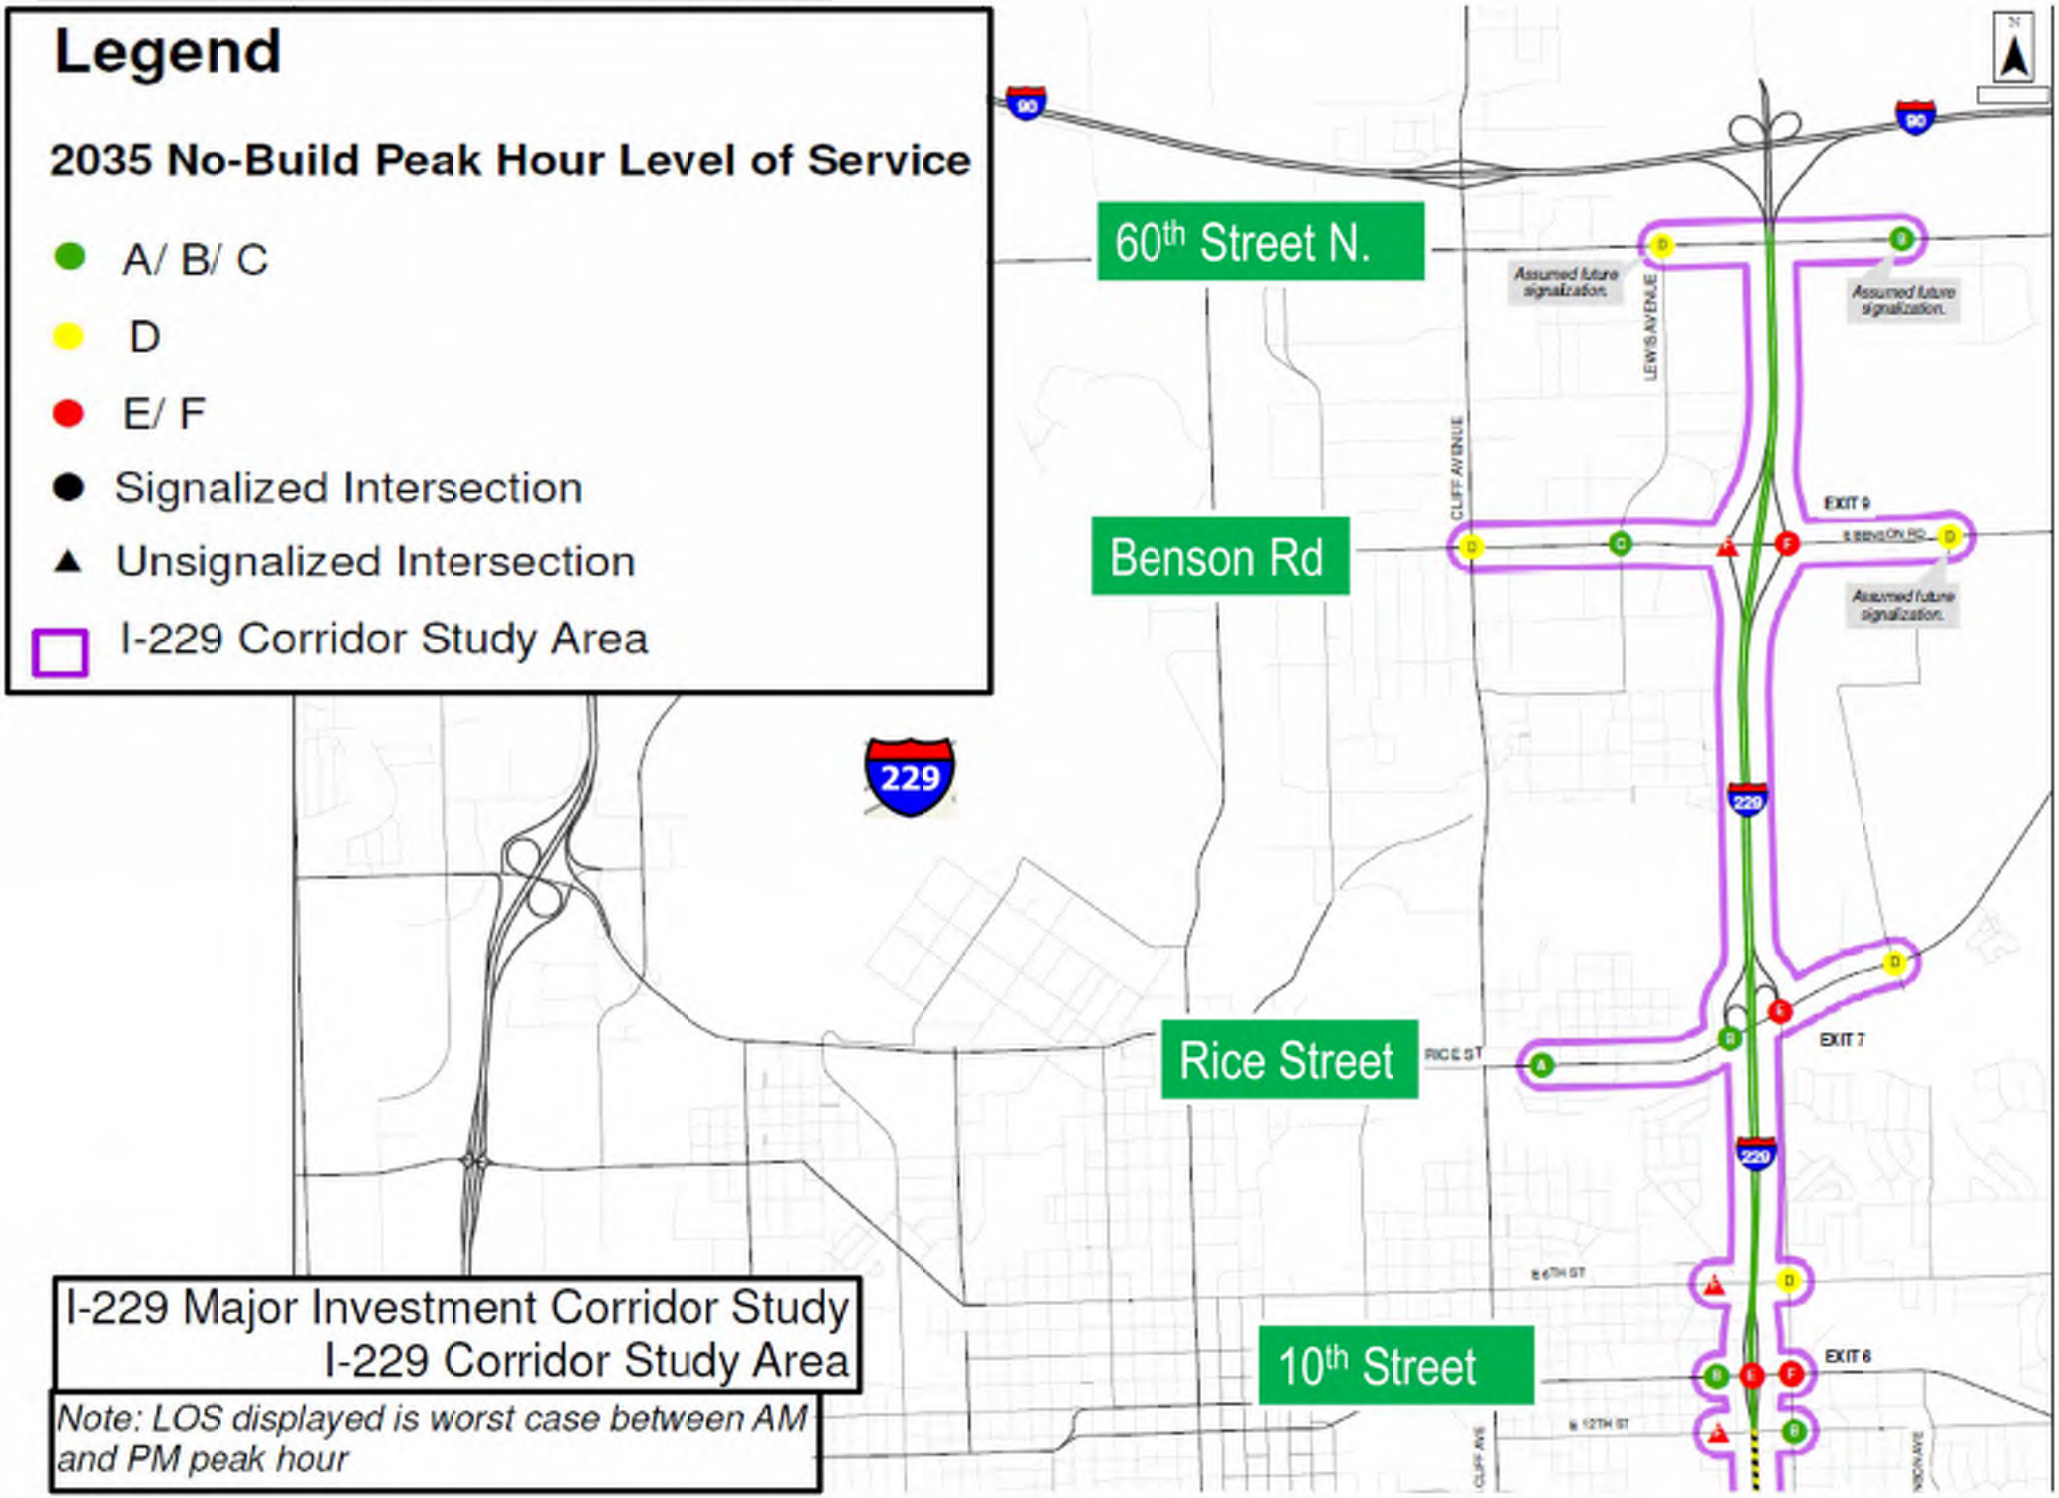

Conceptual Ideas for I-229 Mainline

What you will be able to see tonight:


- **Additional 3rd Lane between 26th Street and 10th Street**
- **Modify design radius to allow for 65 mph design speed**

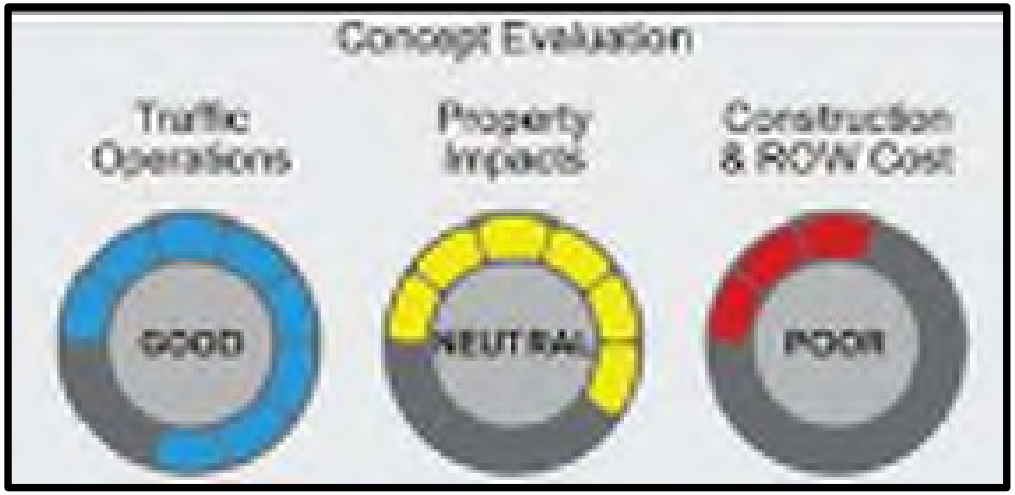

Southeastern Avenue

I-229 – Between 26th Street and 10th Street




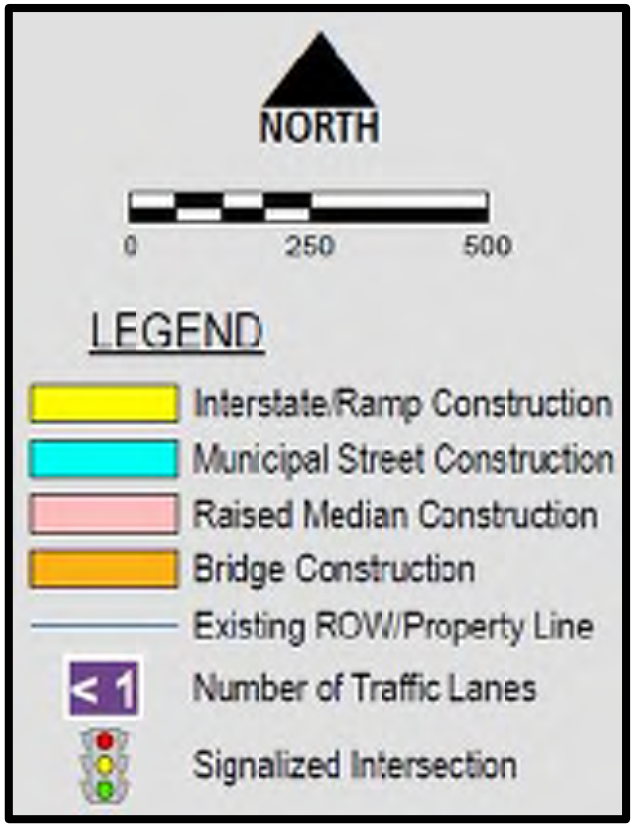


Conceptual Ideas for Minnesota Avenue

What you will be able to see tonight:


- 13 Interchange Conceptual Options
- 4 Corridor Options
- Access Changes to Yankton Trail Park
- Conceptual Options to improve safety

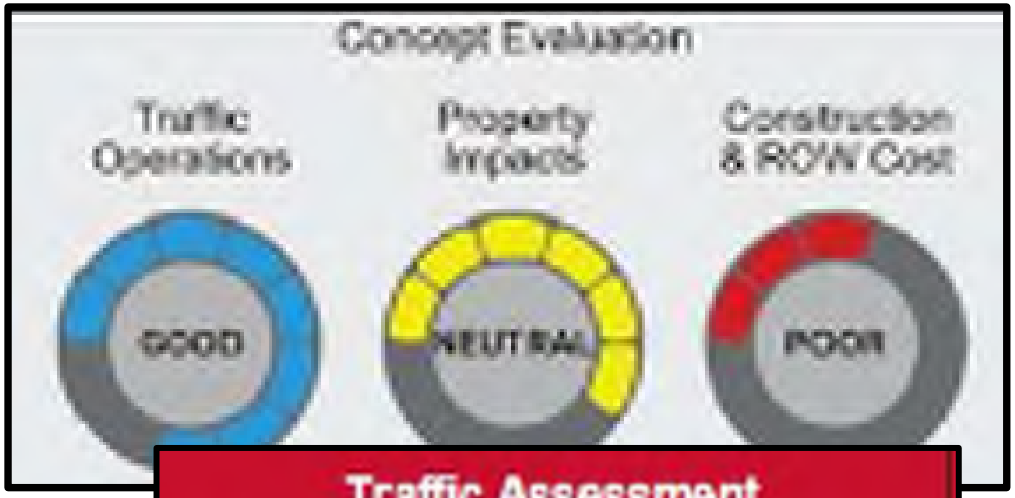

Minnesota Avenue / I-229 Interchange
Partial Clover Option

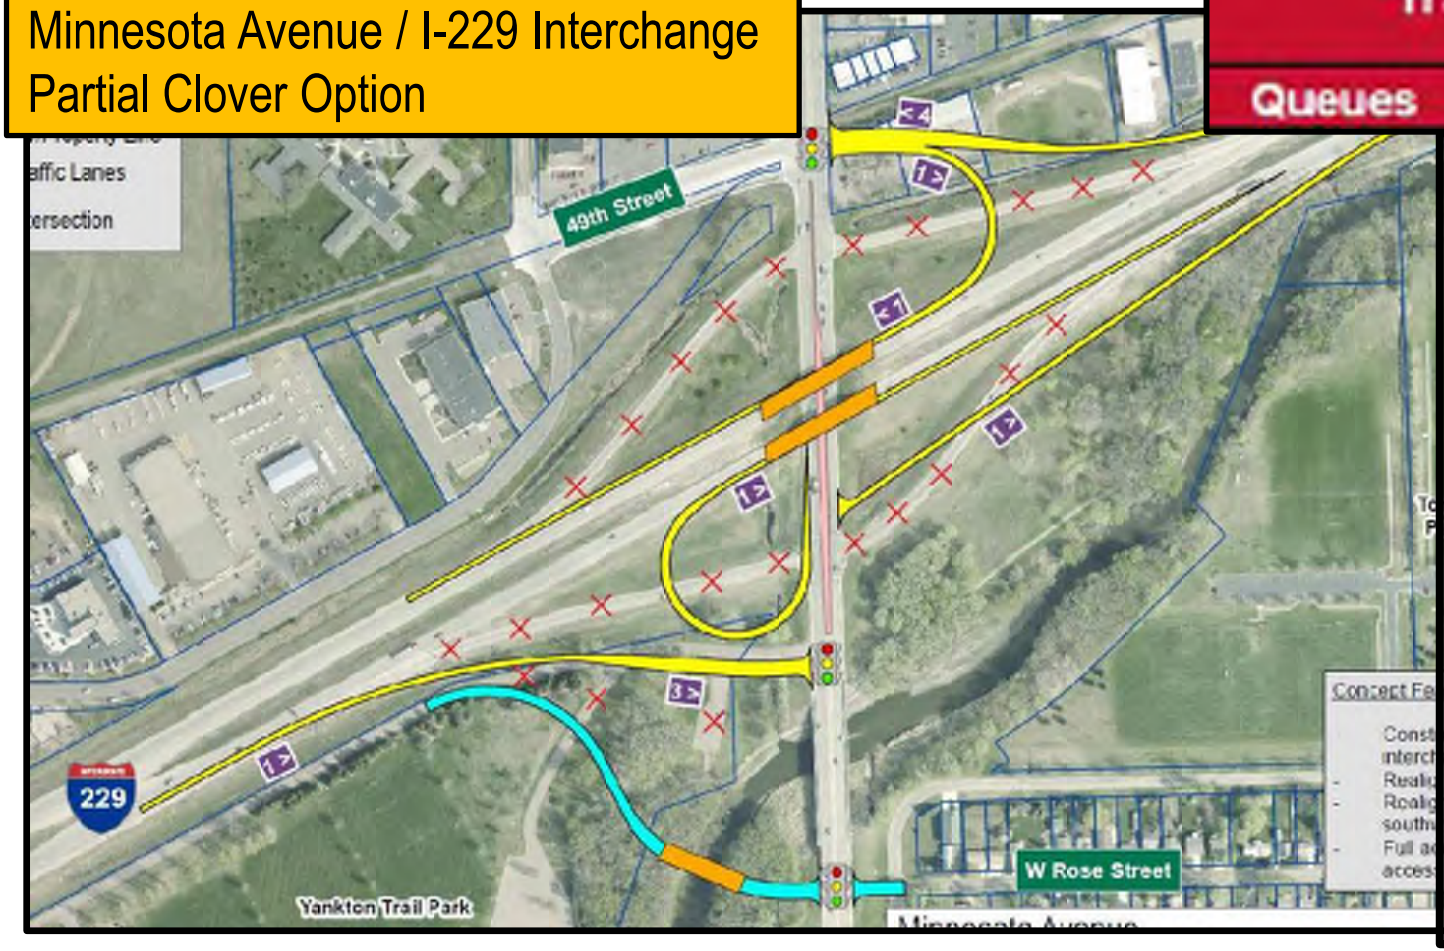


Traffic Assessment		
Queues	Delay	Travel Time

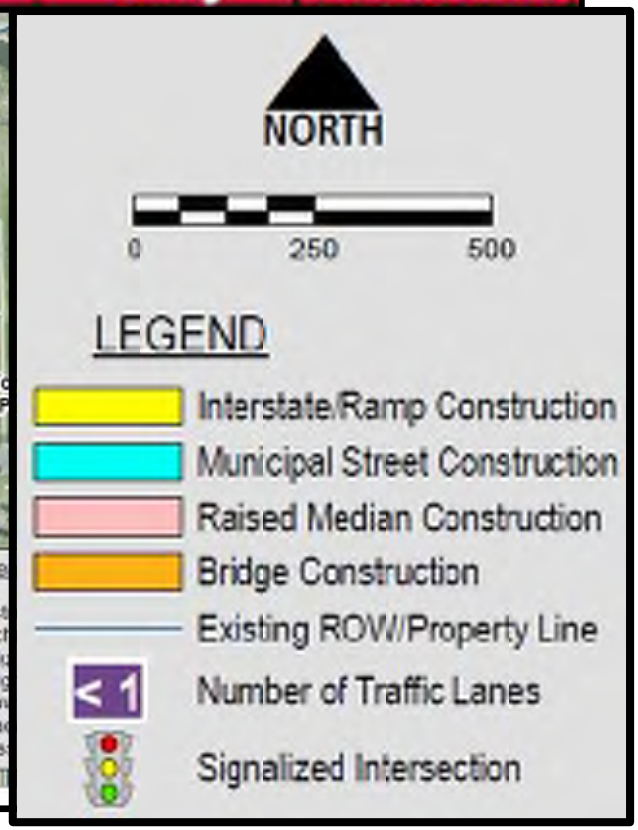

Conceptual Ideas for Cliff Avenue

What you will be able to see tonight:


- **3 Interchange Conceptual Options**

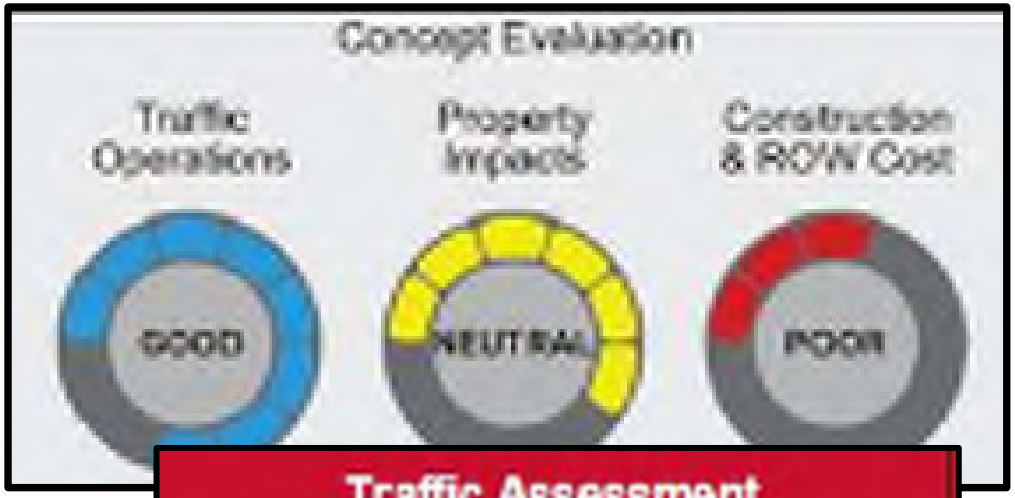


Traffic Assessment

Queues	Delay	Travel Time

Cliff Avenue / I-229 Interchange
Folded Diamond Option

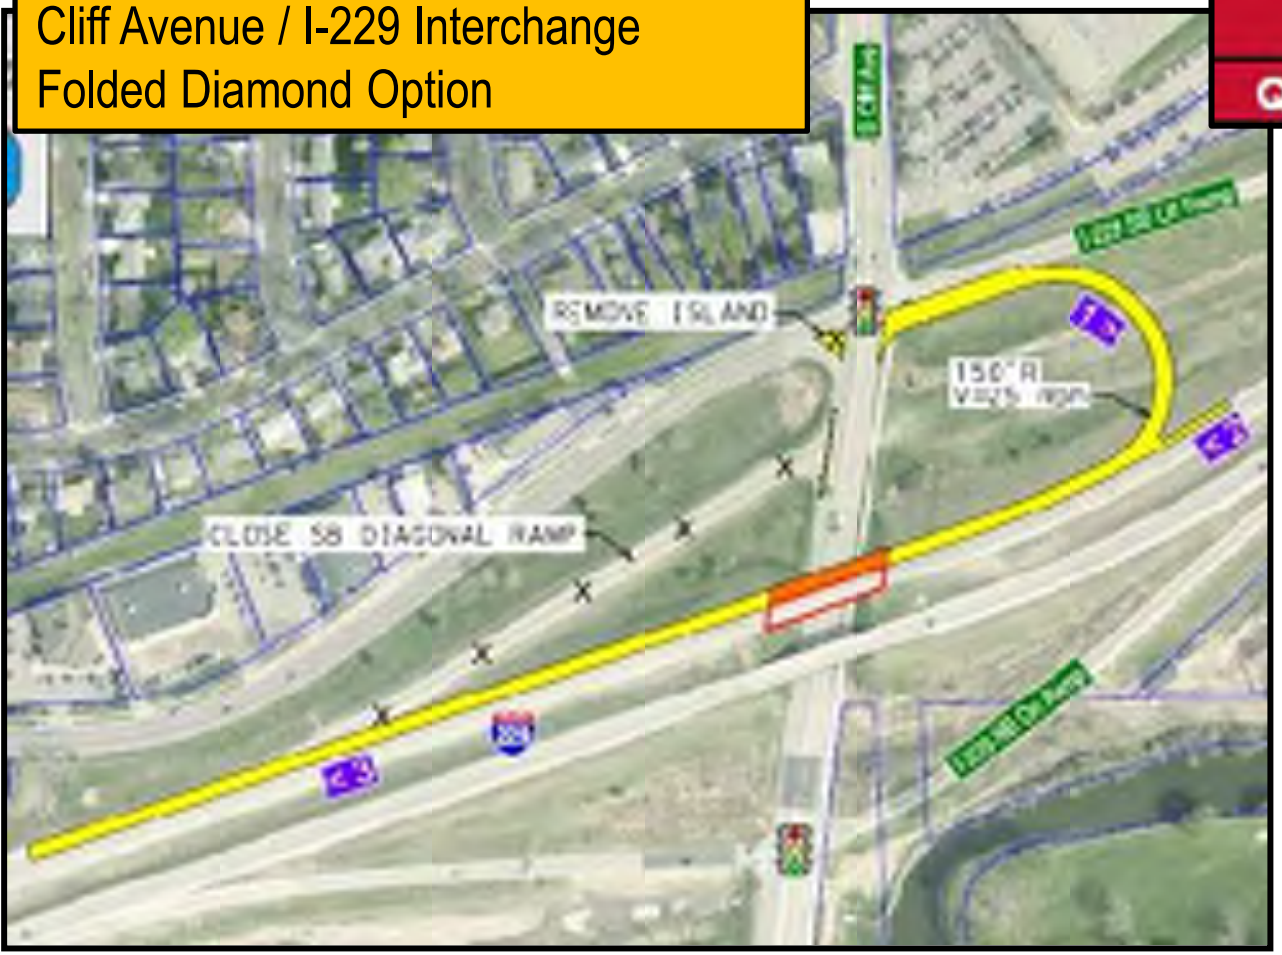


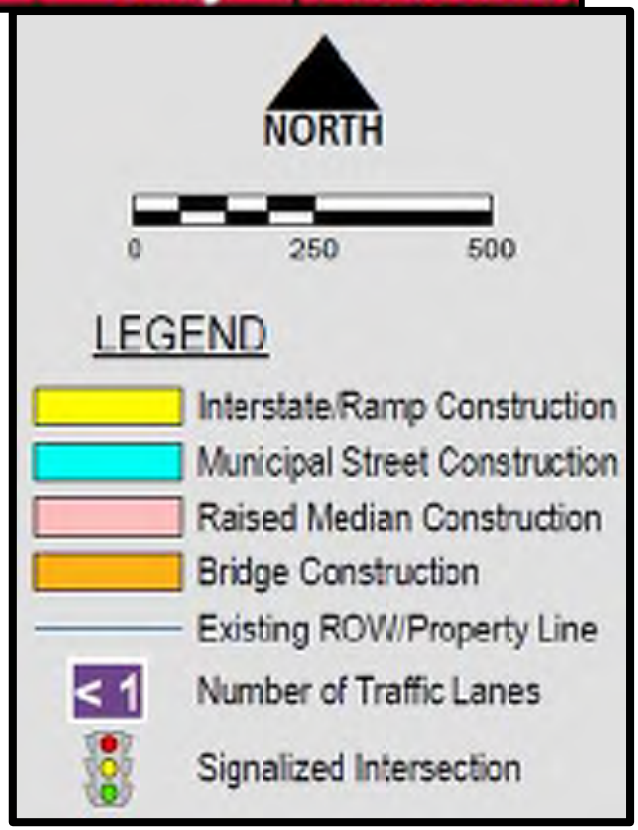


Conceptual Ideas for 10th Street Corridor

What you will be able to see tonight:

- 8 Interchange Conceptual Options
- 4 Corridor Options
- Median Changes or Driveway Closures to Improve Safety

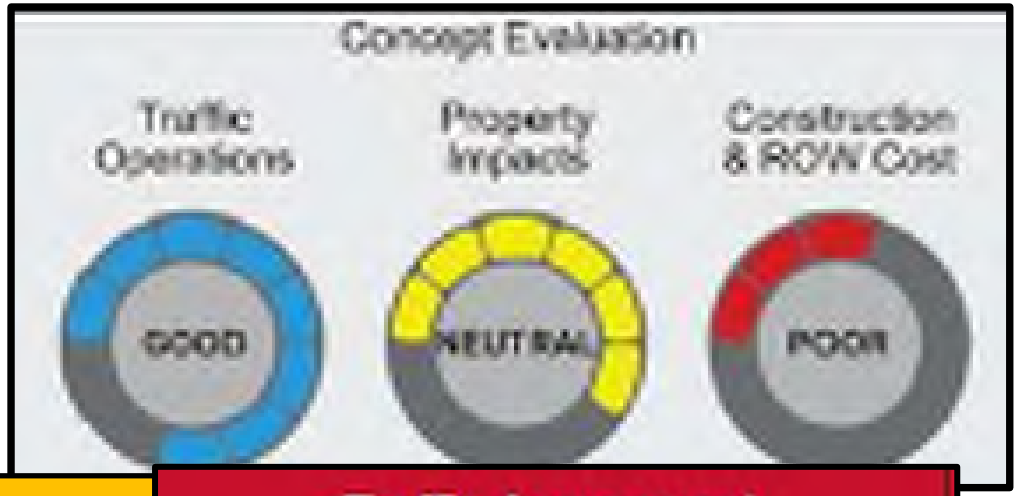


10th Street / I-229 Interchange Diverging Diamond Option

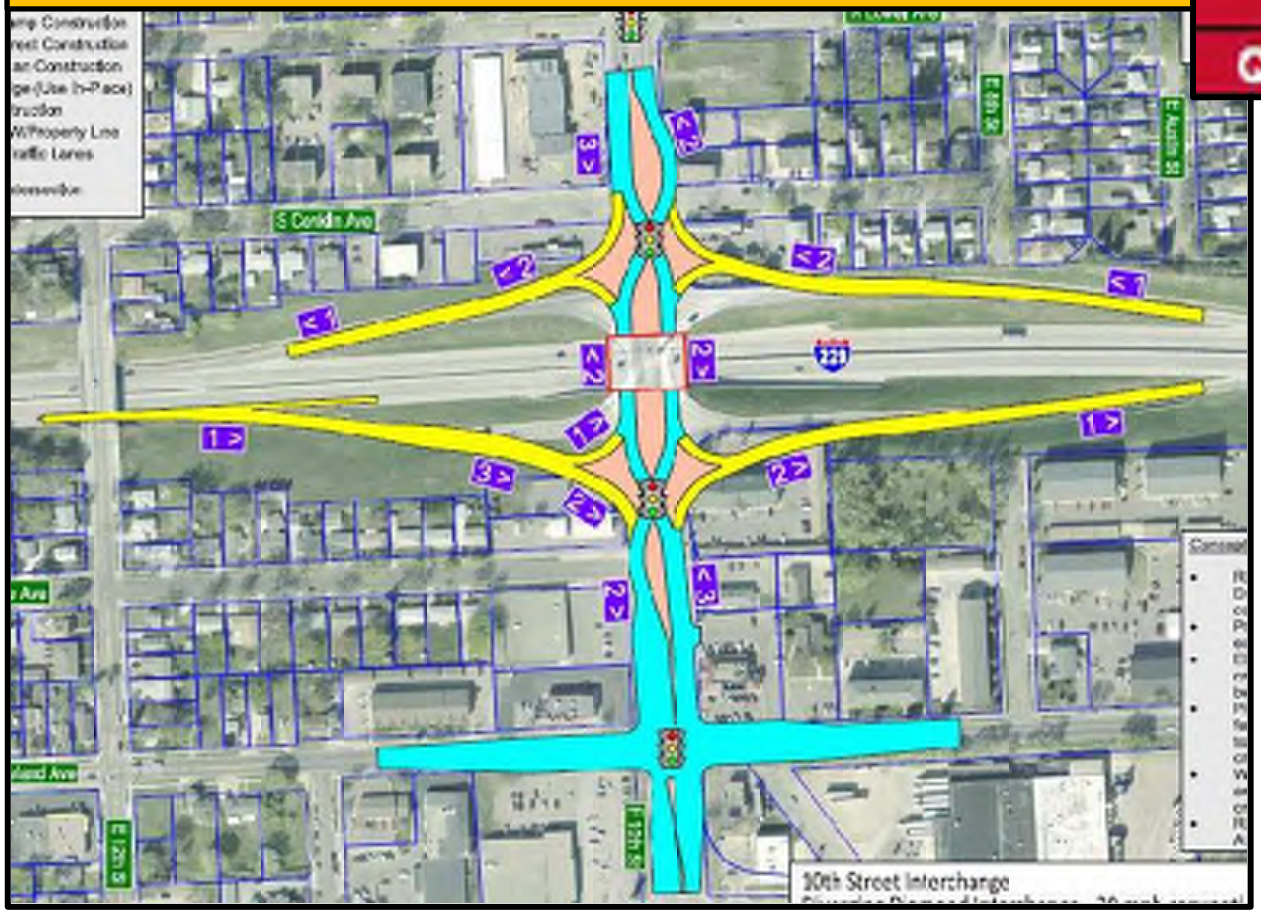

Traffic Assessment


Queues	Delay	Travel Time

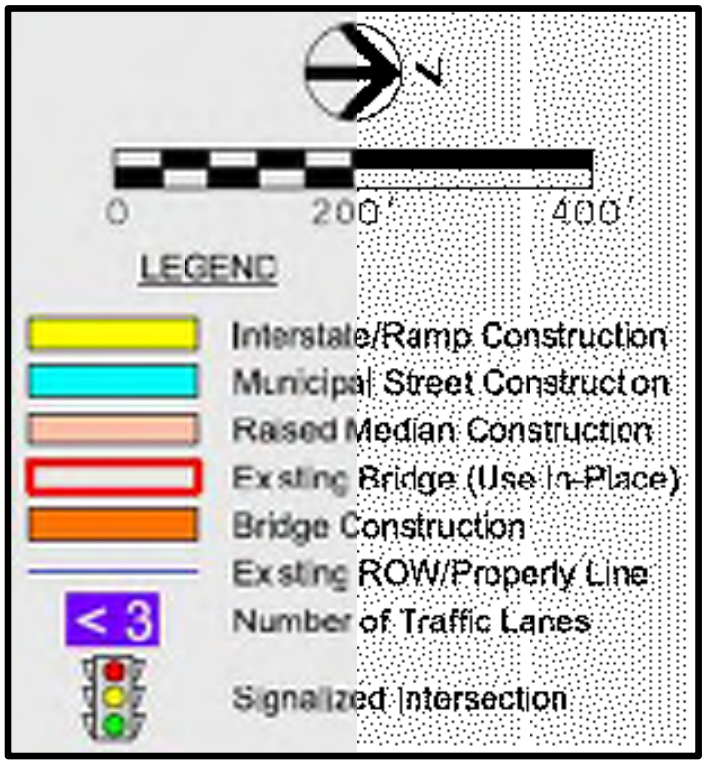


Conceptual Ideas for Rice Street Interchange

What you will be able to see tonight:

- **1 Interchange Conceptual Options**

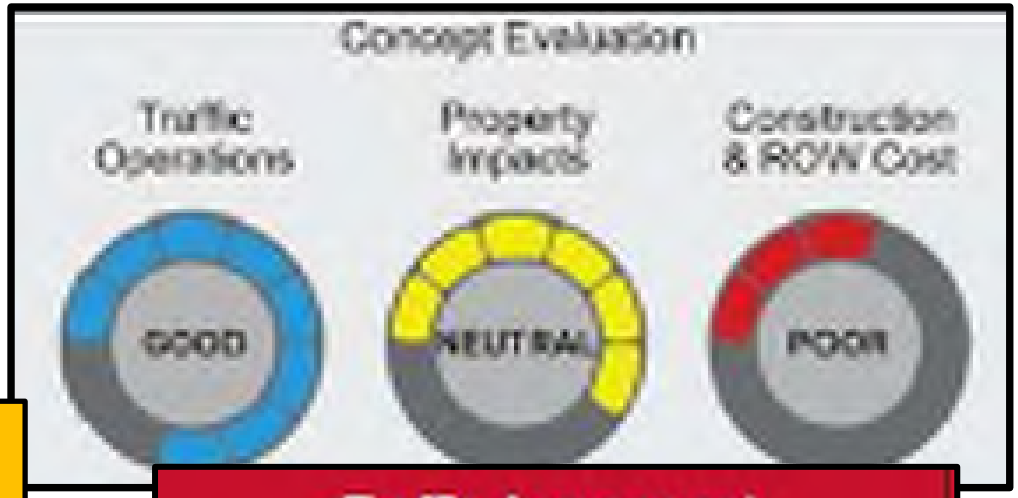


Rice Street / I-229 Interchange Folded Diamond Improvements

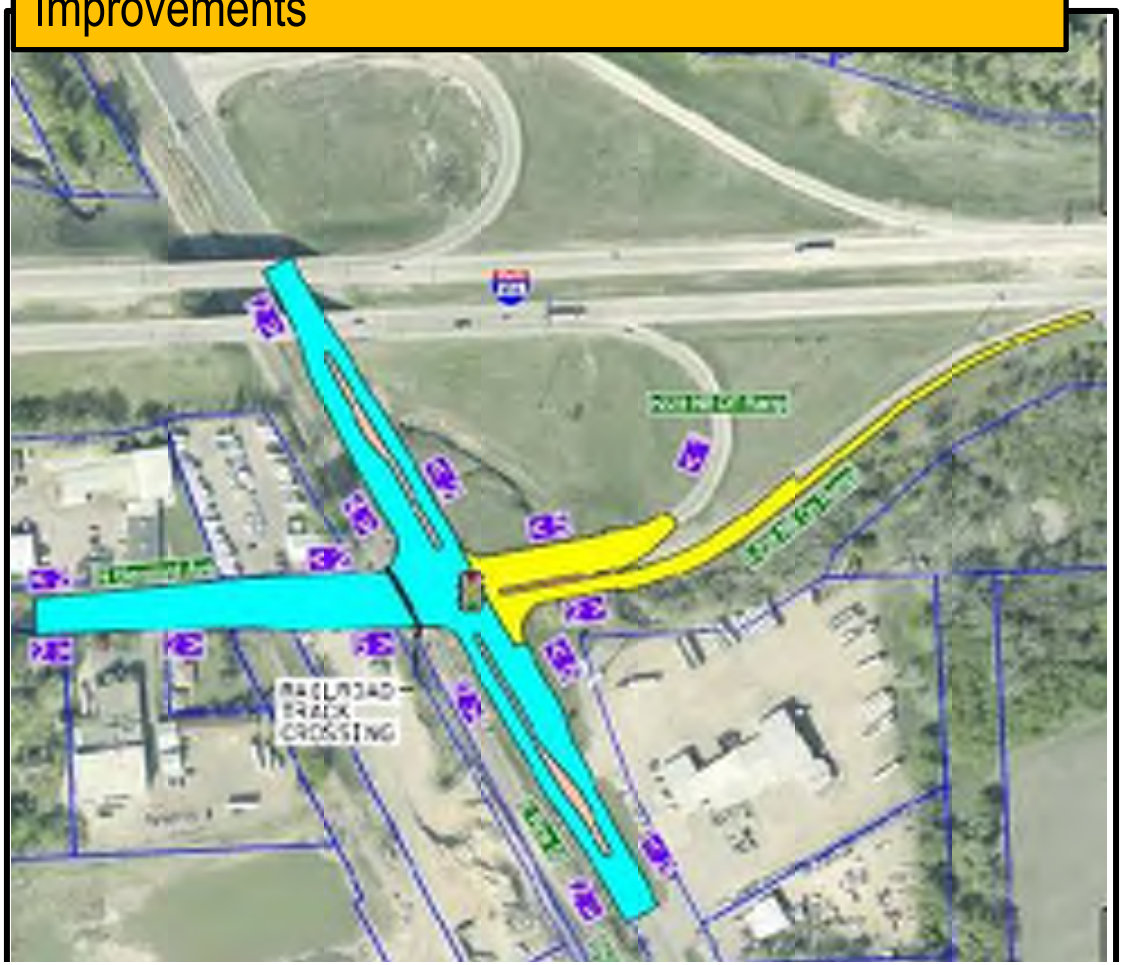

Traffic Assessment


Queues	Delay	Travel Time

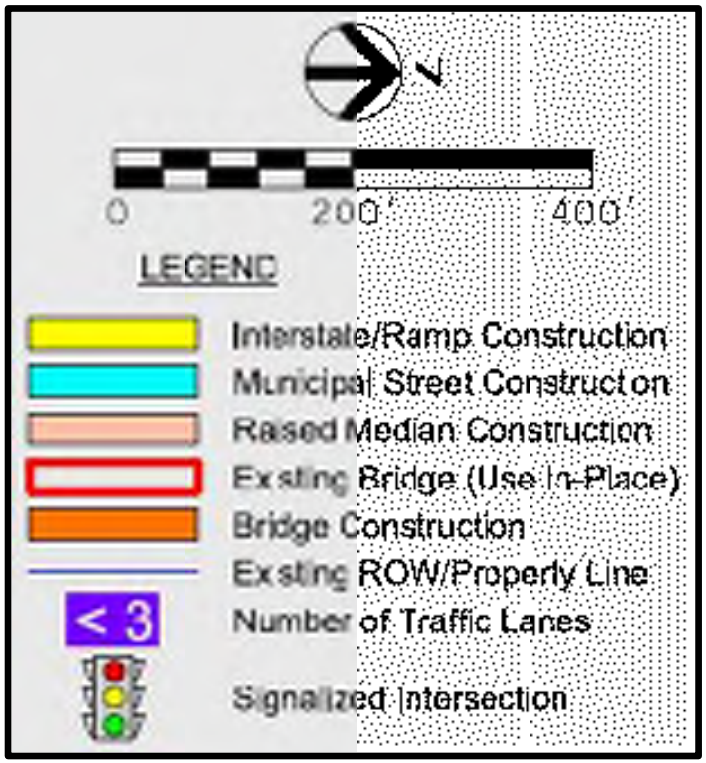

Conceptual Ideas for Benson Road

What you will be able to see tonight:


- **4 Interchange Conceptual Options**
- **1 Corridor Option**

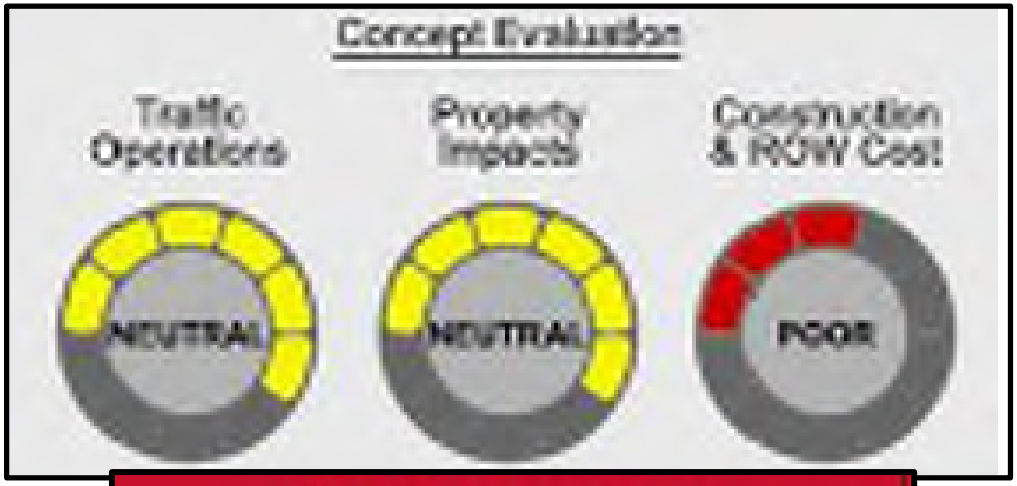


Traffic Assessment

Queues	Delay	Travel Time

Benson Road / I-229 Interchange Folded Diamond Option

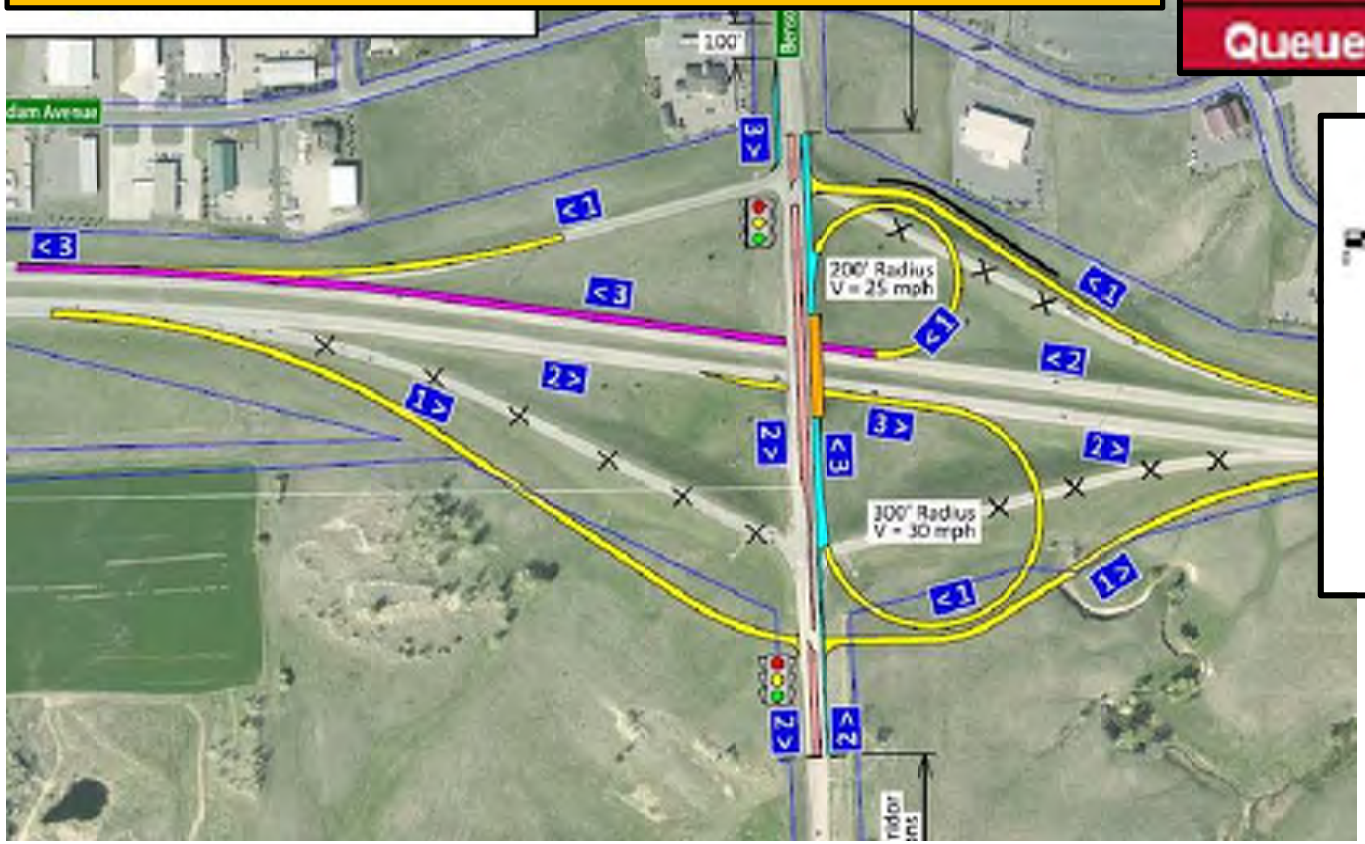


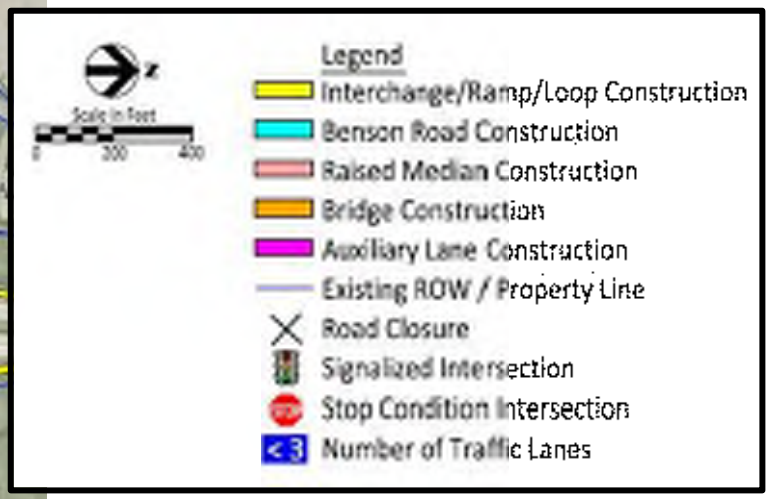


Next Steps for I-229

- Finalize Conceptual Options for all Sub-Studies
- Review Public Comments
- Complete additional Traffic Operations analysis on a reduced number of options based on the screening activities
- Develop Priority Phasing Plan for I-229 Corridor and Sub-Study Corridor
- Determine what "ITS" applications could improve the I-229 corridor safety
- Schedule and Conduct next public meeting



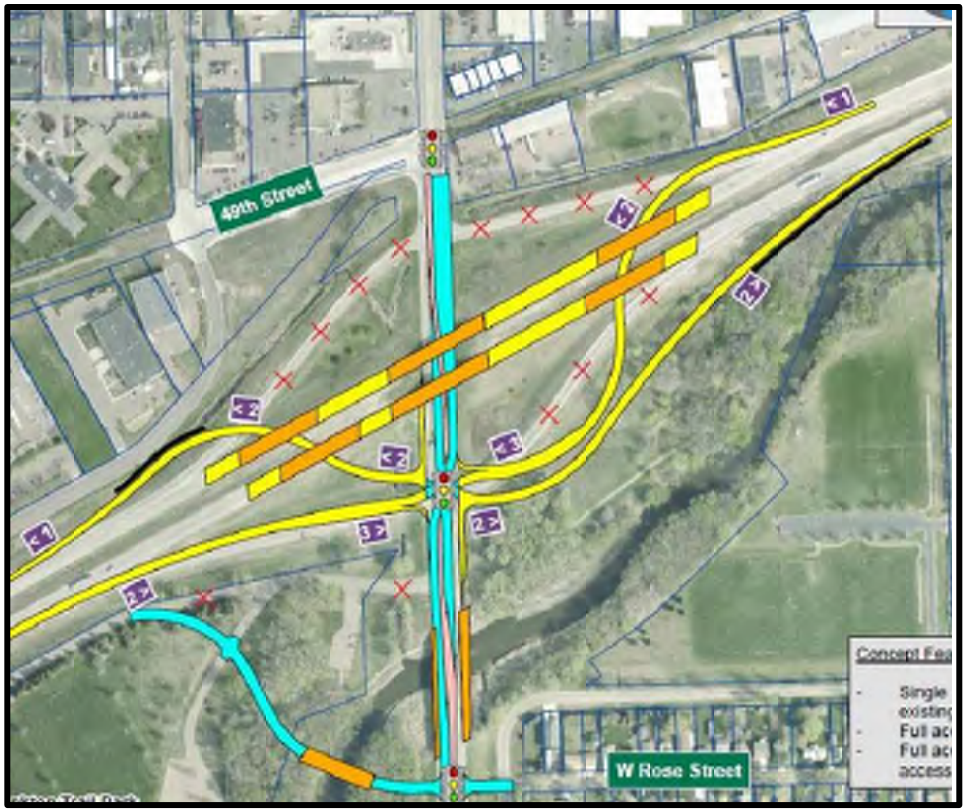

WWW.I229STUDY.COM

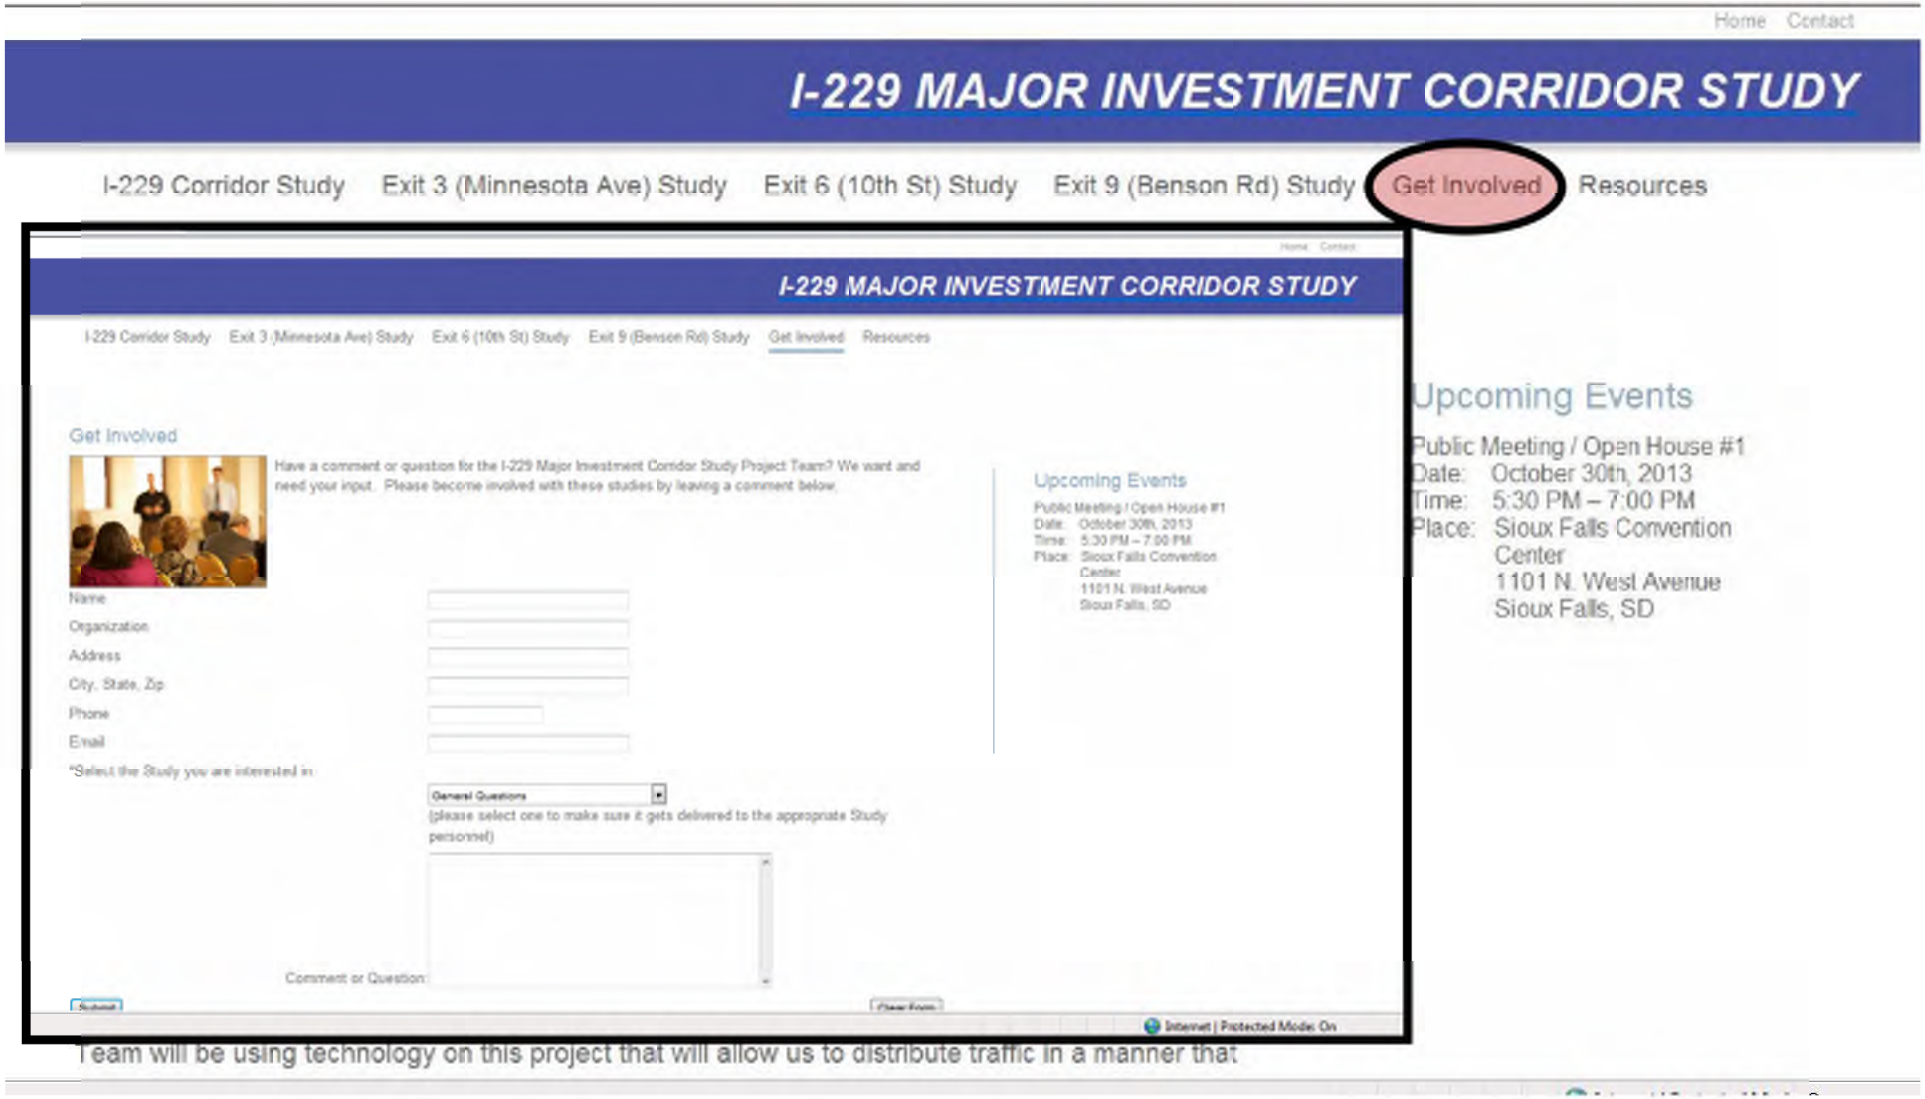

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Dave Meier – HDR Engineering, Inc.
402-399-1068 or dave.meier@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Mainline I-229 Sub-Study 1

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

MEETING NOTES

Memo

Date:	Tuesday, June 02, 2015
Project:	I229 MIS Public Meeting Debriefing Summary
To:	Project Study Advisory Team (SAT)
From:	HDR
Subject:	***Debriefing Summary / Meeting Comments***

Sub-Study 1 - I-229 Corridor:

- Mixture of interchange types confuses drivers. Should apply consistency in upgrading existing interchanges.
- Re ITS – Whatever advance information that can be provided to drivers via ITS features is a good thing.
- Concern about pavement noise. The I-229 pavement seems to generate a lot of noise.

Sub-Study 2 - Minnesota Ave:

- Prefer concepts with NO median on Minnesota north of 49th St.
- Don't see anything in the concepts shown that will improve operations on Minnesota outside the interchange area, particularly at 41st St and 57th St.
- Need to look at the sources of traffic congestion beyond the study limits.
- There were no operations problems on Minnesota until the traffic signals were added at the I-229 interchange ramps.
- Additional bicycle access across the I-229 corridor would be better if NOT on Minnesota.
- What about offsetting the school start time to avoid the morning peak period?
- Prefer interchange concepts without the traffic signals at the ramp terminals.
- Keep pedestrian and bike access separate from Minnesota Ave (off-alignment). Possibly aligned with Phillips or maybe with Duluth, Center or Spring. An overpass is preferred to an underpass.
- Improve bicycle/pedestrian access across I-229 on Minnesota and provide connection to Phillips corridor north of I-229.
- Like Minn-9 best. OK with right-turning traffic yield to pedestrians.
- Like the relocated Yankton Trails Park access concept with full access. Right-in/right-out for park access would not be good. Rose St connection to east as shown will not work – too steep a grade.
- Southbound ramp terminal intersection offset from 49th St is better – worried about ramp to/from 49th traffic speeding if the approaches are lined up.
- Post No Right Turn on Red for right turns onto of from ramp terminals to enhance safety of bike/pedestrian crossings.
- Significant population living northwest of 49th and Duluth that would benefit from improved pedestrian access.
- Believe there are issues with the railroad ROW easements that place limitations on use.
- Railroad ROW is not wide enough for street width shown on the Minn-C2 concept.
- 49th St should be perpendicular to Minnesota Ave. A horizontal curve to set up a 90-degree intersection would limit speeds on 49th and the ramps. Also have concern for angle of turn for trucks from eastbound 49th to southbound Minnesota.

- Like Minn-9 concept best except for park entrance right-in/out. Relocate the park access, but connect it to the existing trail parking lot to minimize impacts on forested area of park along river. Use the pavement from the existing drive from Minnesota for replacement trail parking.
- Relocated park access impacts Frisbee's drive.
- Need to provide pedestrian/bicycle connectivity between Minnesota Ave, Yankton Trail Park and Tomar Park.
- One person suggested studying a roundabout at Phillips with the 49th extension east alternative.
- One person commented that they preferred the loop ramps that remove left turns from Minnesota.

Sub-Study 3 - 10th Street:

- Potential noise issues with split diamond concepts due to added one way ramp connectors.

Sub-Study 4 – Benson Road:

- Need only one set of ramps (half interchange) at 60th St N.
- SPUI interchange at 10th St and elsewhere have worked well. Is it a potential concept at Benson Rd?
- During peak periods traffic on Benson Rd typically lets traffic from Potsdam onto Benson Rd.
- If concrete casting plant (Gage Bros. Concrete) relocates to the Benson Rd area, beams up to 120 feet long may be transported onto I-229 at the Benson Rd interchange. Plant relocation could involve up to 60 trailers/day for all products shipped and materials received. Intrigued by DDI concept.
- Concern that none of concepts shown have features to address strong eastbound to southbound right turns onto I-229 entrance ramp. Dual right turn with two-lane ramp for some distance may be needed.
- Prefer that Benson Rd interchange get big capacity increase and do nothing at 60th St N. 60th St N has good I-229 trail crossing potential if there are no interchange ramps.
- 54th St N would be a good new I-229 trail crossing corridor.
- Minimal pedestrian use is expected along the Benson Road corridor due to the commercial and industrial land use in the area.

COMMENTS

Comment 01

Sioux Falls, SD 57108-2102

Benson: improve flow EB Benson → SB 229
If + when Interchange comes to 60th N, will NEED alternate Bike/Ped Crossing eg @ 54th N
Consider Rail to Trail 26th → MN → west (49th St)

Comment 02

Please evaluate dual lanes for SB movement from eastbound Benson. Very poor LOS at PM peak. The affects Ptsdam and Lewis intersections. At least increase radius if leaving on ramp right turns at one lane.

Comment 03

10th St. Corridor

I think there needs to be more attention paid to providing safe, convenient, and accessible access for bicycle, pedestrian, and public transportation users. More traffic lanes does not produce less congestion. There needs to be a more profound design that accommodates non-motorized transportation ~~users~~ users. I-229 is a major barrier that has been identified as troublesome for getting people who walk, bike, or ride the bus.

(optional)
Name: Address:
Phone: Email:

I really like the concept of the diversing diamond on 10th St. as well as the service road access that would connect 10th & 6th St. I believe that the idea that 10th & 6th can be parallel urban arterials that provide safe, convenient, and timely travel to-and-from downtown ~~in terms~~ is great in terms of east-west travel.

Comment 04

6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

Fax: 605-977-7747

Need to include other modes of Transit in the evaluations!
Long-Term: Rail to Trail along 49th all the way to Cliff/26th would be Brilliant!

Any MN Exit that dumps into 49th St will Turn it into an Extension of the freeway & Prevent Other uses

Any Entry ways from 6th or 12th will add Traffic on these Streets & Complicate the Bike/Pedestrian BRIDGE from Changing except at huge, High Speed intersections

(optional)

Comment 05

I think there needs to be a major consideration of the impacts to the entire Minnesota Ave. corridor to downtown/airport. Need to consider impacts to the ability to safely and conveniently bike, walk, and ride the bus. While I think bicycle/pedestrian access across I-229 should be first-and-foremost, ~~pedestrian~~ access to public transportation needs to be seriously considered in an area that doesn't already have fixed route service available to them. Otherwise they are left with a singular option of ~~vehicle~~ single occupant vehicle trips, which I do not believe that any of the concepts address lessening the impacts of ~~traffic~~ future traffic congestion as there needs to be more of a focus on increasing bike/ped/transit access.

(optional)
Name: _____ Address: _____
Phone: _____ Email: _____

Comment 06

RE: I-229 Corridor Study – Minnesota Ave Interchange

As a volunteer member of the American Heart Association Advocacy Committee I strongly encourage this I-229 corridor study consider all roadway users (motorized and not) equally as it seeks to improve the way people move in and around the corridor. Interstates within cities have repeatedly proven to be significant barriers to the free movement of people. This is as true in Sioux Falls as it is in cities all over the world.

The American Heart Association identifies living actively as an important factor in preventing heart disease and preserving heart health. The possibility of active living is greatly enhanced by removing barriers to movement. Public roads and public spaces that are safe for the most vulnerable users are of primary importance.

I am particularly mindful of the southernmost portion of I-229 as it stands as a wall cutting the southern core of the city off from major pathways of desire: the river, the parks, the bike path. Directing these pathways of desire to traffic dense Western Ave, Minnesota Ave and Cliff Ave presents significant challenges to users. A person need only navigate these three interchanges a few times, counting the conflicts that present themselves before realizing these spaces were not meant for users who choose to power themselves.

Please rework the Minnesota Ave interchange seeking to give an equal level of safety to all roadway users, motorized and not. Use it then as a model throughout the city.

Comment 07

I am concerned for the ability of all citizens to safely cross I-229 including cyclists and pedestrians who are trying to access the Multi-Use trail from the growing southern Sioux Falls neighborhoods. Please keep this in mind at the Minnesota Ave interchange. Thank you for the opportunity to comment

---

Comment 08

Comments I would like to see some sort of bike/pedestrian bridge over/under I-229 near the Yankton Trails Park area. Getting from south Sioux Falls via bicycle is terribly difficult. Thank you

---

Comment 09

Comments

Please include me in any future planning around 10th Street. I am a commercial property owner around 10th and Cleveland, so I am particularly interested in any future plans. I appreciate your making this public and inclusive.

Comment 10

Something that I feel needs to be addressed concerning the I-229 corridor is the unsafe traffic conditions at Cliff Avenue on the north side of I-229. The current traffic light set-up forces northbound drivers to risk their lives to get on westbound I-229. The main problem for this is the amount of traffic going southbound, and the timing of the lights. The traffic heading south through the intersection is going downhill and generally driving rather faster than the speed limit. The traffic coming off I-229 and turning south on Cliff Avenue is usually going pretty fast too, as the green light is short, and no one wants to wait. Additionally, eastbound traffic on 41st street turning south on Cliff Avenue faces only a yield sign. Knowing that the southbound traffic is heavy and fast when southbound Cliff Avenue or westbound 41st Street have a green light, the eastbound 41st Street traffic turning south has a brief window to gun it and head south on Cliff Avenue. Sitting in the northbound Cliff Avenue turning lane, waiting to turn west onto the westbound I-229 on ramp becomes a crap-shoot. It's unsafe to turn across the two lanes of southbound Cliff Avenue when Cliff Avenue has a south green light, or when westbound traffic off I-229 has a green light, or when both those lanes have a red light, and the southbound traffic coming off 41st Street speeds south during the brief window of time when only northbound Cliff Avenue has the green light. When it's busy, especially before and after school, and after 5:00, there is no safe time to turn left from Cliff Avenue onto the I-229 on-ramp.Consequently, every car taking that route has to gun it, and hope the southbound traffic hits the brakes. This situation is clearly unsafe now. As traffic grows, it will get worse. A simple fix, for now, would be to time the lights a little different, or at least a little longer, and add a red light in place of the yield controlling southbound Cliff Avenue traffic from 41st Street. When all southbound and westbound traffic has a red light, those cars headed for southbound I-229 would have a safe, clear path. Time the light long enough to allow 6 cars to get through. Another, simple way to improve the traffic situation would be to widen the lane where traffic turns south onto Cliff Avenue from 41st Street. If that lane were twice as wide, 41st Street traffic trying to get on the on-ramp for I-229 south could do so without having to pull into the right lane of southbound Cliff Avenue. That lane should still have the traffic light in place of the yield sign. It wouldn't take much of a traffic study to see the issues at that intersection. Spending a half hour observing at 7:30 a.m. on a school day would tell you all you need to know.

Comment 11

Thanks for the reply. To be honest, I poked around a lot in the site I sent the message from, but did not see the part you link here. It looks interesting and it looks like it's designed to alleviate the exact problem I wrote about. Some questions- Would there be another lane added where the loop comes onto SB I-229, so that I'm not trying to merge into 65 mph (ha ha- wish they were going that slow) traffic while accelerating up a hill on a curve? What would be the purpose of the retaining walls shown between I-229 and the existing SB on-ramp? Is there a time frame yet on when this work will be started?

APPENDIX -

CLIFF AVENUE AND RICE STREET PUBLIC MEETINGS – JUNE 22ND, 2016

RICE STREET

JUNE 22ND, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- COMMENTS
- POWERPOINT SLIDES

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 5 – Rice Street Exit 7
Date:	Wednesday, June 22, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 8 Participants

Comments & responses noted:

1. Trucking firm on North side Rice, east of I-229 (Kunkel Truck Lines)
   - Concern for Eastbound truck ingress to property.
   - What is the purpose of the proposed median? Response: Median is the preferred treatment for arterials carrying more than 20,000 veh/day (City)
   - Are the proposed corridor improvements similar to W 12th Street near I-29? Response: Yes (City)
   - Will the railroad have one track or two? Response: BNSF has not indicated how many tracks there may be in the future. They have not ruled out the potential for expansion.
   - Business owns both existing drives on the north side of Rice St. An adjacent business to the east (Eastgate Towing) also has access to Rice St via the eastern of the two drives.
   - The proposed backage road would require 15-20 feet of embankment.
   - Existing security at the drives is provided by security cameras only. The business intends to add gates. Proposed widening on Rice St will make it more difficult for the business to position the gates.

2. Business southeast corner of Bahnson Ave (Myrl & Roy's Paving)
   - Recommend that project planners expect more railroad traffic.
   - Recommend consideration of eastbound in-bound trucks queueing when trains are in the crossing. Response: It is expected that the number of unit trains/day will remain about the same but local trains could increase to 3-4 per day (City).
   - The Cleveland realignment option is a step backward because it inhibits direct access to I-229.

3. Gravel Company – East side of Cleveland
   - When the railroad crossing is blocked, there will be no way out of our business if a median is built on Cleveland.

4. Proposed improvements on Rice St will increase speeds on Rice and create more problems with slow turning trucks. Response: Satisfying both commuter and industrial traffic is a challenge.

5. Between 4:00 – 4:30 pm, trucks waiting for a gap in Rice St traffic to turn out block the railroad crossing.

6. A railroad grade separation is needed.

7. What is the timeline for construction of Rice St improvements? Response: the I-229 study will include recommendations to prioritize improvements over a time span of more than 20 years. Widening Cleveland Ave to a 5-lane roadway is anticipated to be a near term project (City).

8. Eastbound right turn lane has been considered to allow westbound left lane to be added, but it is needed to hold traffic when railroad crossing is blocked.

9. Why is that more important than queuing traffic waiting for left turn traffic in the morning?

10. The railroad track should be realigned south to its original alignment farther south of Rice St.

11. The mine pit south of Rice St is now used mostly for recycling and has an indefinite remaining life.

12. Not opposed to realignment of Cleveland Ave if it can be shifted farther west or south toward the residential development.

13. When will SD-100 be constructed to Rice Street? Response: In about two years.

14. Why do the I-229 bridges need to be redone before improvements along Rice St?

15. On Concept Rice-5, would a roundabout be located where the ramps intersect Rice St? Response: A signalized intersection similar to the one at I-229 and 10th St would be located at the ramp terminals.

16. What is the benefit of the proposed median? Response: Vehicle crash mitigation and reduction of turning movement conflicts.

17. Have studies been conducted regarding the safety of U-turns? Response: 57th & Southeastern project has been the source of some complaints about u-turns. 12th Street is working OK. A 30% reduction in crashes has been determined by analysis of previous median construction projects (City).

18. Senior driver comment – Medians cause confusion because drivers often cannot exit an adjacent property the same way they entered it.

19. Do not see a lot of semi-trailer trucks on Rice St west of I-229.

20. Business West Side of Cleveland South of Rice
    - Have been operating since 1991. Have only 70 employees, who may go on-site to service customers.
    - There are truck operations in and out of the site.
    - The site contains 50 storage spaces for customer RV's and campers storage.
    - Customers like that the storage spaces are close to I-229 access ramps.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting for Rice Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Wednesday, June 22, 2016 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Brad Remmich	Pierre	773-3093	brad.jay.remmich@state.sd.us
2	Brigitte Faulks	1208 N Lowell Ave	605-310-7935	
3	Steve Gramm	700 E. Broadway Ave	773-6491	Steve.gramm@state.sd.us
4	Jason Ligenstad	6300 S. Old Village Pl	977-7740	jason.ligenstad@hdrinc.com
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting for Rice Street Sub-Study
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3618P, PCN 044K **Project No.:** 207030
Meeting Date Wednesday, June 22, 2016 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Andy Vandel	Pierre	773-4421	andy.vandel@state.sd.us
2	Jason Kjerstad	HDR	605-977-7740	jason.kjerstad@hdrinc.com
3	Josh Callahan	1501 N. Cleveland Ave Sioux Falls	605-521-6586	josh.callahan@smpsecurity.com
4	TROY MILLER	SIOUX FALLS	605-553-8729	TMILLER@SIOUXFALLS.ORG
5	Colleen Adler	1301 N. Lowell Ave SF 57103	339-2630	ca47dakota@gmail.com
6	Jackie Nash	2105 Tricia Lane 57103	338-1870	jackie830n@yahoo.com
7	+4 Media			
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting for Rice Street Sub-Study
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030
Meeting Date Wednesday, June 22, 2016 5:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	PETE LONGMAN	700 EAST Broadway - Pierre	773-6488	pete.longman@state.sd.us
2	Christina Bennett	700 E Broadway - Pierre	773-4759	Christina.Bennett@state.sd.us
3	Tom Lehnkuhl	700 E. Broadway	773.3721	tom.lehnkuhl@state.sd.us
4	DEAN DELASHMUTT	1207 N VIOLET PL	496 1108	
5	Dhan Khaptangi	1000 N Broken Bow Ave	605 360 3549	
6	Jesse Callahan	1501 N Cleveland Ave	334 9357	info@smpsecurity.com
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Comment Card

R3B LOOKS GOOD FOR CLEVELAND

I-229 Major Investment Corridor Study – Rice Street Sub-Study

Public Open House

PL 0100(87) 3616P, PCN 044K

June 22, 2016

Comments:

FUTURE: 4 LANES - HMMM?

RICE ST - C2

MEDIAN BETWEEN JESSICA & WAYLAND: (AND TO SAVE MONEY),

REDO DRAINAGE ON JESSICA - REMOVE MERIDIAN

RICE ST - 1 TRUCKING FIRM RATHER INCONVIENCED FOR TRIPS NORTH BOUND. SOUTH BOUND IS "DO-ABLE" BACK ACCESS ACCESSABLE TO I-229?

Name: DEAN DELASHMUTT Address: 1207 N VIOLET PL

Phone: 605 496 1108 E-mail:

For your comments to be considered, please return by July 7, 2016.
Comments can also be e-mailed to: sausen@siouxfalls.org







Interstate 229 Major Investment Study

Exit 7 – Rice Street

Public Meeting
June 22nd, 2016
5:00 pm to 6:30 pm

HDR

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road
Added Exit 4 – Cliff Avenue
Added Exit 7 – Rice Street

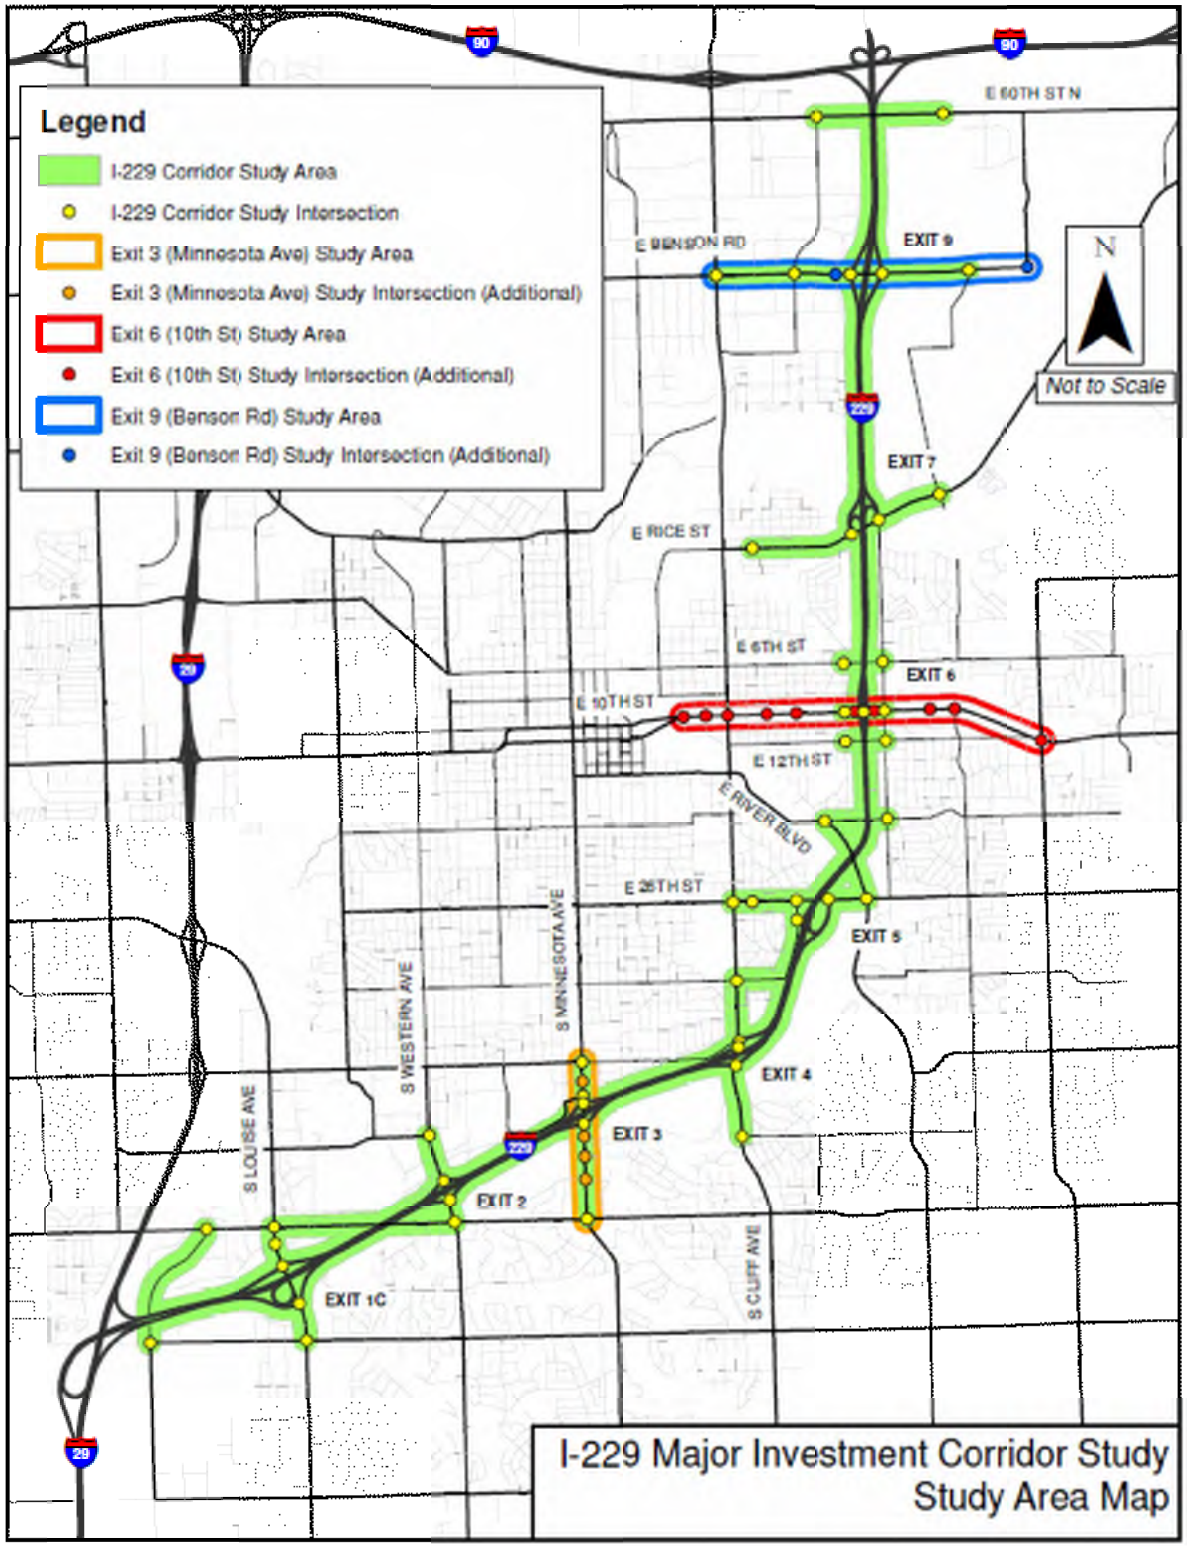

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)


Exit 7 (Rice Street) Crossroad Study Goals


- Reduce traffic congestion
- Provide and Interchange that will meet the future capacity requirements
- Improve pedestrian mobility
- Improve safety for corridor users







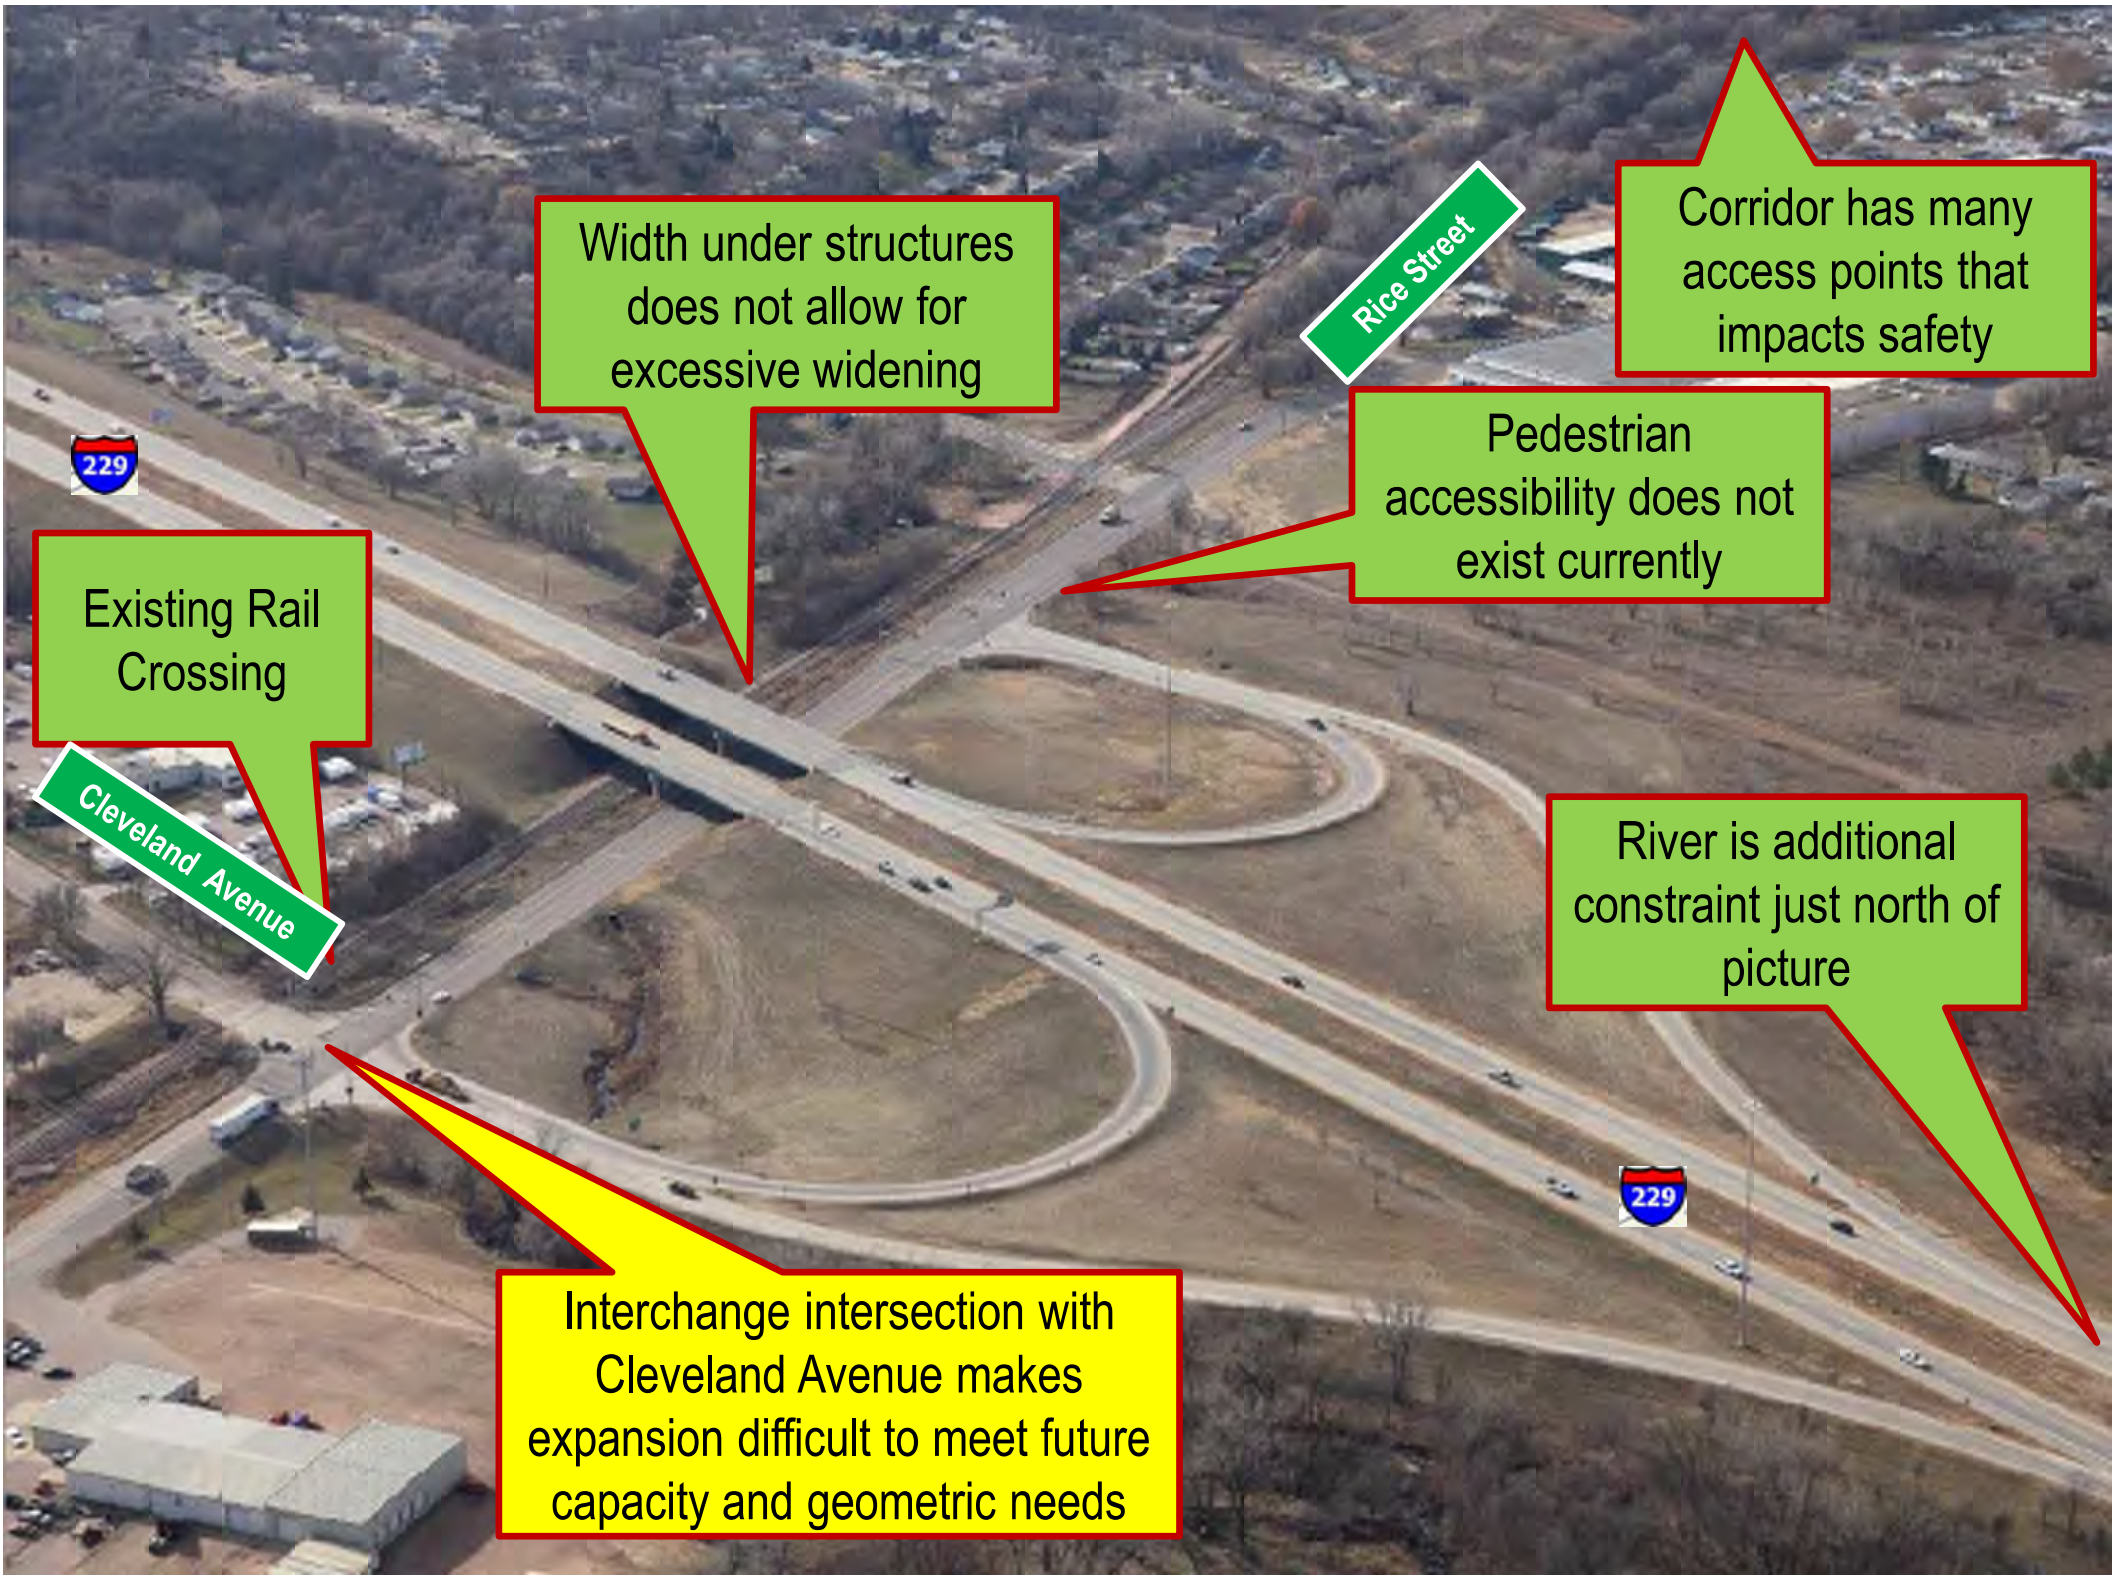




Width under structures does not allow for excessive widening
Rice Street
Corridor has many access points that impacts safety
229
Pedestrian accessibility does not exist currently
Existing Rail Crossing
Cleveland Avenue
River is additional constraint just north of picture
229
Interchange intersection with Cleveland Avenue makes expansion difficult to meet future capacity and geometric needs

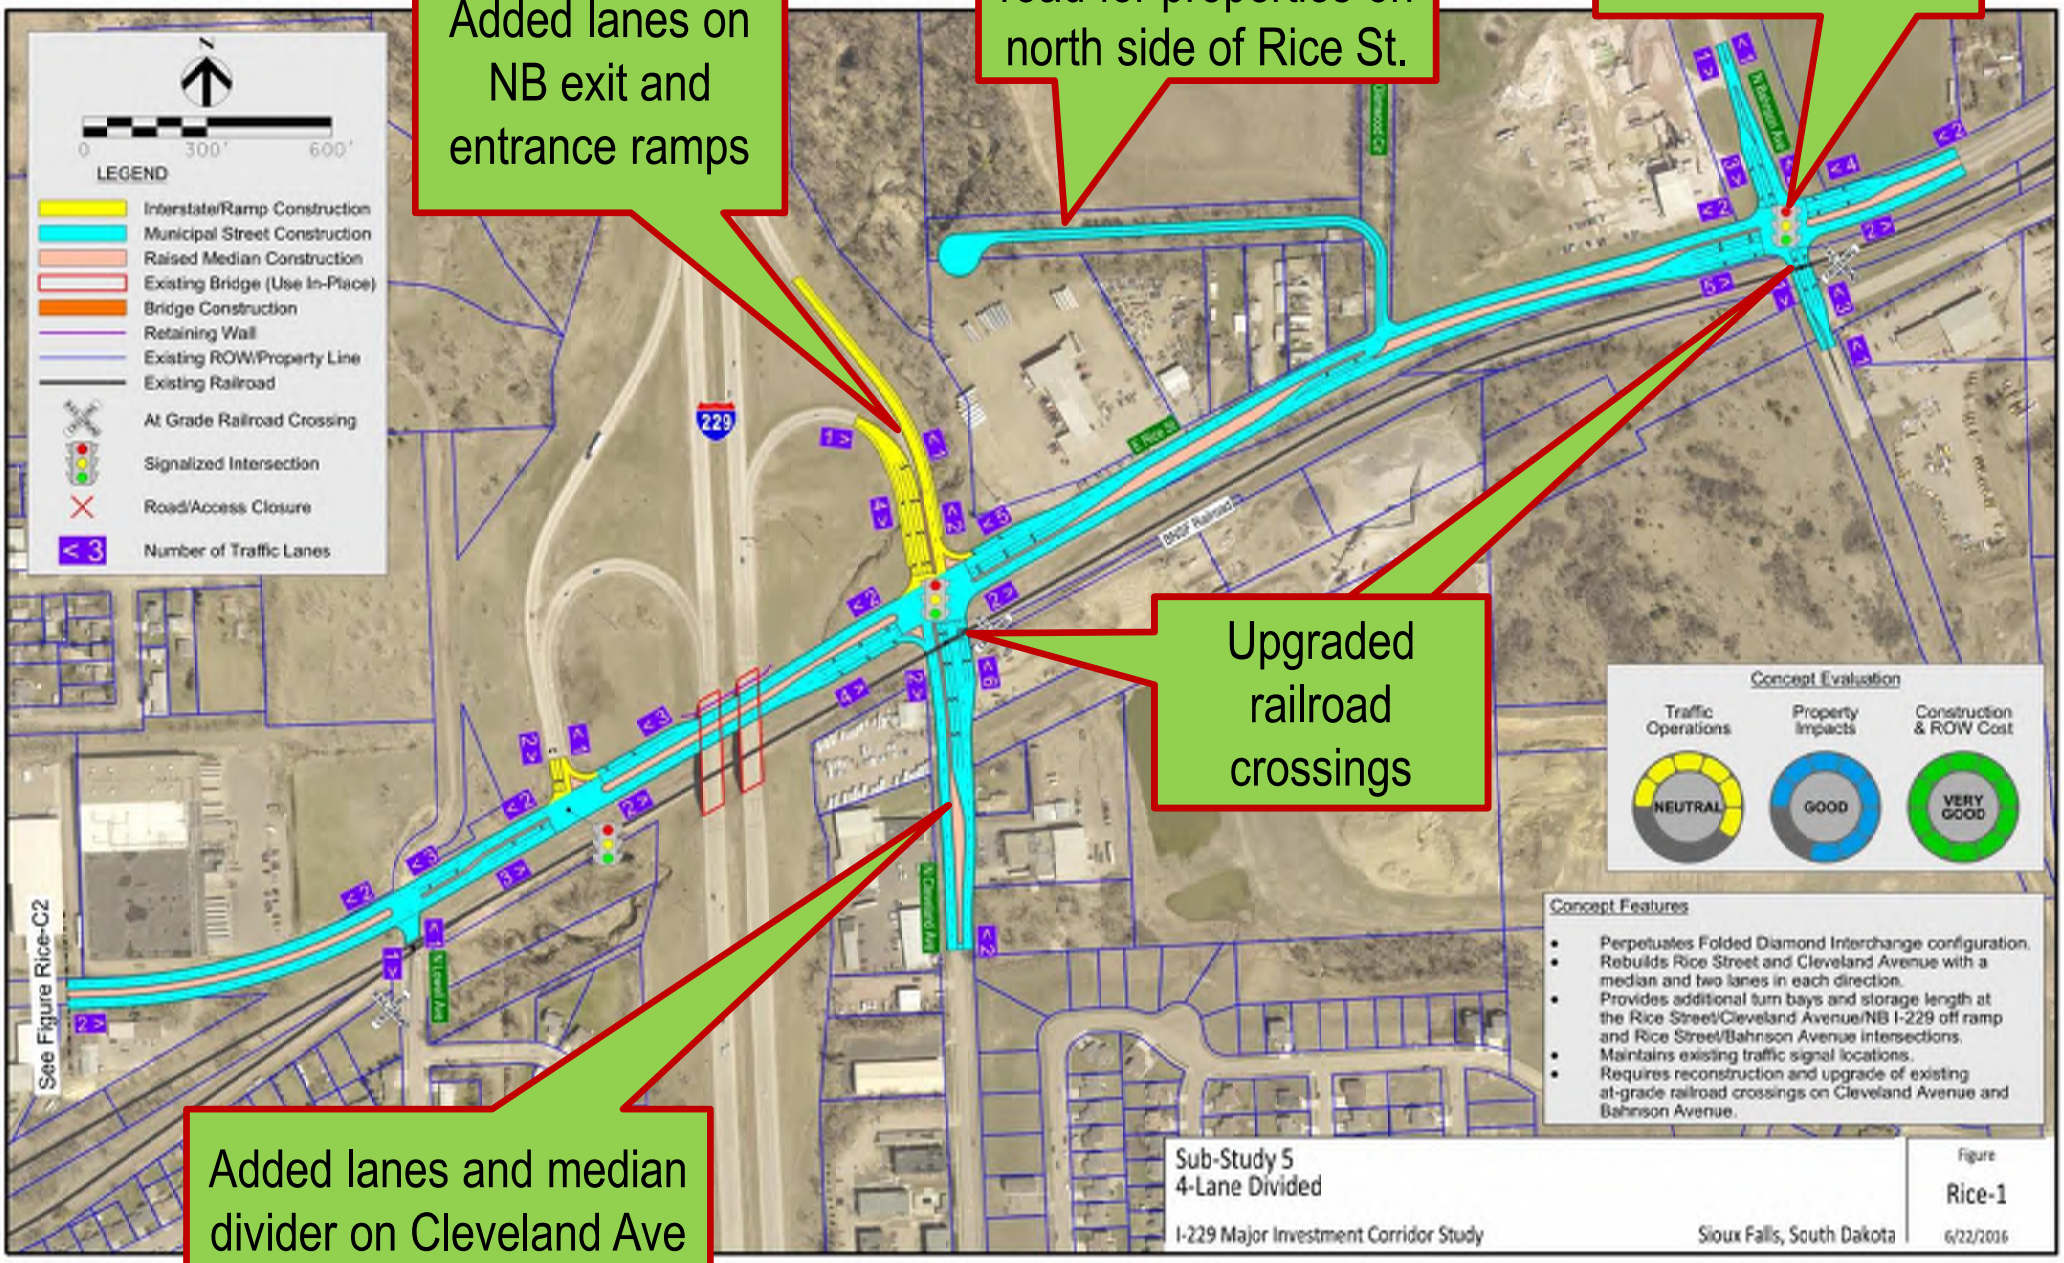

Added lanes on NB exit and entrance ramps
New back access road for properties on north side of Rice St.
Turn lanes added at Bahnson Ave
Upgraded railroad crossings
Added lanes and median divider on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
NEUTRAL
GOOD
VERY GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street and Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Maintains existing traffic signal locations.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
4-Lane Divided
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-1
6/22/2016

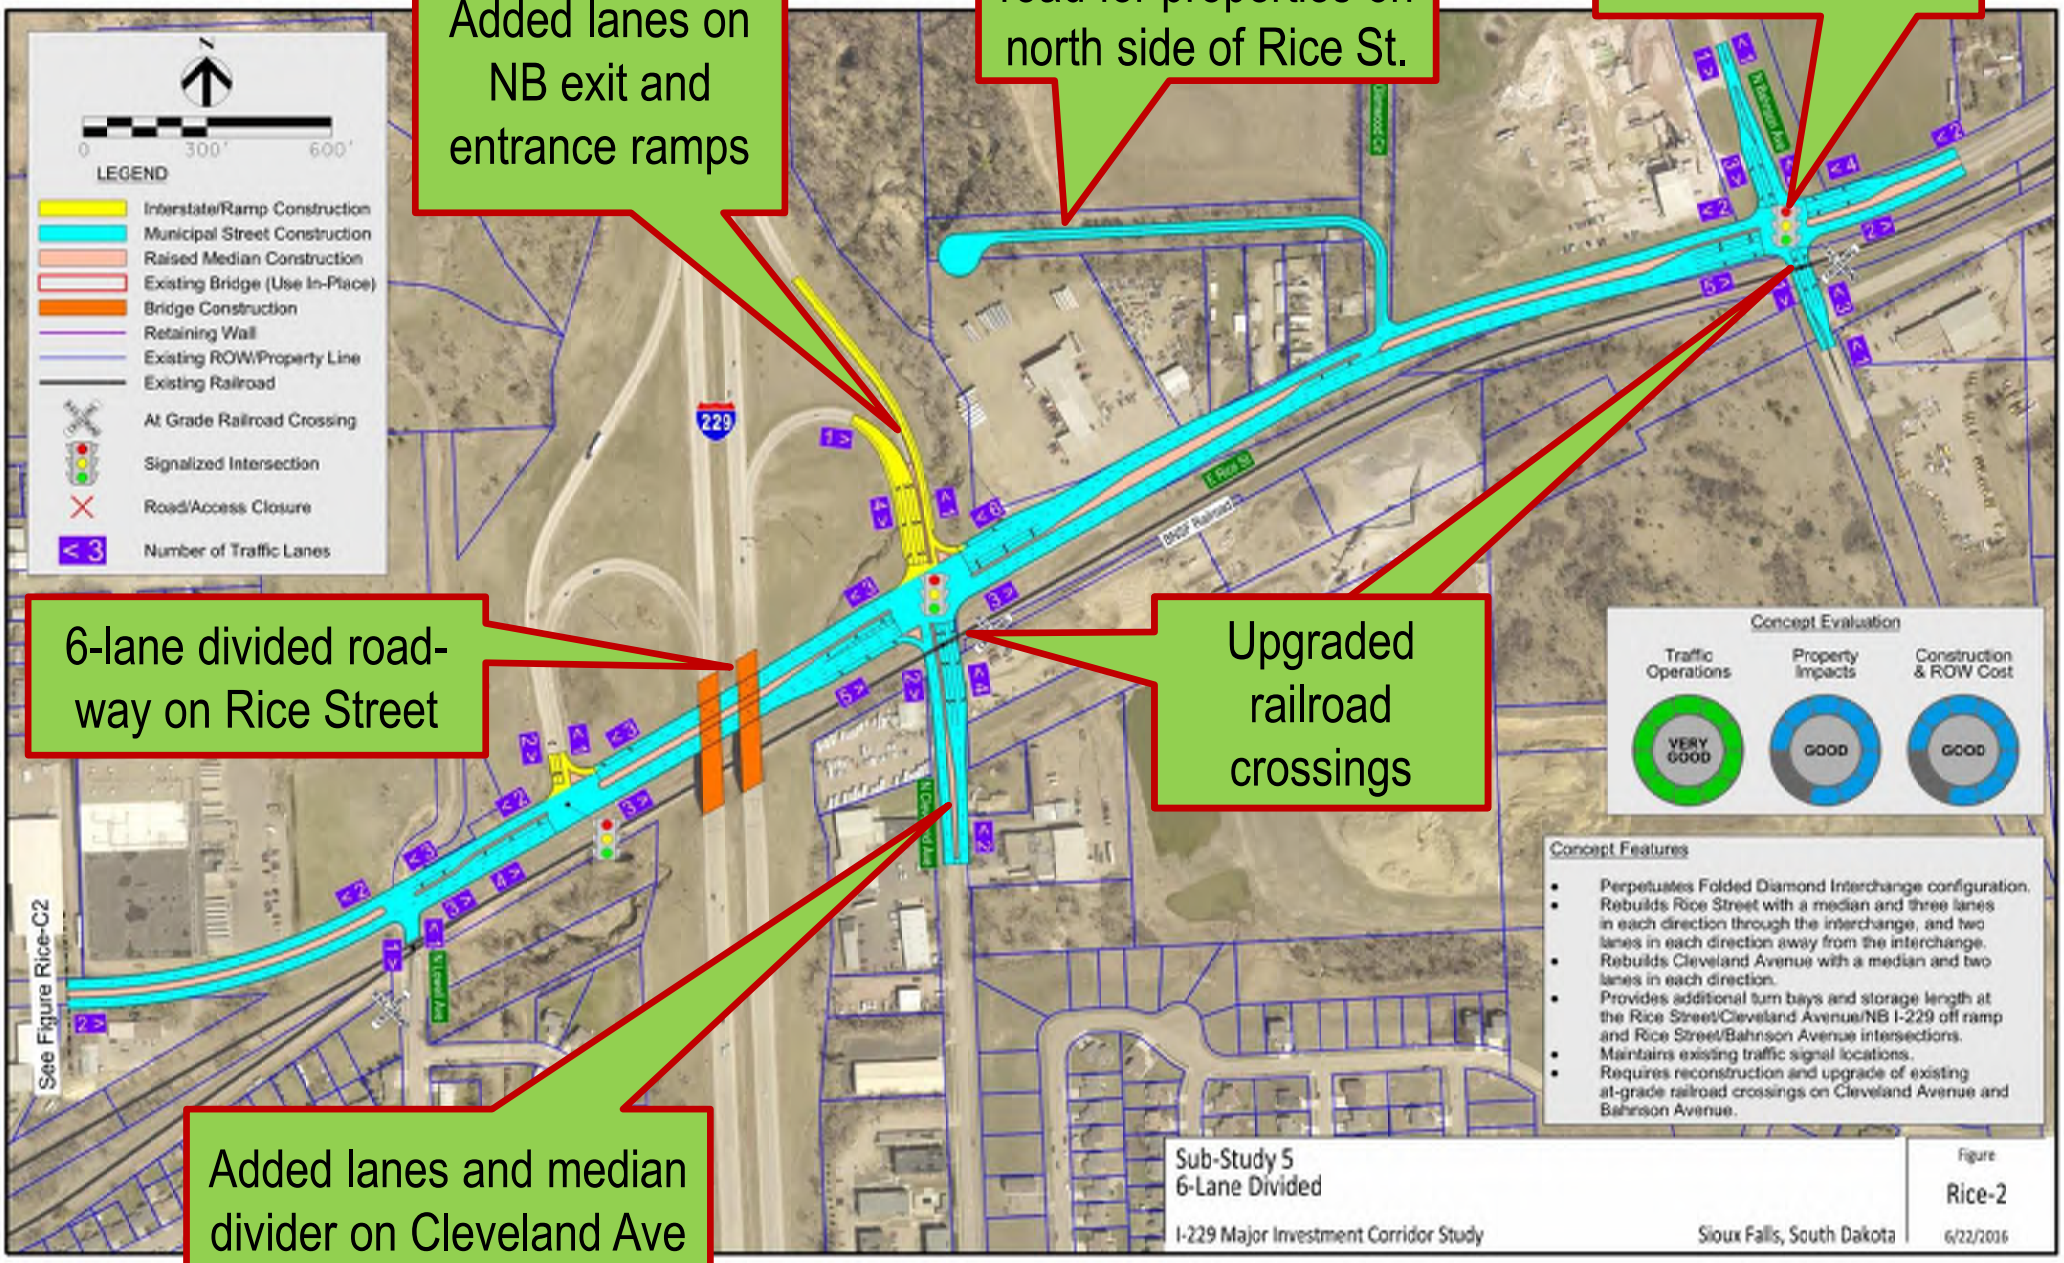

Added lanes on NB exit and entrance ramps
New back access road for properties on north side of Rice St.
Turn lanes added at Bahnson Ave
6-lane divided road-way on Rice Street
Upgraded railroad crossings
Added lanes and median divider on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
GOOD
GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
Rebuilds Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Maintains existing traffic signal locations.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
6-Lane Divided
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-2
6/22/2016

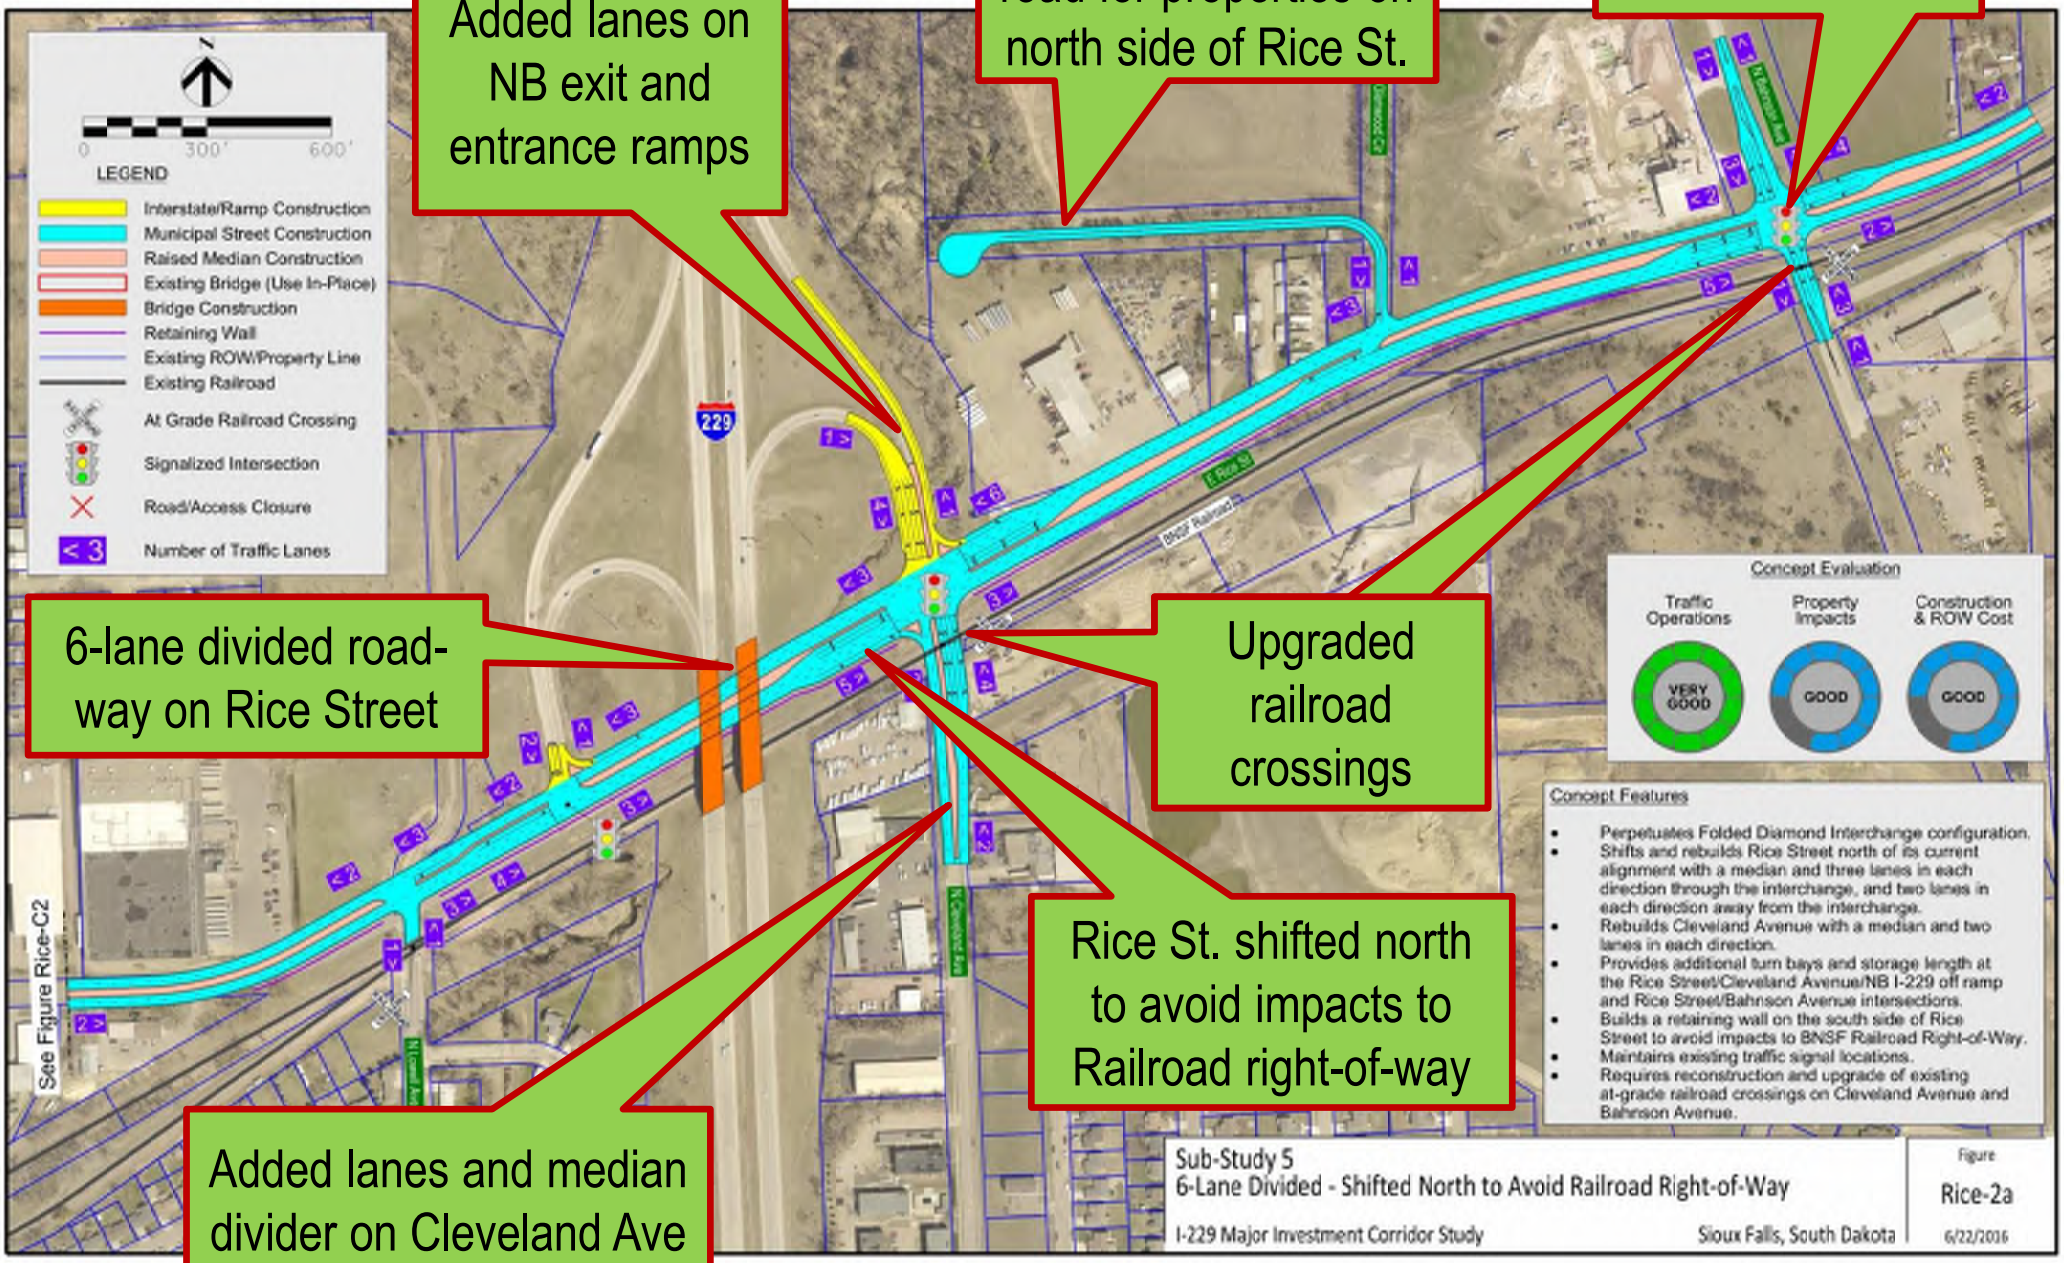

Added lanes on NB exit and entrance ramps
New back access road for properties on north side of Rice St.
Turn lanes added at Bahnson Ave
6-lane divided road-way on Rice Street
Upgraded railroad crossings
Rice St. shifted north to avoid impacts to Railroad right-of-way
Added lanes and median divider on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
GOOD
GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Shifts and rebuilds Rice Street north of its current alignment with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
Rebuilds Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Builds a retaining wall on the south side of Rice Street to avoid impacts to BNSF Railroad Right-of-Way.
Maintains existing traffic signal locations.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
6-Lane Divided - Shifted North to Avoid Railroad Right-of-Way
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-2a
6/22/2016

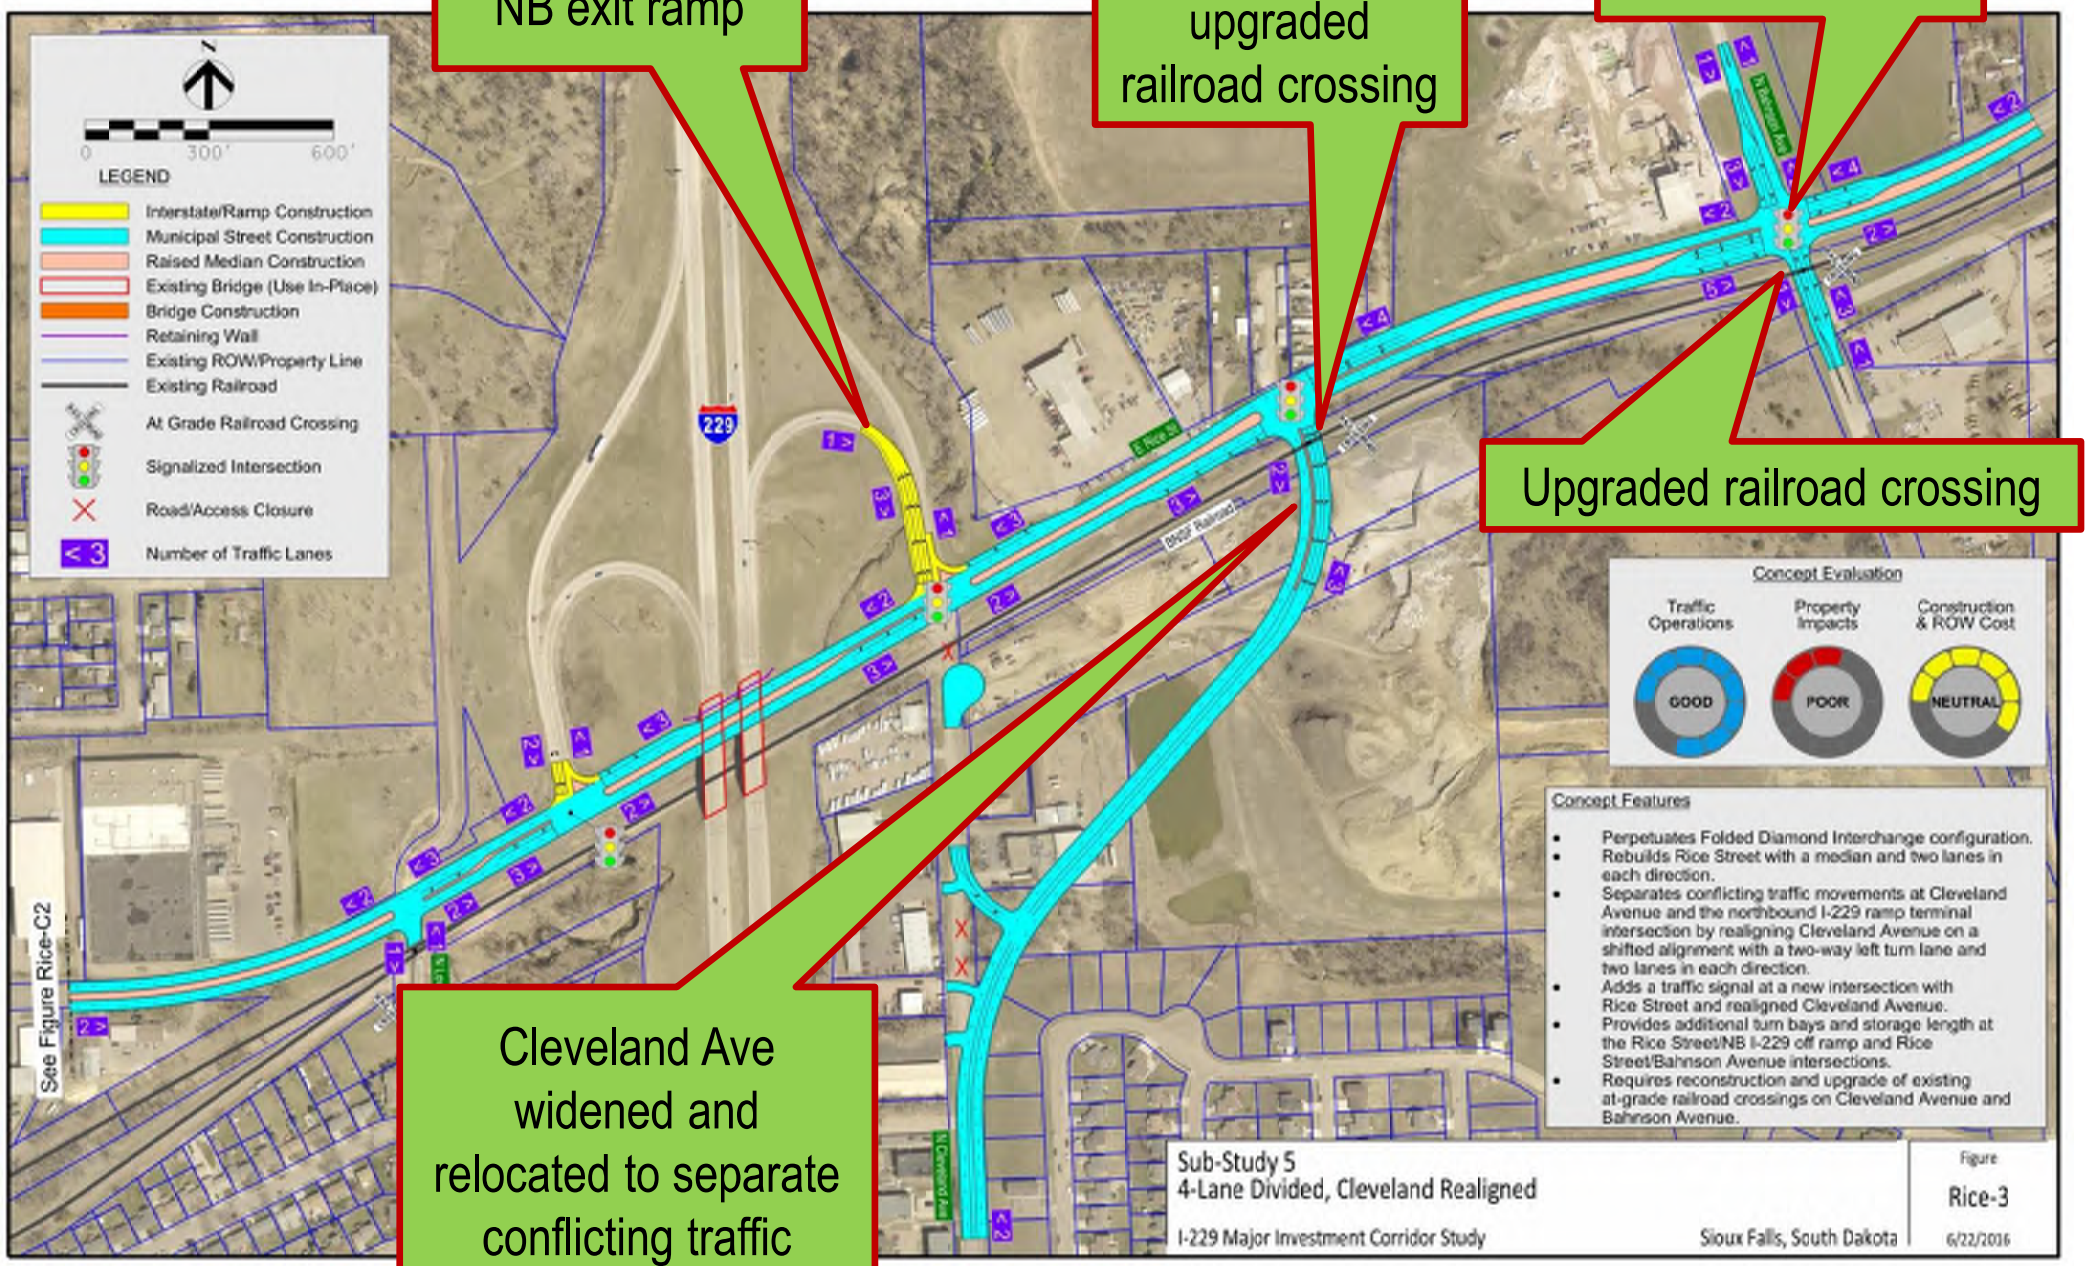

Added lane on NB exit ramp
Relocated and upgraded railroad crossing
Turn lanes added at Bahnson Ave
Upgraded railroad crossing
Cleveland Ave widened and relocated to separate conflicting traffic movements at I-229
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
POOR
NEUTRAL
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street with a median and two lanes in each direction.
Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
Adds a traffic signal at a new intersection with Rice Street and realigned Cleveland Avenue.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
4-Lane Divided, Cleveland Realigned
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-3
6/22/2016

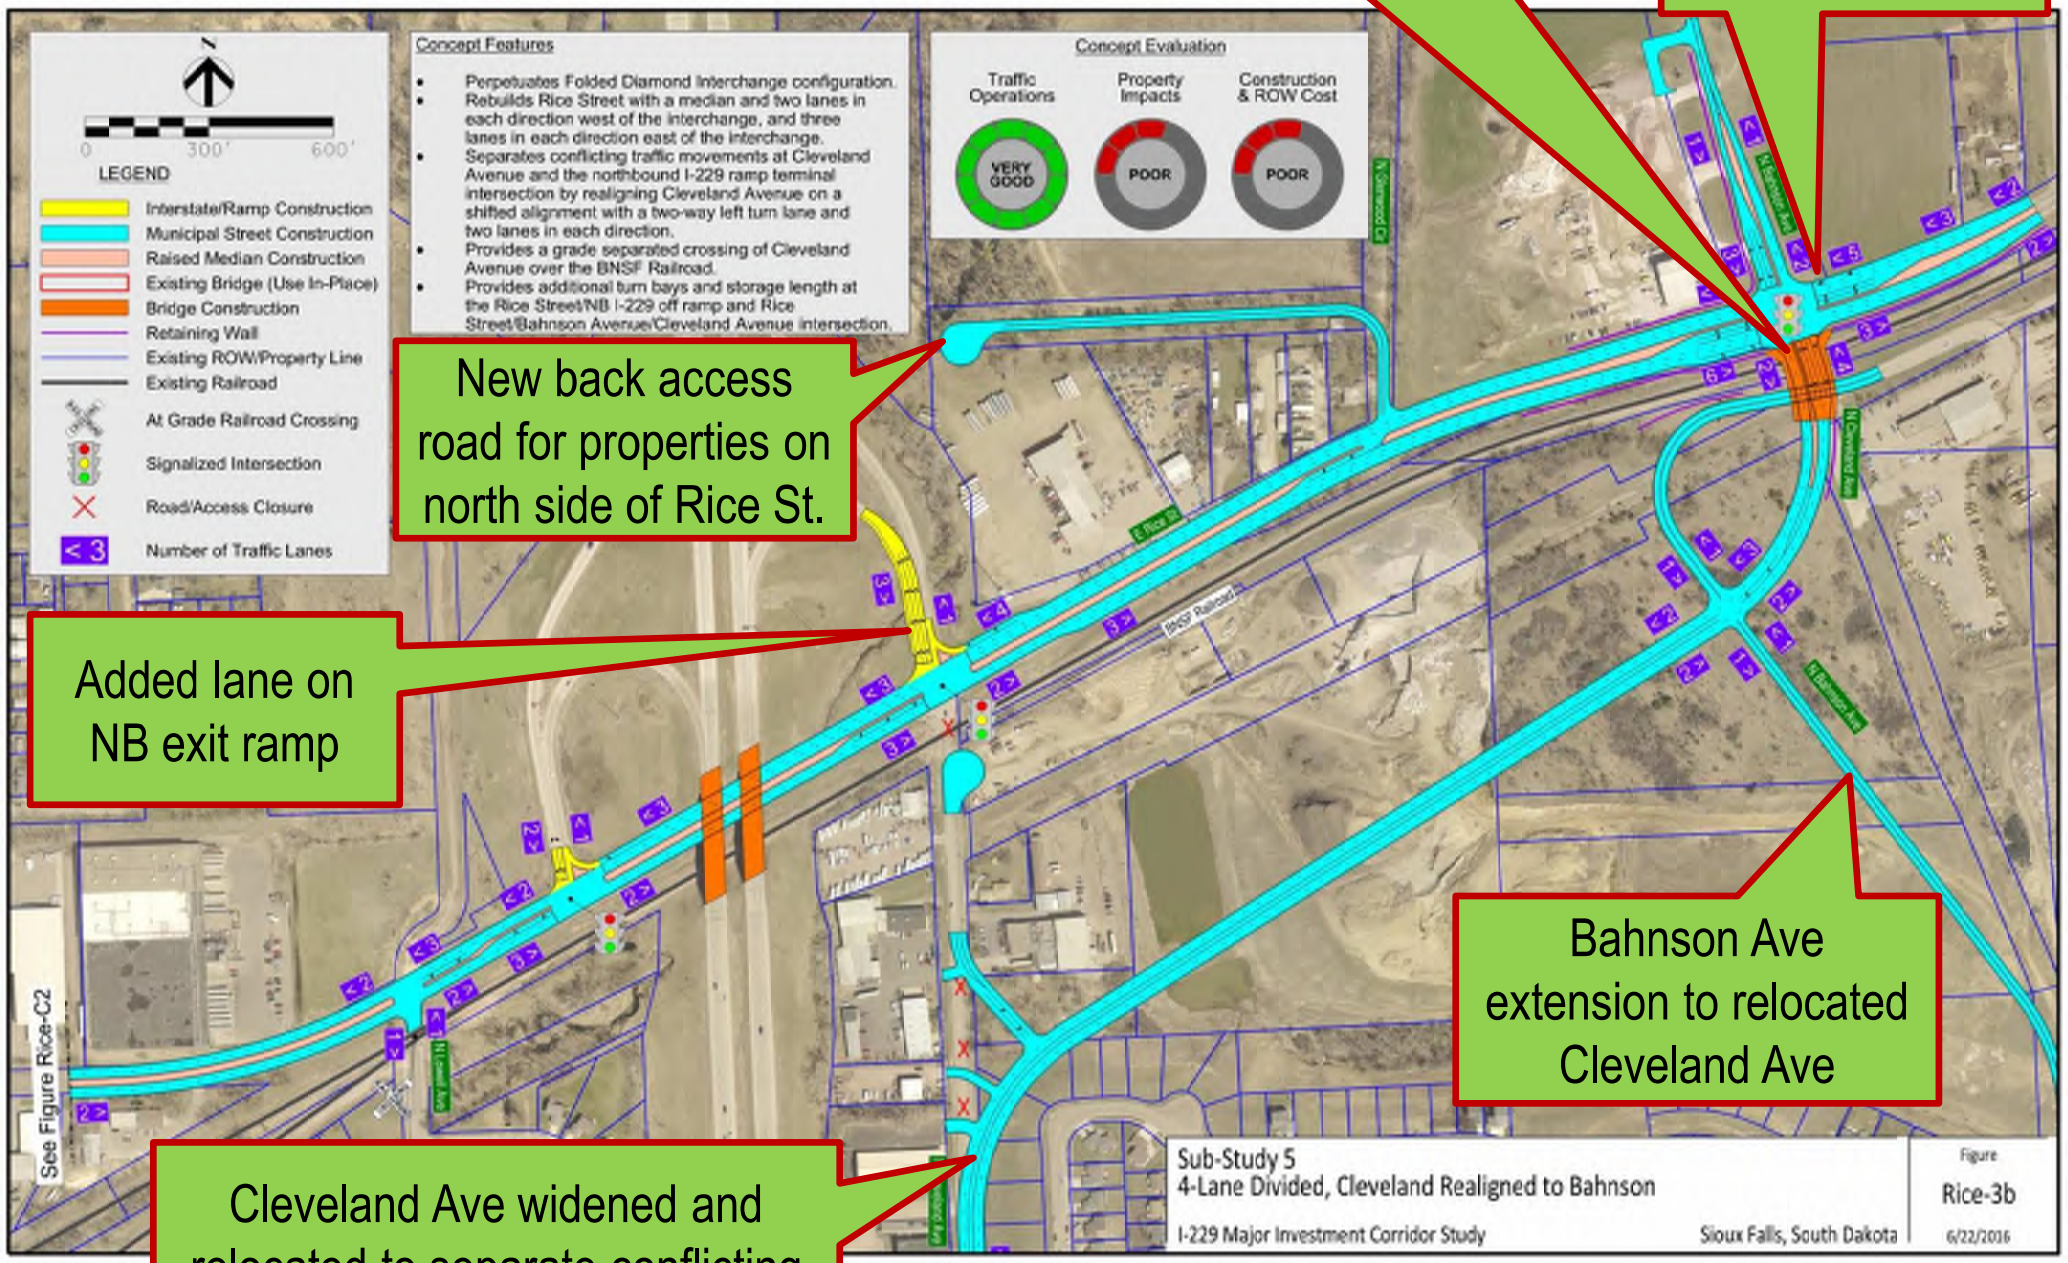

New grade separated railroad crossing
Turn lanes added at Bahnson Ave
New back access road for properties on north side of Rice St.
Added lane on NB exit ramp
Bahnson Ave extension to relocated Cleveland Ave
Cleveland Ave widened and relocated to separate conflicting traffic movements at I-229
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Features
Perpetuates Folded Diamond interchange configuration.
Rebuilds Rice Street with a median and two lanes in each direction west of the interchange, and three lanes in each direction east of the interchange.
Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection.
Concept Evaluation
Traffic Operations
VERY GOOD
Property Impacts
POOR
Construction & ROW Cost
POOR
See Figure Rice-C2
Sub-Study 5
4-Lane Divided, Cleveland Realigned to Bahnson
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-3b
6/22/2016

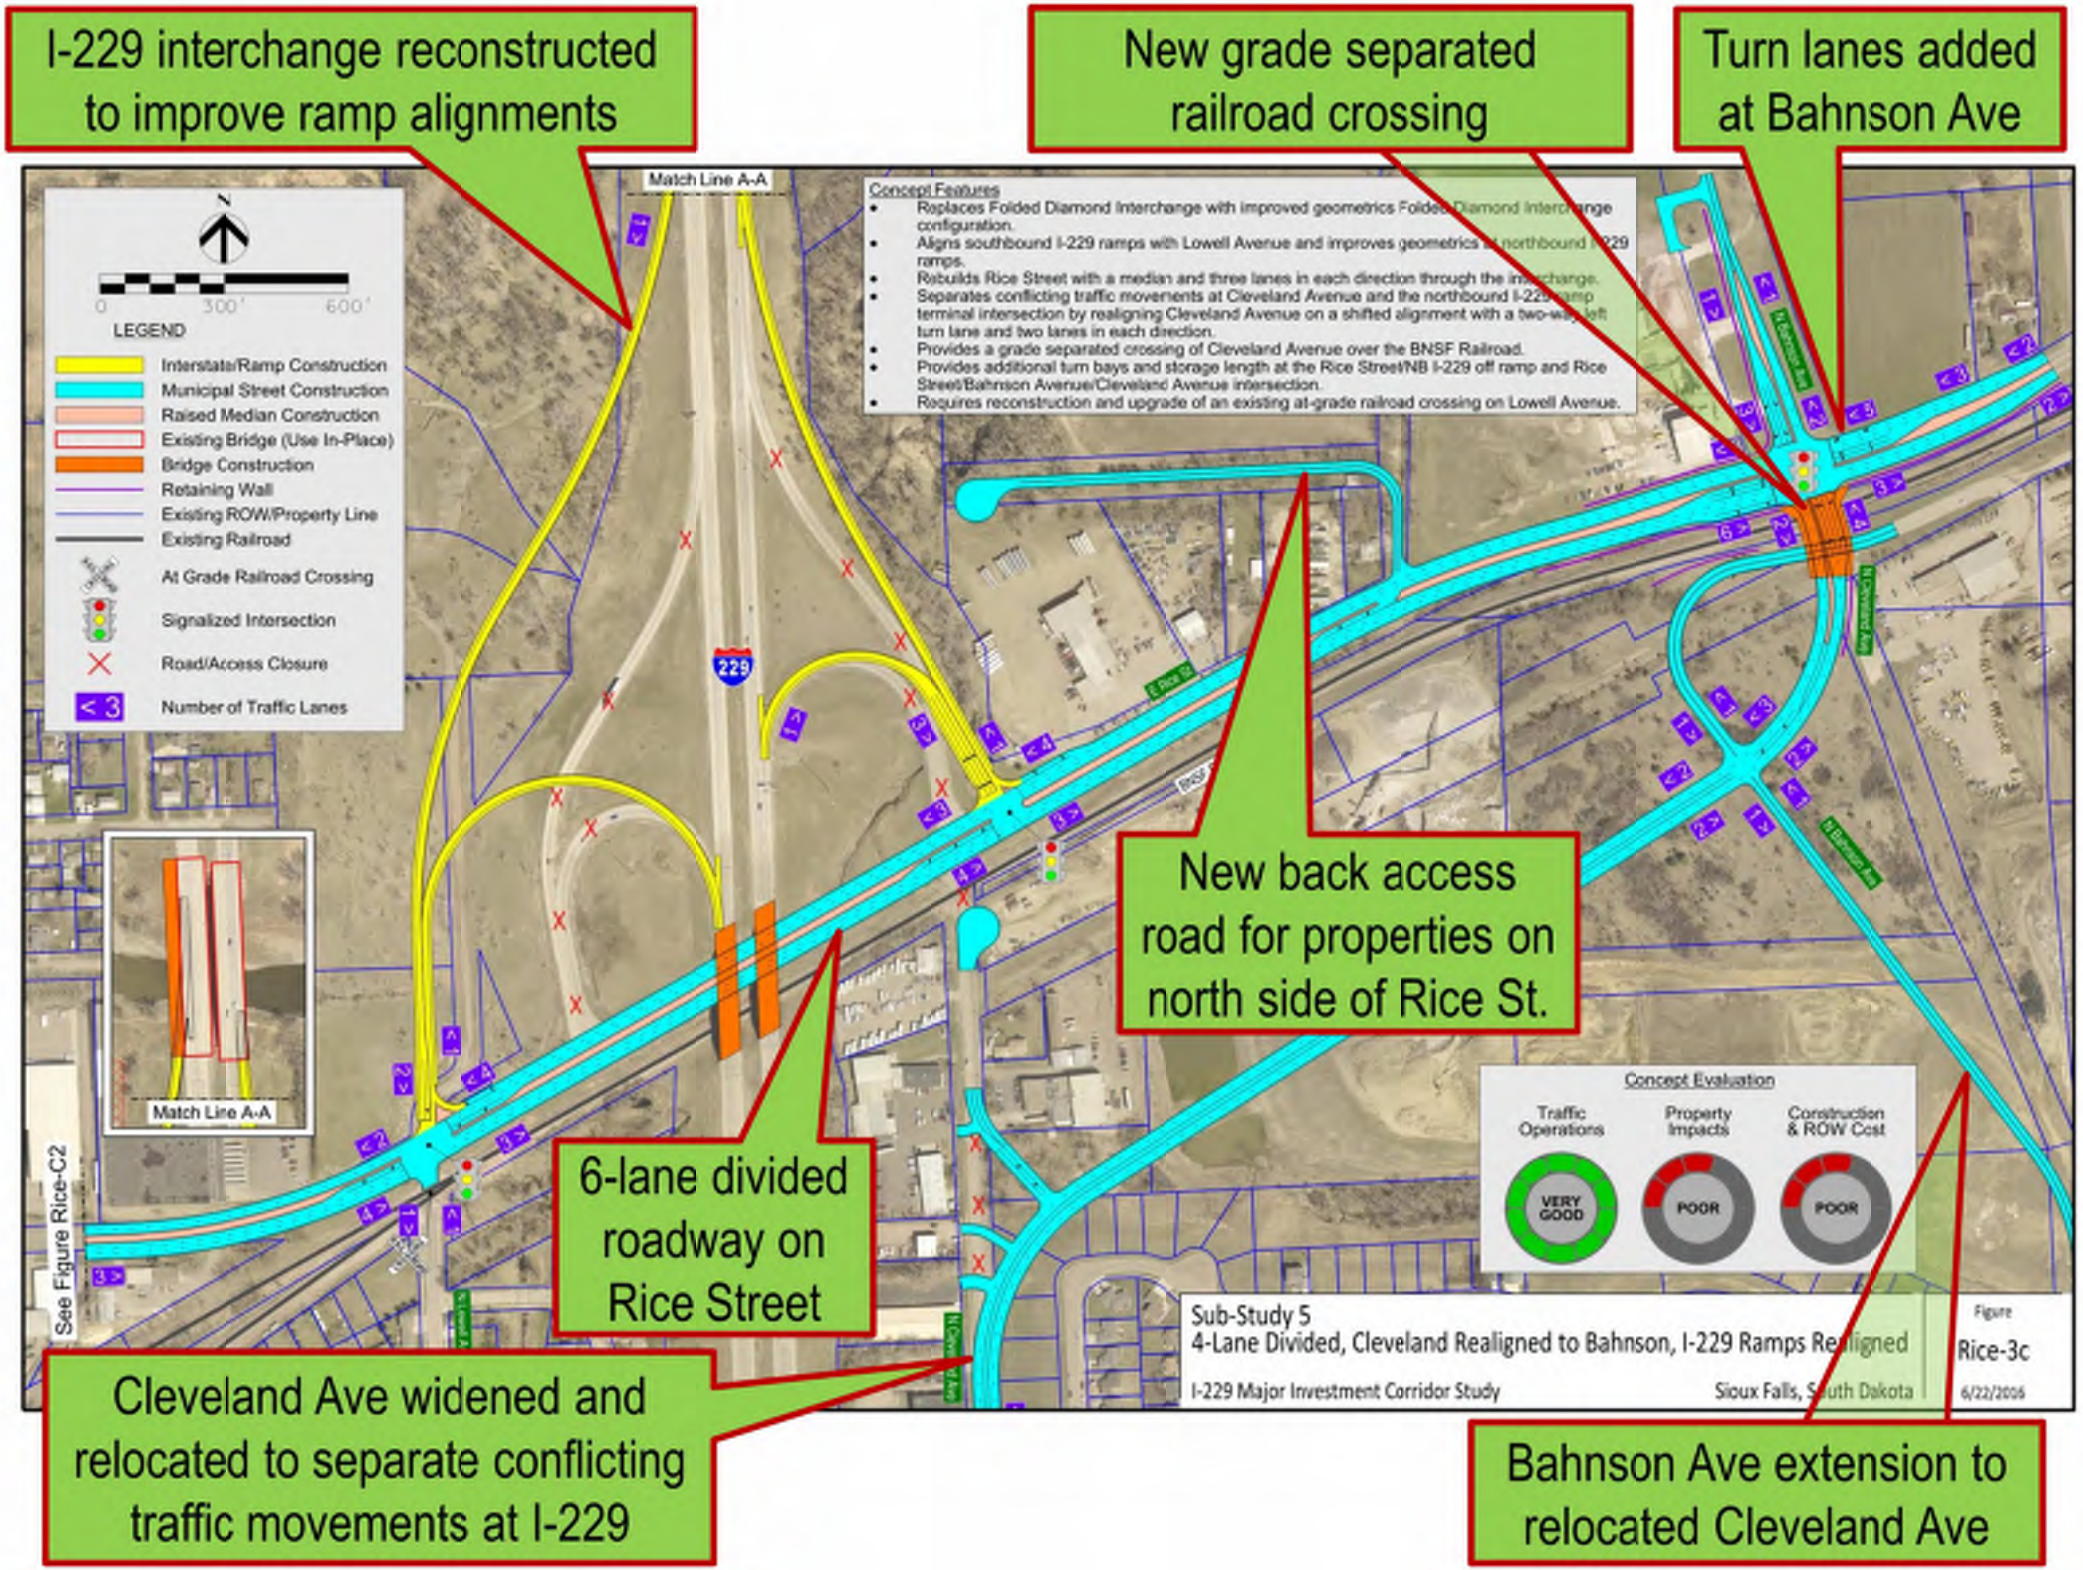
I-229 interchange reconstructed to improve ramp alignments
New grade separated railroad crossing
Turn lanes added at Bahnson Ave
New back access road for properties on north side of Rice St.
6-lane divided roadway on Rice Street
Cleveland Ave widened and relocated to separate conflicting traffic movements at I-229
Bahnson Ave extension to relocated Cleveland Ave
Match Line A-A
Concept Features
Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration.
Aligns southbound I-229 ramps with Lowell Avenue and improves geometrics at northbound I-229 ramps.
Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection.
Requires reconstruction and upgrade of an existing at-grade railroad crossing on Lowell Avenue.
LEGEND
0 300' 600'
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
< 3 Number of Traffic Lanes
229
E Rice St
BNSF
N Cleveland Ave
N Bahnson Ave
N Lowell Ave
Concept Evaluation
Traffic Operations
VERY GOOD
Property Impacts
POOR
Construction & ROW Cost
POOR
See Figure Rice-C2
Sub-Study 5
4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-3c
6/22/2016

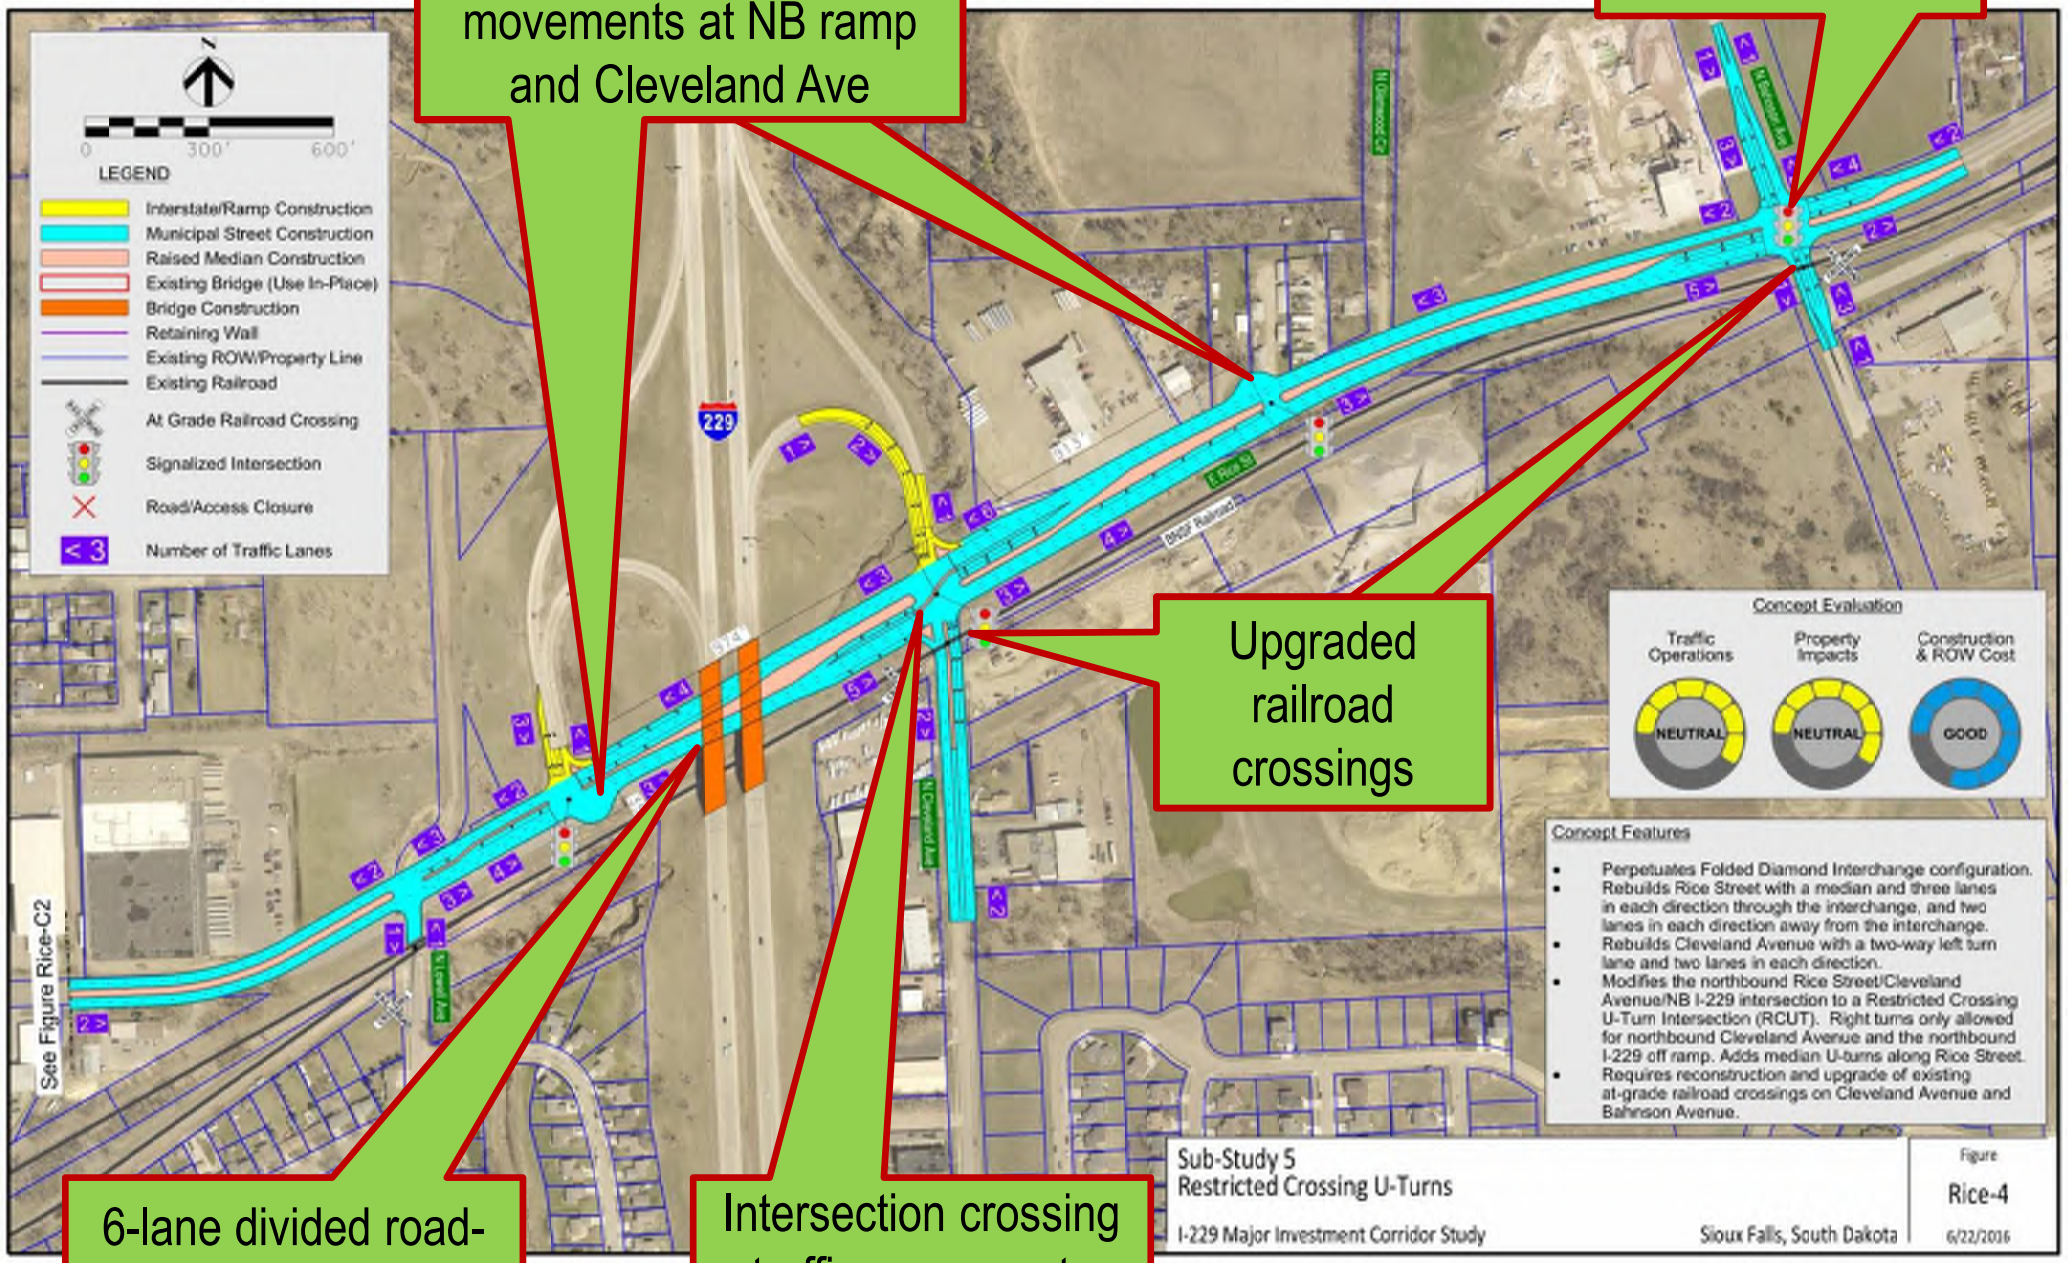
Median U-turns provided to replace crossing movements at NB ramp and Cleveland Ave
Turn lanes added at Bahnson Ave
Upgraded railroad crossings
6-lane divided road-way on Rice Street
Intersection crossing traffic movements restricted
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
NEUTRAL
NEUTRAL
GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
Rebuilds Cleveland Avenue with a two-way left turn lane and two lanes in each direction.
Modifies the northbound Rice Street/Cleveland Avenue/NB I-229 intersection to a Restricted Crossing U-Turn Intersection (RCUT). Right turns only allowed for northbound Cleveland Avenue and the northbound I-229 off ramp. Adds median U-turns along Rice Street.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
Restricted Crossing U-Turns
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-4
6/22/2016

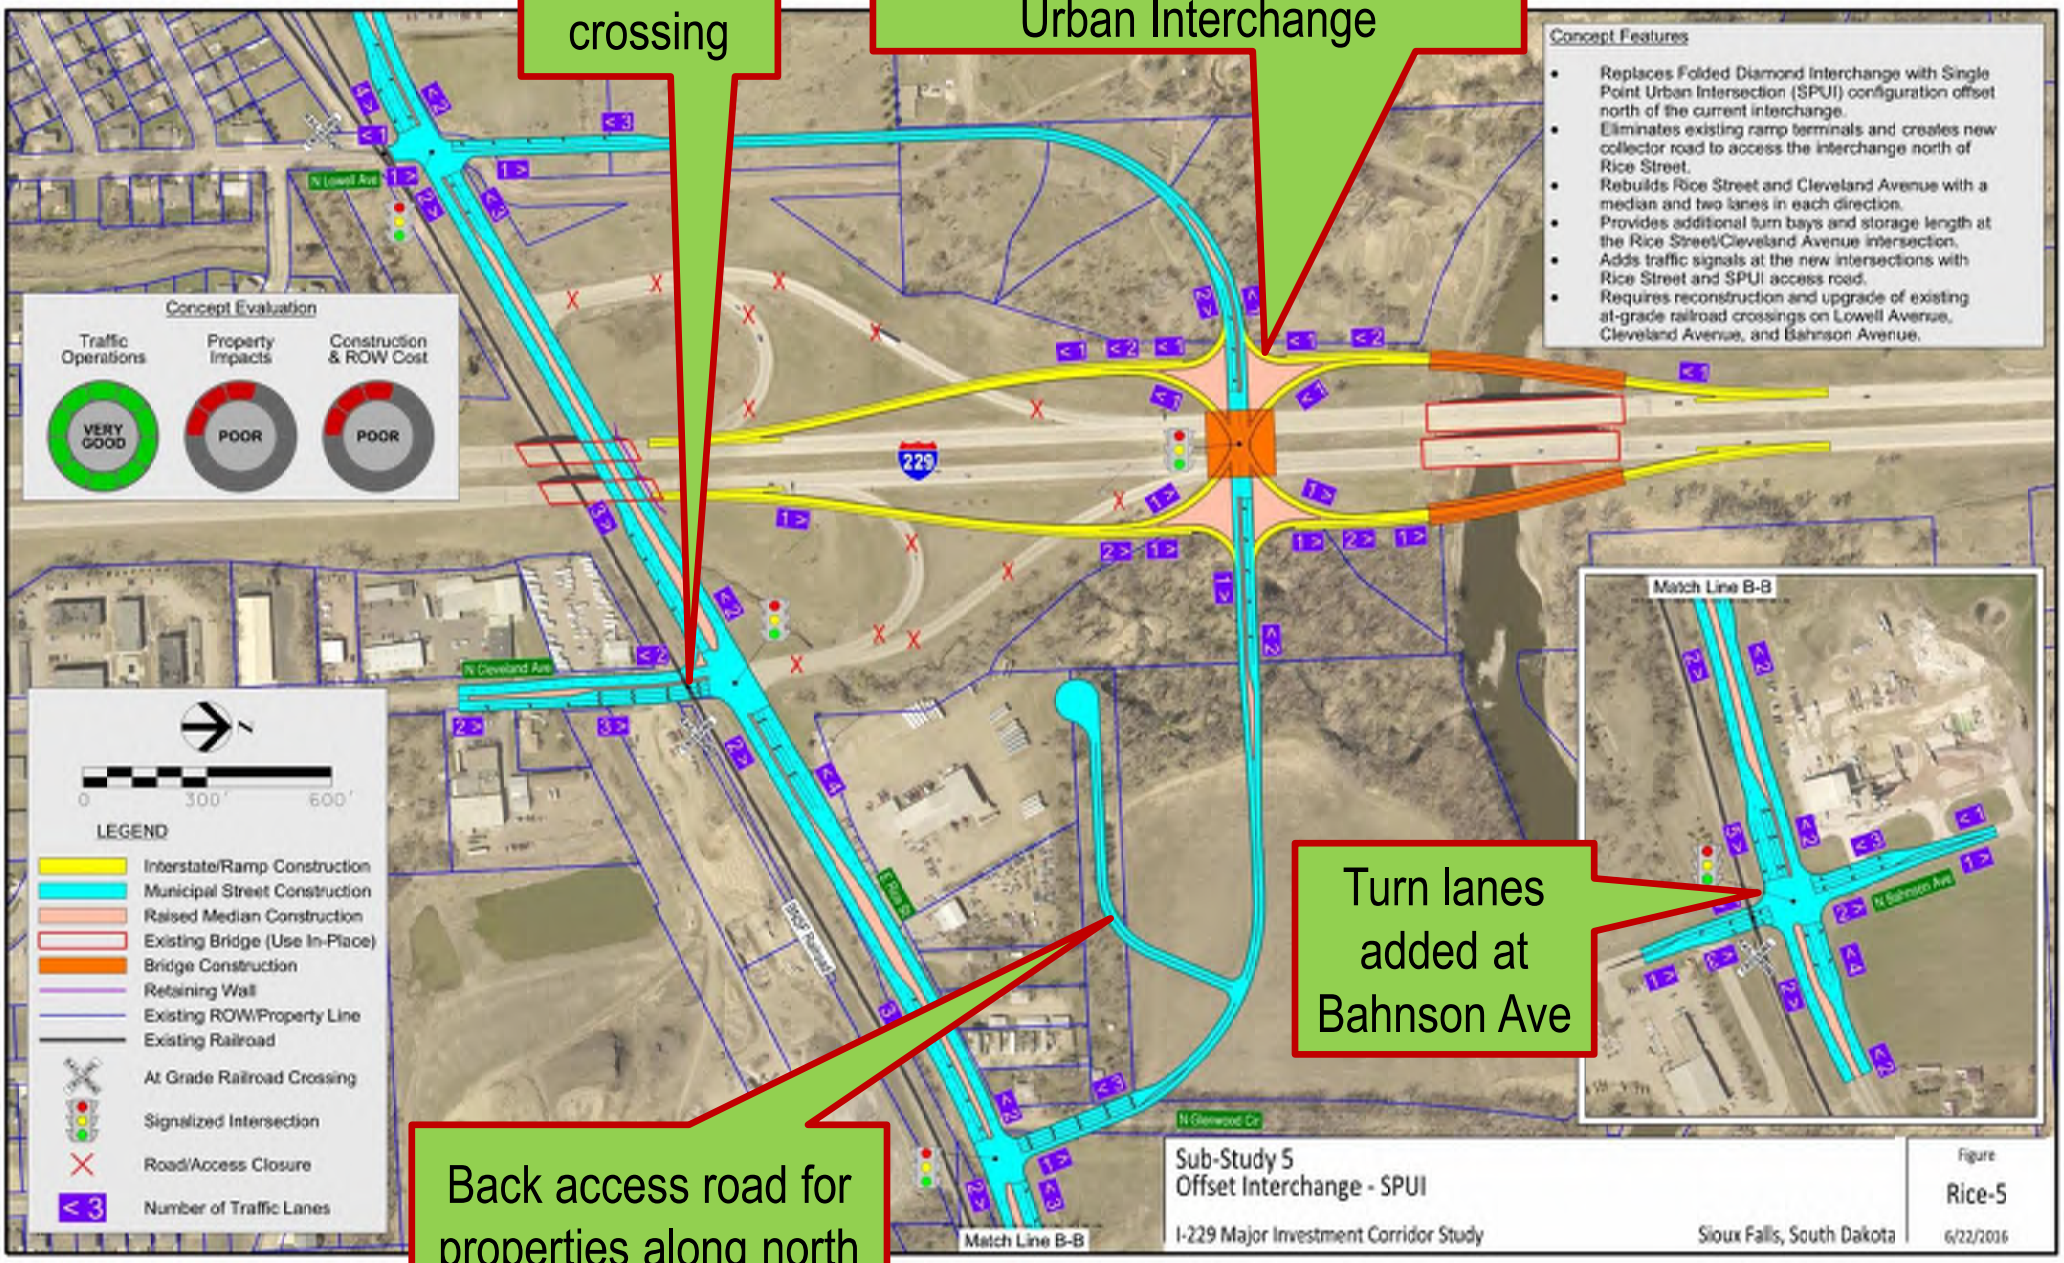
Upgraded railroad crossing
Relocated Rice St. interchange constructed as Single Point Urban Interchange
Concept Features
Replaces Folded Diamond Interchange with Single Point Urban Intersection (SPUI) configuration offset north of the current interchange.
Eliminates existing ramp terminals and creates new collector road to access the interchange north of Rice Street.
Rebuilds Rice Street and Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue intersection.
Adds traffic signals at the new intersections with Rice Street and SPUI access road.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Lowell Avenue, Cleveland Avenue, and Bahnson Avenue.
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
POOR
POOR
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Match Line B-B
Turn lanes added at Bahnson Ave
Back access road for properties along north side of Rice St.
Sub-Study 5
Offset Interchange - SPUI
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-5
6/22/2016

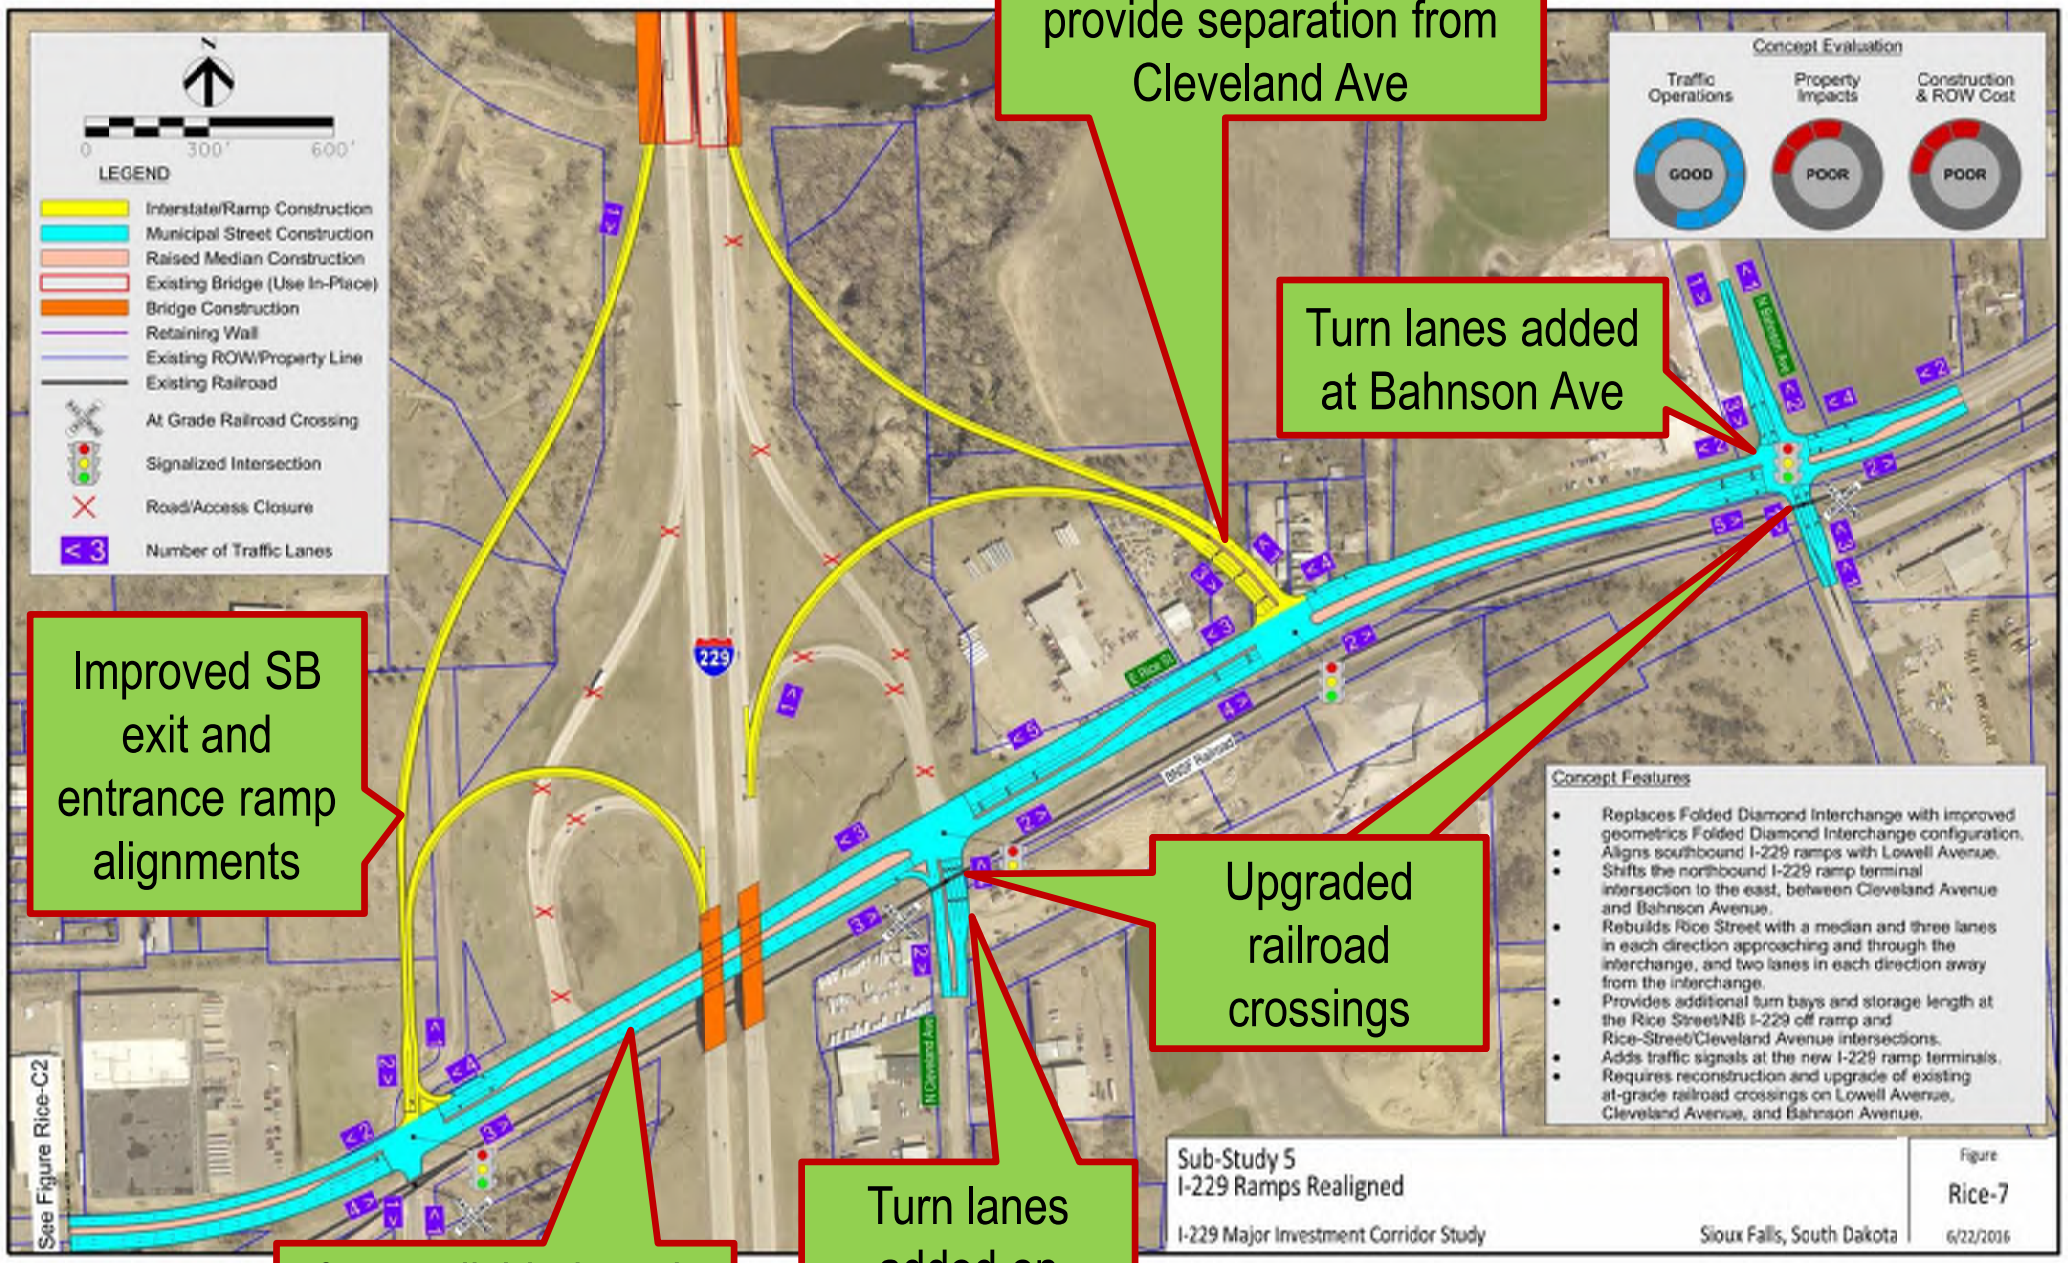
Relocated SB exit and entrance ramps to provide separation from Cleveland Ave
Turn lanes added at Bahnson Ave
Improved SB exit and entrance ramp alignments
Upgraded railroad crossings
6-lane divided road-way on Rice Street
Turn lanes added on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
POOR
POOR
Concept Features
Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration.
Aligns southbound I-229 ramps with Lowell Avenue.
Shifts the northbound I-229 ramp terminal intersection to the east, between Cleveland Avenue and Bahnson Avenue.
Rebuilds Rice Street with a median and three lanes in each direction approaching and through the interchange, and two lanes in each direction away from the interchange.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice-Street/Cleveland Avenue intersections.
Adds traffic signals at the new I-229 ramp terminals.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Lowell Avenue, Cleveland Avenue, and Bahnson Avenue.
Sub-Study 5
I-229 Ramps Realigned
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-7
6/22/2016
See Figure Rice-C2

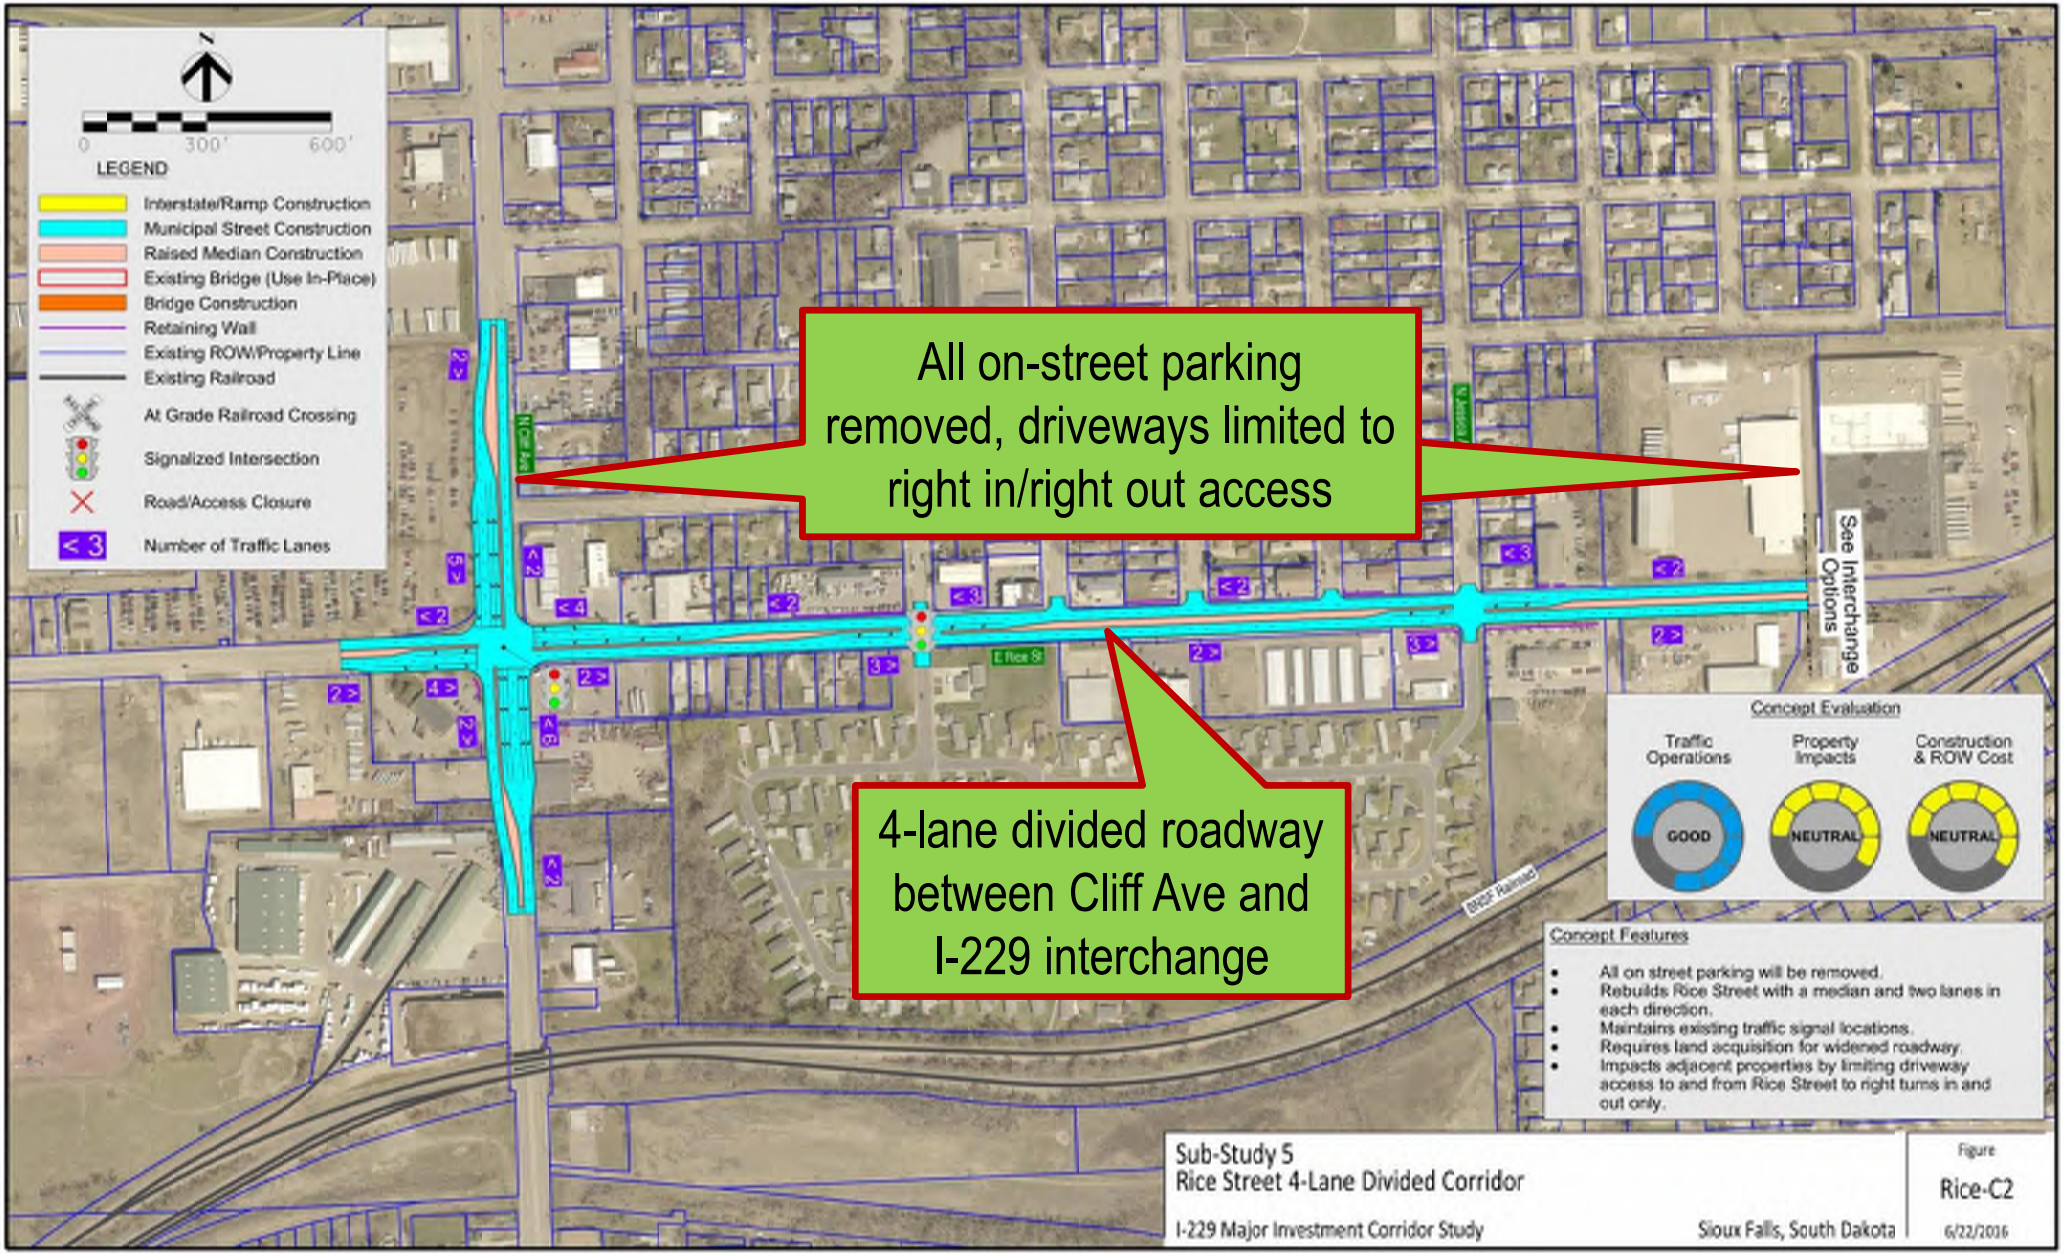
0
300'
600'
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
All on-street parking removed, driveways limited to right in/right out access
4-lane divided roadway between Cliff Ave and I-229 interchange
See Interchange Options
E Rice St
BNSF Railway
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
NEUTRAL
NEUTRAL
Concept Features
All on street parking will be removed.
Rebuilds Rice Street with a median and two lanes in each direction.
Maintains existing traffic signal locations.
Requires land acquisition for widened roadway.
Impacts adjacent properties by limiting driveway access to and from Rice Street to right turns in and out only.
Sub-Study 5
Rice Street 4-Lane Divided Corridor
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-C2
6/22/2016

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Dave Meier – HDR Engineering, Inc.
402-399-1068 or Dave.Meier@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us



Interstate 229 Major Investment Study

Exit 7 – Rice Street

Thanks for Attending!!!!!

© 2014 HDR, all rights reserved.

CLIFF AVENUE

JUNE 22ND, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- COMMENTS
- POWERPOINT SLIDES

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting and Public Meeting– Sub-study 6 – Cliff Avenue Exit 4
Date:	Wednesday, June 22, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 8 Participants

Follow-up discussion items included:

1. What about pedestrian access along Cliff Ave? Response: Providing pedestrian access along both sides of Cliff Ave is being proposed.

2. For Concept Cliff-4, why are property impacts shown described as "neutral"? The impacts look severe along Pam Rd.

3. Resident on Pam Rd – Proposed concepts will add noise to neighborhood.

4. Lincoln High School – Like Concepts Cliff-4 and Cliff-8 that include the 41st St relocation aligned with an entrance to the high school and signalized access to Cliff Ave. About half of the high school related traffic is to and from the south.

5. South 10th/38th St Resident – Parents can't get in to Lincoln High School to pick up children. They park in the neighborhood west of Cliff Ave and the students cross Cliff Ave at random locations.

6. Lincoln High School – Adding a median on Cliff Ave will force school traffic into the school driveway loop. The school bus stop location was moved to 38th & S 10th from its previous location on Cliff Ave in recent years to help direct students to the designated pedestrian crossing on Cliff Ave.

7. Lincoln High School was asked if the existing Cliff Ave pedestrian crossing functions acceptably. The high school responded that some confusion has been noted. Operations are better in the morning peak period than the afternoon peak. It was noted that nearby residents hear vehicle screeching tires at night when the pedestrian crossing is activated. A comment was made that relocating the crossing to 38th St would help. The City noted that Lincoln High School and the City did discuss locating the crossing at the 38th St intersection before the existing midblock location was selected.

8. Will widening Cliff Ave bring more traffic? Response: Traffic volumes on Cliff Ave are approximately 15,000 vehicles/day north of I-229 and about 20,000 vehicles/day between the I-229 ramp terminal intersections. Traffic volumes have been consistent over the last five years.

9. Will it be possible to reduce truck traffic on Cliff Ave? Response: Cliff Ave is a designated truck route and that designation is unlikely to be removed.

10. What is the timeline for completion of the I-229 study? Response: Stakeholder and public comments will be reviewed followed by screening and some refinement of the concepts. A priority plan for potential projects will be the final study step. The study should wrap up in late 2016.

11. Lincoln High School – The high school prefers Concept Cliff-4, but would prefer that the proposed 41st St realignment be modified to stay south of the high school property line.

12. A right turn lane for southbound traffic at the park entrance south of the Cliff Ave bridge over the Big Sioux River is needed.

13. Although Cliff Ave has two southbound through lanes to the East 49th St intersection, drivers treat Cliff Ave as single lane going southbound up the hill toward East 49th. Response: Plans exist to extend a four lane section on Cliff Ave south of East 49th St.

14. Who owns the old railroad right of way? Response: The City owns the former railroad property.

15. Why is the connection from Pam Rd to South 10th Ave shown on Concept Cliff-6? Response: The purpose of the proposed connection is local street continuity and access to properties unaffected by the proposed realignment of East 41st St.

16. Consider using the old railroad right of way for street improvements instead of widening on 41st St. Response: Widening on 41st St is proposed to add lane capacity near Cliff Ave because the existing right of way along 41st St is wider than the former railroad right of way.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting for Cliff Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207090

Meeting Date Wednesday, June 22, 2016 7:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Christina Bennett	700 E Broadway Ave Pierre	773-4759	Christina.Bennett@state.sd.us
2	Andy Vandel	Pierre	773-4421	andy.vandel@state.sd.us
3	Pete Longman	Pierre	773-6488	pete.longman@state.sd.us
4	Dean DeLashmutt	1207 N Violet Pl. Sioux Falls		
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting for Cliff Avenue Sub-Study
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030
Meeting Date Wednesday, June 22, 2016 7:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Steve Gramm	700 E. Broadway Ave	773-4411	Steve.gramm@state.sd.us
2	Jason Kjerstad	6700 S. Old Village Pl, SF, SD	977-7790	jason.kjerstad@hdrinc.com
3	Paul Nikolas	5316 W 60th St. N SF, SD	367-5690	paul.nikolas@state.sd.us
4	Rob Leonhardt	2001 Cardinal Dr	231-5074	
5	Courtney & Jerry Helke	3709 S. Slatern Park Dr.	376-8286	Helkes@sio.midco.net
6	Evelyn Hallett	905 E. Sam Rd	605-376-2022	evs@sio.midco.net
7	Jodi Pettinson	1109 S Lamice		
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Comment Card

I-229 Major Investment Corridor Study – Cliff Avenue Sub-Study

Public Open House

PL 0100(87) 3616P, PCN 044K

June 22, 2016

Comments:

CLIFF 8 has The Best Concept Because TRAFFIC STREAM IS DRAWN FURTHER AWAY FROM LINCOLN H.S. The Signal AT THE School is A VERY good idea.

Cancel → Suggestion use OLD RR, meeting 41ST, STRAIGHTEN 41ST To ABOUT 9TH.

Name: DEAN DELASHMUTT Address: 1207 N VIOLET PL 57103

Phone: 605 496 1108 E-mail:

For your comments to be considered, please return by July 7, 2016.
Comments can also be e-mailed to: sausen@siouxfalls.org

Comment Card

I-229 Major Investment Corridor Study – Cliff Avenue Sub-Study

Public Open House

PL 0100(87) 3616P, PCN 044K

June 22, 2016

Comments:

CLIFF 8 has The Best Concept Because TRAFFIC STREAM is DRAWN FURTHER AWAY From LINCOLN H.S. The Signal AT The School is A very good idea.

Cancel → Suggestion use OLD RR, meeting 41ST, STRAIGHTEN 41ST To ABOUT 9TH.

Name: DEAN DELASHMUTT Address: 1207 N VIOLET PL 57103

Phone: 605 496 1108 E-mail:

For your comments to be considered, please return by July 7, 2016.
Comments can also be e-mailed to: sausen@siouxfalls.org







Interstate 229 Major Investment Study

Exit 4 – Cliff Avenue

Public Meeting
June 22nd, 2016
7:00 pm to 8:30 pm

HDR

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road
Added Exit 4 – Cliff Avenue
Added Exit 7 – Rice Street

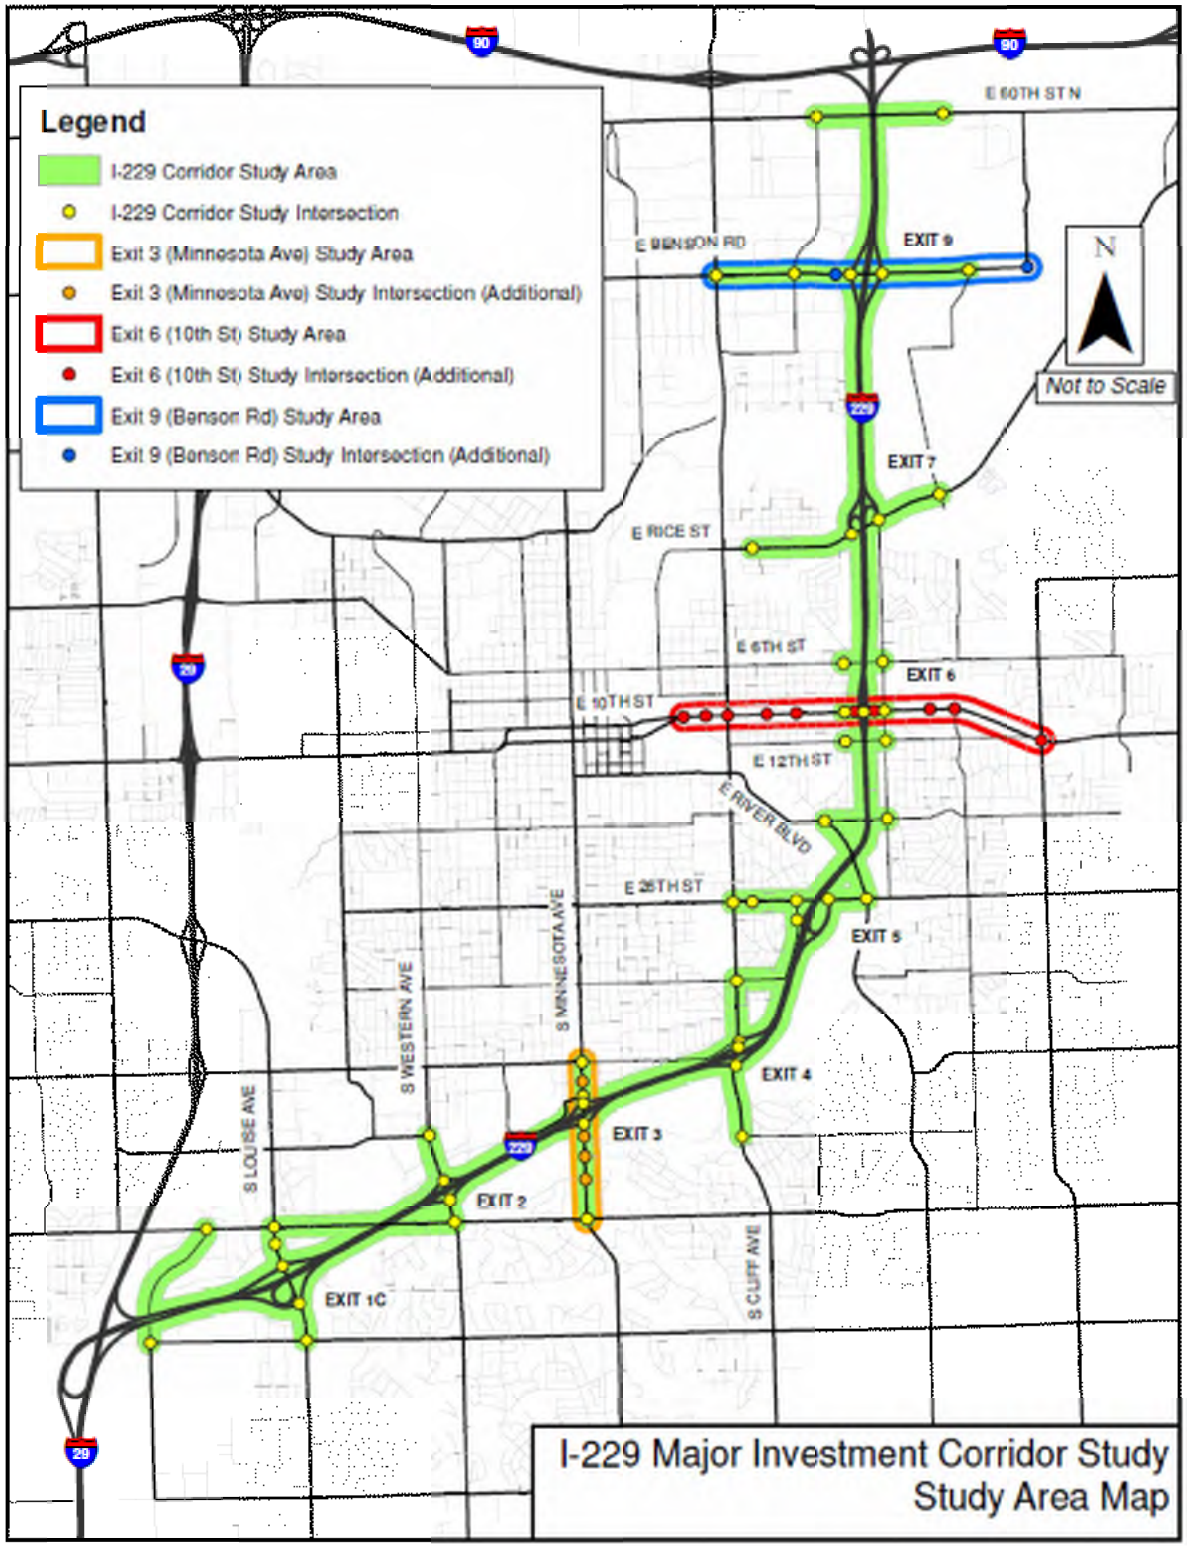

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls


Sioux Falls Metropolitan Planning Organization (MPO)


Federal Highway Administration (FHWA)

Exit 4 (Cliff Avenue) Sub - Study Goals


- Reduce traffic congestion
- Develop new geometrics to improve capacity at 41st Street and Interchange
- Improve pedestrian mobility
- Improve safety for corridor users




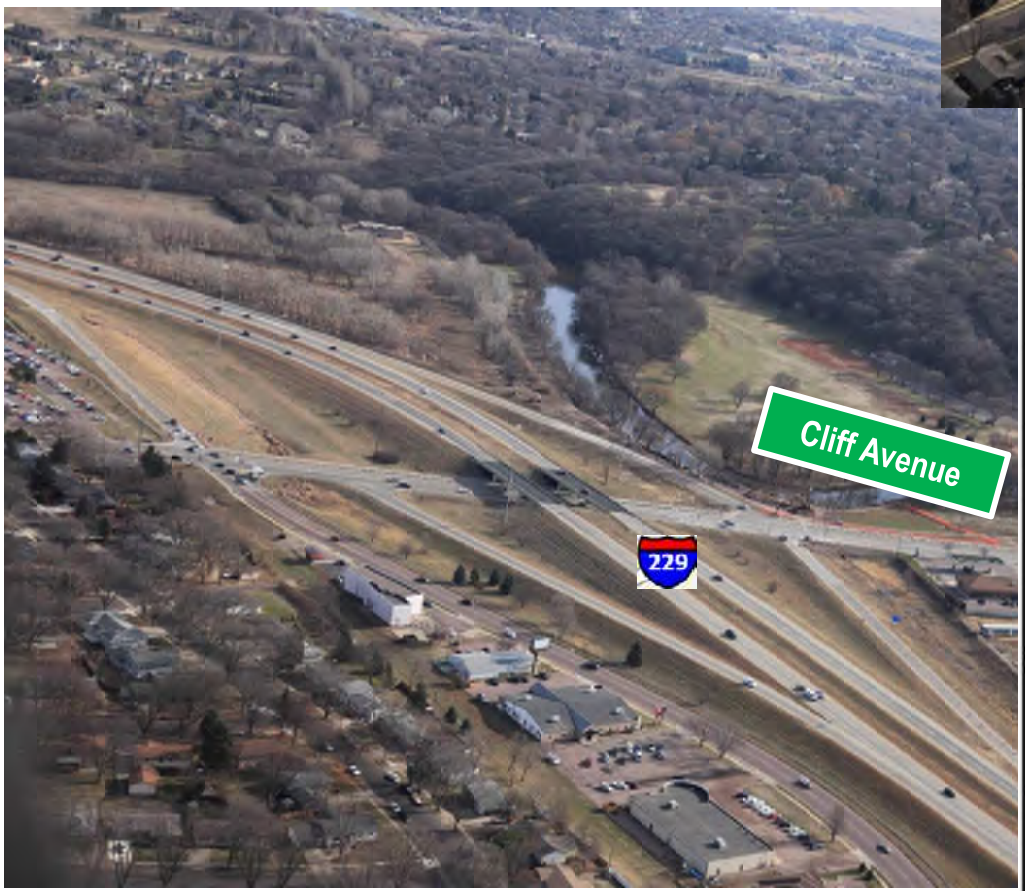


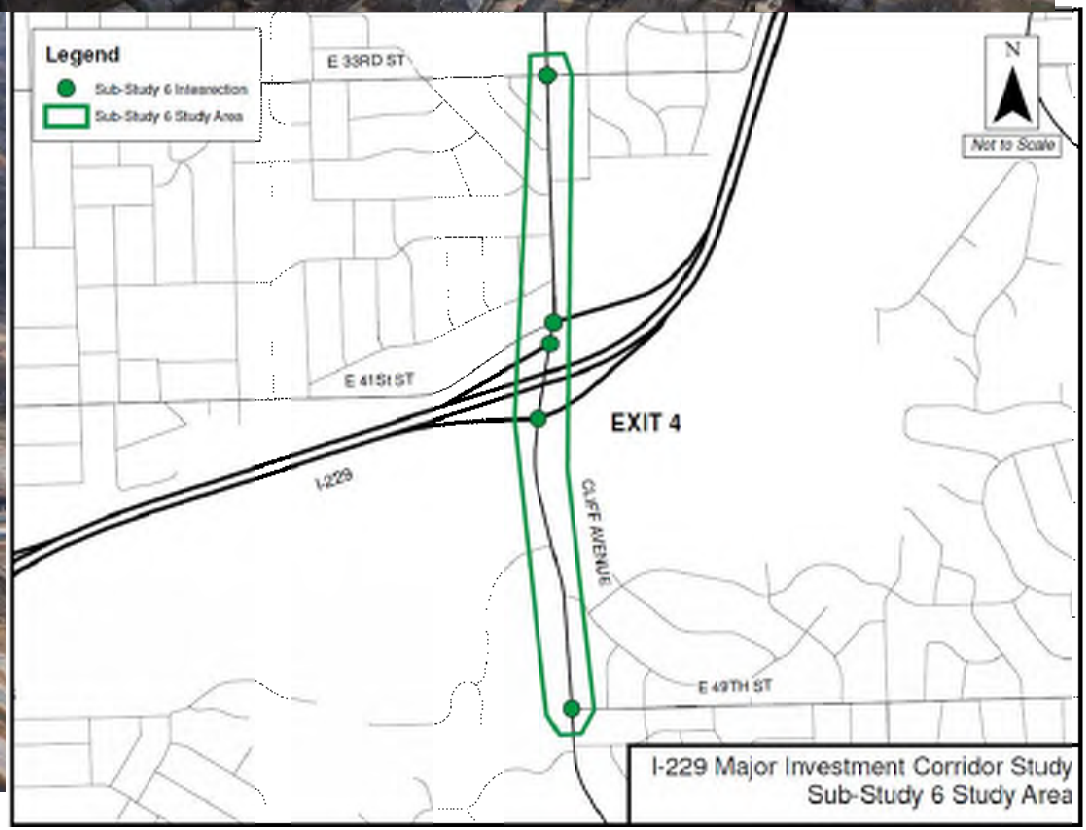




Access to Park close to interchange makes it difficult to exit during peak hour periods
Turn Lane short and few gaps exist to complete left turn movement
Cliff Avenue
229
Cliff Avenue
High Right Turn Volume in the PM Peak Hour
Congestion due to close proximity of 41st Street to I229 SB ON Ramp

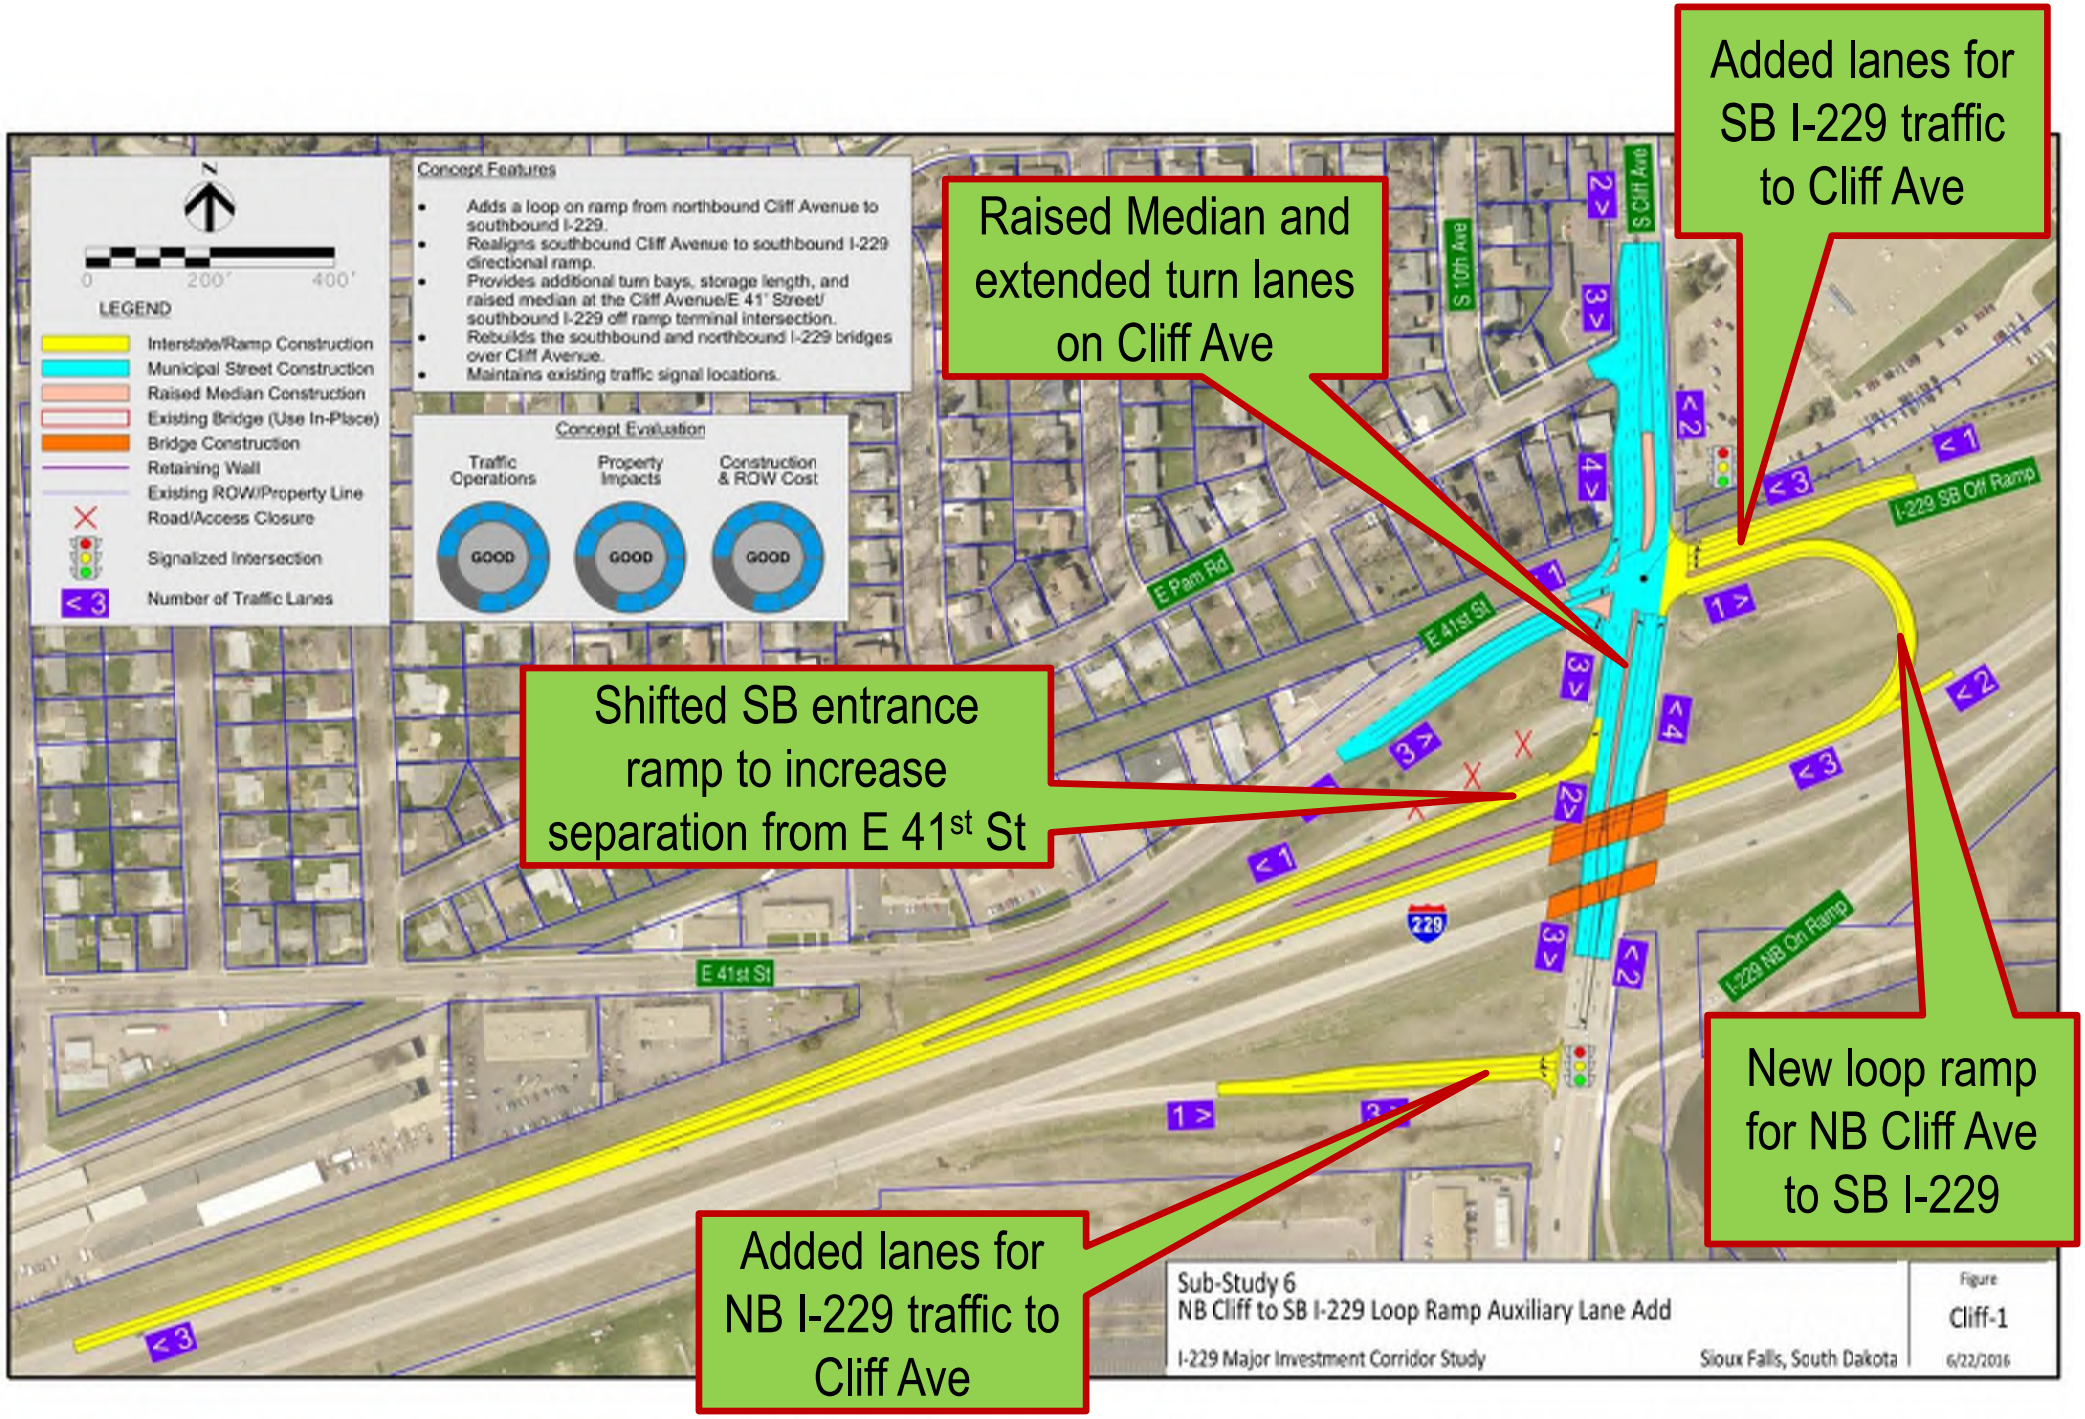

Added lanes for SB I-229 traffic to Cliff Ave
Raised Median and extended turn lanes on Cliff Ave
Shifted SB entrance ramp to increase separation from E 41st St
New loop ramp for NB Cliff Ave to SB I-229
Added lanes for NB I-229 traffic to Cliff Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
Concept Features
Adds a loop on ramp from northbound Cliff Avenue to southbound I-229.
Realigns southbound Cliff Avenue to southbound I-229 directional ramp.
Provides additional turn bays, storage length, and raised median at the Cliff Avenue/E 41st Street/ southbound I-229 off ramp terminal intersection.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Maintains existing traffic signal locations.
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
GOOD
GOOD
E Pam Rd
E 41st St
S 10th Ave
S Cliff Ave
I-229 SB Off Ramp
I-229 NB On Ramp
229
Sub-Study 6
NB Cliff to SB I-229 Loop Ramp Auxiliary Lane Add
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-1
6/22/2016

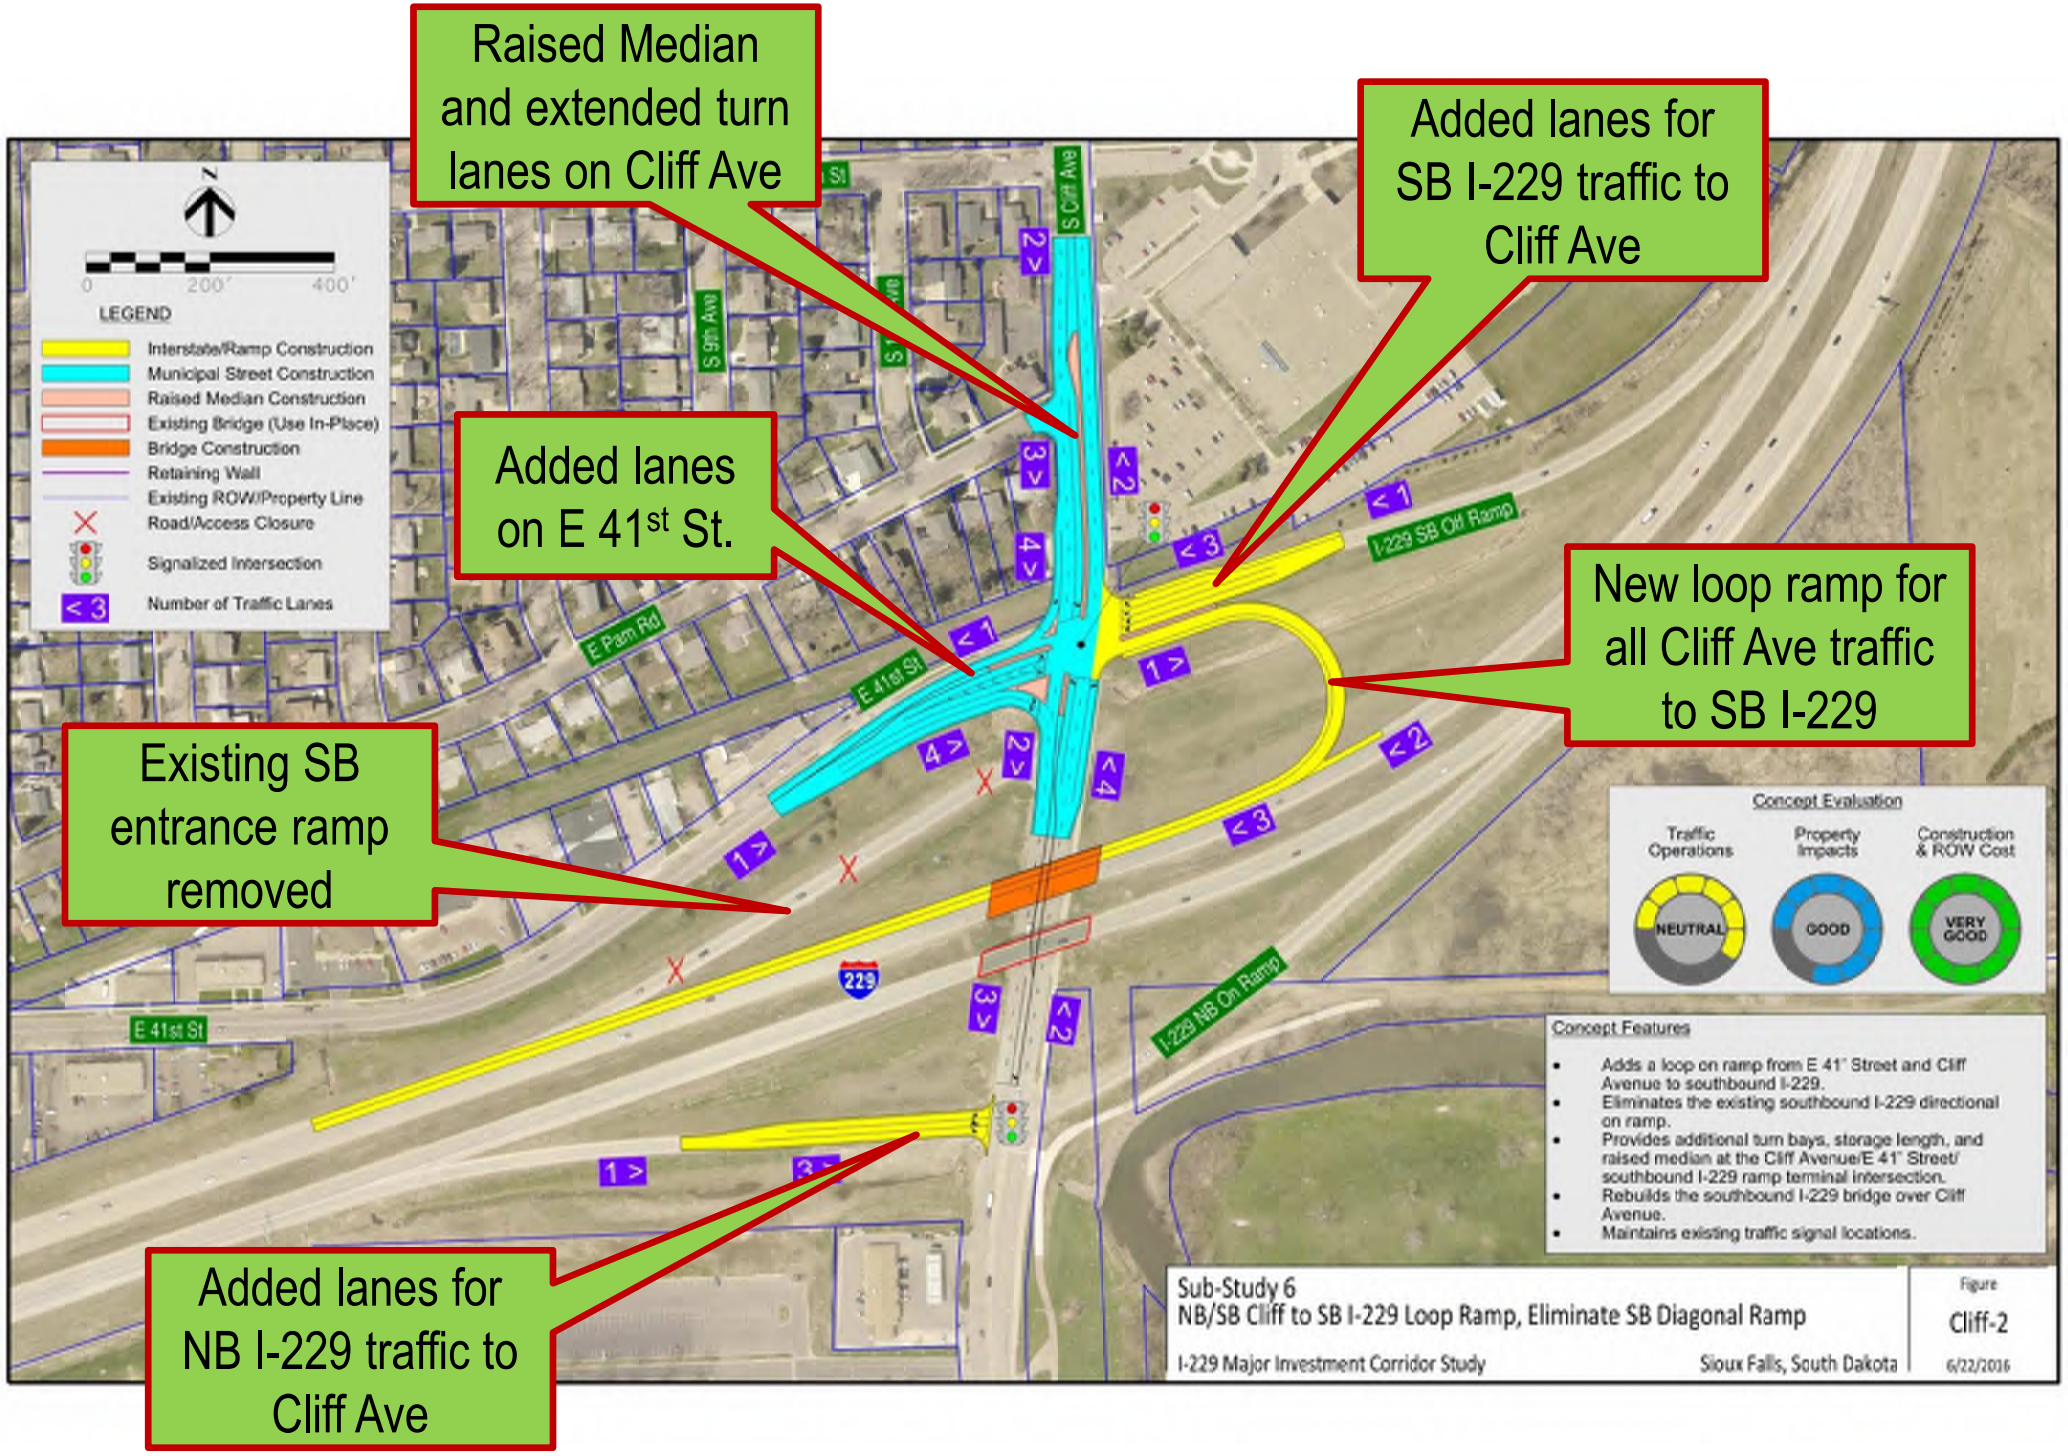
Raised Median and extended turn lanes on Cliff Ave
Added lanes for SB I-229 traffic to Cliff Ave
Added lanes on E 41st St.
New loop ramp for all Cliff Ave traffic to SB I-229
Existing SB entrance ramp removed
Added lanes for NB I-229 traffic to Cliff Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
S Cliff Ave
S 9th Ave
E Pam Rd
E 41st St
I-229 SB On Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
NEUTRAL
GOOD
VERY GOOD
Concept Features
Adds a loop on ramp from E 41st Street and Cliff Avenue to southbound I-229.
Eliminates the existing southbound I-229 directional on ramp.
Provides additional turn bays, storage length, and raised median at the Cliff Avenue/E 41st Street/ southbound I-229 ramp terminal intersection.
Rebuilds the southbound I-229 bridge over Cliff Avenue.
Maintains existing traffic signal locations.
Sub-Study 6
NB/SB Cliff to SB I-229 Loop Ramp, Eliminate SB Diagonal Ramp
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-2
6/22/2016

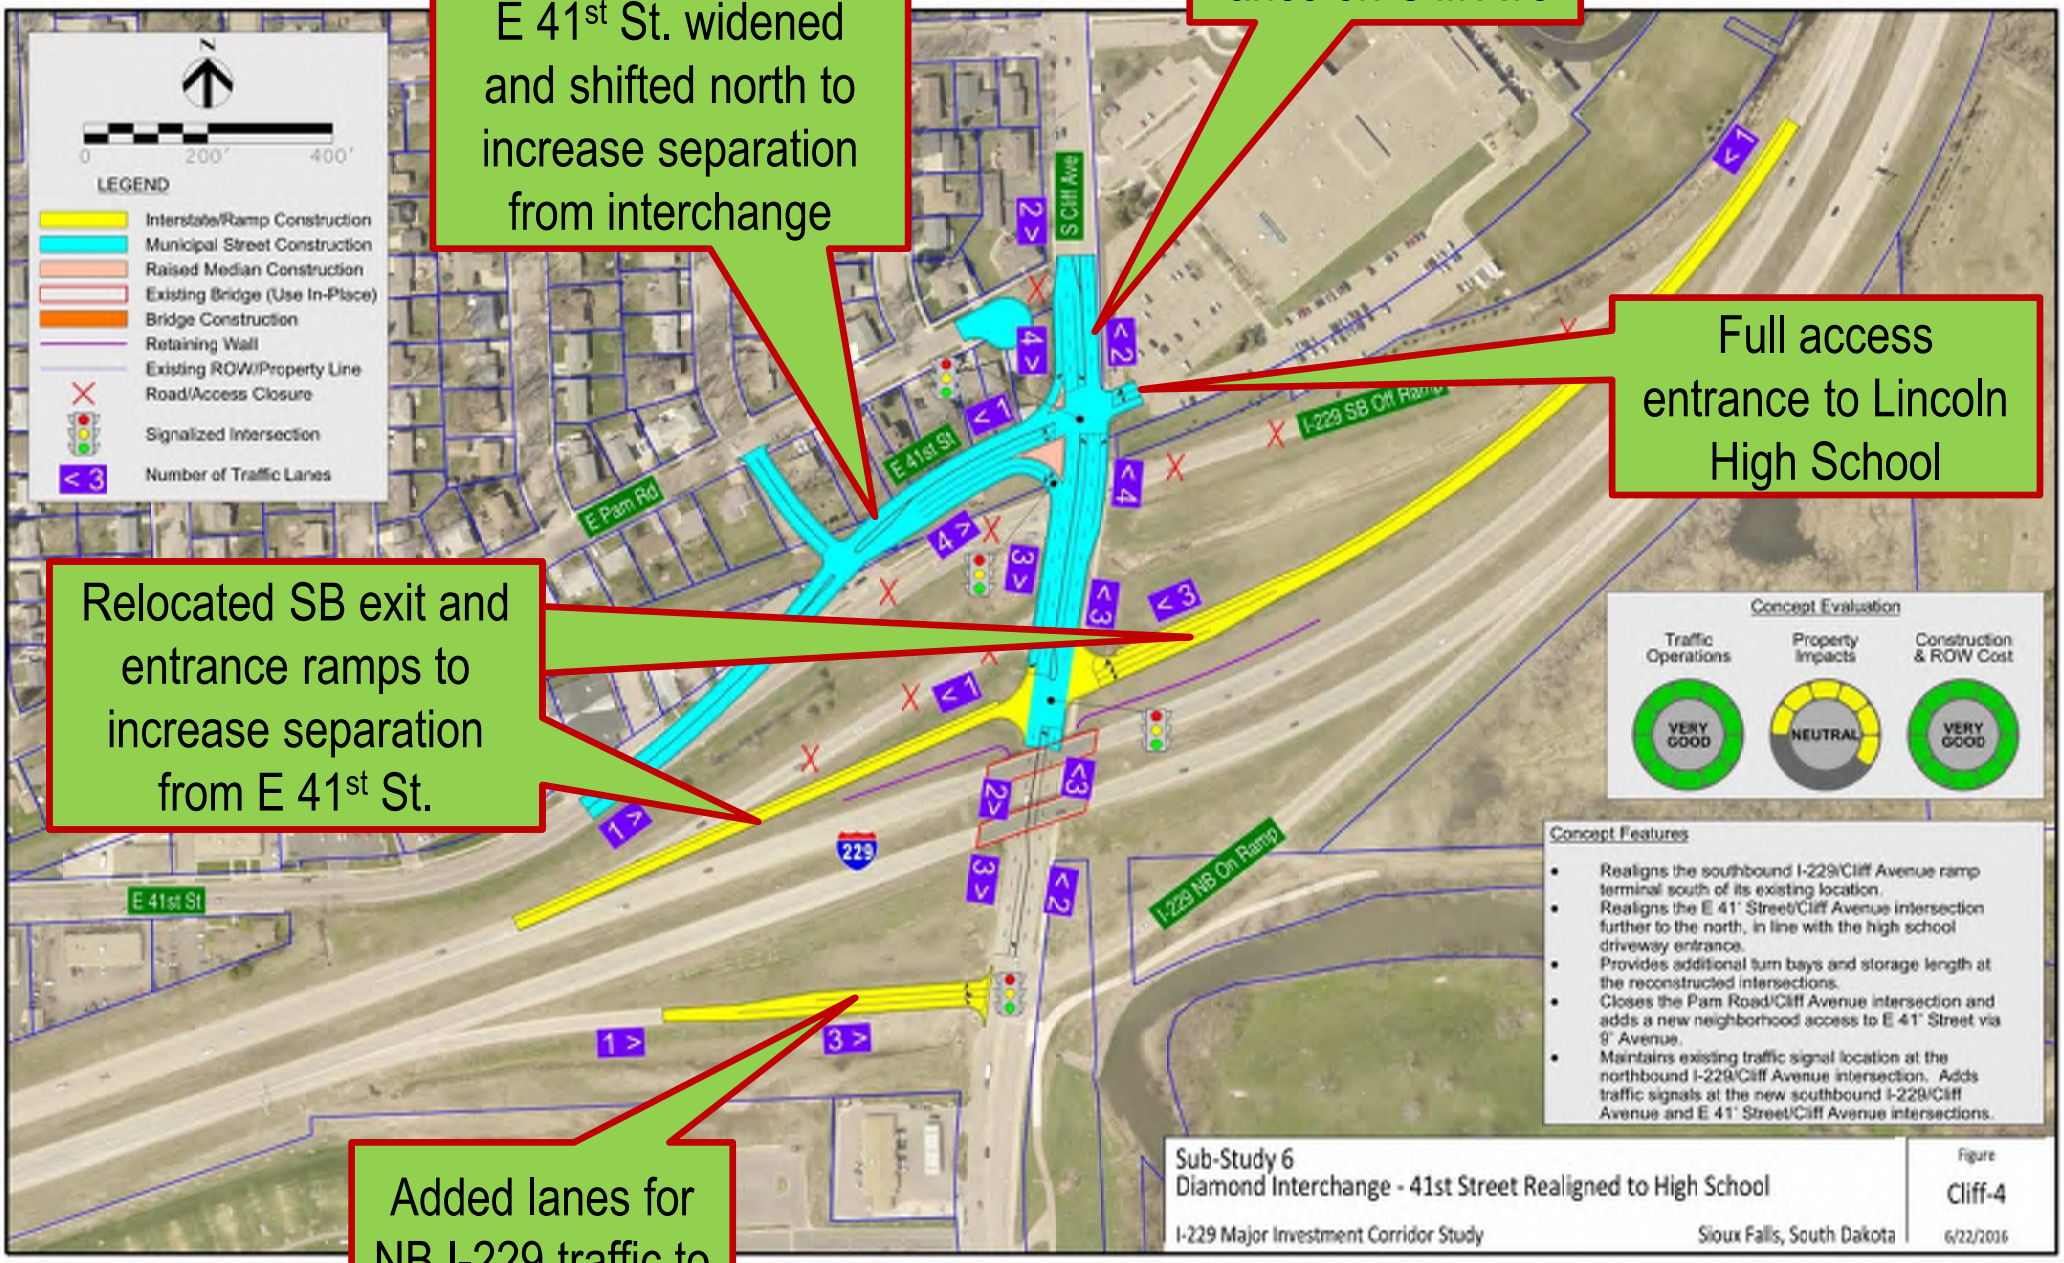
E 41st St. widened and shifted north to increase separation from interchange
Extended turn lanes on Cliff Ave
Full access entrance to Lincoln High School
Relocated SB exit and entrance ramps to increase separation from E 41st St.
Added lanes for NB I-229 traffic to Cliff Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
S Cliff Ave
E 41st St
E Pam Rd
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
NEUTRAL
VERY GOOD
Concept Features
Realigns the southbound I-229/Cliff Avenue ramp terminal south of its existing location.
Realigns the E 41st Street/Cliff Avenue intersection further to the north, in line with the high school driveway entrance.
Provides additional turn bays and storage length at the reconstructed intersections.
Closes the Pam Road/Cliff Avenue intersection and adds a new neighborhood access to E 41st Street via 9th Avenue.
Maintains existing traffic signal location at the northbound I-229/Cliff Avenue intersection. Adds traffic signals at the new southbound I-229/Cliff Avenue and E 41st Street/Cliff Avenue intersections.
Sub-Study 6
Diamond Interchange - 41st Street Realigned to High School
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-4
6/22/2016

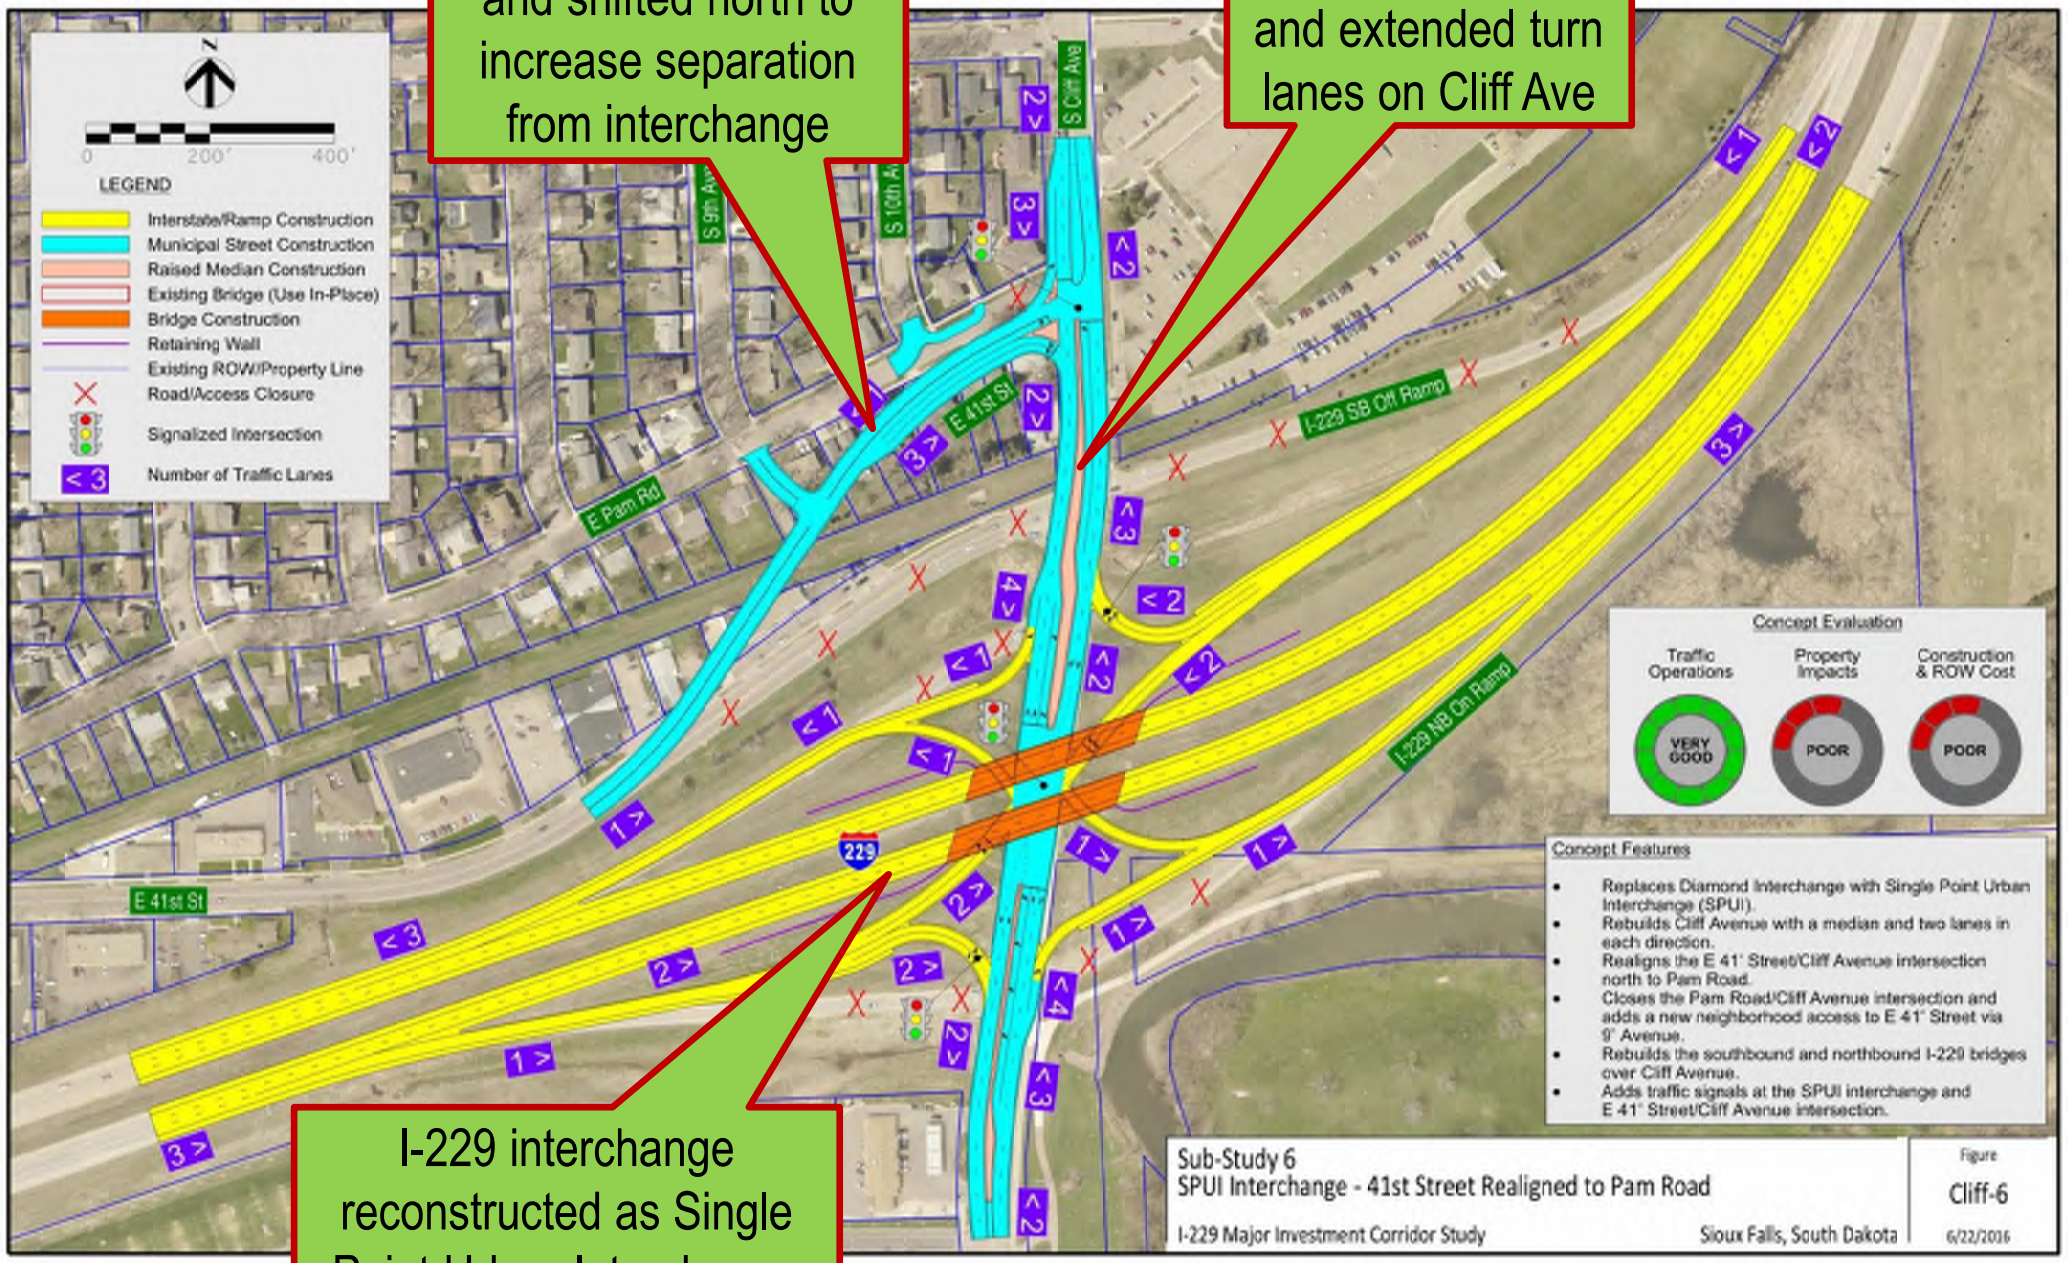
E 41st St. widened and shifted north to increase separation from interchange
Raised Median and extended turn lanes on Cliff Ave
I-229 interchange reconstructed as Single Point Urban Interchange for added capacity
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
0
200'
400'
S Cliff Ave
E 41st St
E Pam Rd
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
VERY GOOD
Property Impacts
POOR
Construction & ROW Cost
POOR
Concept Features
Replaces Diamond Interchange with Single Point Urban Interchange (SPUI).
Rebuilds Cliff Avenue with a median and two lanes in each direction.
Realigns the E 41st Street/Cliff Avenue intersection north to Pam Road.
Closes the Pam Road/Cliff Avenue intersection and adds a new neighborhood access to E 41st Street via 9th Avenue.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Adds traffic signals at the SPUI interchange and E 41st Street/Cliff Avenue intersection.
Sub-Study 6
SPUI Interchange - 41st Street Realigned to Pam Road
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-6
6/22/2016

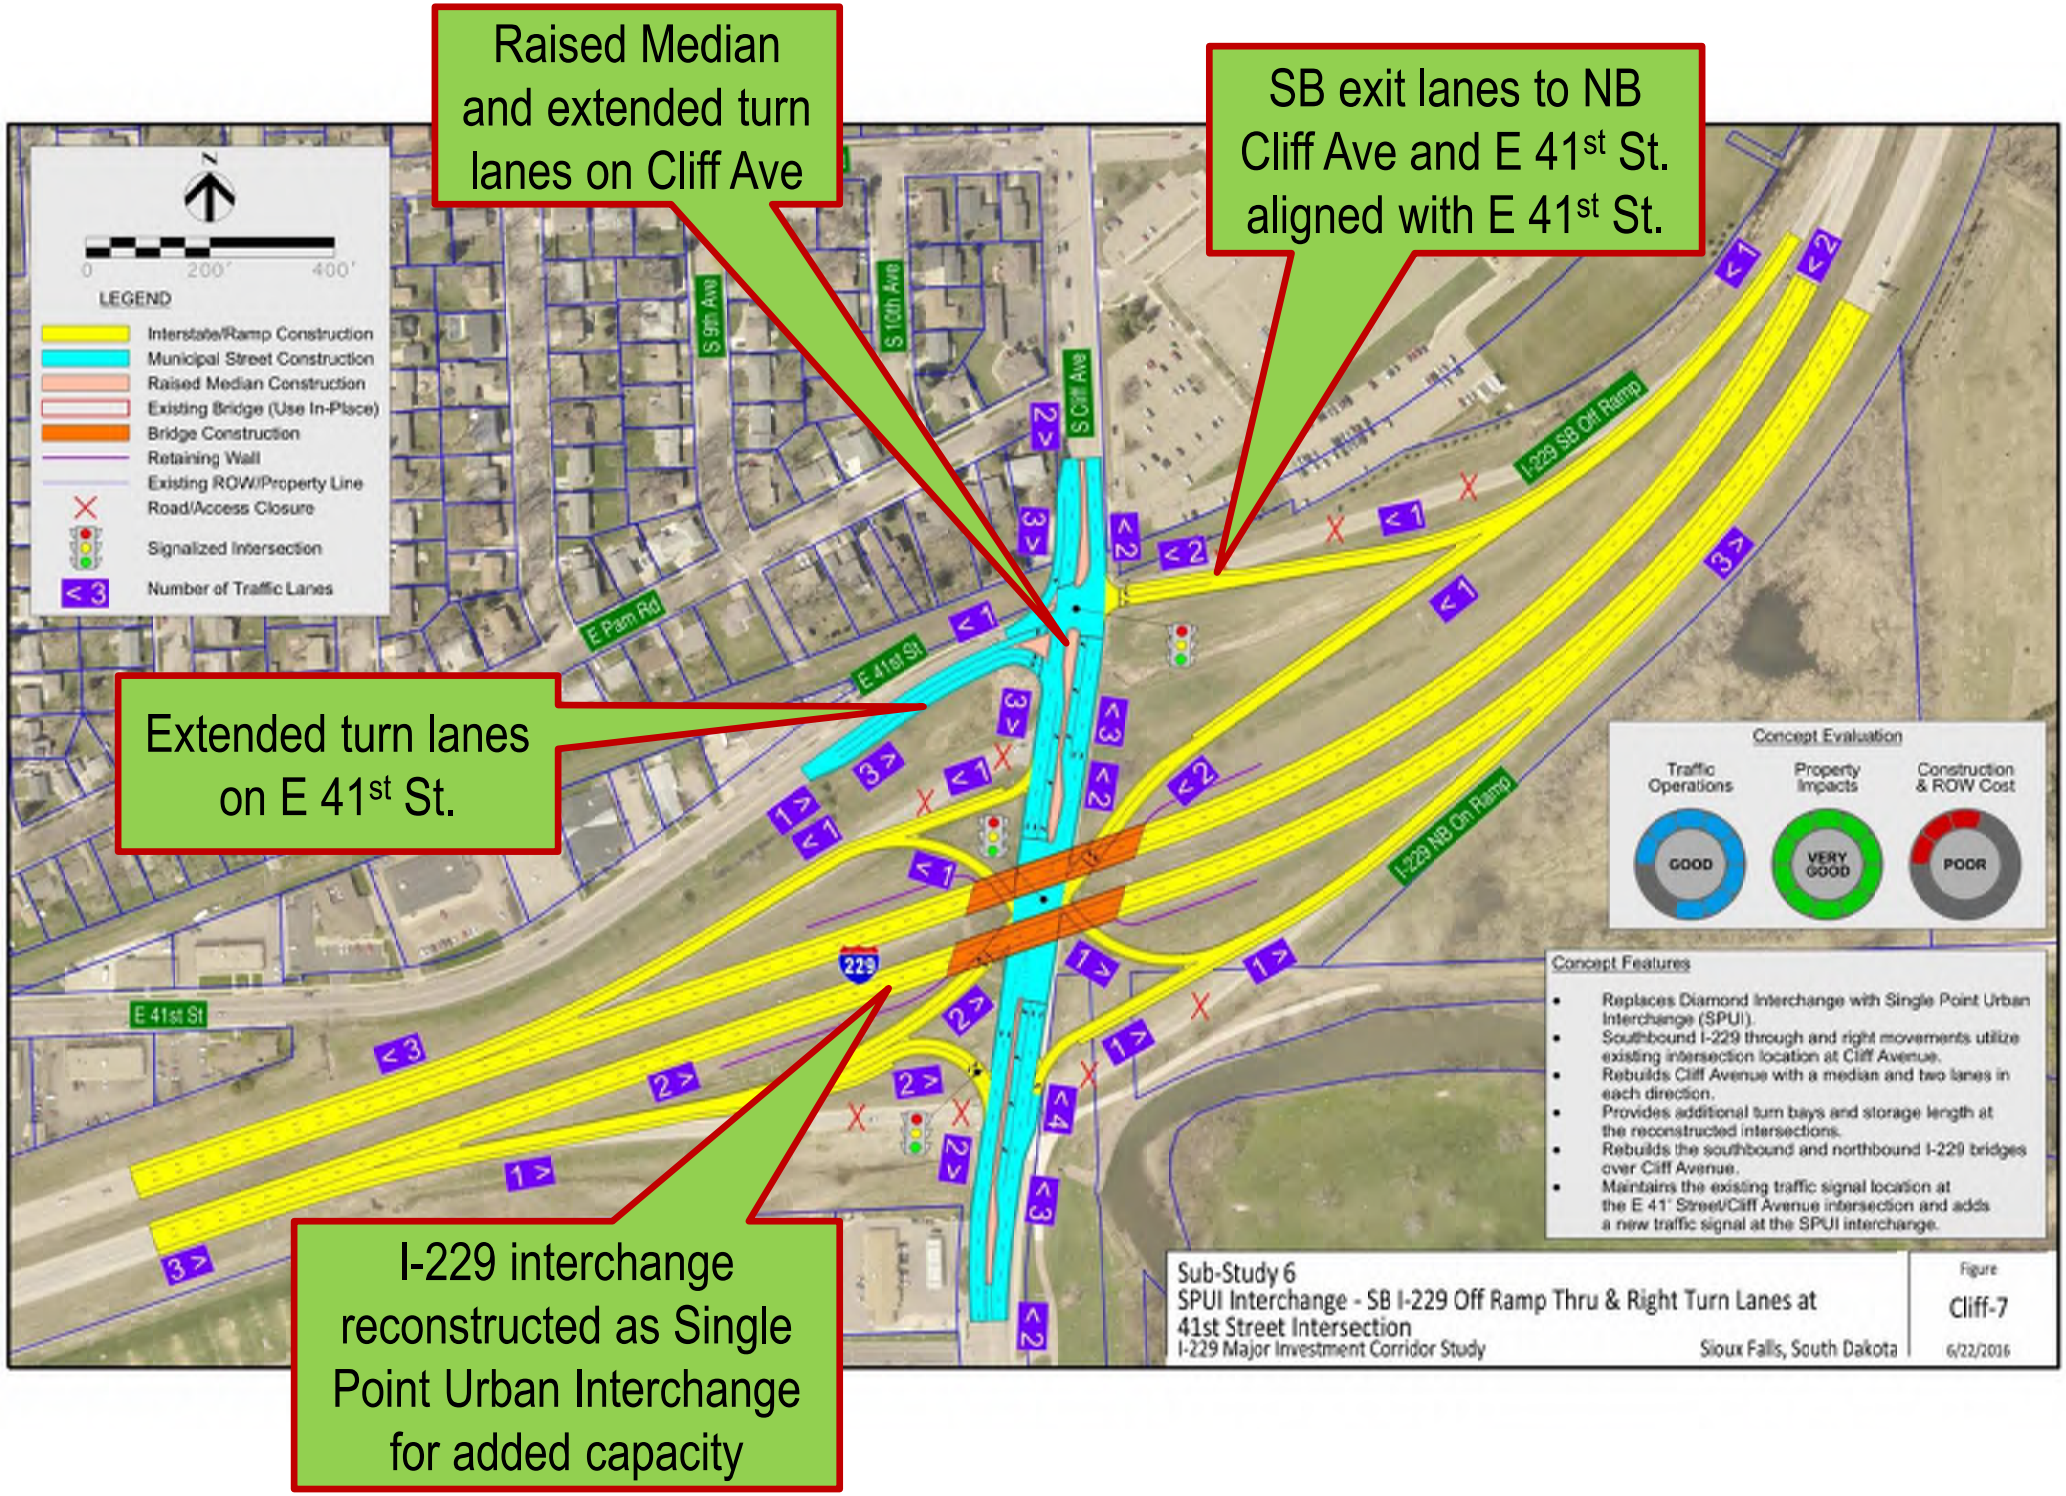
Raised Median and extended turn lanes on Cliff Ave
SB exit lanes to NB Cliff Ave and E 41st St. aligned with E 41st St.
Extended turn lanes on E 41st St.
I-229 interchange reconstructed as Single Point Urban Interchange for added capacity
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
S Cliff Ave
S 9th Ave
S 10th Ave
E Pam Rd
E 41st St
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
GOOD
Property Impacts
VERY GOOD
Construction & ROW Cost
POOR
Concept Features
Replaces Diamond Interchange with Single Point Urban Interchange (SPUI).
Southbound I-229 through and right movements utilize existing intersection location at Cliff Avenue.
Rebuilds Cliff Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the reconstructed intersections.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Maintains the existing traffic signal location at the E 41' Street/Cliff Avenue intersection and adds a new traffic signal at the SPUI interchange.
Sub-Study 6
SPUI Interchange - SB I-229 Off Ramp Thru & Right Turn Lanes at 41st Street Intersection
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-7
6/22/2016

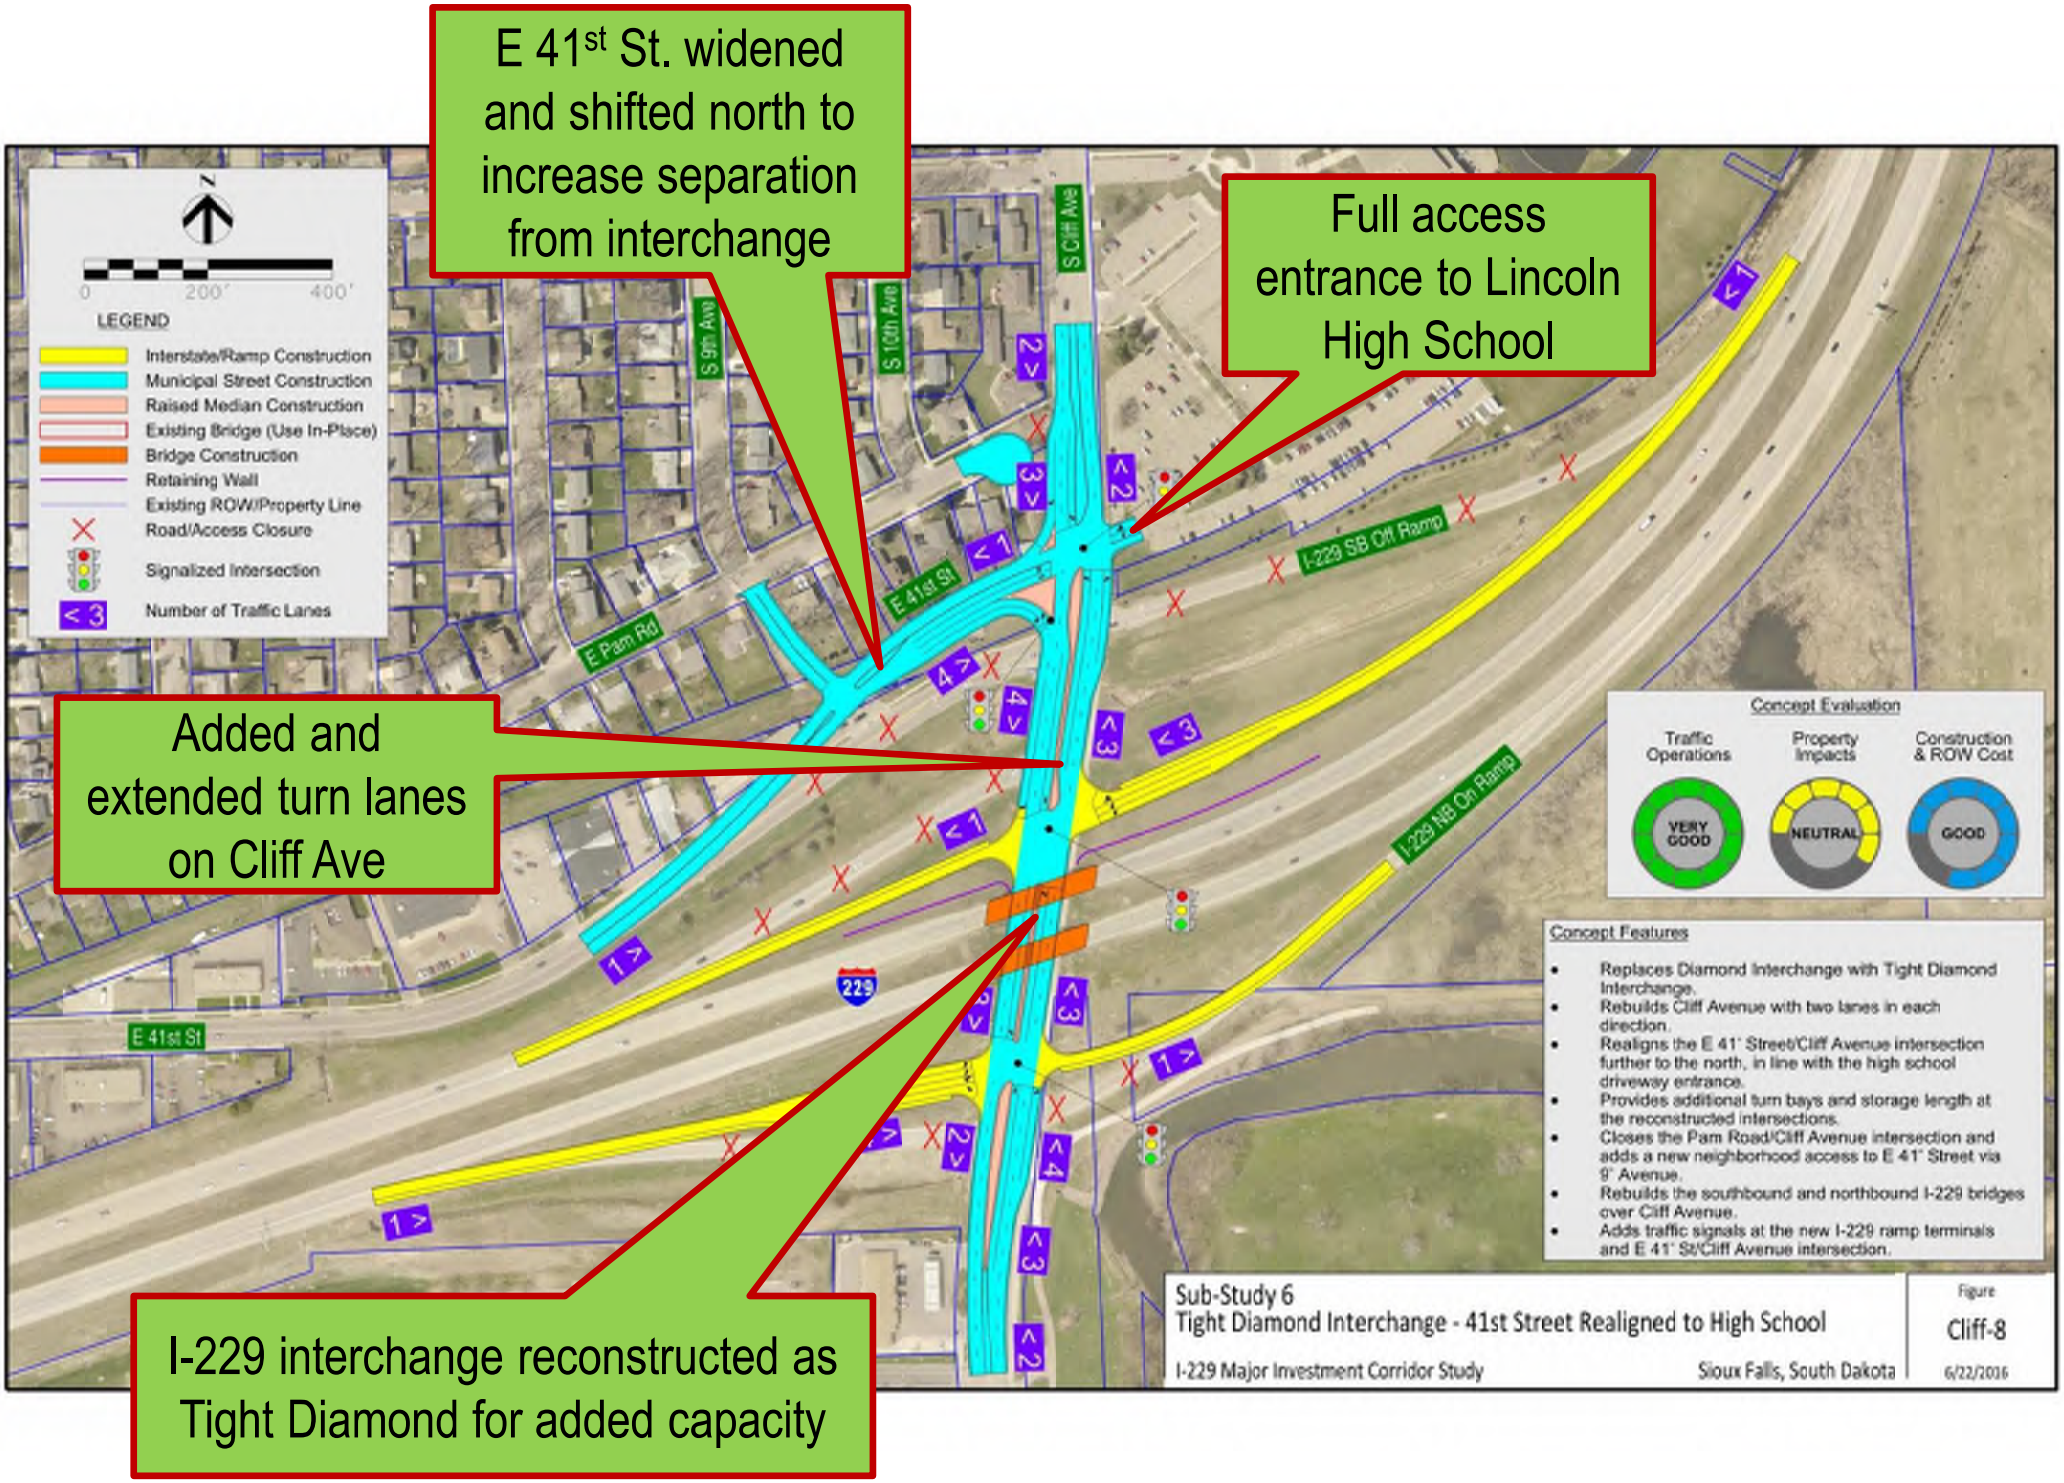
E 41st St. widened and shifted north to increase separation from interchange
Full access entrance to Lincoln High School
Added and extended turn lanes on Cliff Ave
I-229 interchange reconstructed as Tight Diamond for added capacity
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
0
200'
400'
S Cliff Ave
S 9th Ave
S 10th Ave
E 41st St
E Pam Rd
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
NEUTRAL
GOOD
Concept Features
Replaces Diamond Interchange with Tight Diamond Interchange.
Rebuilds Cliff Avenue with two lanes in each direction.
Realigns the E 41st Street/Cliff Avenue intersection further to the north, in line with the high school driveway entrance.
Provides additional turn bays and storage length at the reconstructed intersections.
Closes the Pam Road/Cliff Avenue intersection and adds a new neighborhood access to E 41st Street via 9th Avenue.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Adds traffic signals at the new I-229 ramp terminals and E 41st St/Cliff Avenue intersection.
Sub-Study 6
Tight Diamond Interchange - 41st Street Realigned to High School
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-8
6/22/2016

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Brian Ray– HDR Engineering, Inc.
402-548-5066 or Brian.Ray@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 4 – Cliff Avenue

Thanks for Attending!!!!!

HDR

© 2014 HDR, all rights reserved.

APPENDIX -

PUBLIC MEETING #3 – DECEMBER 6TH, 2016

- SIGN-IN SHEETS
- COMMENTS
- POWERPOINT SLIDES
- MEETING NOTES (SEE STAKEHOLDER MEETINGS #2 APPENDIX)

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030
Meeting Date Tuesday, December 6th, 2016 6:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Bruce Wichers	3221 S SHERMAN TR	605-254-4375	
2	Le Miller	905 E 34th St.	605-310-9643	
3	Mark Elliason	101 S Cleveland	605-338-6221	
4	Pete Longman	SDDOT Pierre	773-6488	
5	Joe Boyt	2533 E HARRIET LEA	206-454-2698	
6	Jo Wahle		605-351-0658	
7	Luke Henriksen	2200 S Shirley Ave 57106	605 321-5040	
8	Riley Hosman	Brandon, SD	951-5391	rhos1205@gmail.com
9	Bob Booth	1116 64th Ave	605 334 4220	
10	Gerald TEunissen	808 Jana Lane	605-366-1979	gerald@benderco.com
11	Judy Mickalowski		605-521-0345	
12	Carsen Bower	25225 476th Ave Dell Rapids SD	605-594-6431	
13	Joe Painter	3512 S Alpine SF		
14	Mark Meyer	1504 W. Mosby ST SF	605 275 2607	
15	Travis Kreba	2405 S Glendale Ln	605 254 8651	
16	Sharon Fix	301 N. Marquette Ave 57110	605-335-6001	
17	Jon Smith	941 S. Grandview 57103	334-5869	jdsmith@sio.midco.net
18	Ahan Kostboth	1205 E. 38th St. 57105	940-2721	Kostboth@sio.midco.net
19	Dennis Olsen	2608 E Winston Cir 57108	978-3980	dennis.olsen@medvantx.com
20	DALE Froehlich	West Valley & So Le Chateau SF, SD 57105	201-9810	

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3516P, PCN 044K **Project No.:** 207030
Meeting Date Tuesday, December 6th, 2016 6:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Steve Gramm	700 E. Broadway Ave.	773-6641	steve.gramm@state.sd.us
2	Dean DeHaSamuTT	7207 N Violet Pl	496 1108	
3	Paul Nikles	5314 W 60th St. N.	367-5680	Paul.Nikles@state.sd.us
4	Brad Remmich	SDDot – Pierre	773-3093	bradley.remmich@state.sd.us
5	Sarah Schafer	117 E Twin Oaks Pl #53	338-5741	–
6	gary bussellman	7201G Madison ST Sioux Falls SD 57110	605 334 5692	gary@garybuss.com
7	Bruce Card	4815 E Hawthorne Dr. S F SD 57110	605-261-1627	bcard@amenstest.com
8	Amber Gibson	500 N Weber Ave Ste 100 SFSD 57104	605-367-5313	amber@secog.org
9	BART BROST	48005 Oak Trail Pl SF, SD 57108	605-310-8628	brosbart@showplacewood.com
10	Lanny Blum	6300 E 26th St SF SD 57110	605 332-7891	
11	Kim Blackburn	2708 S D	940-7908	frynpennysguy@HOTMAIL.COM
12	Mark Skadsen	25952 476th Ave	351-9512	
13	Jason Kjenstad	6200 S. Old Village Pl Suite 100	977-7740	jason.kjenstad@hdrinc.com
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Public Meeting
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3518P, PCN 044K **Project No.:** 207030
Meeting Date Tuesday, December 6th, 2016 6:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Shannon Ausen	224 W 9th St SF SD	367-8607	sausen@siouxfalls.org
2	Jason Kjenstad	6300 S. Old Village Pl Suite 100 SF SD	977-7740	jason.kjenstad@hdrinc.com
3	Mark Haines	116 E. Dakota Ave Pierre, SD	776-1010	mark.haines@dot.gov
4	Steve Painter	4101 S. Western	359-8525	
5	Andy Vandel	SDDOT Pierre	773-4421	andy.vandel@state.sd.us
6	Jeff Hanssen	3101 W. Auburn Hills Ct	310-6280	jeff.hanssen@kneipgroup.com
7	Charles Knefp	3066 W. Benning Sioux Falls	359-9451	charles.knefp@kneipgroup.com
8	Mitch Brandner	830 E 41st St, SF SD.	605-366-2404	mitch.brandner@gmail.com
9	Josh Larson	2208 S Sheffield SF SD	605-271-1607	jshnedavid@hotmail.com
10	Debi Schafer	23005 Jefferson SF SD	605 310 2698	—
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

Very much like improved pedestrian/bike access on all options.
Of the 3 current options, Cliff 1 + 7 have less property owner impact (good). Cliff 7 appears to have less impact on affordable housing. Cliff 6 would feed Lincoln H.S. traffic right onto 41st - Probably not a good idea. Intersection of Cliff + 41st at LHS would be a real mess 7:30-9 am + 3-4:15 pm (current LHS busiest times. It's already not a favorite timed place for bus + paratransit drivers + commuters.

(optional)
Name: Wendy Butler-Boyesen Address: 1104 E. Pam Rd.

Phone: 605-906-1203 Email: wbutlerboyesen@gmail.com

DOT Connecting South Dakota and the Nation

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: HDR Engineering, Inc.
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: Jason.Kjenstad@hdrinc.com

Fax: 605-977-7747

Website very useful → advertise on marquee sign please!

Thanks for making considerations for cyclists!

(optional)
Name: Riley Hasman Address: 1205 Parkview blvd, Brandon

Phone: 951-5391 Email: rhos1205@gmail.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

DONT INSTALL A DIVIDED MEDIAN ON BASON. PREVENTS LEFT TURNS FROM THE SOUTH

(optional)
Name: CHRIS RANS Address: 3412 N. POTSDAM

Phone: 338-9110 Email: CHRIS@SUNKOTACONSTRUCTION.COM

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

Divider (median) along Minn from 41st south makes no sense. Will not improve safety. Will negatively impact retail business. How will access be maintained during construction and long term. NO GOOD ACCESS TO STAPES / Dollar Tree

(optional)
Name: Dave McElroy Address: 3310 S Minn Ave

Phone: 605-338-9515 Email: mcelroy.dave@gmail.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

DO NOT INSTALL A RAISED Median ON BENSON to ELIMINATE LEFT TURNS FROM the SOUTH

(optional)
Name: CHRIS RAWS
Address: 3412 N. POTSDAM AVE.
Phone: 338-9110
Email: CHRIS@SUNKOTACONSTRUCTION AVE.

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

Like Maple Ave 2D
" 10th 2 B/C
" Benson 1A — Suggest doing Southbound Ramp prior to working about NB Ramp
" Rice 3C — no need to move SB 229 Ramp
" Cliff 1

(optional)
Name: Lanny Boom
Address: 6300 E 26th St
Phone: 332-7391
Email: SQDAS@sioux.midco.net

Kjenstad, Jason

From: Gary Busselman <gary@garybuss.com>
Sent: Wednesday, December 07, 2016 5:27 PM
To: Kjenstad, Jason
Cc: Nancy Busselman
Subject: I-229 E 10th St Exit COMMENT

I-229 Major Investment Corridor Study
HDR Engineering Inc
ATT: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls SD 57108-2102

Jason.Kjenstad@hdrinc.com

Fax: 605-977-7747

December 7, 2016

RE: 2700 & 2704 E 10th St
Loss of either of the two approaches or the front parking/pass through will amount to a virtual condemnation and will likely result in an inverse condemnation action. Either buy my property or don't damage it so I can't use it as is or sell it to somebody else.

Gary Busselman
STEM LLC
7201 E Madison St
Sioux Falls, SD 57110
605-334-5692
gary@garybuss.com

DOT
ing South Dakota and the Nation

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS
PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

HDR Engineering, Inc.
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

I have a tenet in 3508 S. Minesota Ave. Access off of Minesota Ave & being able to turn onto 43rd St. when heading S. on Minesota Ave to access the business is important to the rentability of these bushnesses and customer access.

Name: Jeff Mindt

Phone: 360-6108

Address: 804 E. 38th St. SF, SD 57105

Email: jmindt68@gmail.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS
PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

No Build -
Keep 43rd Street open to Minnesota Ave for N + S Bound traffic
No Median

(optional)
Name: Tim Hein

Address:

Phone: 361-8400

Email: theinmail@gmail.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS
PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

No Build
Keep 43rd Street open to Minnesota Ave for N + S Bound Traffic
No Median.

(optional)
Name: MARY HEIN

Address:

Phone: 361-8400

Email: 4heinmail@gmail.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

www.i229study.com

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

December 7, 2016

RE: 2700 & 2704 E 10th St

Loss of either of the two approaches or the front parking/pass through will amount to a virtual condemnation and will likely result in an inverse condemnation action. Either buy my property or don't damage it so I can't use it as is or sell it to somebody else.

(optional)
Name: Gary Busselman
STEM LLC

Address: 7201 E Madison St
Sioux Falls, SD 57110

Phone: 605-334-5692

Email: gary@garybuss.com

I-229 Major Investment Corridor Study

PL 0100 (87) 3616P, PCN 044K

CITY OF SIOUX FALLS PUBLIC WORKS
Providing a Better Quality of Life for You!

WE WANT TO KNOW WHAT YOU THINK! What are your concerns? What issues does the study team need to overcome with this project? What problems do you foresee? Please submit your comments before December 22, 2016 to:

Mail: *HDR Engineering, Inc.*
ATTN: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls, SD 57108-2102

E-mail: *Jason.Kjenstad@hdrinc.com*

Fax: *605-977-7747*

I think your design which hooks up with 49th ST going west makes most sense.



(optional)
Name: Mary Montoya
4809 S Twin Ridge Rd
Sioux Falls, SD 57108

Address:

Phone:

Email: mary.montoya@sio.midco.net

Kjenstad, Jason

From: Robert Reitz <tooferguy007@gmail.com>
Sent: Monday, December 19, 2016 9:39 AM
To: Tom Hein; Kjenstad, Jason
Cc: Shally Rogen; Jeff R. Mindt; Eric & Mary Stormo; Brian Sather
Subject: Re: I229 and Minnesota Layouts

Please consider access to Minnesota Crossing {3508 S Minnesota Ave} for southbound traffic on Minnesota Ave by narrowing the island to permit a left turn lane for entry to the middle access on the above mentioned property. Otherwise we strongly suggest NO BUILD!

On Tue, Dec 13, 2016 at 8:25 AM, Tom Hein <theinmail@gmail.com> wrote:
Please review DOT options below for destroying our property and access. Be sure to complete the I-229 Major Investment Corridor Study 'We want to know what you think" card and return it to HDR Engineering or Jason.Kjenstad@hdrinc.com with your thoughts. I highly encourage to have a **"No Build"** option which leaves our access points and does not provide a median to prevent our south bound customers from getting into our property.
Please reply.
Thanks,
Tom

---------- Forwarded message ----------
From: **Kjenstad, Jason** <Jason.Kjenstad@hdrinc.com>
Date: Fri, Dec 9, 2016 at 6:04 AM
Subject: Fwd: I229 and Minnesota Layouts
To: Thomas Hein <theinmail@gmail.com>

FYI Tom

Jason Kjenstad 605 360 6595

Begin forwarded message:

> **From:** "Kjenstad, Jason" <Jason.Kjenstad@hdrinc.com>
> **To:** "jmbliss628@aol.com" <jmbliss628@aol.com>
> **Cc:** "Kjenstad, Jason" <Jason.Kjenstad@hdrinc.com>
> **Subject: I229 and Minnesota Layouts**
>
> FYI Rich

Jason Kjenstad, PE, LSIT

Vice President – Dakota's & Wyoming Transportation Operations Manager

HDR

6300 South Old Village Place
Suite 100

I-229 Major Investment Corridor Study
HDR Engineering Inc
ATT: Jason Kjenstad
6300 S. Old Village Place, Suite 100
Sioux Falls SD 57108-2102

Jason.Kjenstad@hdrinc.com

Fax: 605-977-7747

December 7, 2016

RE: 2700 & 2704 E 10th St
Loss of either of the two approaches or the front parking/pass through will amount to a virtual condemnation and will likely result in an inverse condemnation action. Either buy my property or don't damage it so I can't use it as is or sell it to somebody else.

Gary Busselman

Gary Busselman
STEM LLC
7201 E Madison St
Sioux Falls, SD 57110
605-334-5692
gary@garybuss.com

Kjenstad, Jason

From: Brian Sather <gdentltd@hotmail.com>
Sent: Monday, December 19, 2016 2:00 PM
To: Kjenstad, Jason; Jeff R. Mindt; Tom Hein; Shally Rogen; Eric & Mary Stormo; Bob Reitz
Subject: I-229 Major Investment Corridor Study

As one of the owners of property at 3508 S. Minnesota Ave.(#108), I recommend a left turn from a turning lane for southbound traffic into the only remaining access opening on the north side. Also, there is no adequate access in these plans to the south of the building for delivery vehicles, trash haulers, and employees. If these concerns can not be corrected, I recommend a "No Build" as the option.

Brian Sather
gdentltd@hotmail.com

Kjenstad, Jason

From: Malmberg, Chris
Sent: Thursday, December 22, 2016 7:40 AM
To: Meier, Dave; Kjenstad, Jason
Subject: FW: Fryn' Pan Family Restaurant

Didn't know if this made it to you.

Chris Malmberg, PE, ENV SP
D 402.399.4959 **M** 402.212.8136

hdrinc.com/follow-us

From: Stan Mitzel [mailto:smitzel@frynpan.net]
Sent: Wednesday, December 21, 2016 3:50 PM
To: sausen@siouxfalls.org; steve.gramm@state.sd.us; Malmberg, Chris
Cc: Dave Stukel; Rick Weisser
Subject: Fryn' Pan Family Restaurant

Shannon,

I was just looking at the proposed project of the 10 th street corridor as it affects my business at 10th and Cleveland; If we are forced to move because the improvements are causing detrimental effects, I think a good relocation for us would be to take over the old Godfathers building along with the bank lot to the east. This would provide enough parking for us and a suitable location to make our business viable. It seems these lots have been continually vacant the last few years. Just thought I would share my thoughts as this project is very concerning to myself and partners and we would like to know where we stand sooner rather than later.

Thanks for your time,

Stan Mitzel
Fryn' Pan Family Restaurant
3215 S. Carolyn Ave
Sioux Falls, SD 57106
Office: 605.361.7804
Cell: 605.201.5141
Fax: 605.361.7921
smitzel@frynpan.net







INTERSTATE 229 MAJOR INVESTMENT STUDY

Informational Meeting

December 6th, 2016
6:00 pm to 8:00 pm

HDR HRGreen


STUDY AREA MAP

I-229 Corridor Study

Solberg Avenue Overpass to 60th Street N Overpass

Meeting will focus on:

- Minnesota Avenue
- Cliff Avenue
- 10th Street
- Rice Street
- Benson Road

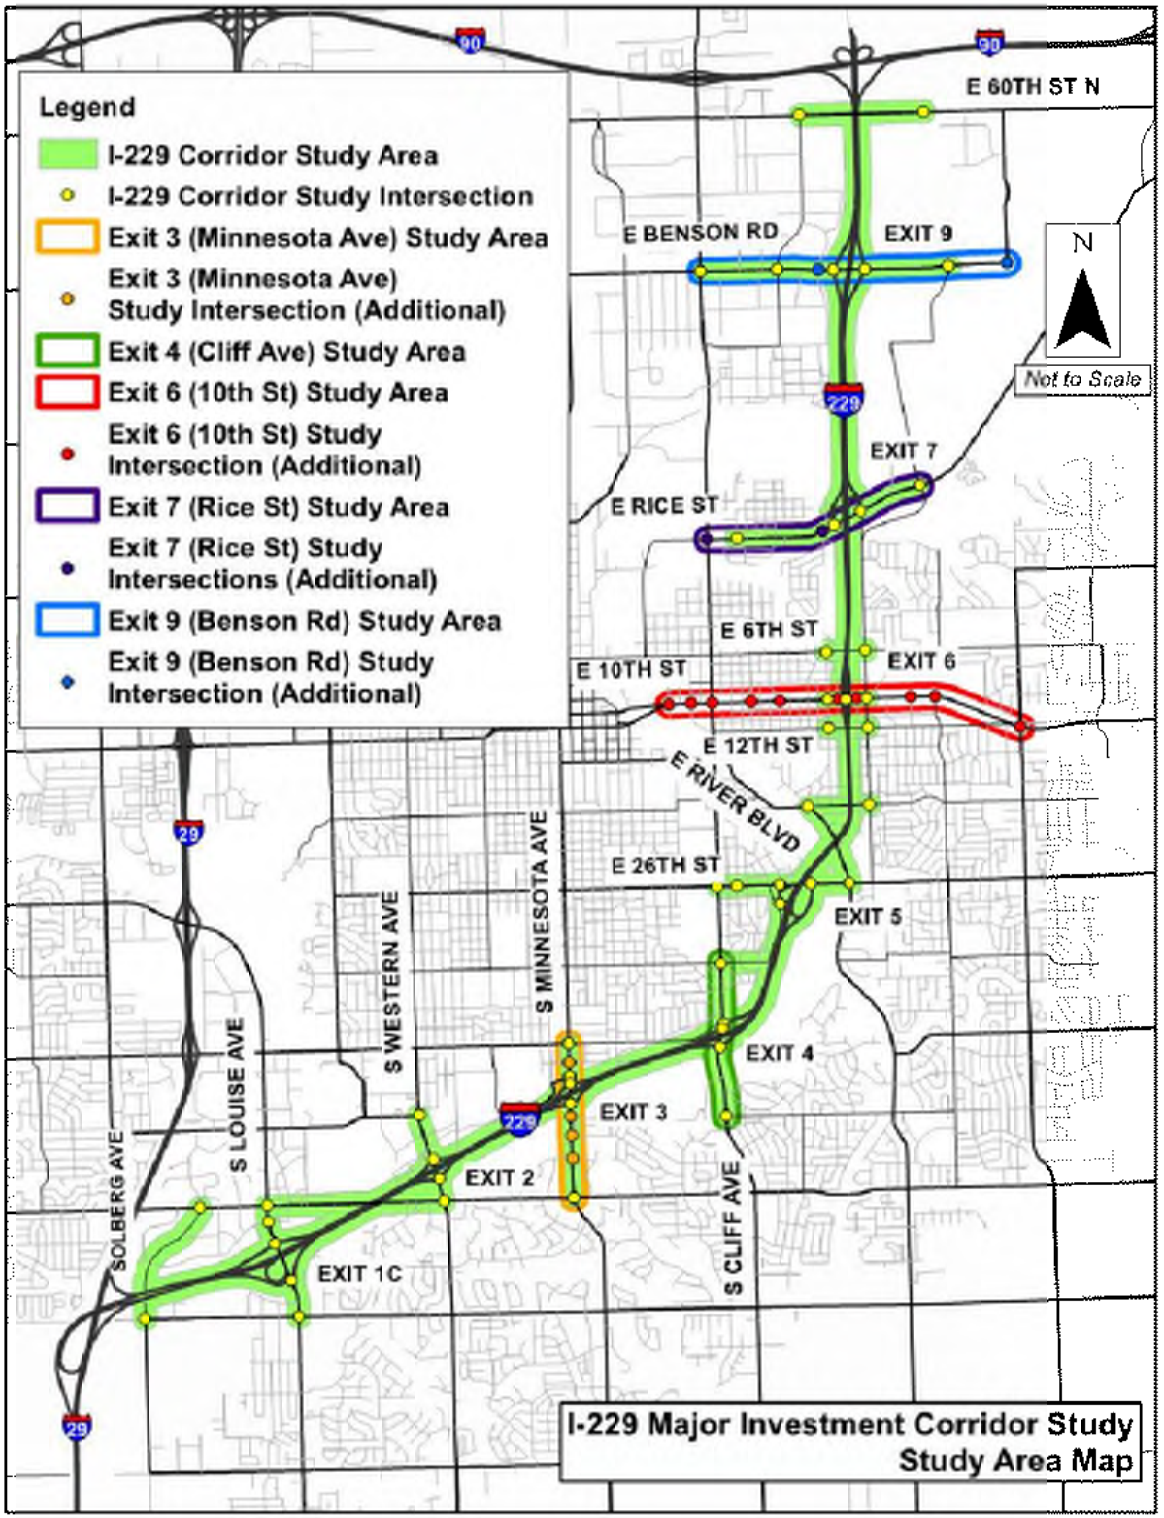

STUDY ADVISORY PARTNERS

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)


Federal Highway Administration (FHWA)

PRESENTATION AGENDA

- Recommended I-229 Corridor Improvement Concepts
- Interchange/Cross Road Sub-studies
  - Concept Evaluation Process
  - Concept Evaluation Results
  - Concepts Recommended for Further Consideration in Future Phases
- Next Steps


I-229 CORRIDOR IMPROVEMENTS

ADD 3RD LANE EACH DIRECTION
BETWEEN 26TH STREET AND 10TH STREET

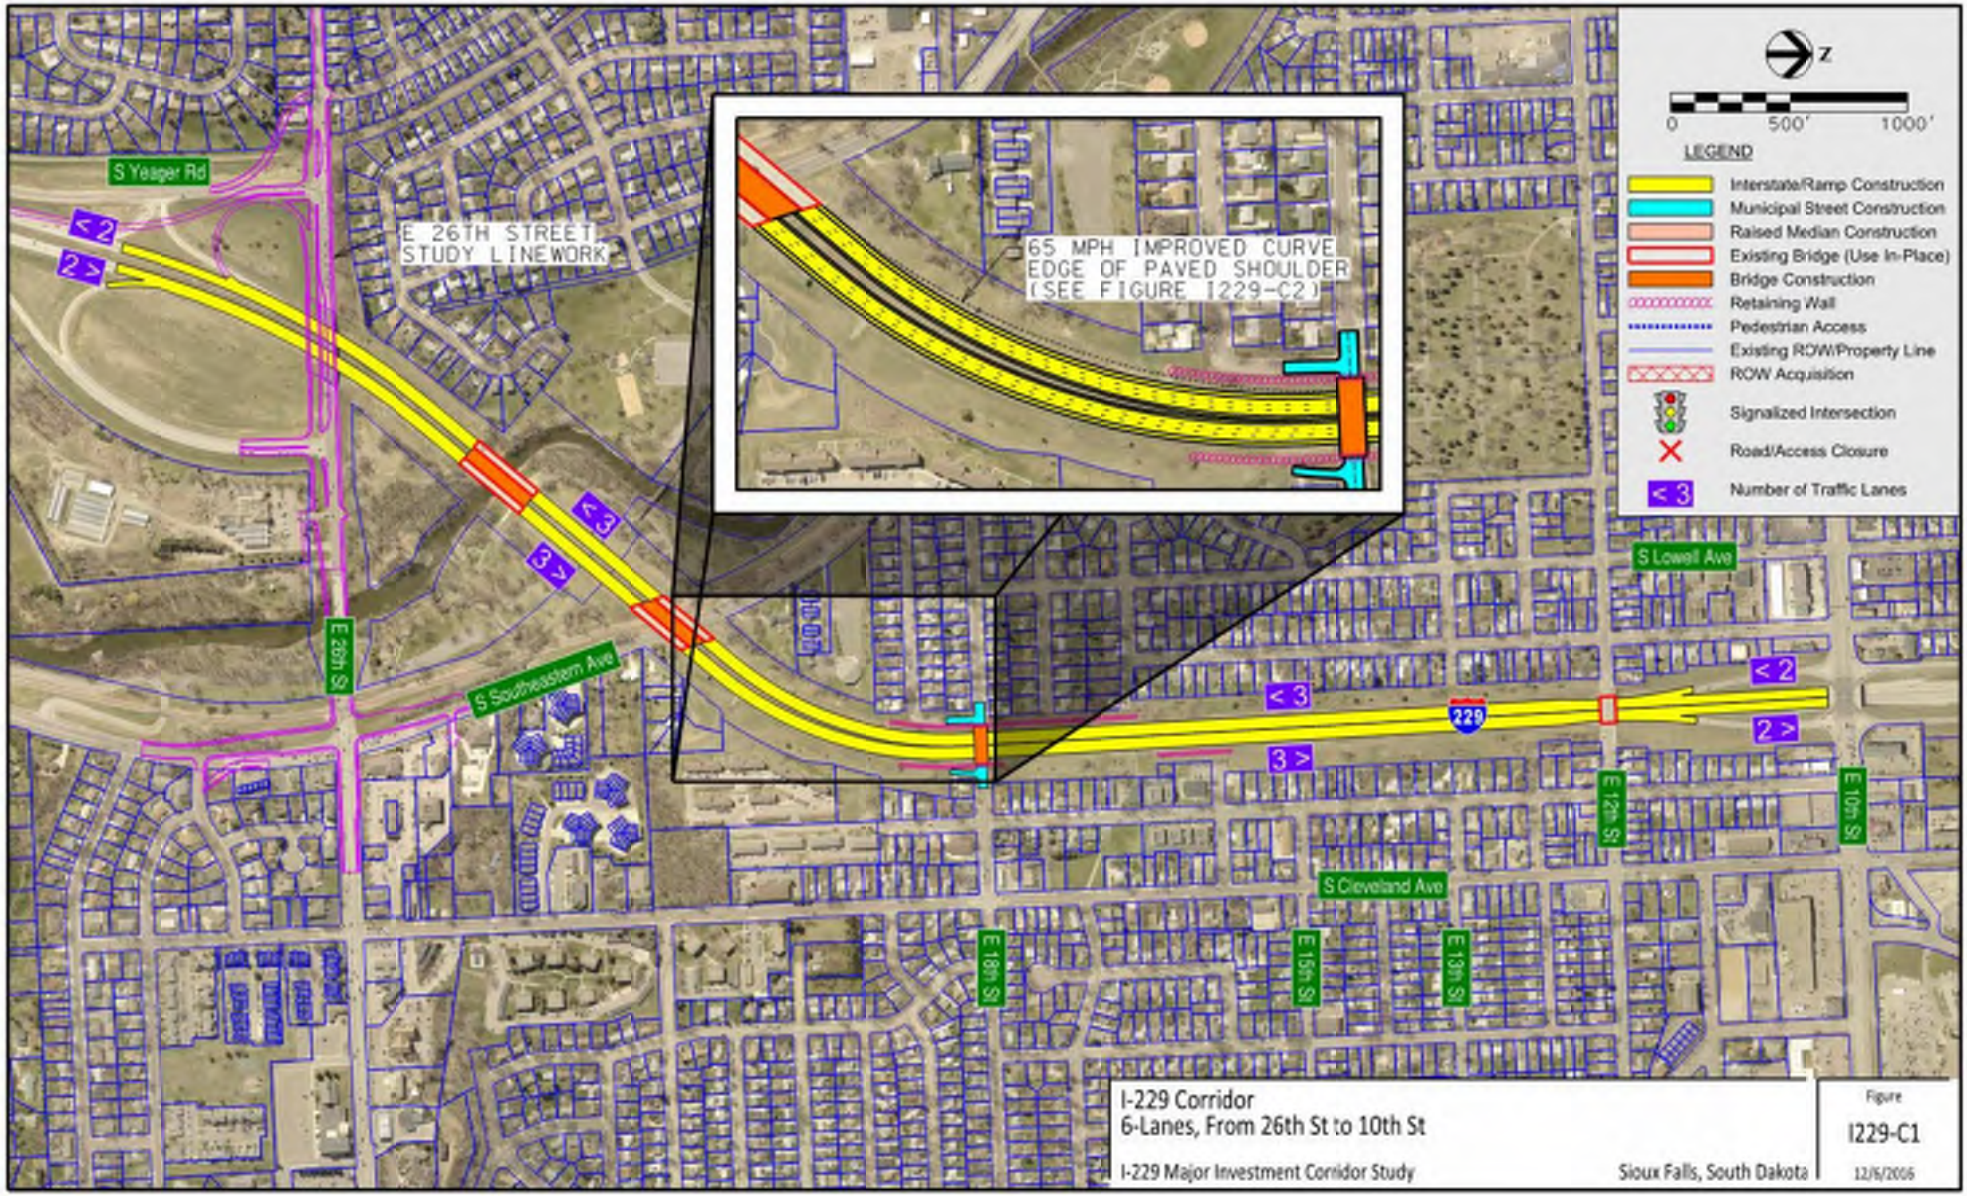

I-229 CORRIDOR IMPROVEMENTS


MODIFY CURVE RADIUS BETWEEN SOUTHEASTERN AVE & 18TH ST TO ALLOW 65 MPH DESIGN SPEED

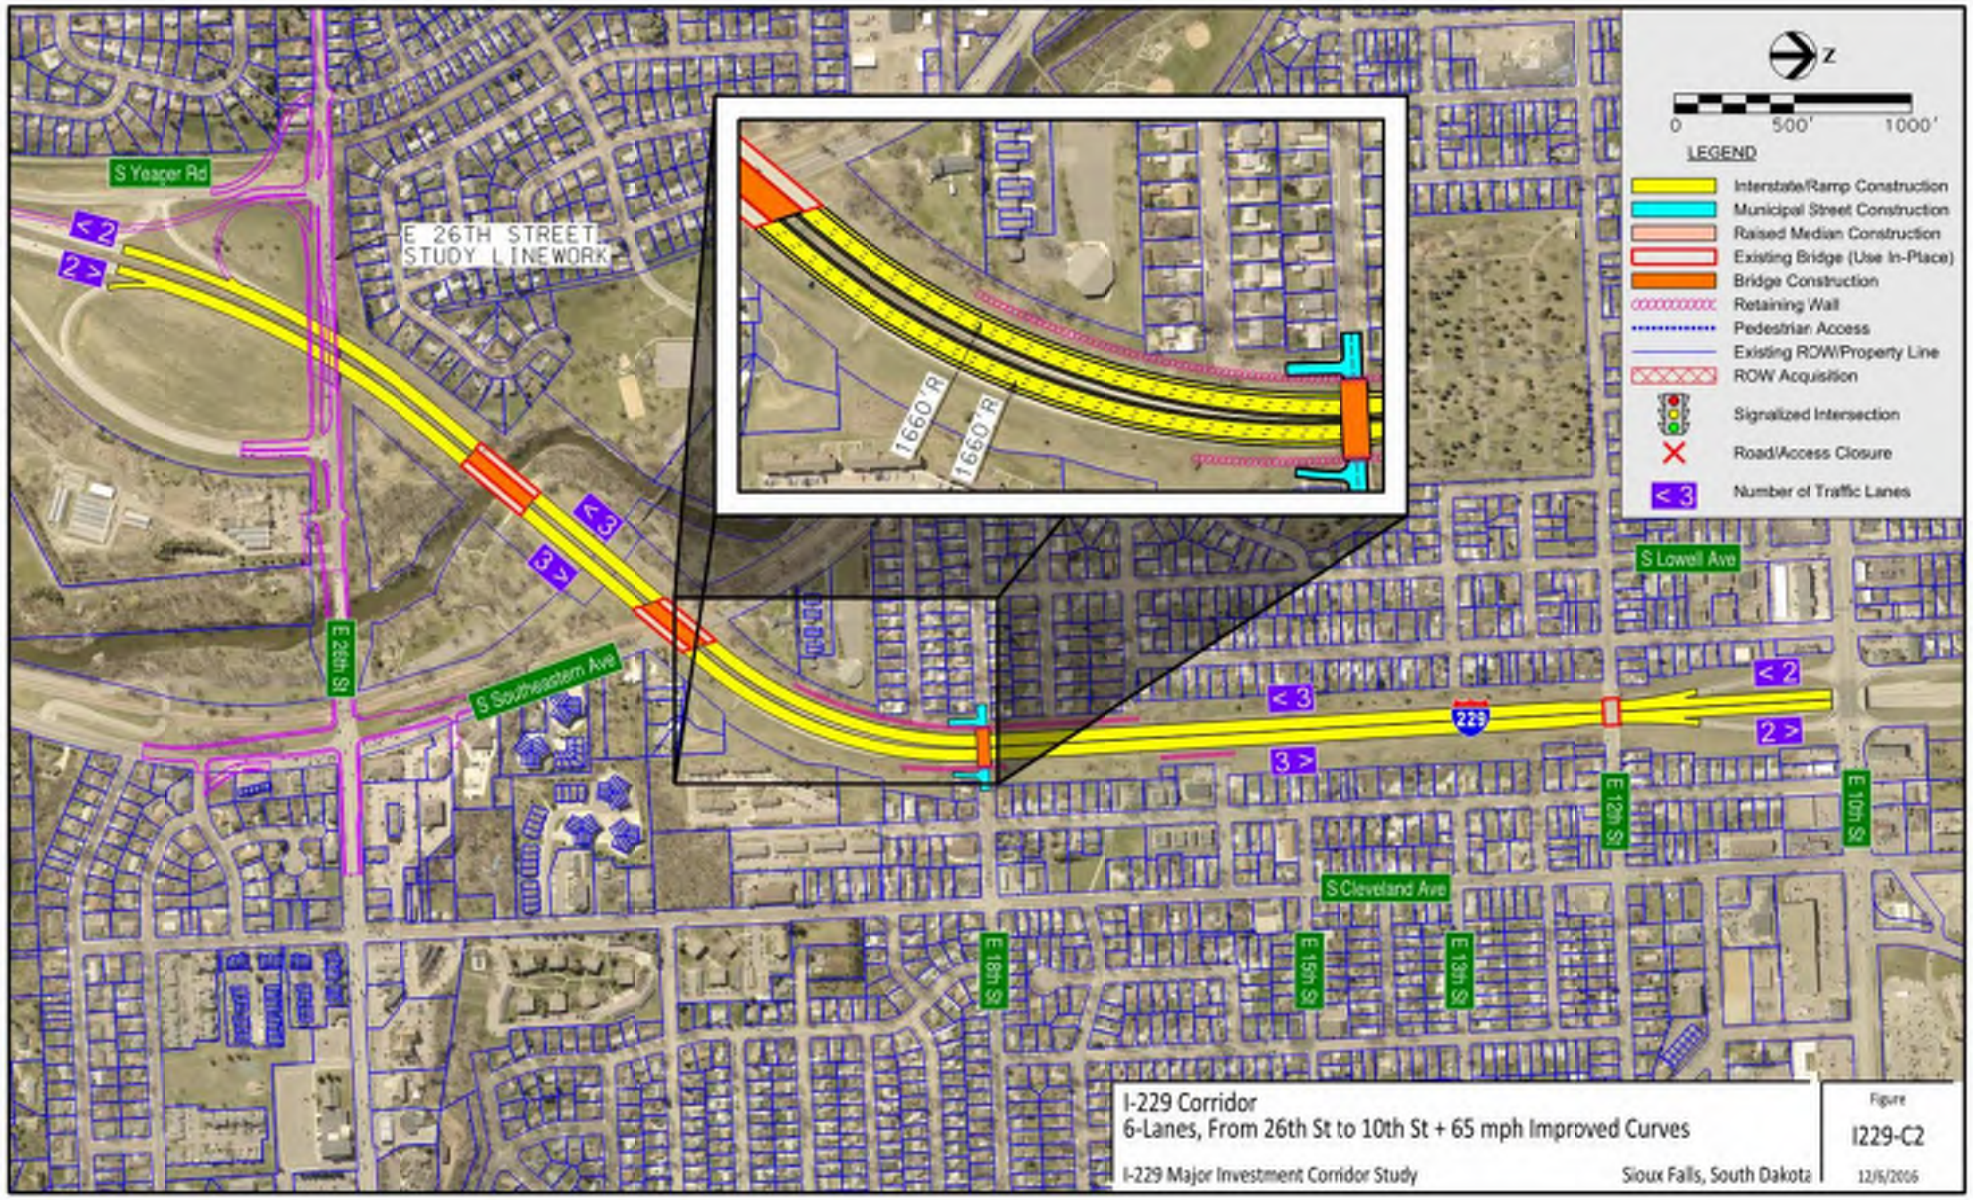

I-229 CORRIDOR IMPROVEMENTS

PEDESTRIAN / BICYCLE CROSSING NEEDS & IMPROVEMENTS


- Sub-study Proposed Improvements
  - Minnesota Avenue
  - Cliff Avenue
  - 10th Street
  - Rice Street
  - Benson Road
- Other Need Locations

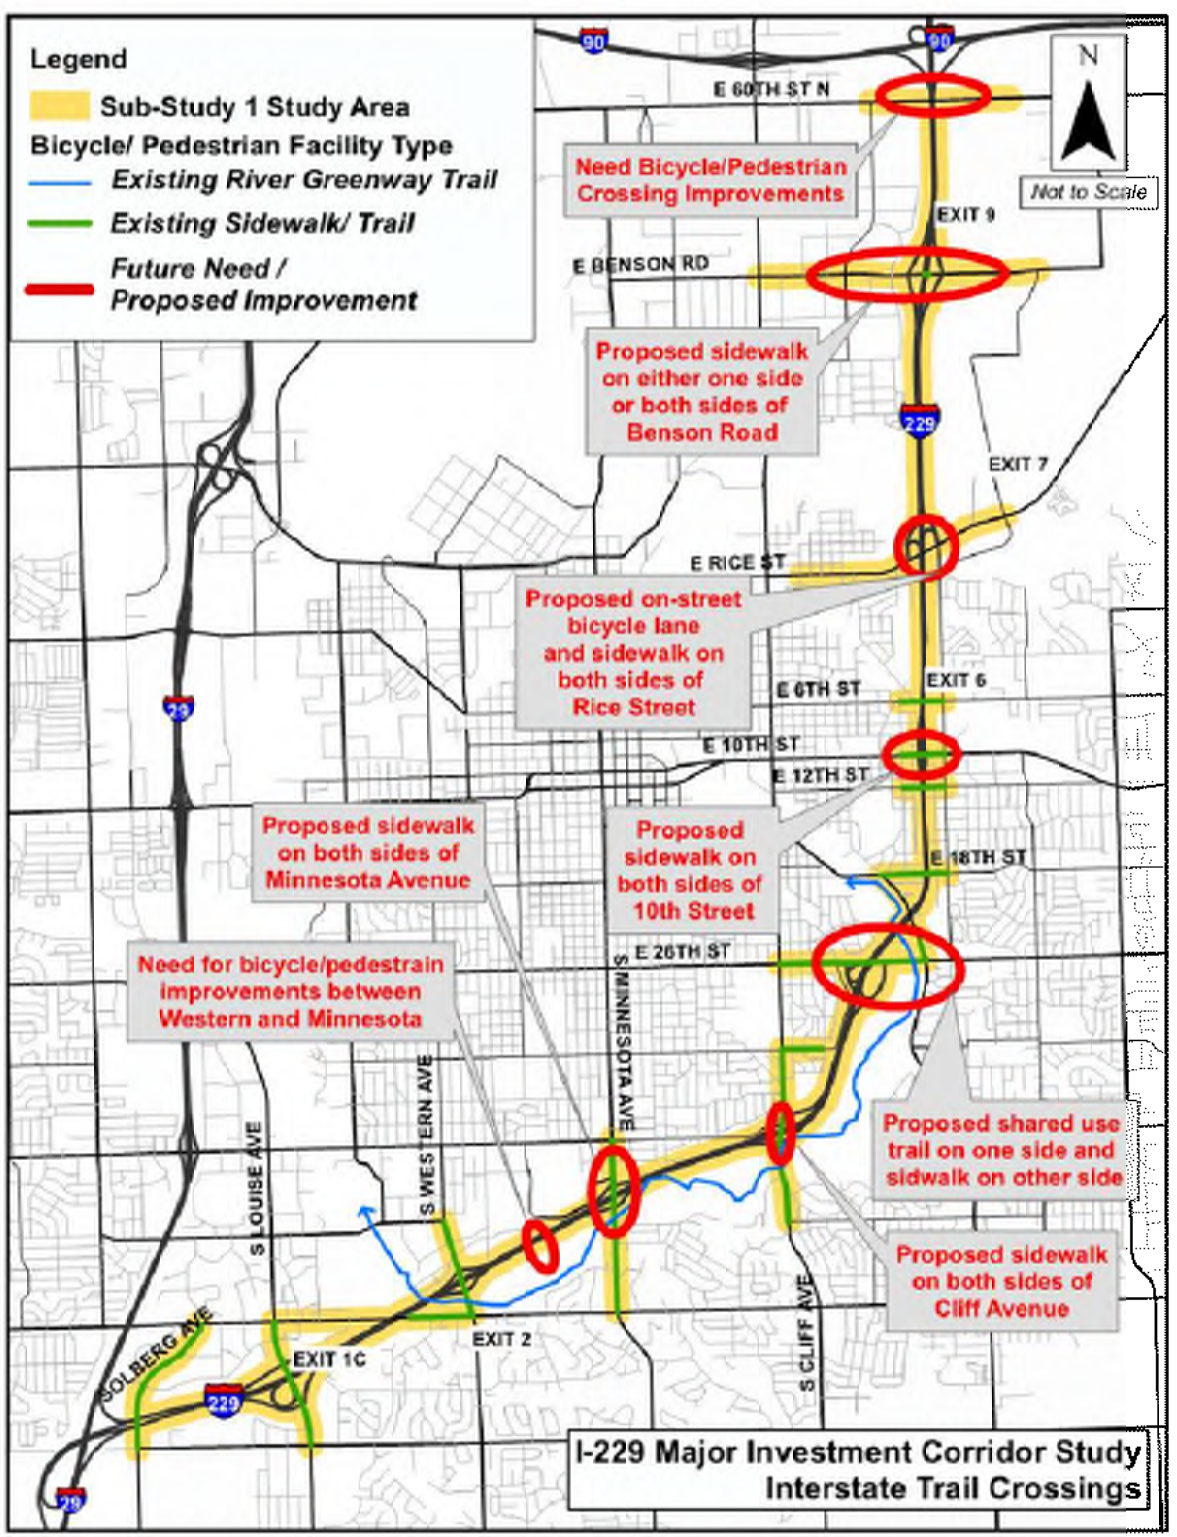

I-229 CORRIDOR IMPROVEMENTS

INTELLIGENT TRANSPORTATION SYSTEMS (ITS) CONCEPTS

- Adaptive Signal Control Technologies
- CCTV Cameras
- Dynamic Message Signs
- Dynamic Road Warning Signs
- Traffic Detectors

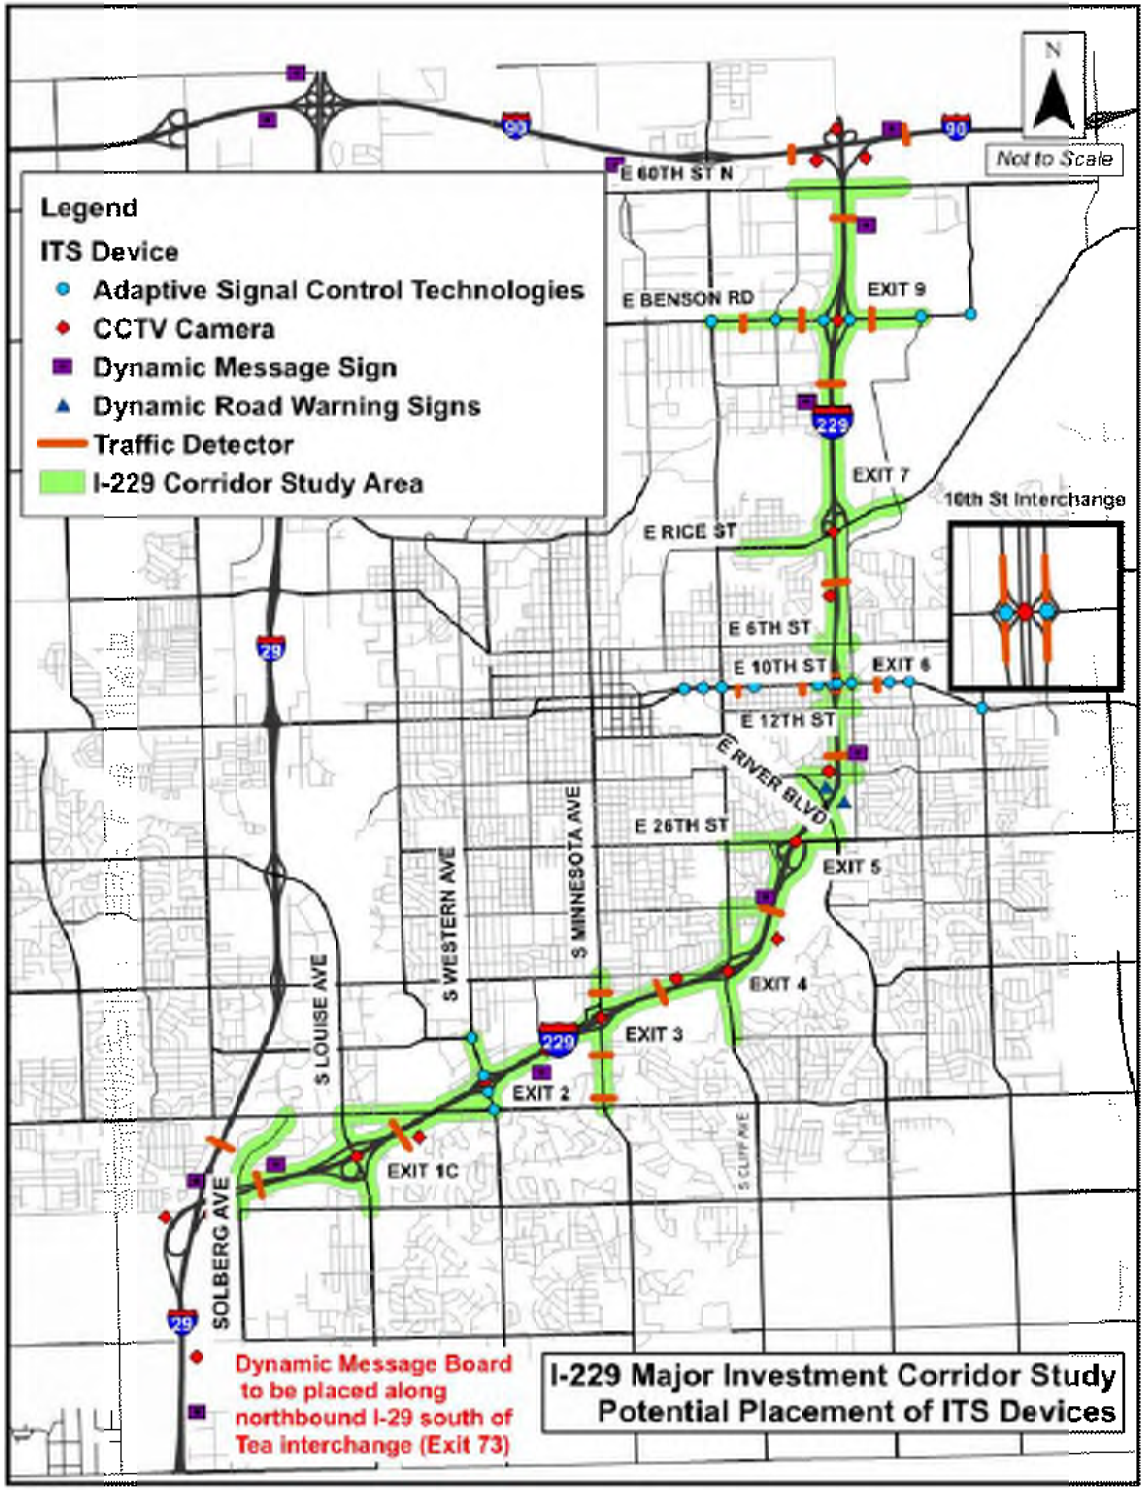

INTERCHANGE AND CROSS ROAD SUB-STUDIES

- Concept Evaluation Process
- Concept Evaluation Results
- Concepts for Further Consideration in Future Phases

CONCEPT EVALUATION PROCESS

- Evaluation Factors:


Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Concept ID	Interchange and Corridor Type	•Traffic Delay •Level of Service •Interchange Year of Failure	Predicted Crash Reduction during 2012-2035	Potential impact to wetlands, historical resources, threatened and endangered species, public lands, and floodplains	Total Right of Way (ROW) Required and Acquisitions	Total Constuction Cost (including ROW)	**Advance or Eliminate**



- Recommended Action


CONCEPTS FOR FURTHER CONSIDERATION

MINNESOTA AVENUE – 2C

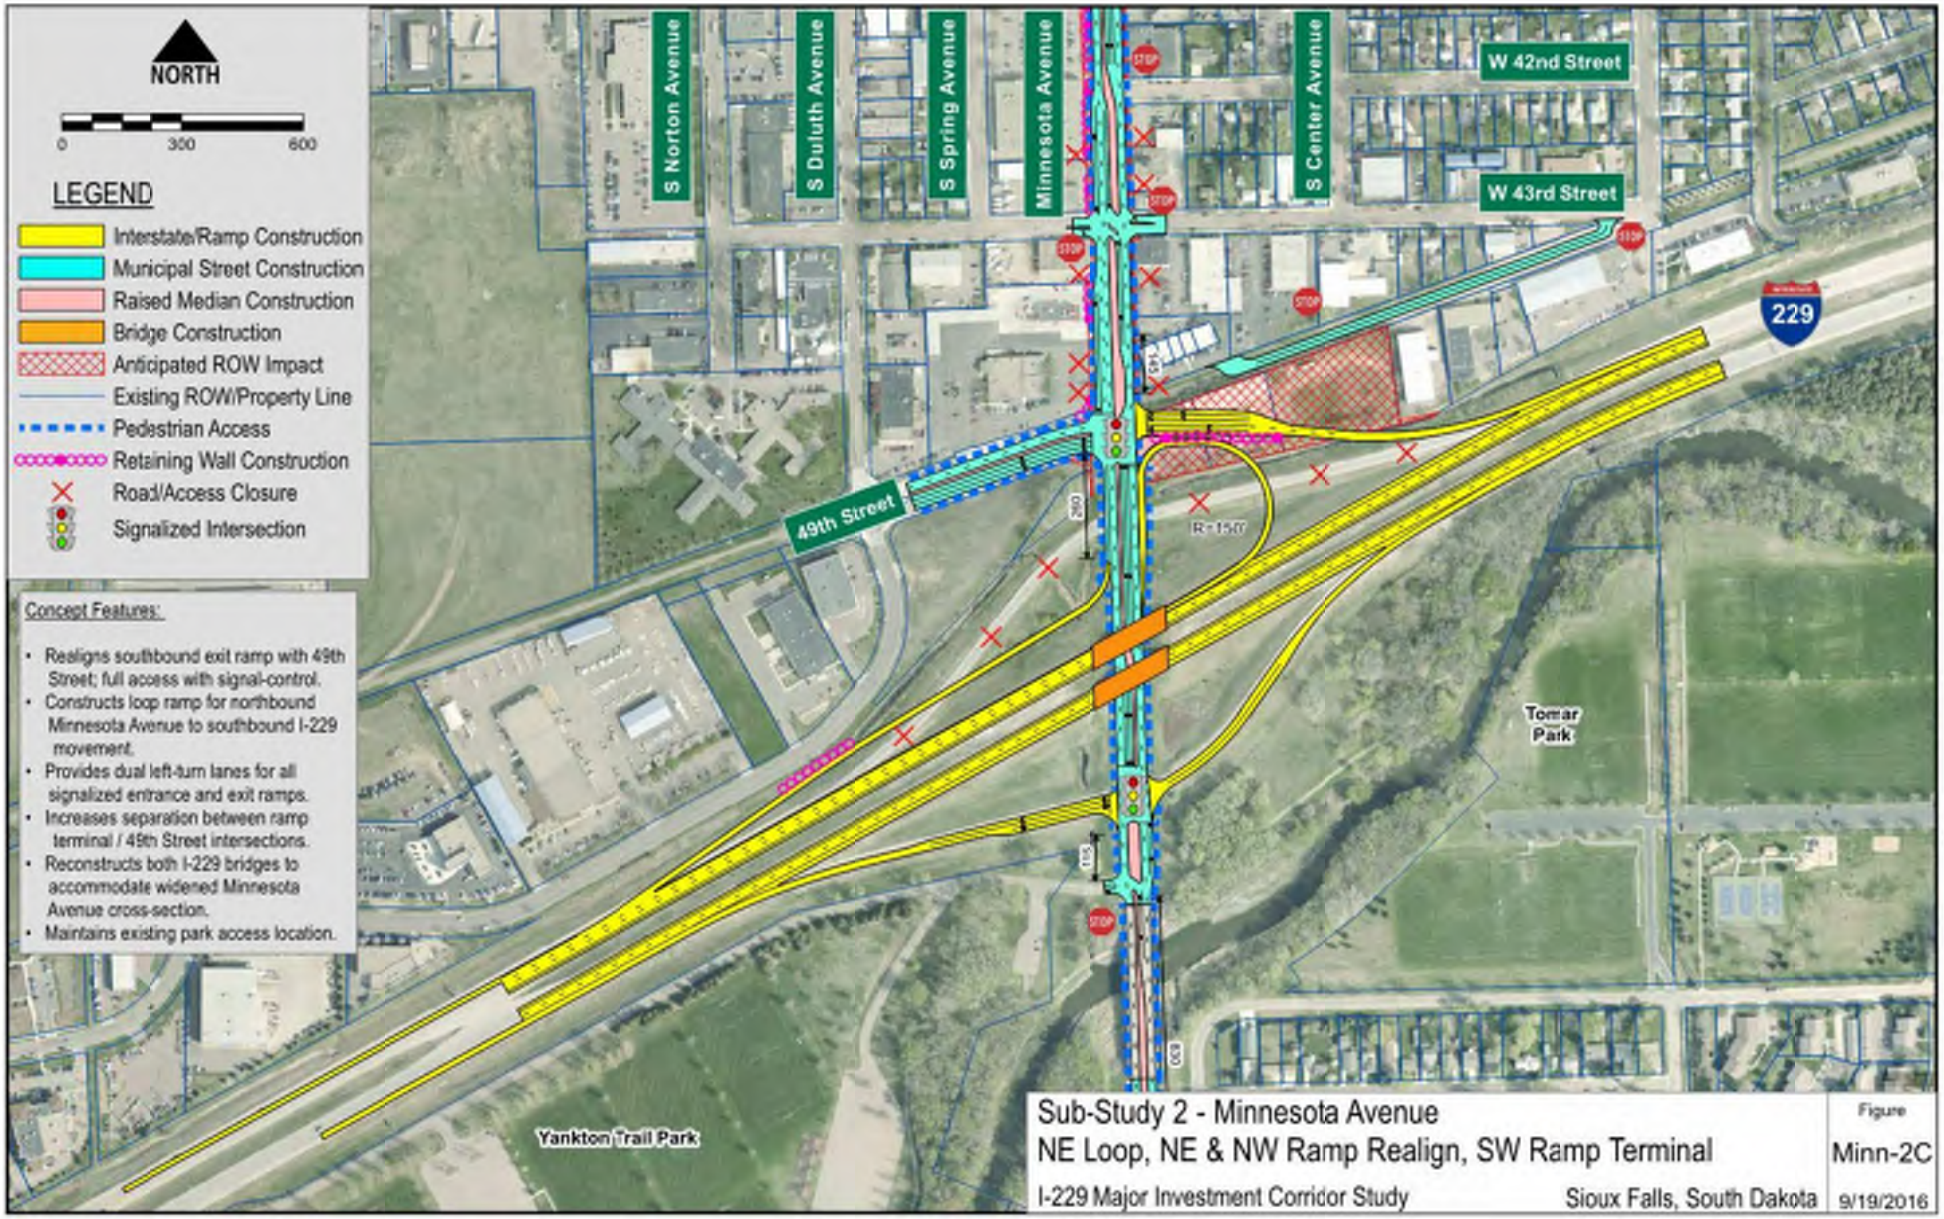



CONCEPTS FOR FURTHER CONSIDERATION

MINNESOTA AVENUE – 2D

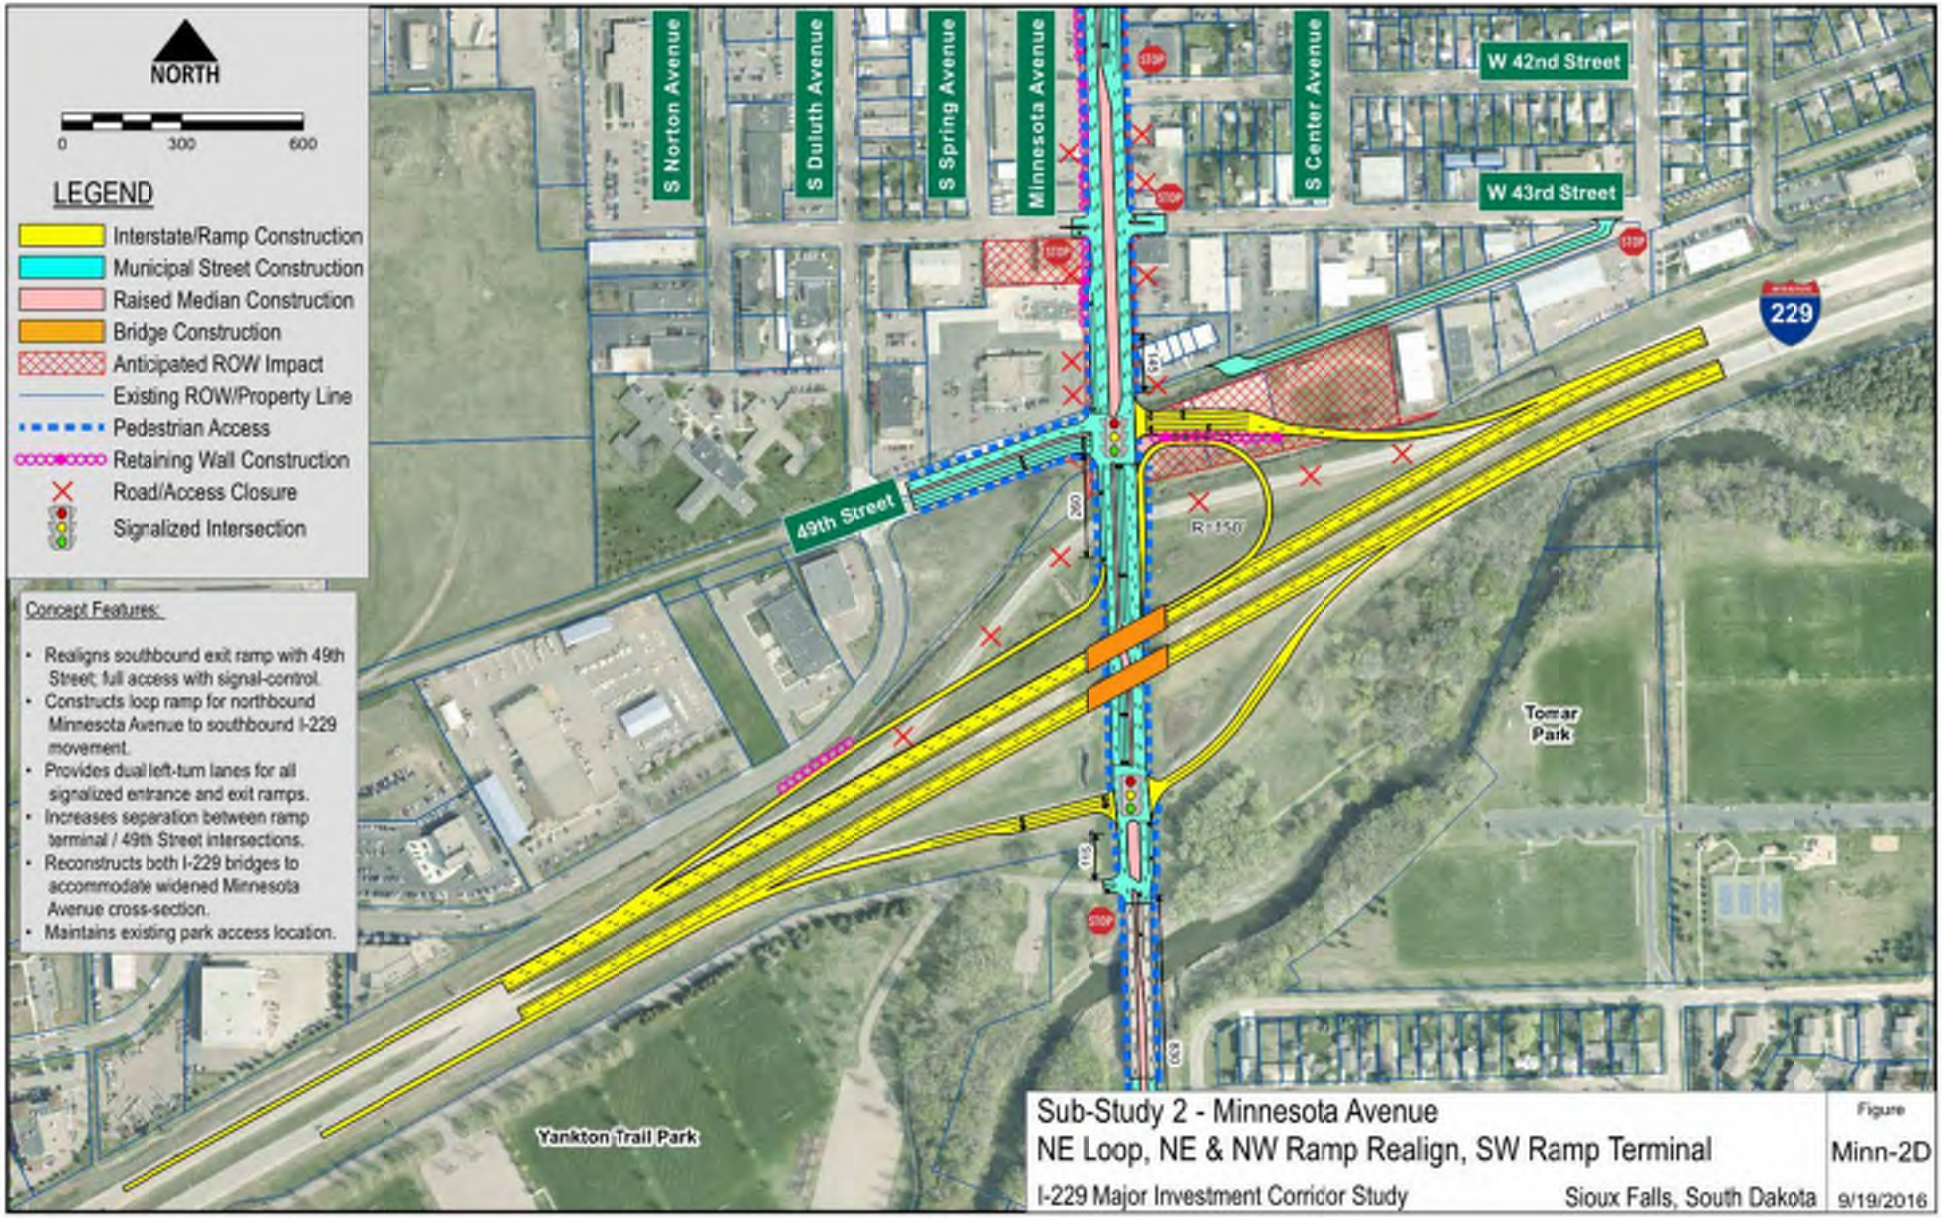


CONCEPT EVALUATION RESULTS

MINNESOTA AVENUE

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Minn-2C	Diamond with Loop, Direct Connect to 49th St, 5-Lane Big Sioux River to 41st St						Advance
Minn-2D	Diamond with Loop, Direct Connect to 49th St, 6-Lane Big Sioux River to 41st St						Advance
Minn-5D	Diverging Diamond Interchange, 6-Lane Big Sioux River to 41st St, 49th St Right-In Right-Out						Eliminate Closure of 49th Street Access


CONCEPTS FOR FURTHER CONSIDERATION

MINNESOTA AVENUE – 8C

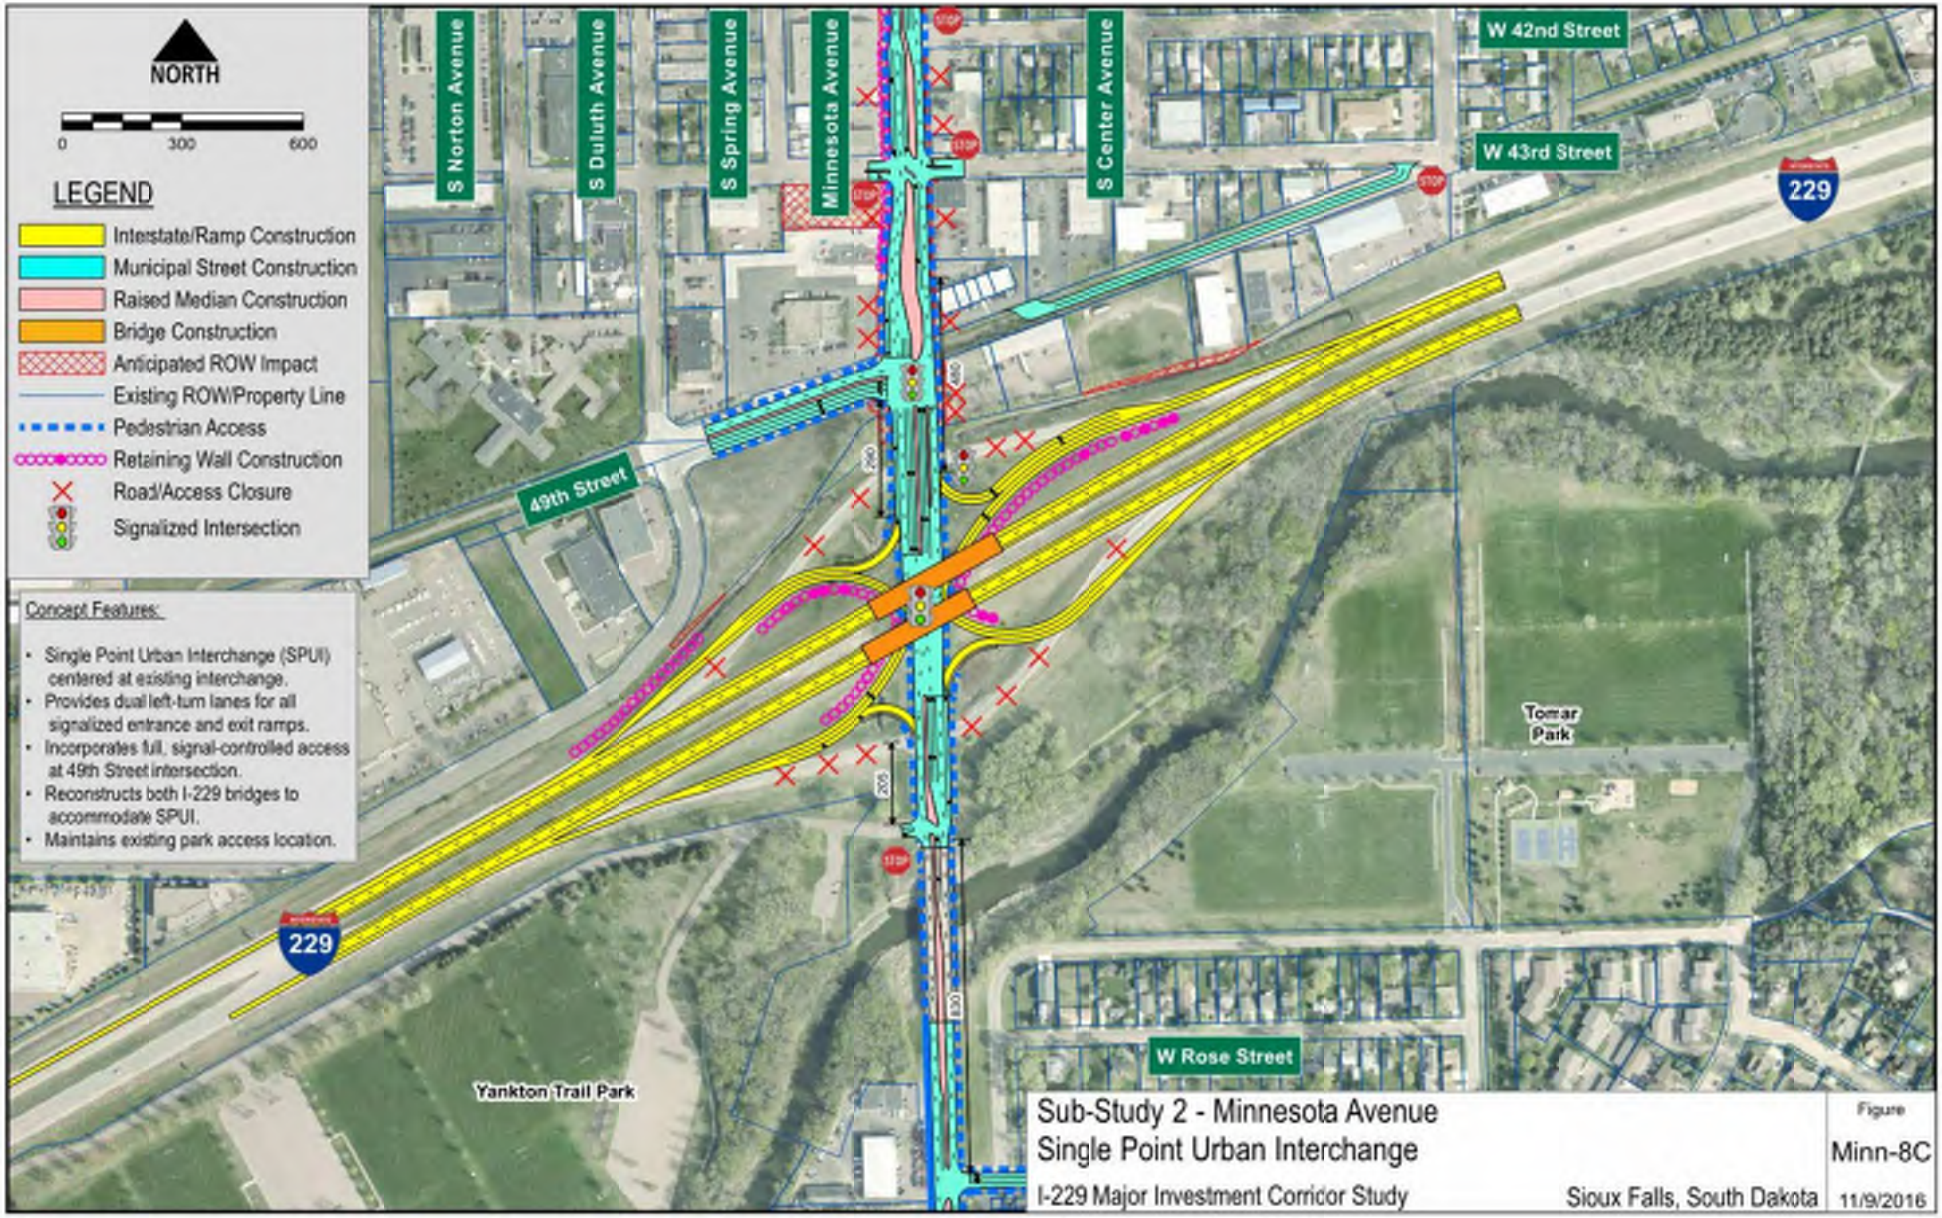


CONCEPTS FOR FURTHER CONSIDERATION

MINNESOTA AVENUE – 8D

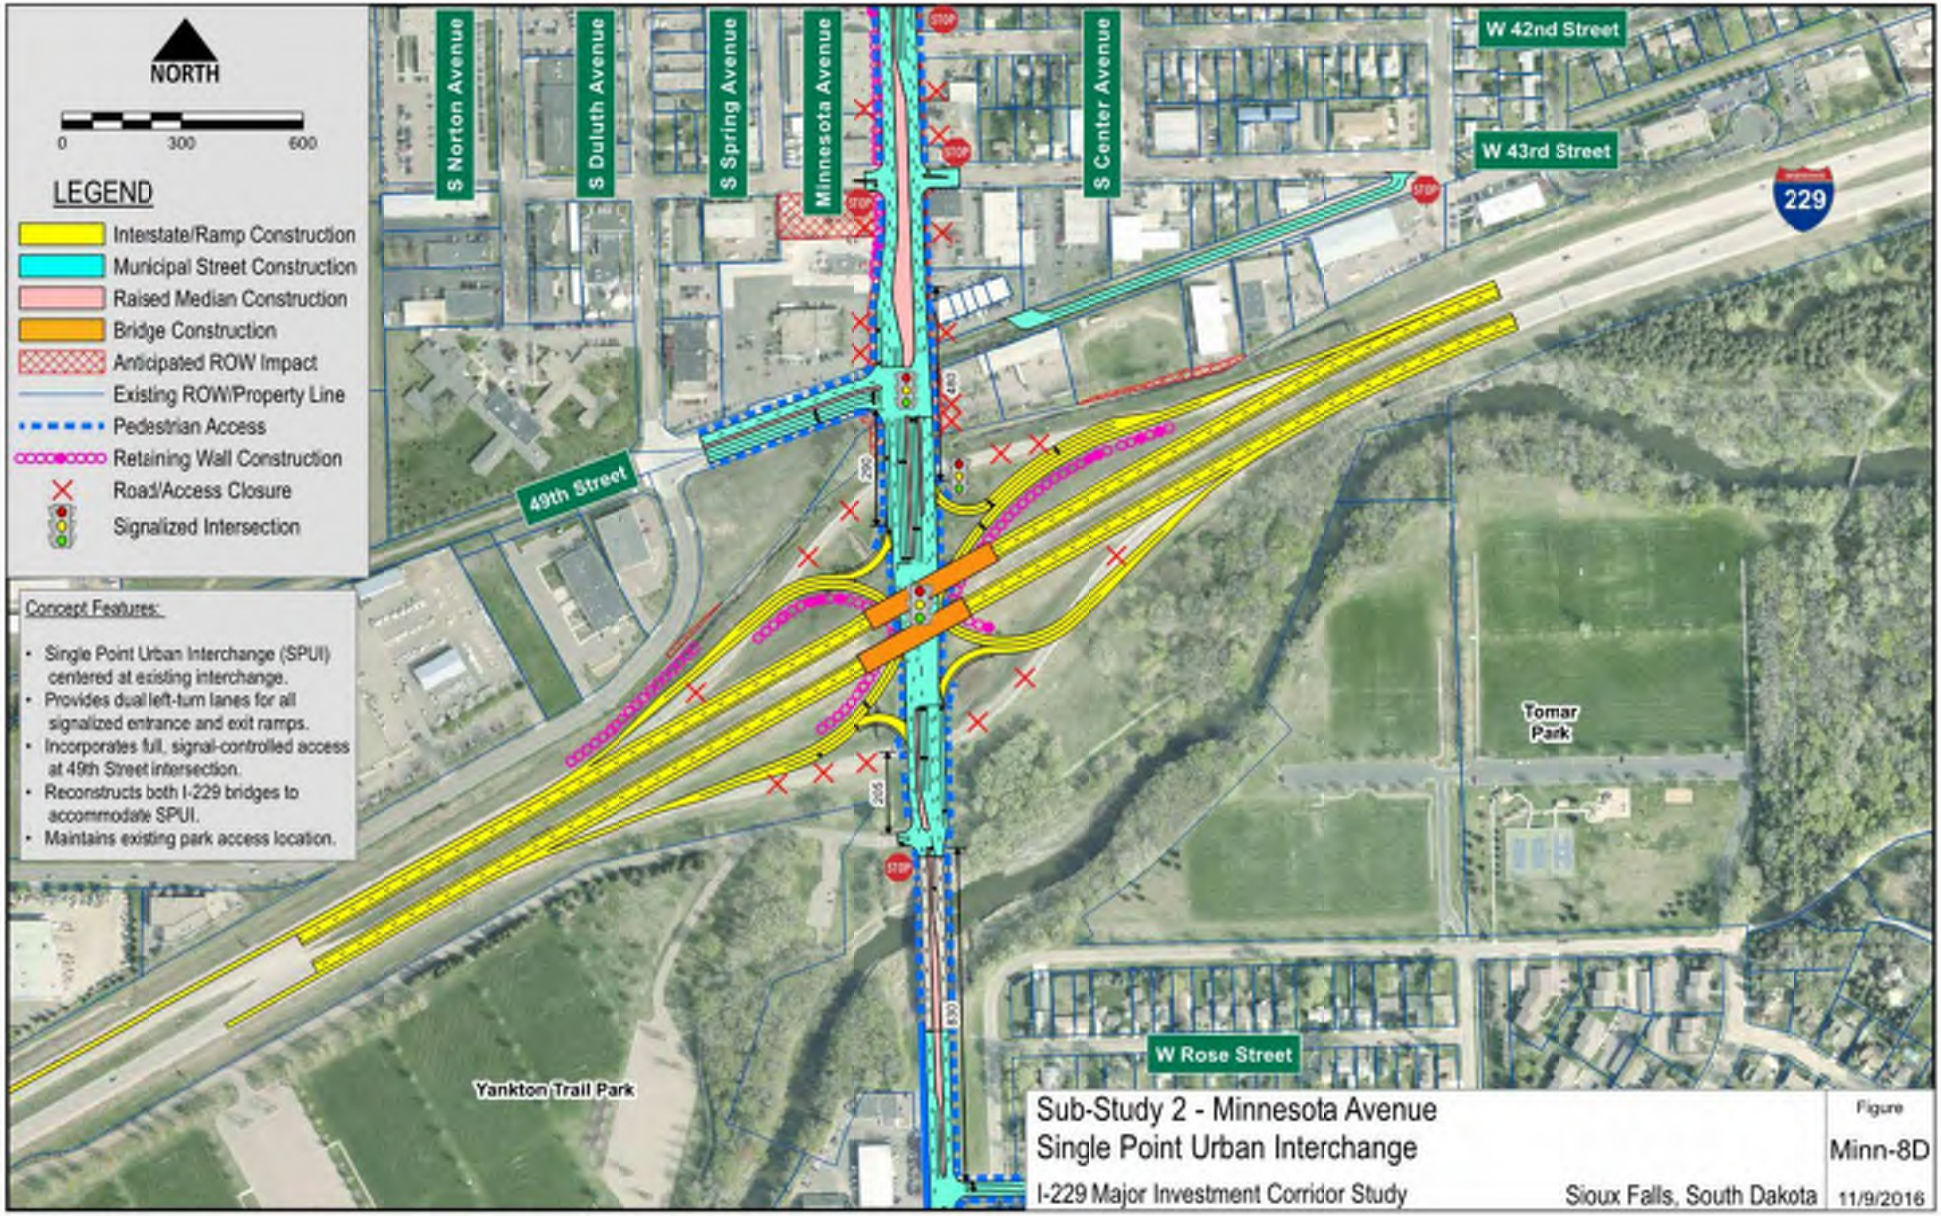


CONCEPTS FOR FURTHER CONSIDERATION

MINNESOTA AVENUE – 9D

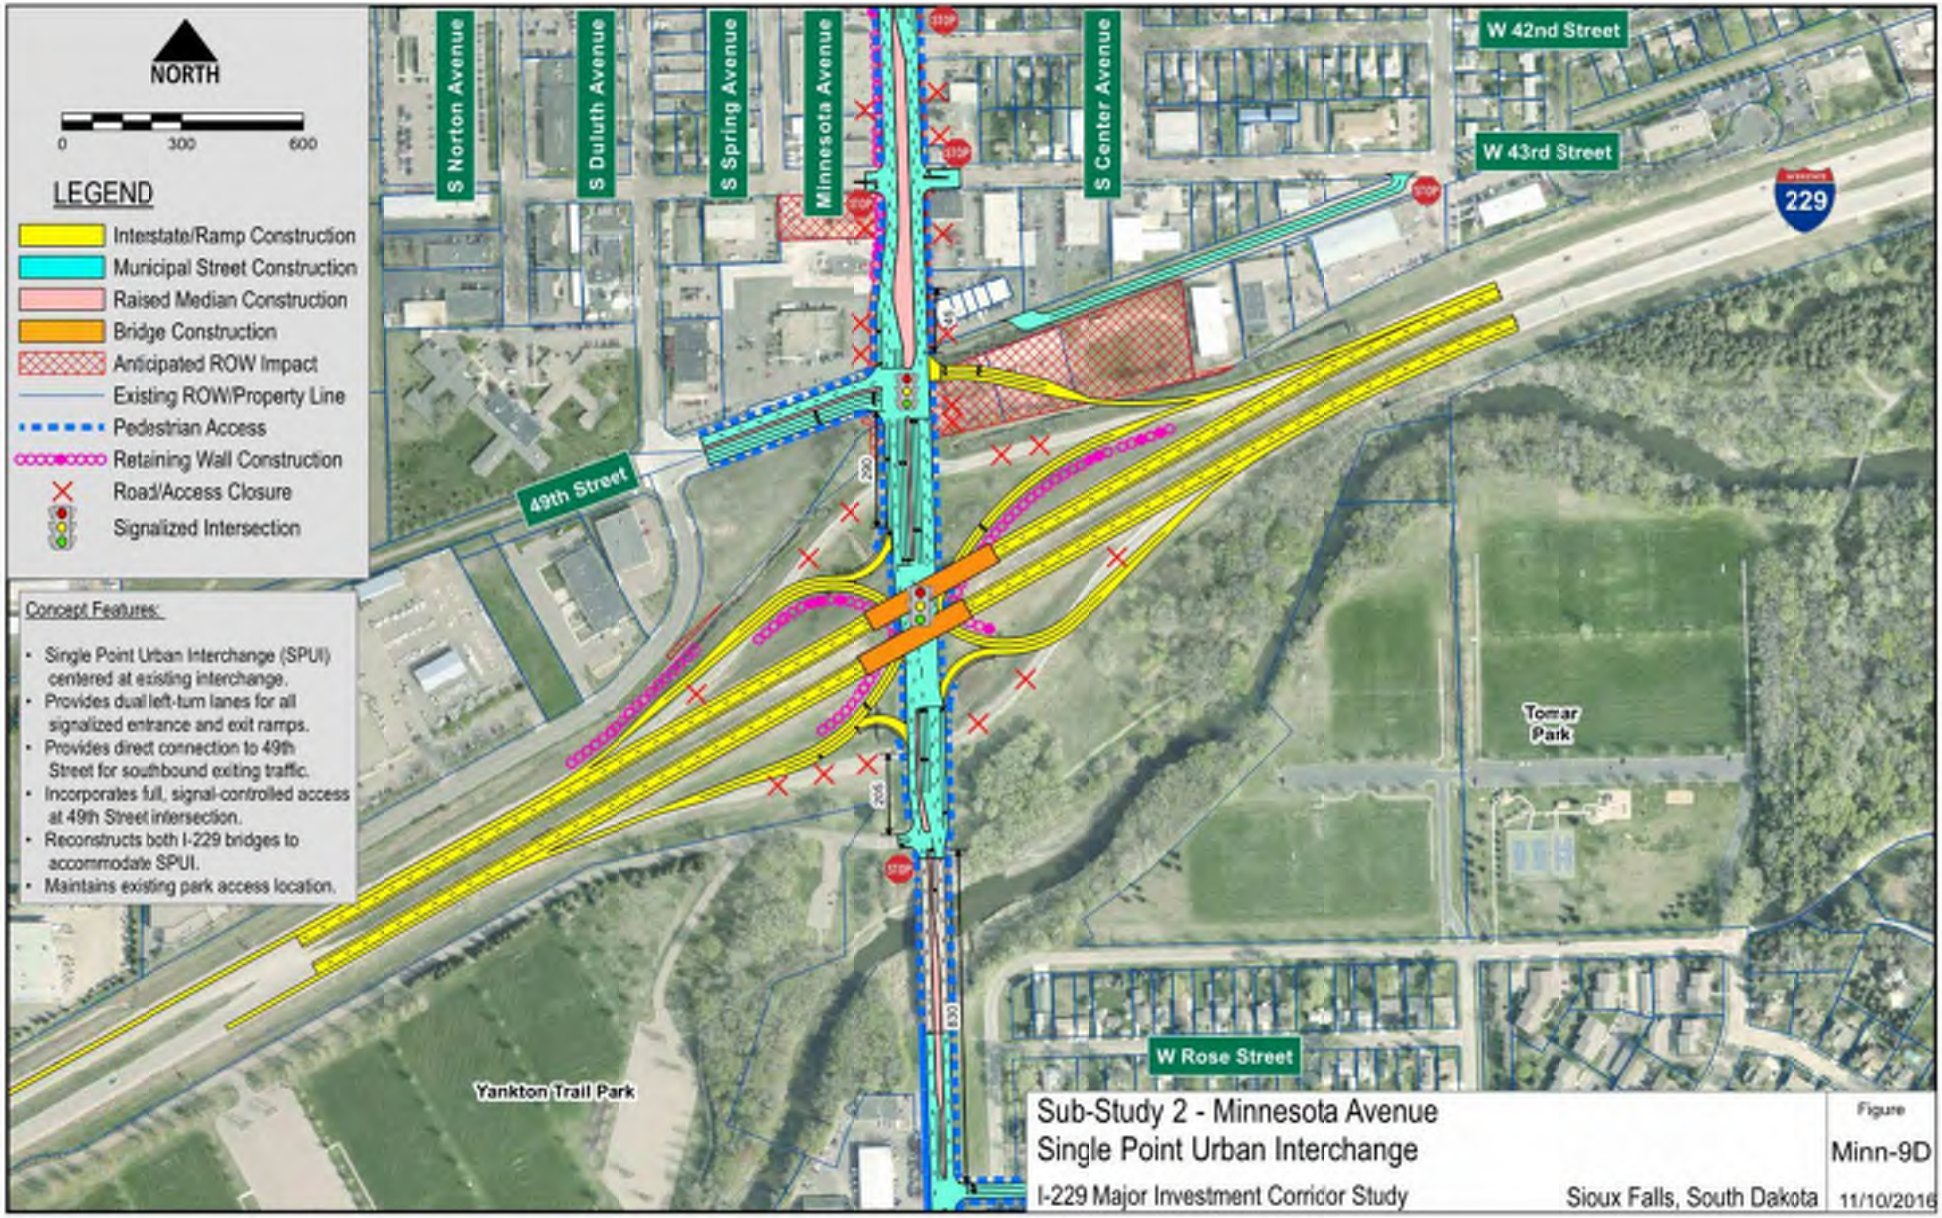


CONCEPT EVALUATION RESULTS

MINNESOTA AVENUE (cont.)

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Minn-8C	Single Point Urban Interchange, 5-Lane Big Sioux River to 41st St, 49th St Full Access						Advance
Minn-8D	Single Point Urban Interchange, 6-Lane Big Sioux River to 41st St, 49th St Full Access						Advance
Minn-9	Single Point Urban Interchange, Exit Ramp Connection to 49th St, 5-Lane Big Sioux River to 41st St						Advance


CONCEPTS FOR FURTHER CONSIDERATION

CLIFF AVENUE – 1

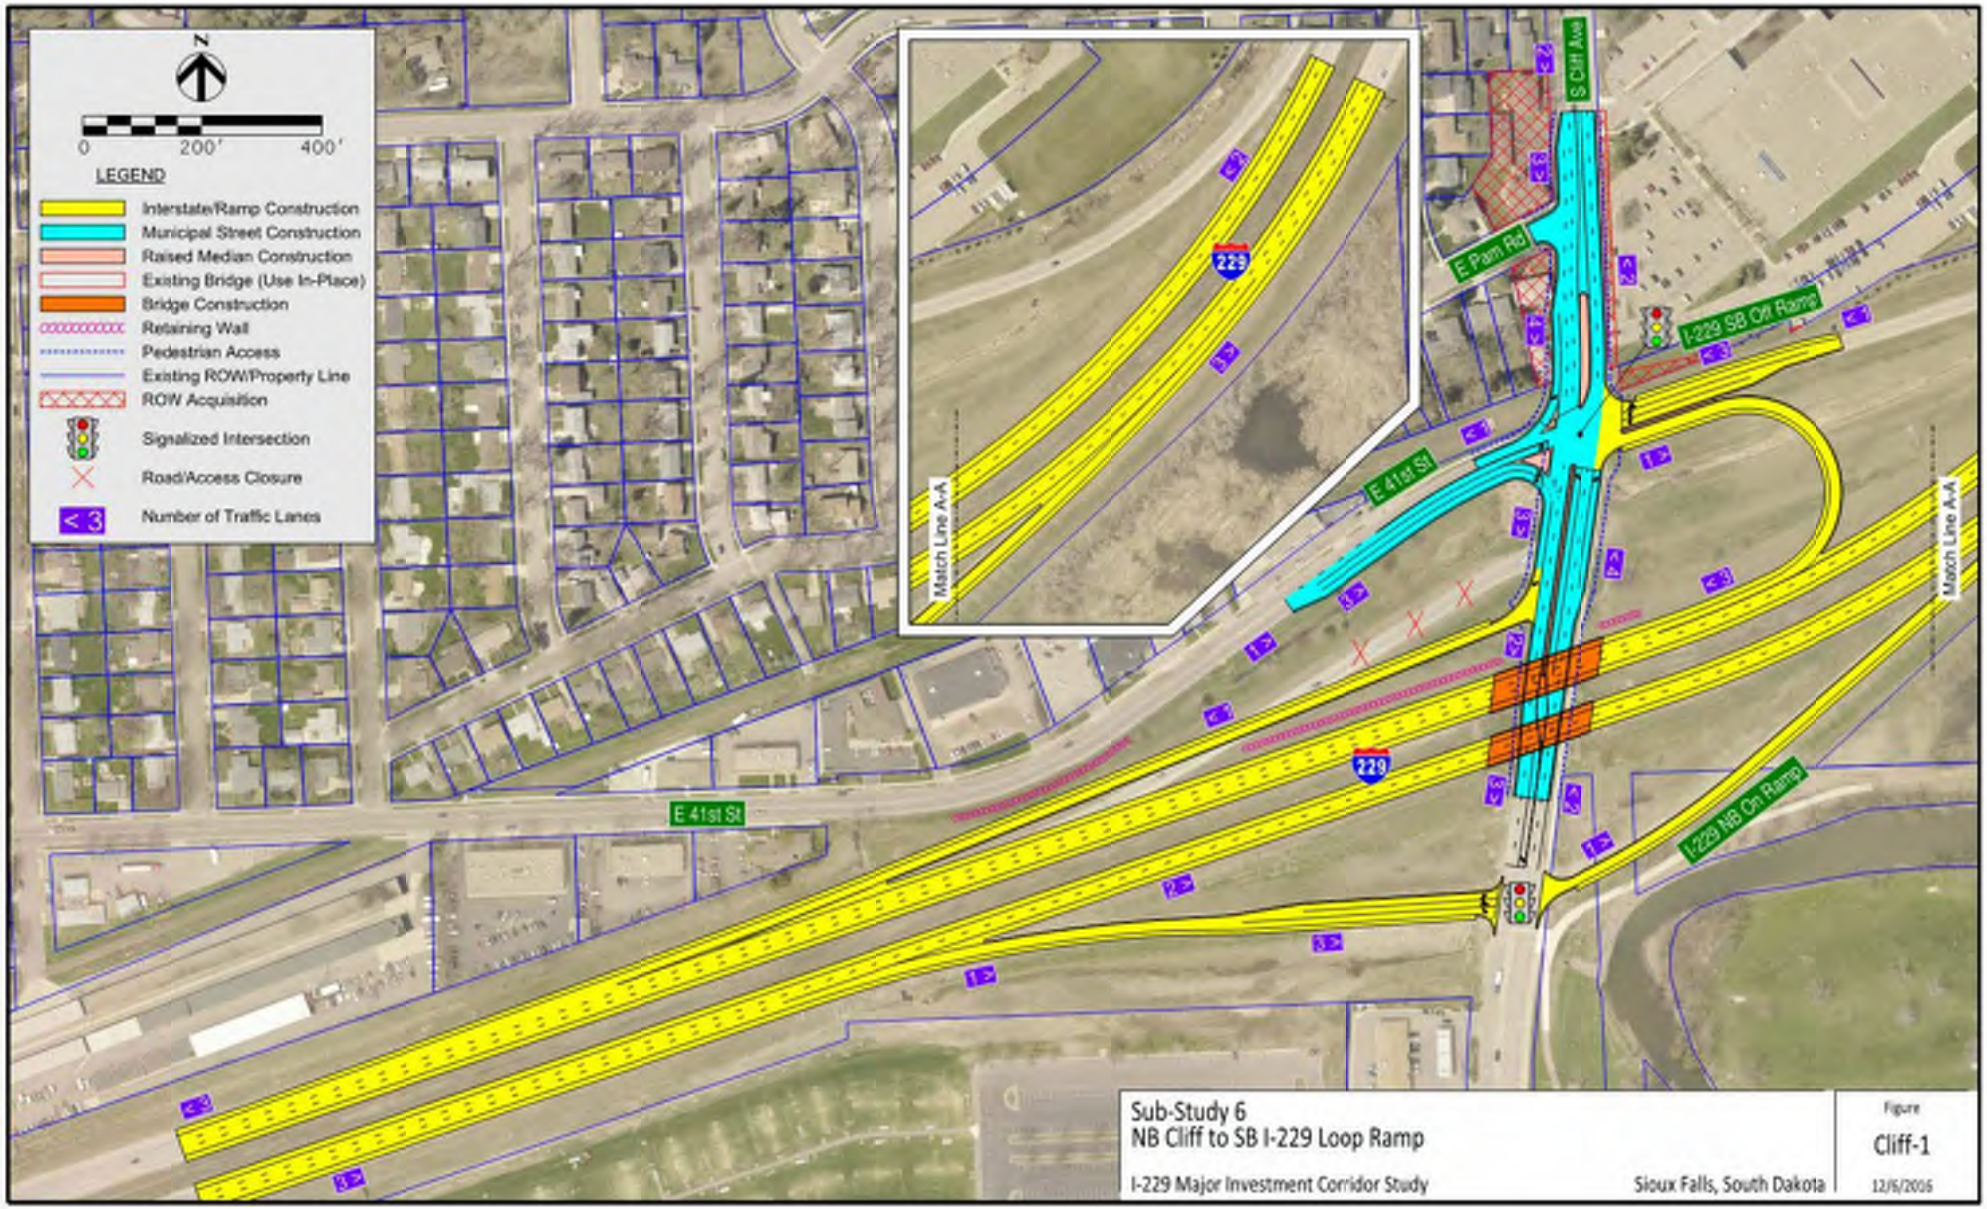


CONCEPTS FOR FURTHER CONSIDERATION

CLIFF AVENUE – 6

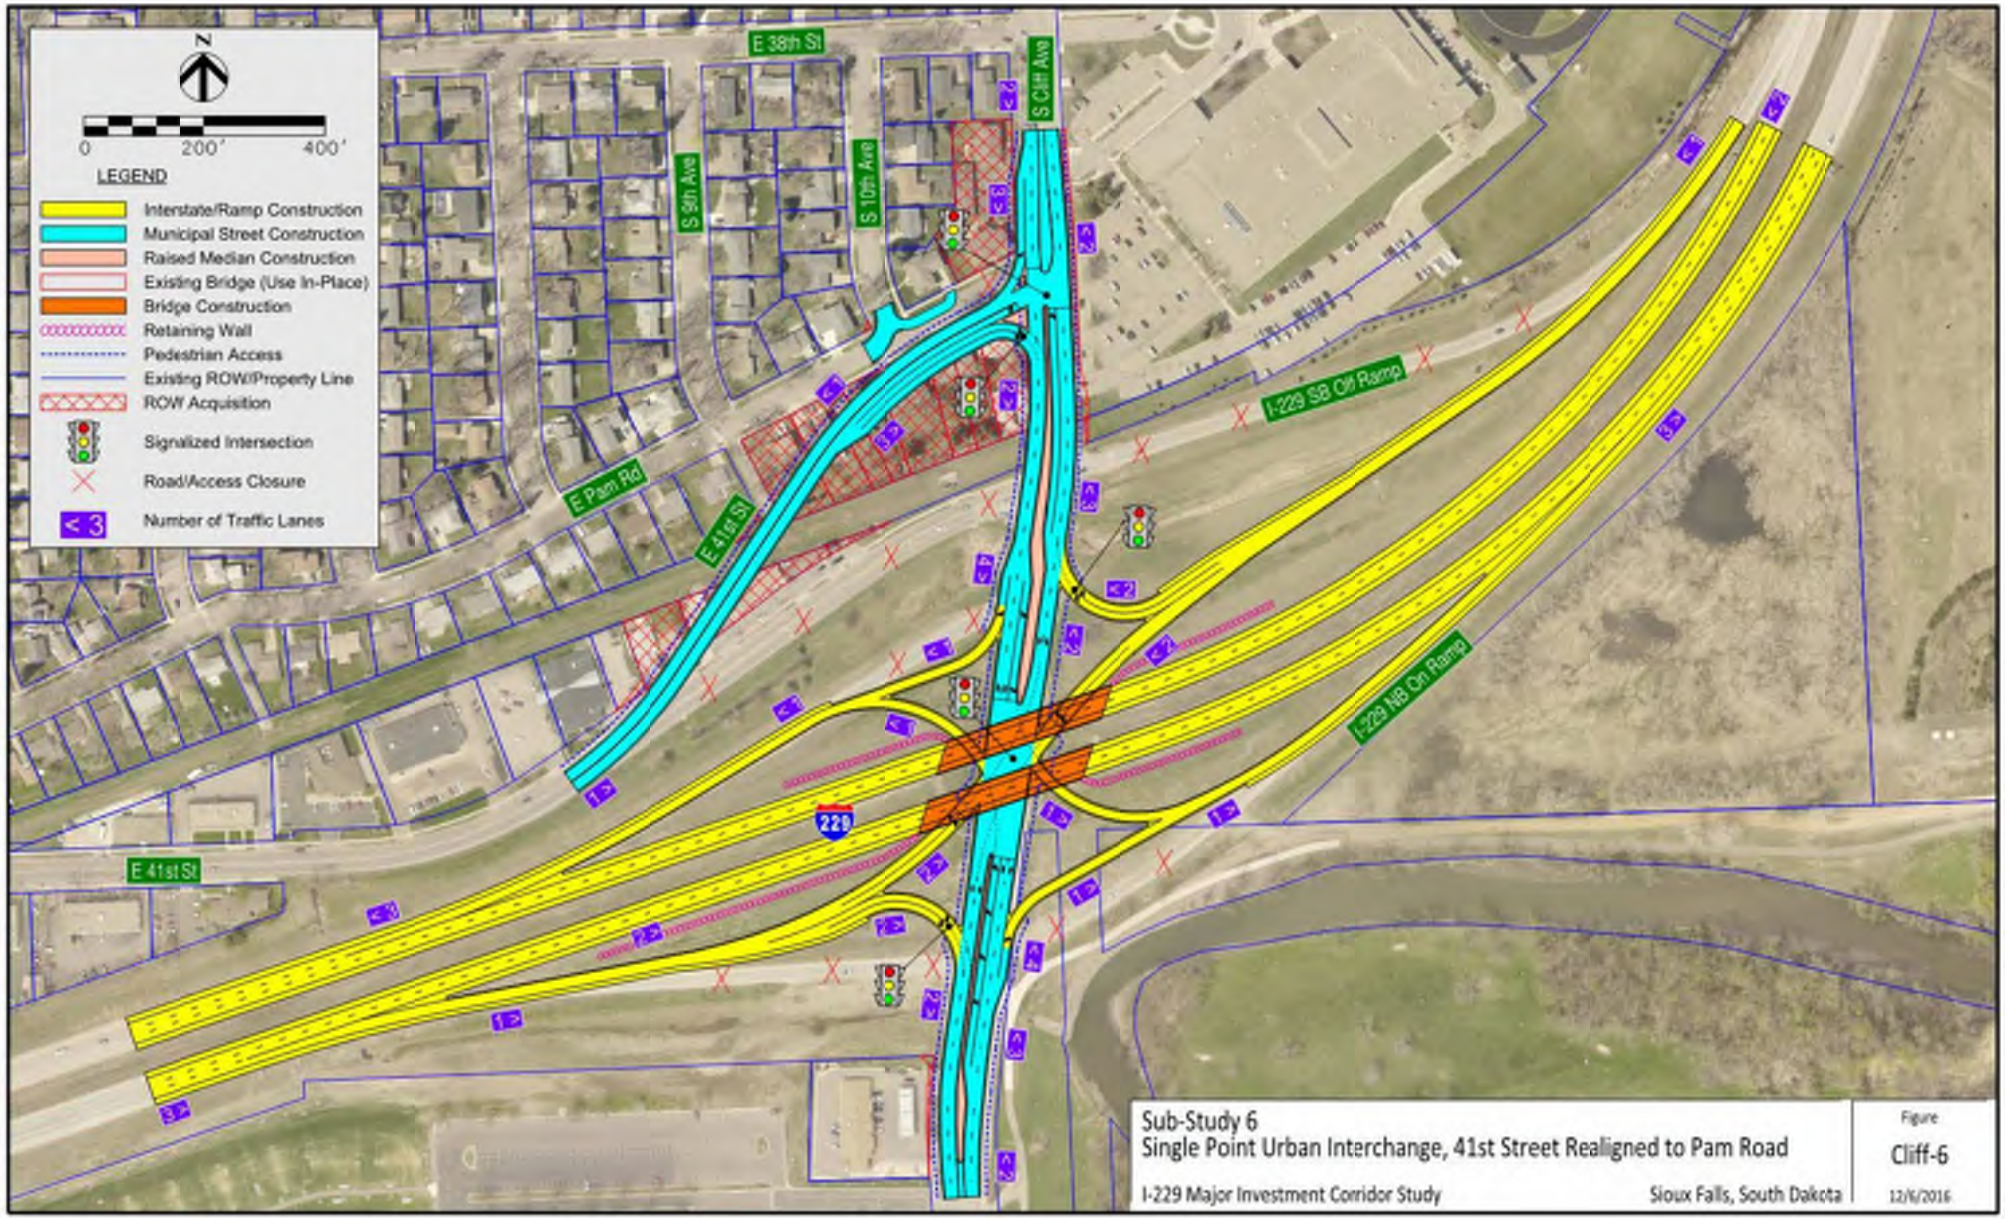






CONCEPTS FOR FURTHER CONSIDERATION

CLIFF AVENUE – 7

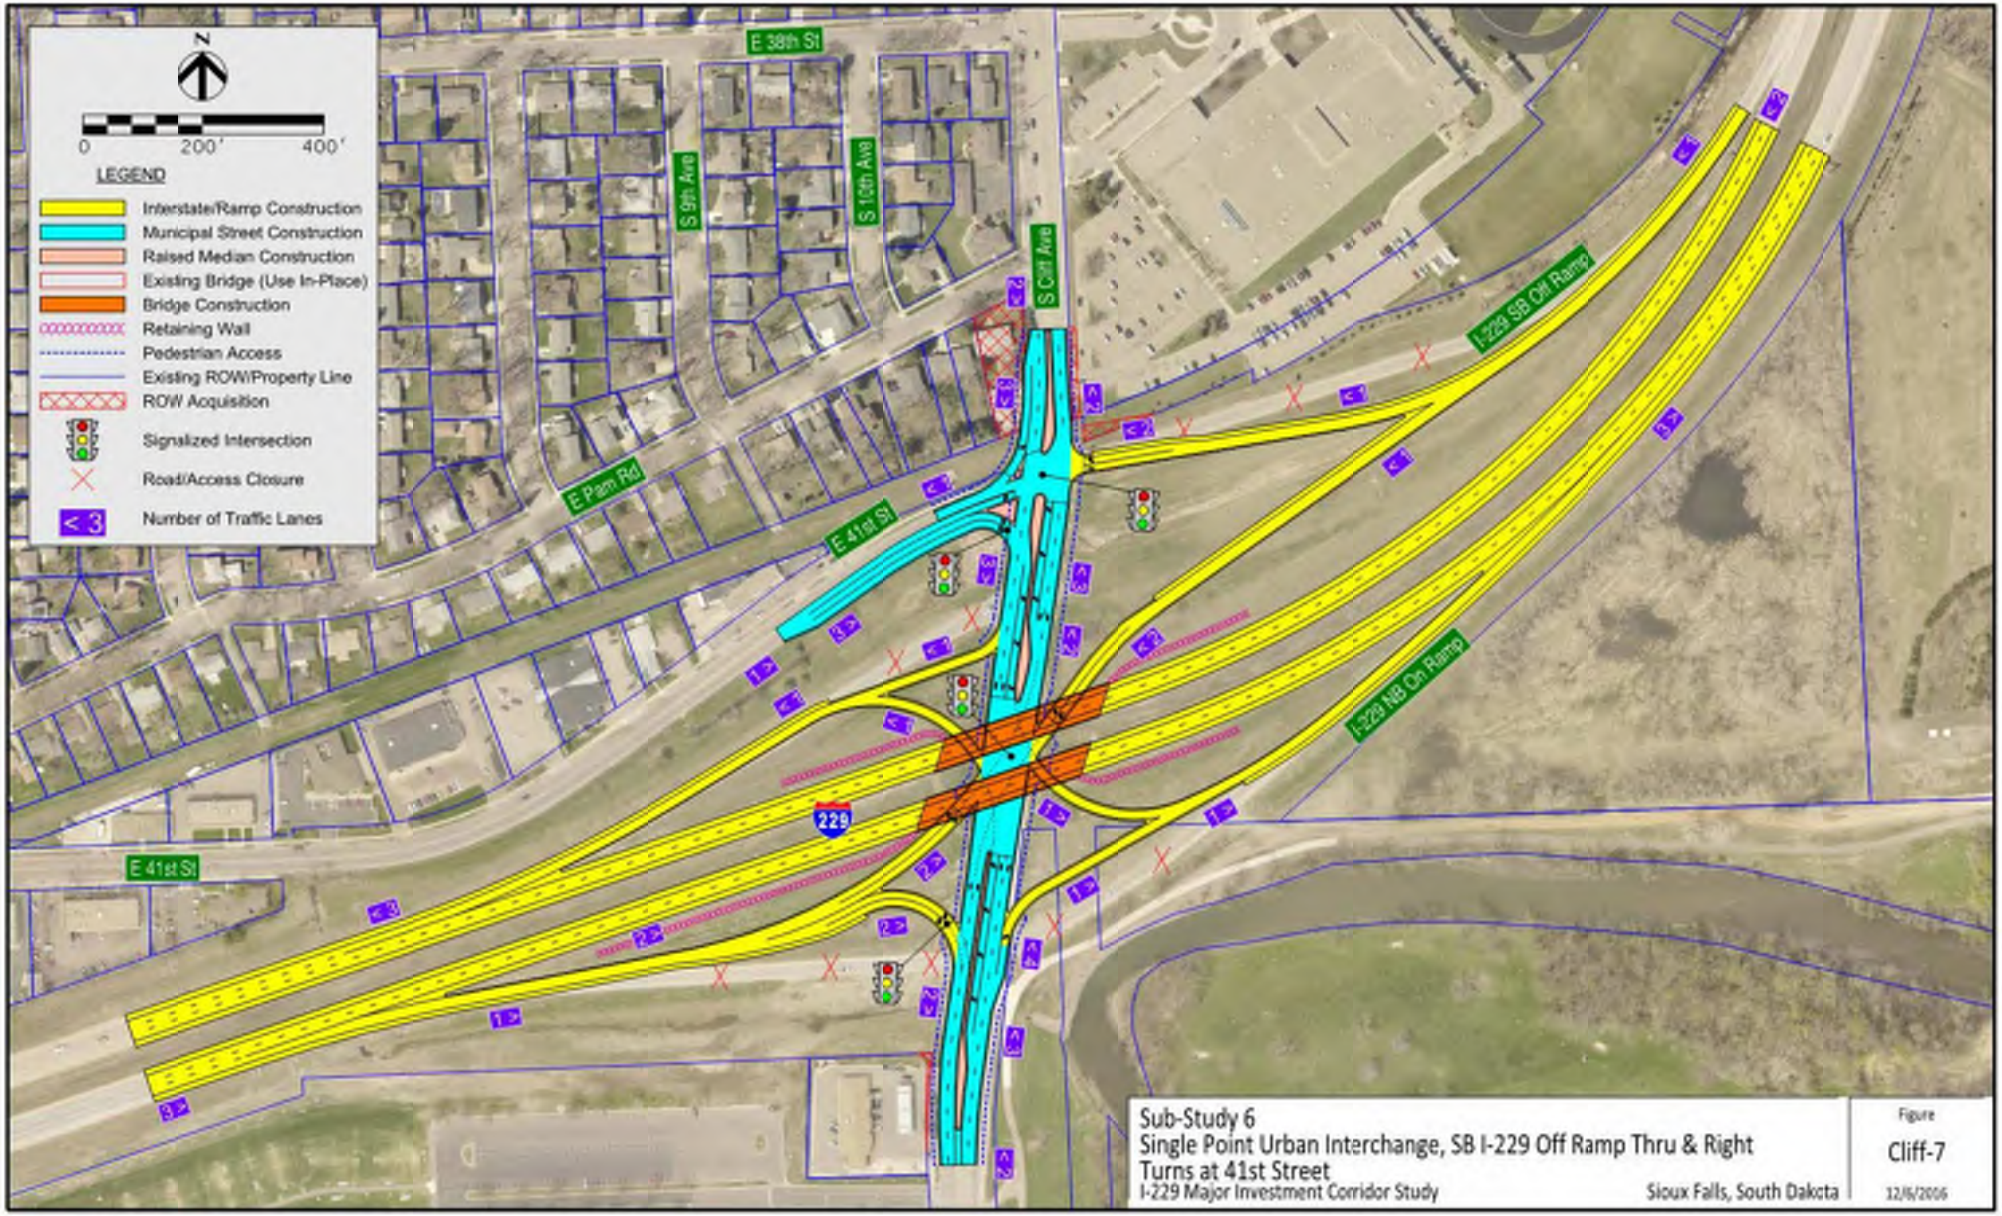


CONCEPT EVALUATION RESULTS

CLIFF AVENUE

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Cliff-1	NB Cliff to SB I-229 Loop Ramp						Advance
Cliff-6	Single Point Urban Interchange, 41st St Realigned to Pam Rd						Advance
Cliff-7	Single Point Urban Interchange, SB I-229 Off-Ramp Thru & Right Turns at 41st St						Advance


CONCEPTS FOR FURTHER CONSIDERATION

10TH STREET – 2 (B/C)

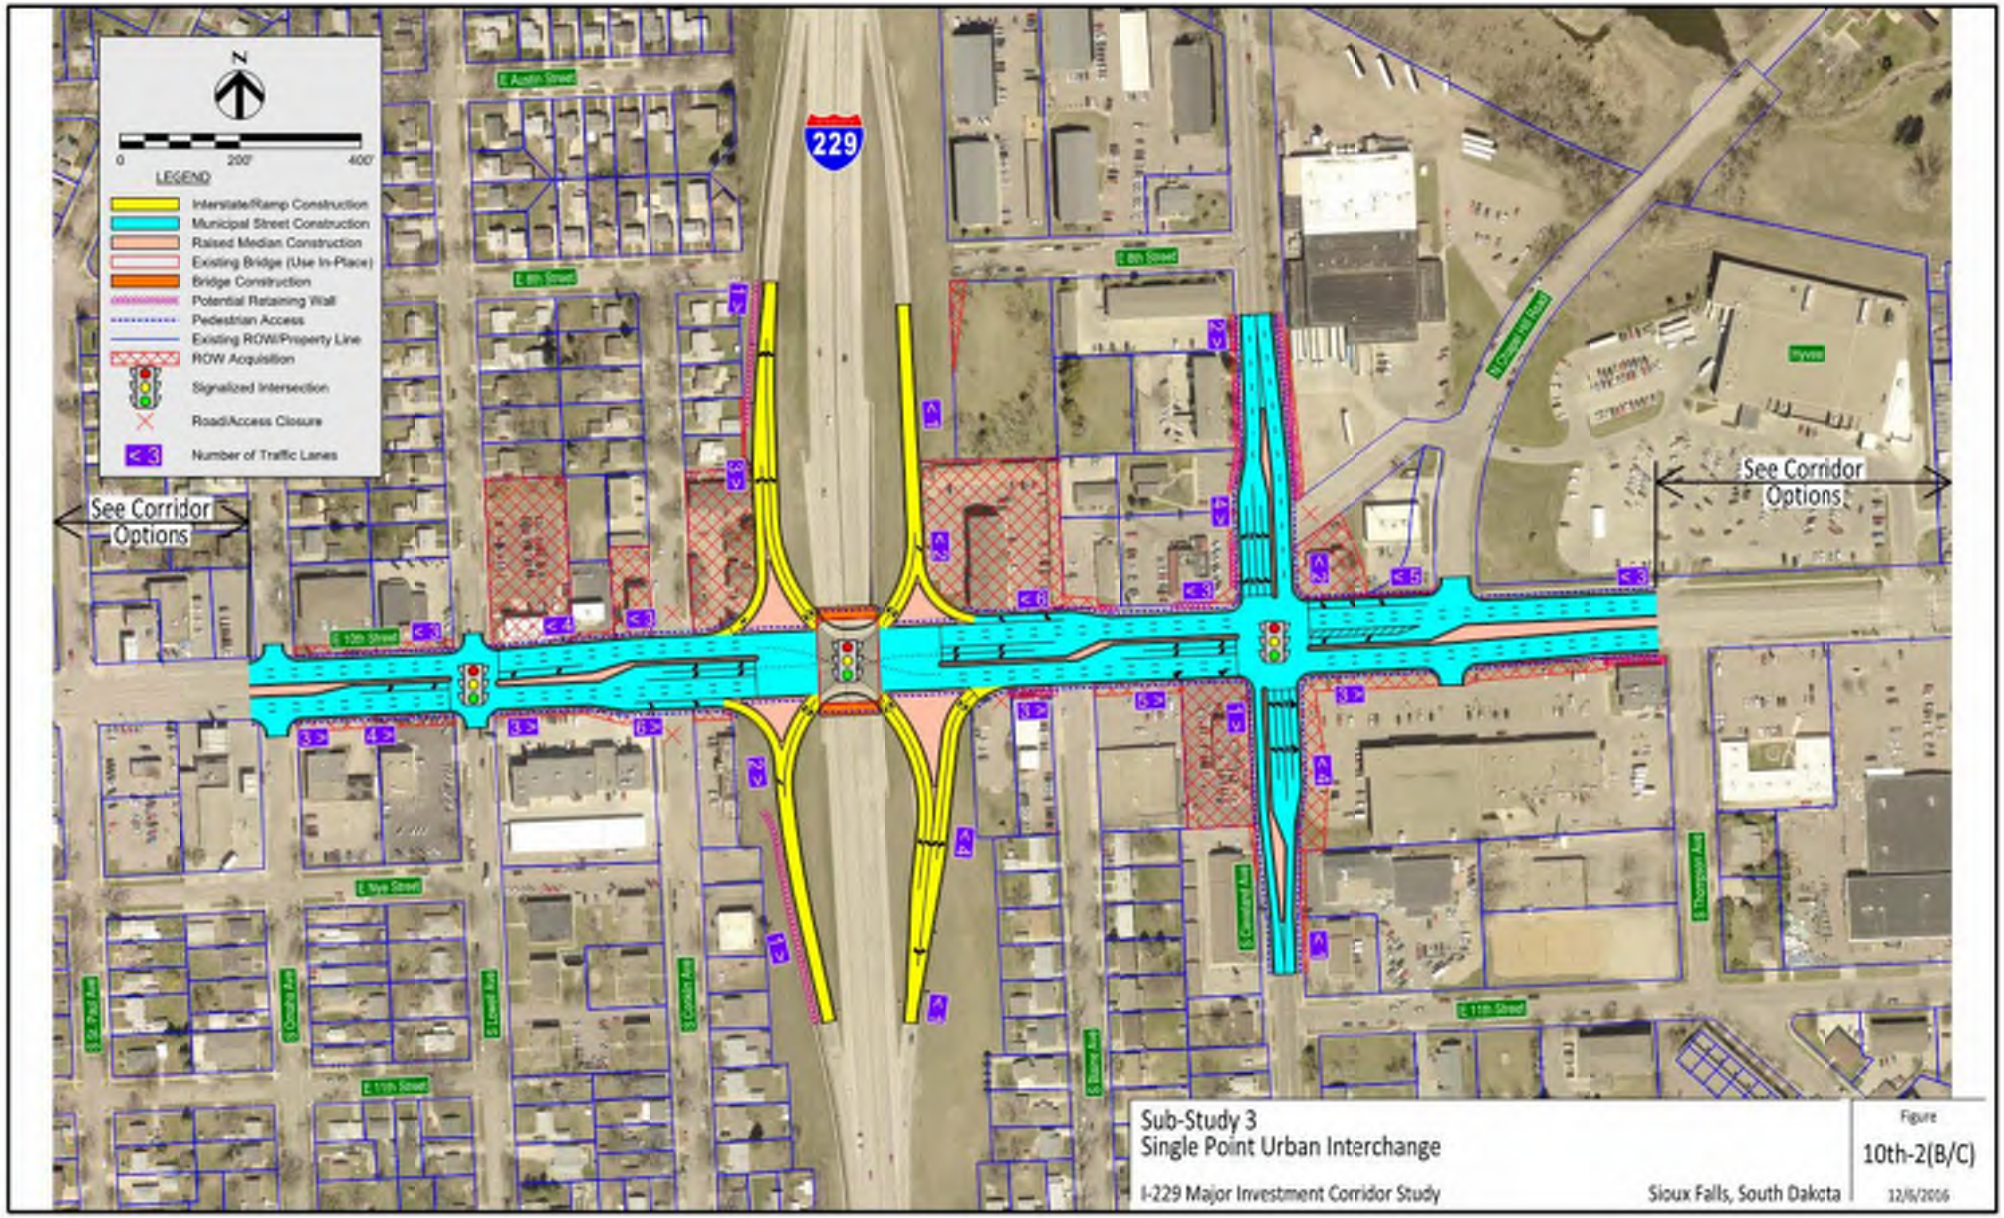


CONCEPTS FOR FURTHER CONSIDERATION

10TH STREET – 5 (B/C)

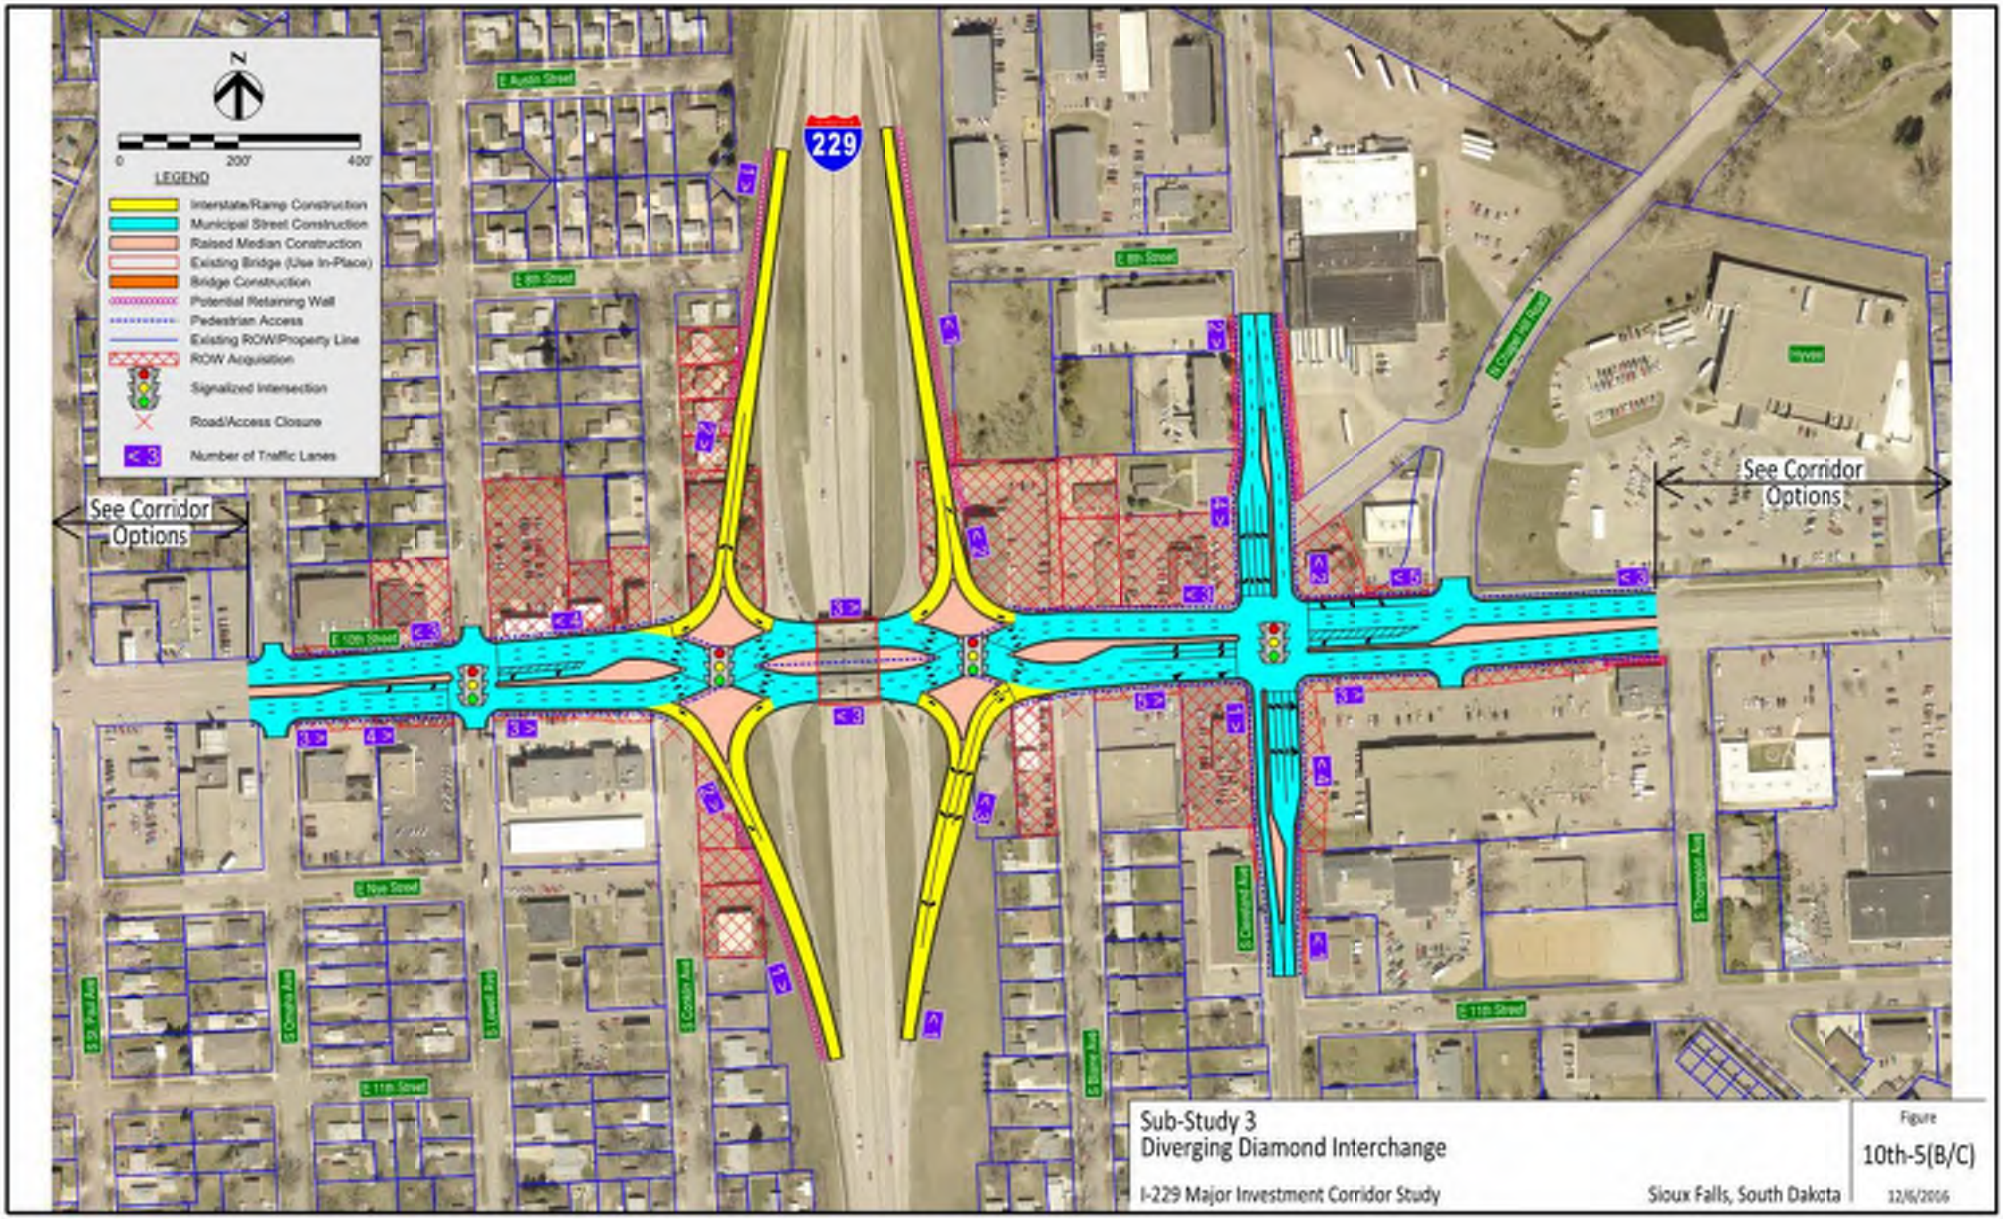



CONCEPTS FOR FURTHER CONSIDERATION

10TH STREET – VAR

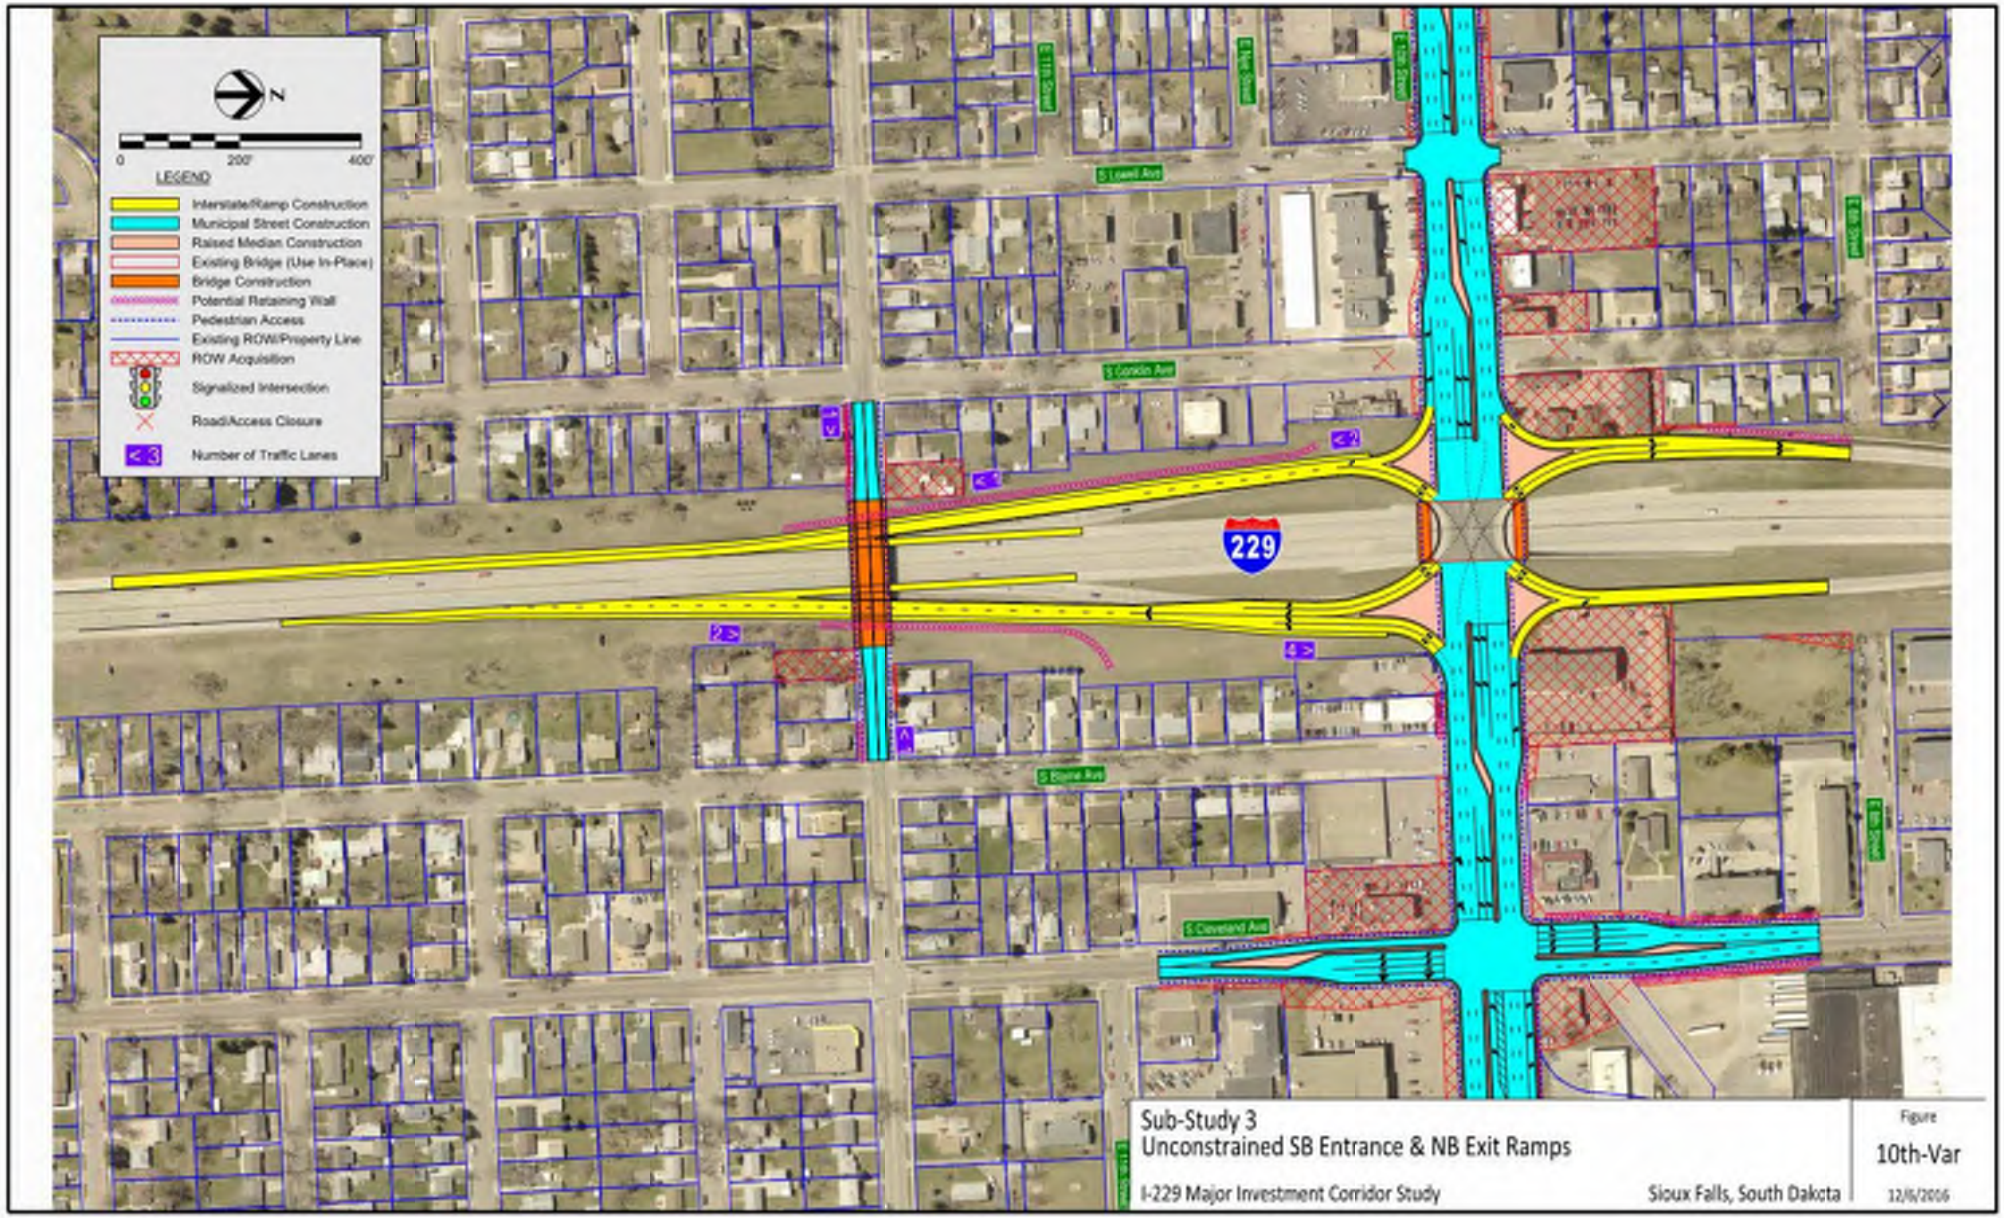


4-Lane Divided Corridor

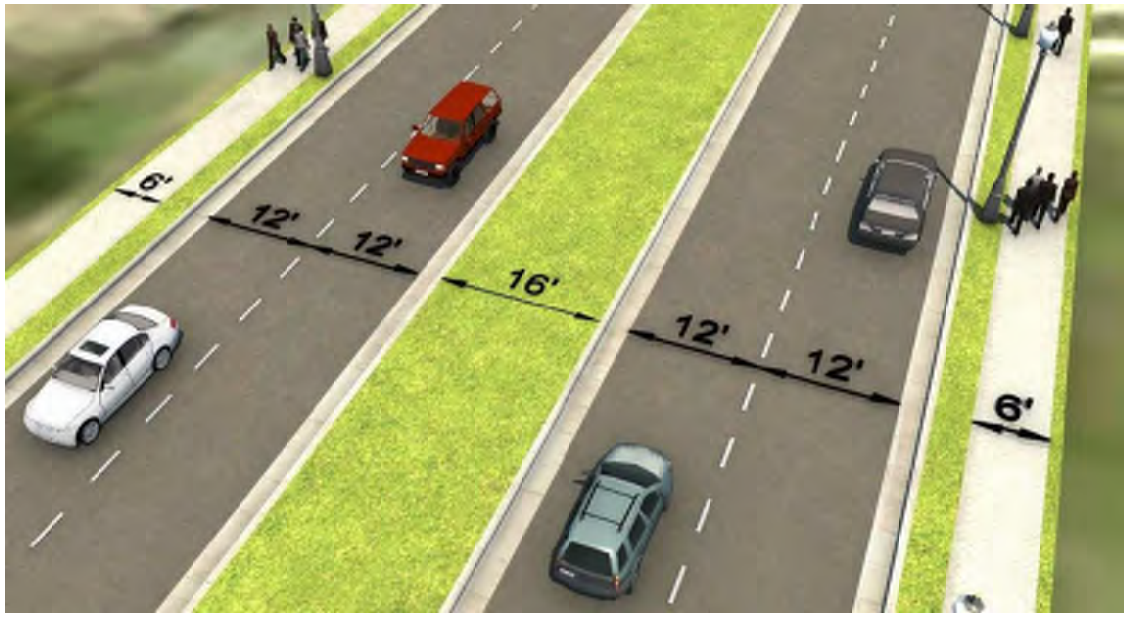

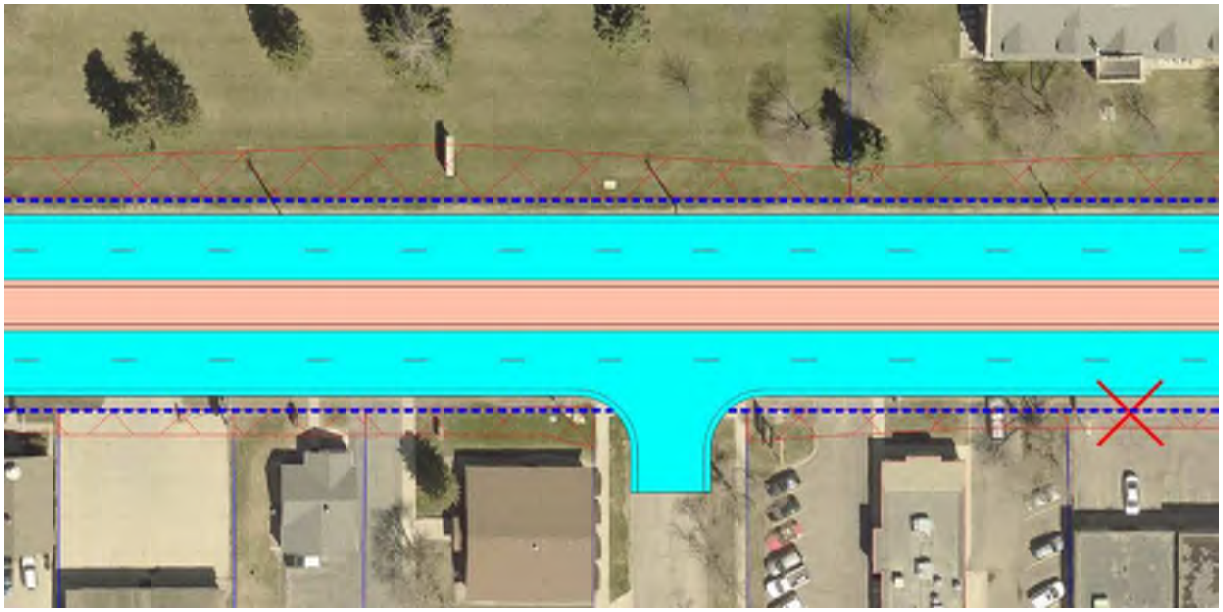










5-Lane Undivided Corridor

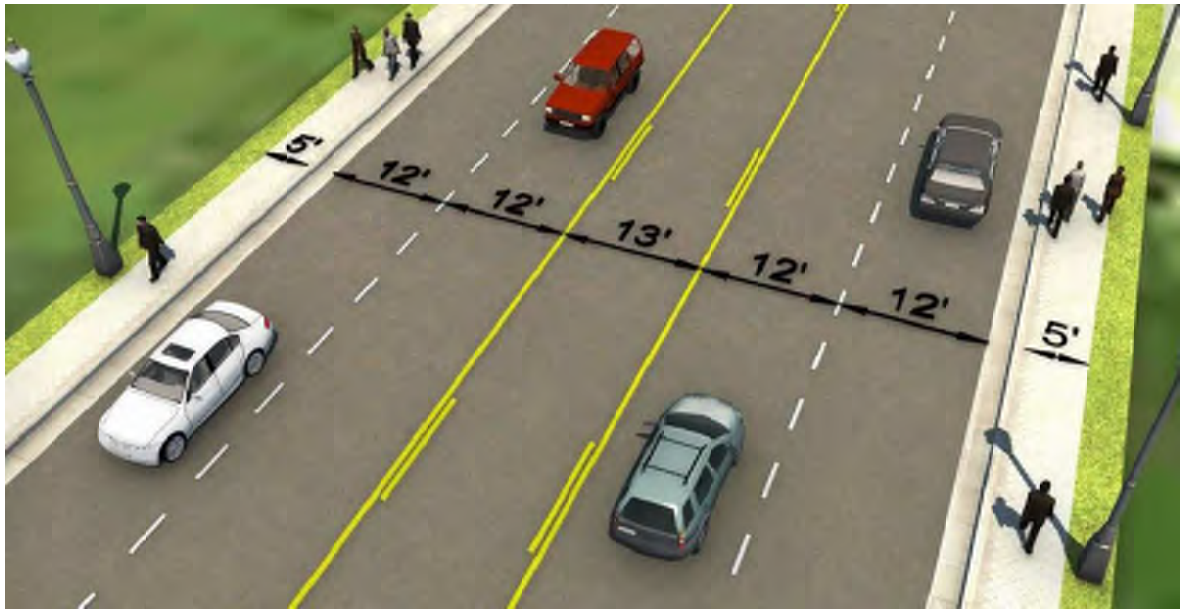














CONCEPT EVALUATION RESULTS

10TH STREET


Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						**Advance**
10th-2A	Single Point Urban Interchange, 6-Lane Divided Corridor						**Eliminate** Property impacts, environmental impacts, and cost
10th-2B	Single Point Urban Interchange, 4-Lane Divided Corridor						**Advance**
10th-2C	Single Point Urban Interchange, 5-Lane Undivided Corridor						**Advance**

CONCEPT EVALUATION RESULTS 10TH STREET (cont.)

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
10th-5A	Diverging Diamond Interchange, 6-Lane Divided Corridor						**Eliminate** Property impacts, environmental impacts, and cost
10th-5B	Diverging Diamond Interchange, 4-Lane Divided Corridor						**Advance**
10th-5C	Diverging Diamond Interchange, 5-Lane Undivided Corridor						**Advance**
10th-9A	Tight Split Diamond, 6th St/10th St with 4-Lane Divided Corridor						**Eliminate** Environmental impacts, cost, and lower traffic & safety benefits
10th-9B	Tight Split Diamond, 6th St/10th St with 5-Lane Undivided Corridor						**Eliminate** Environmental impacts and lower traffic & safety benefits
10th-Var							**Advance**


CONCEPTS FOR FURTHER CONSIDERATION

RICE STREET – 2A

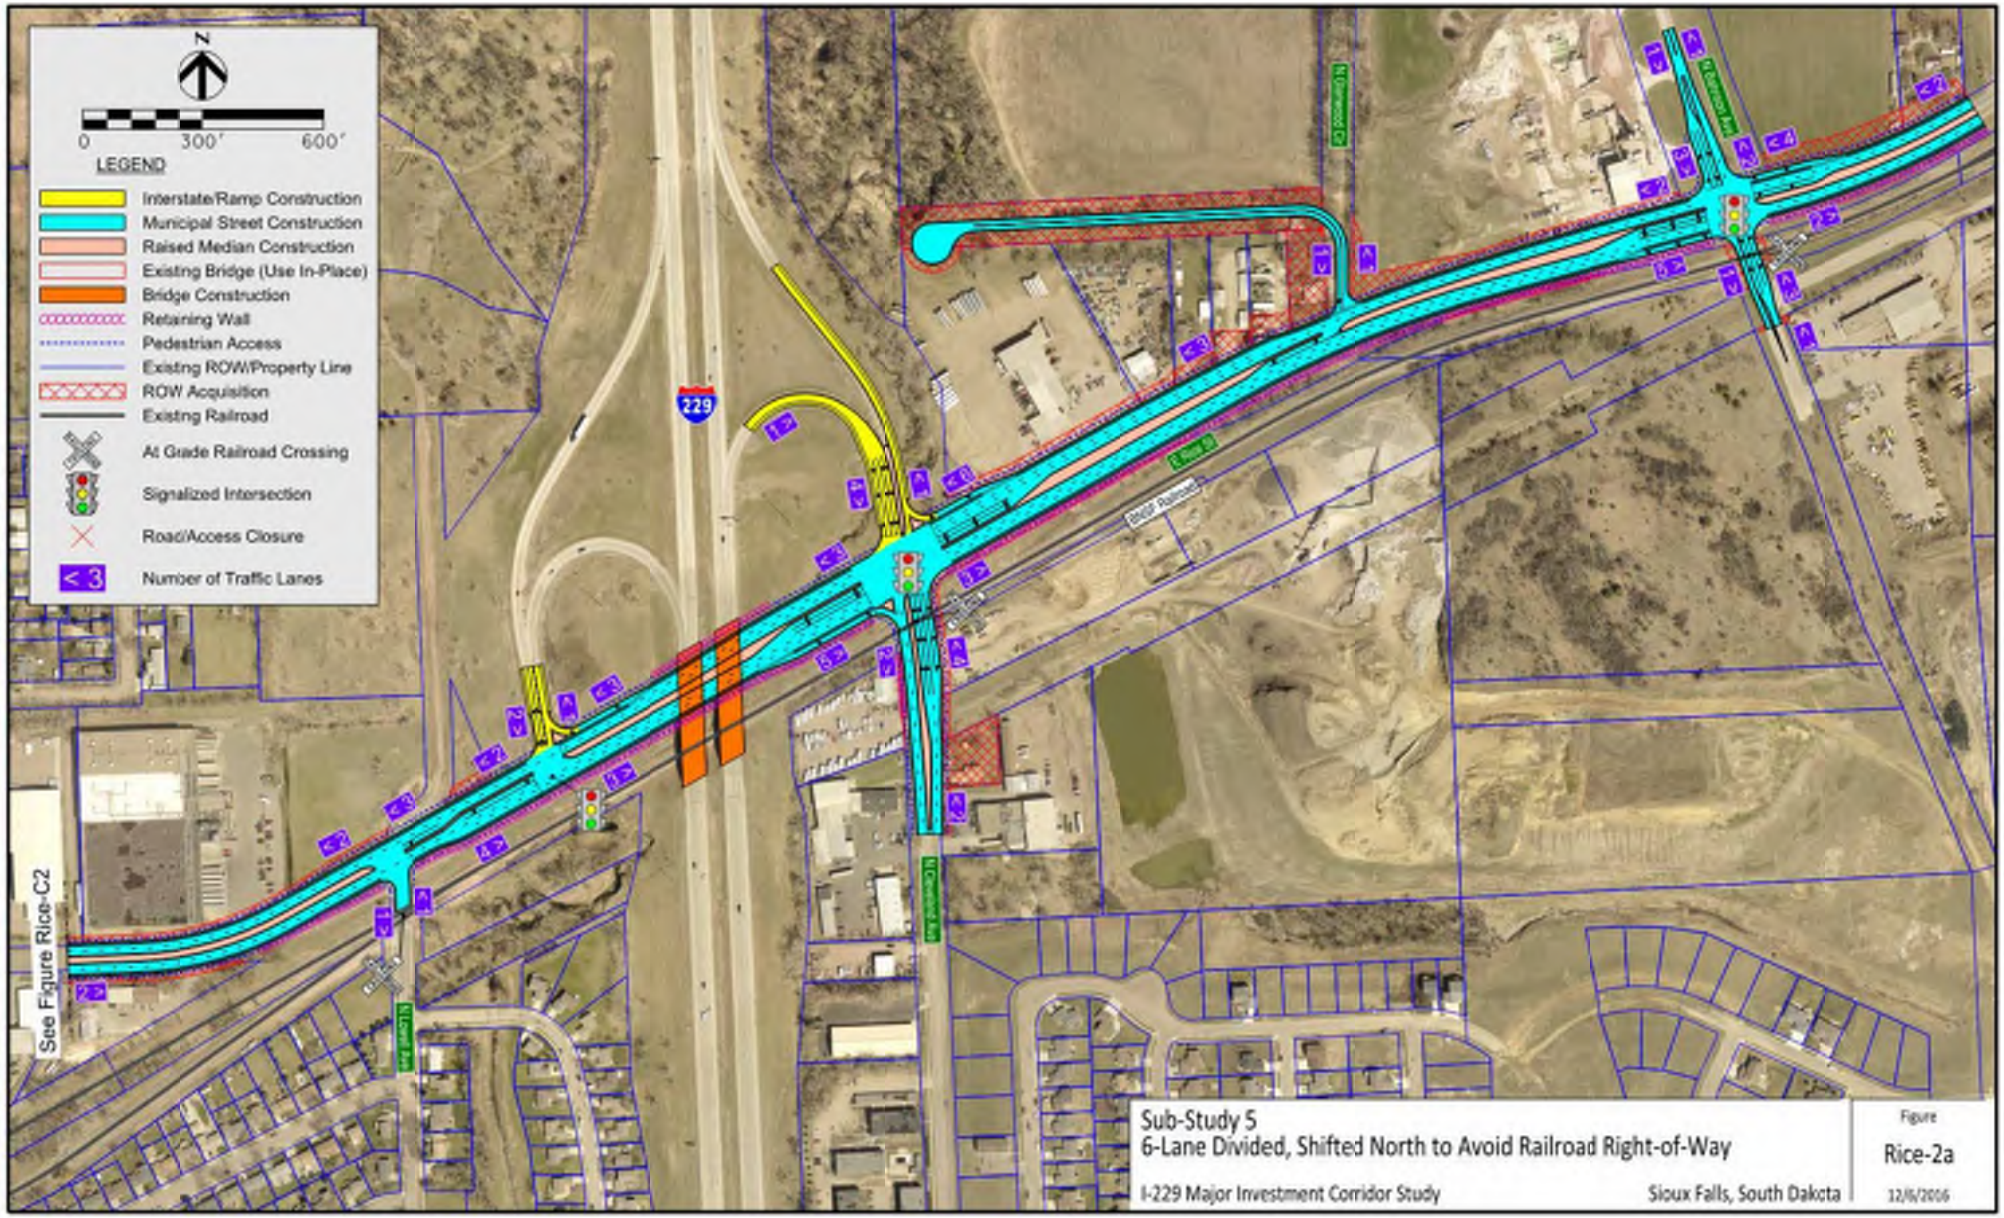


CONCEPTS FOR FURTHER CONSIDERATION

RICE STREET – 3C

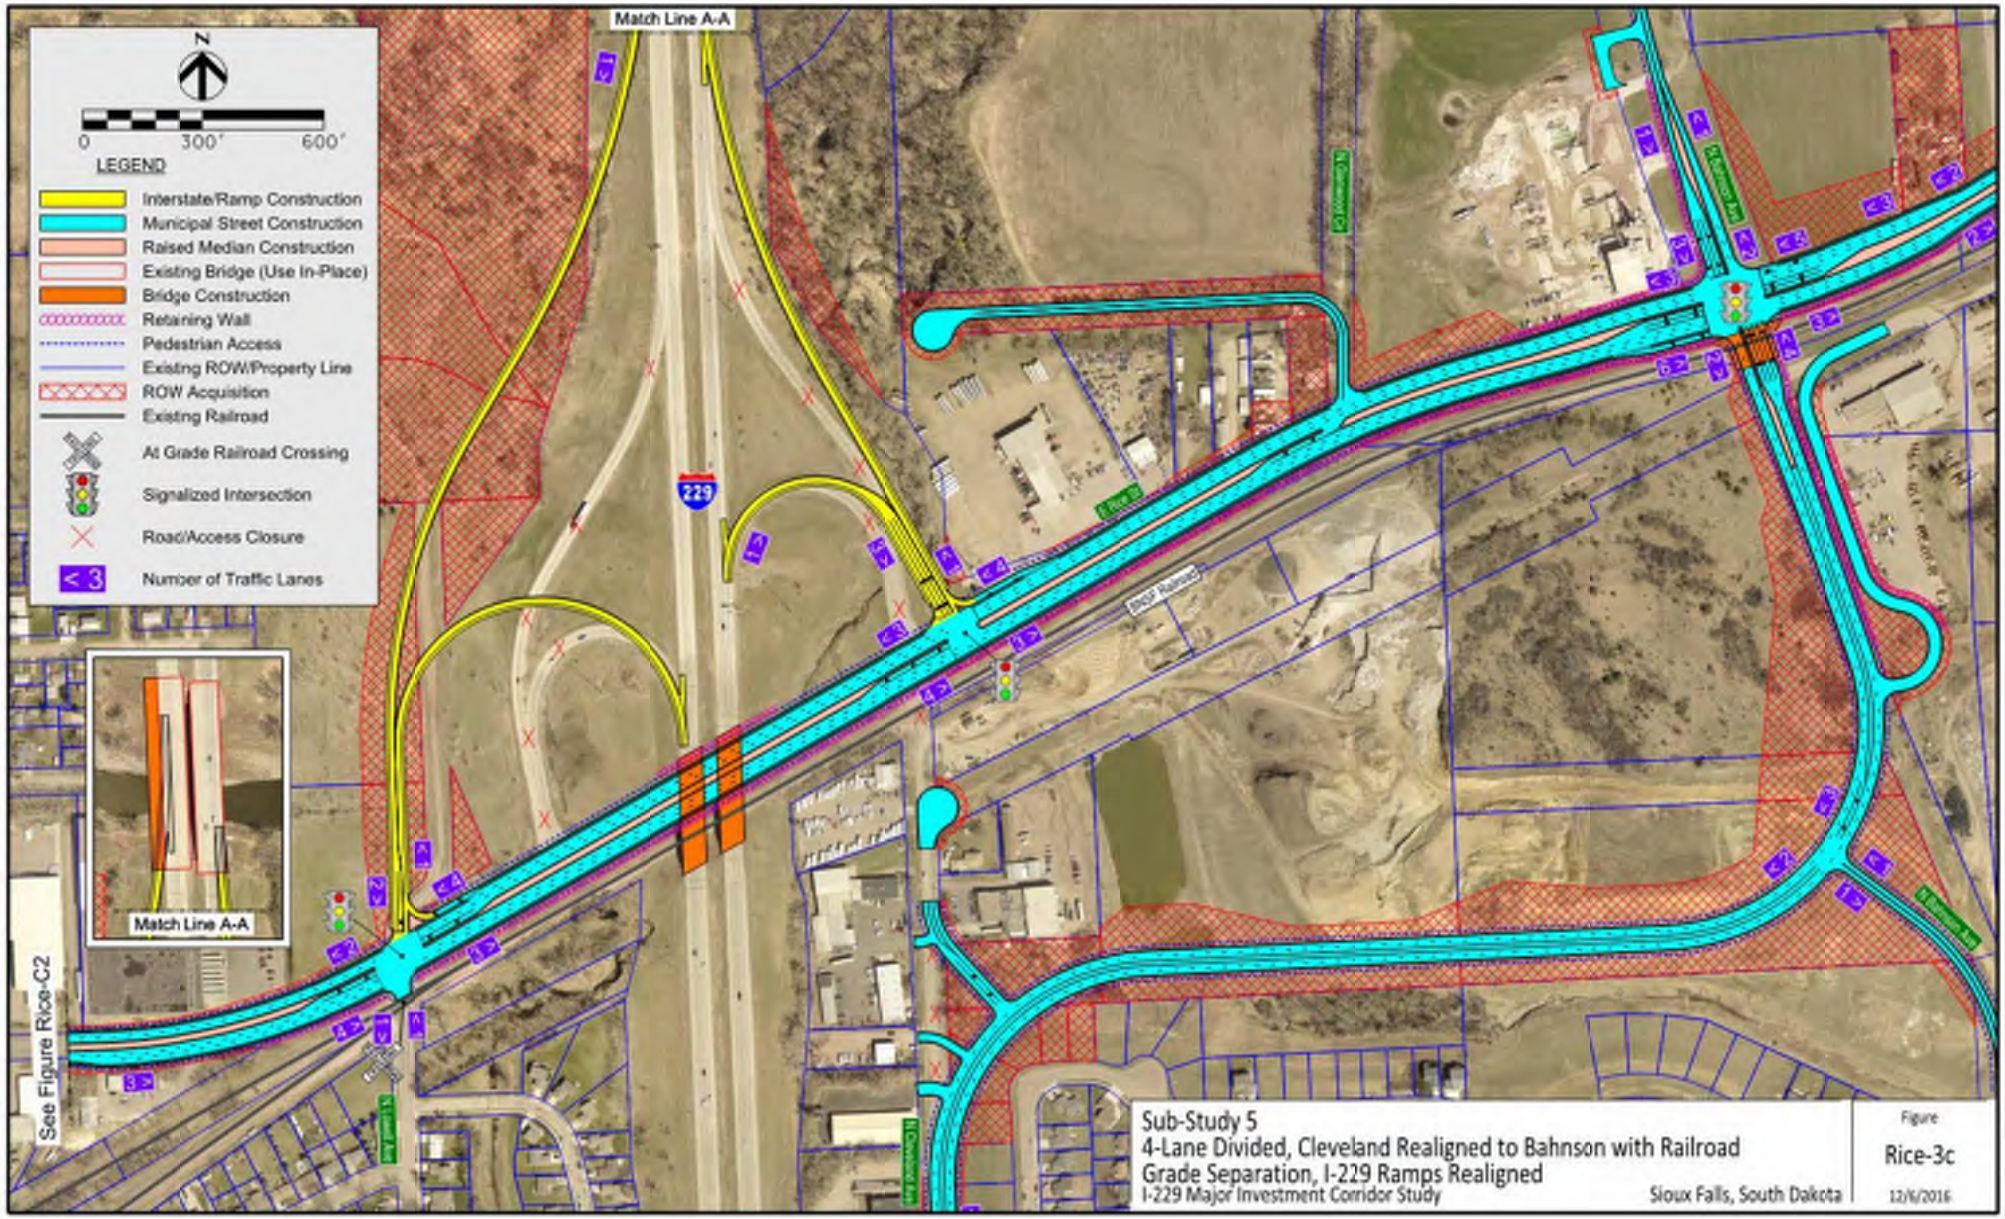






CONCEPTS FOR FURTHER CONSIDERATION

RICE STREET – C2

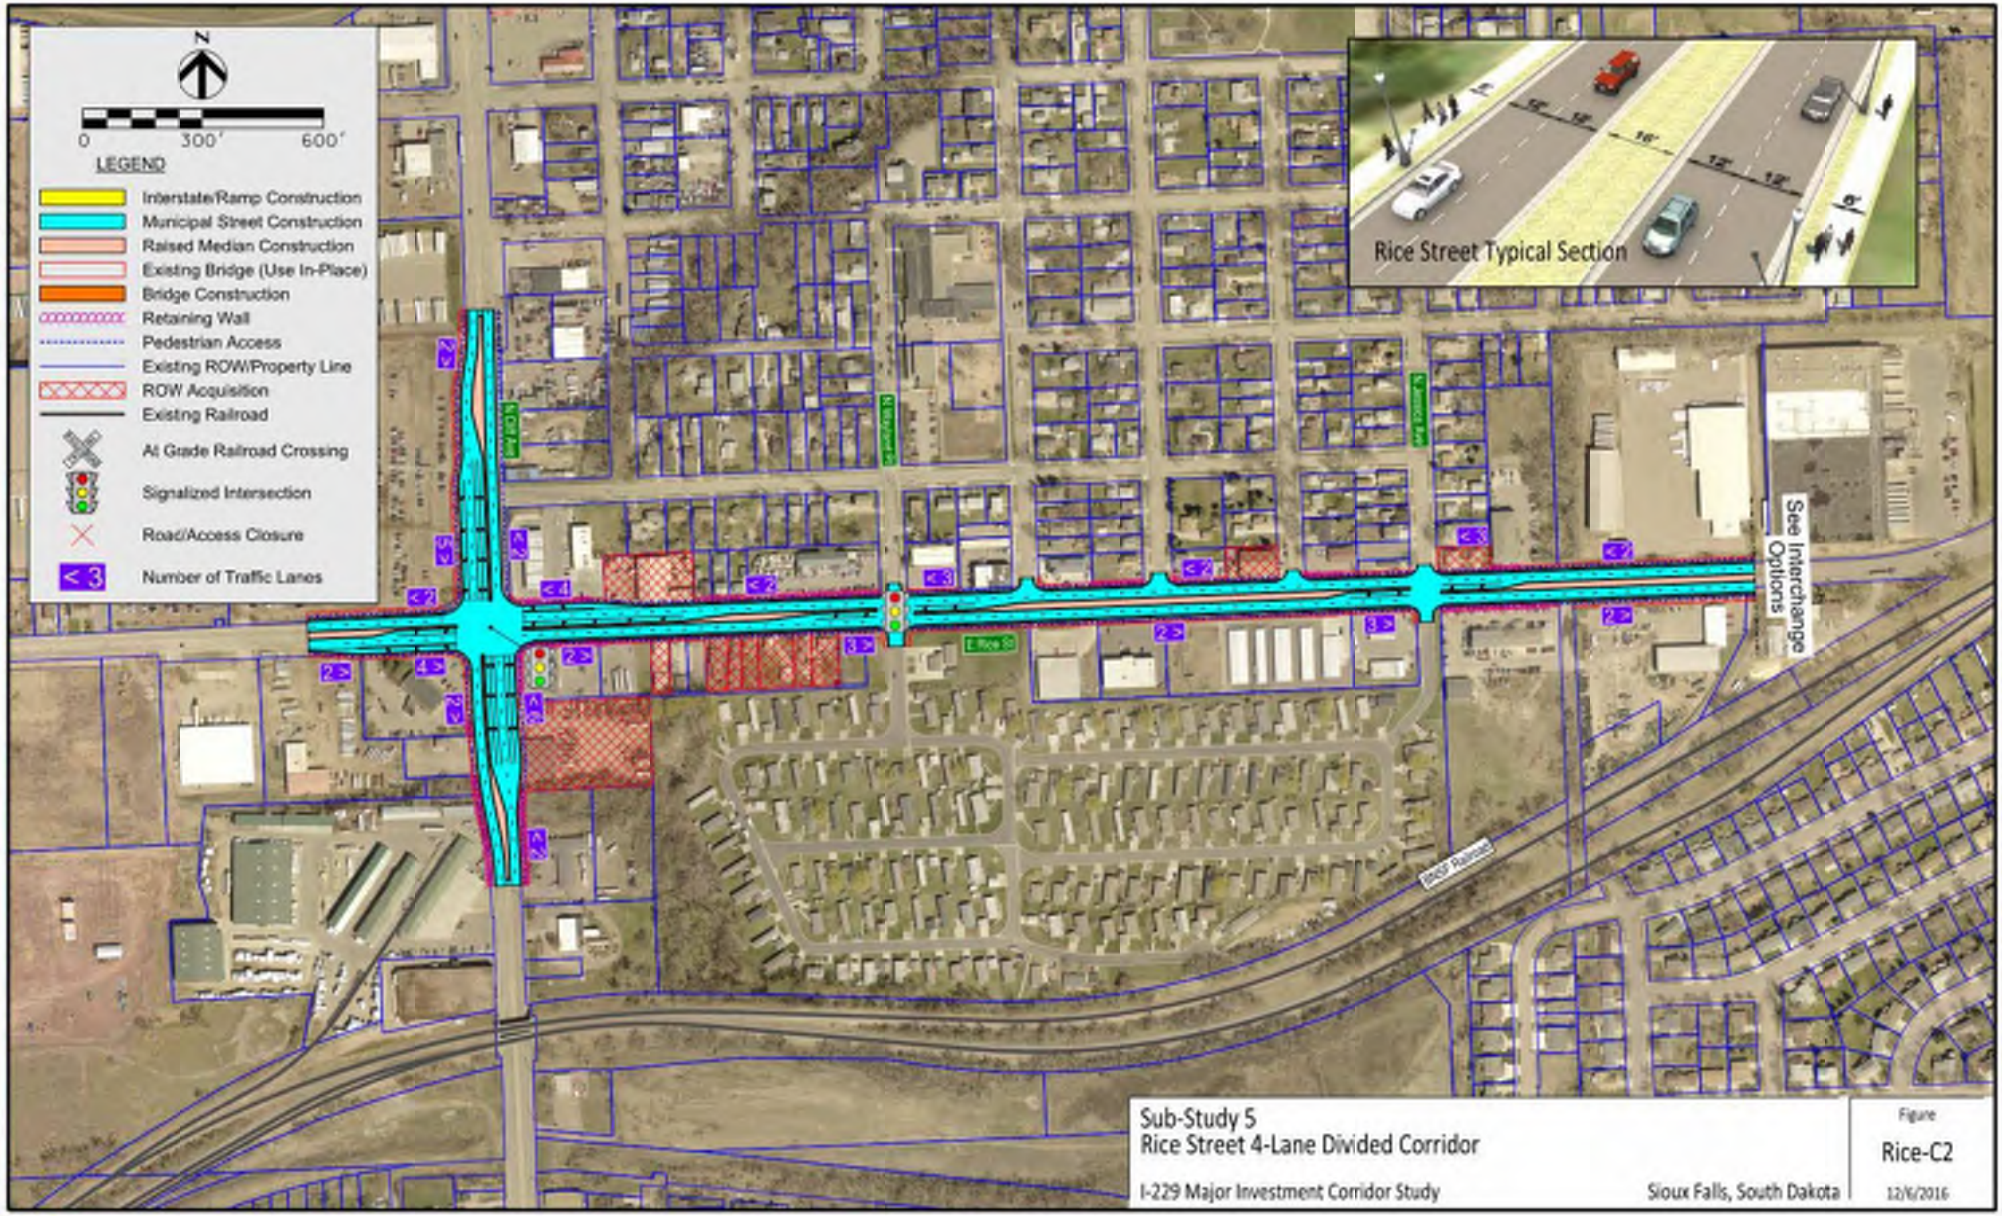


CONCEPT EVALUATION RESULTS

RICE STREET

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Rice-2	6-Lane Divided						Advance
Rice-2A	6-Lane Divided, Shifted North to Avoid Railroad Right-of-Way						Advance
Rice-3C	4-Lane Divided, Cleveland Realigned to Bahnson with Railroad Grade Separation, I-229 Ramps Realigned						Advance


CONCEPTS FOR FURTHER CONSIDERATION

BENSON ROAD – 1A

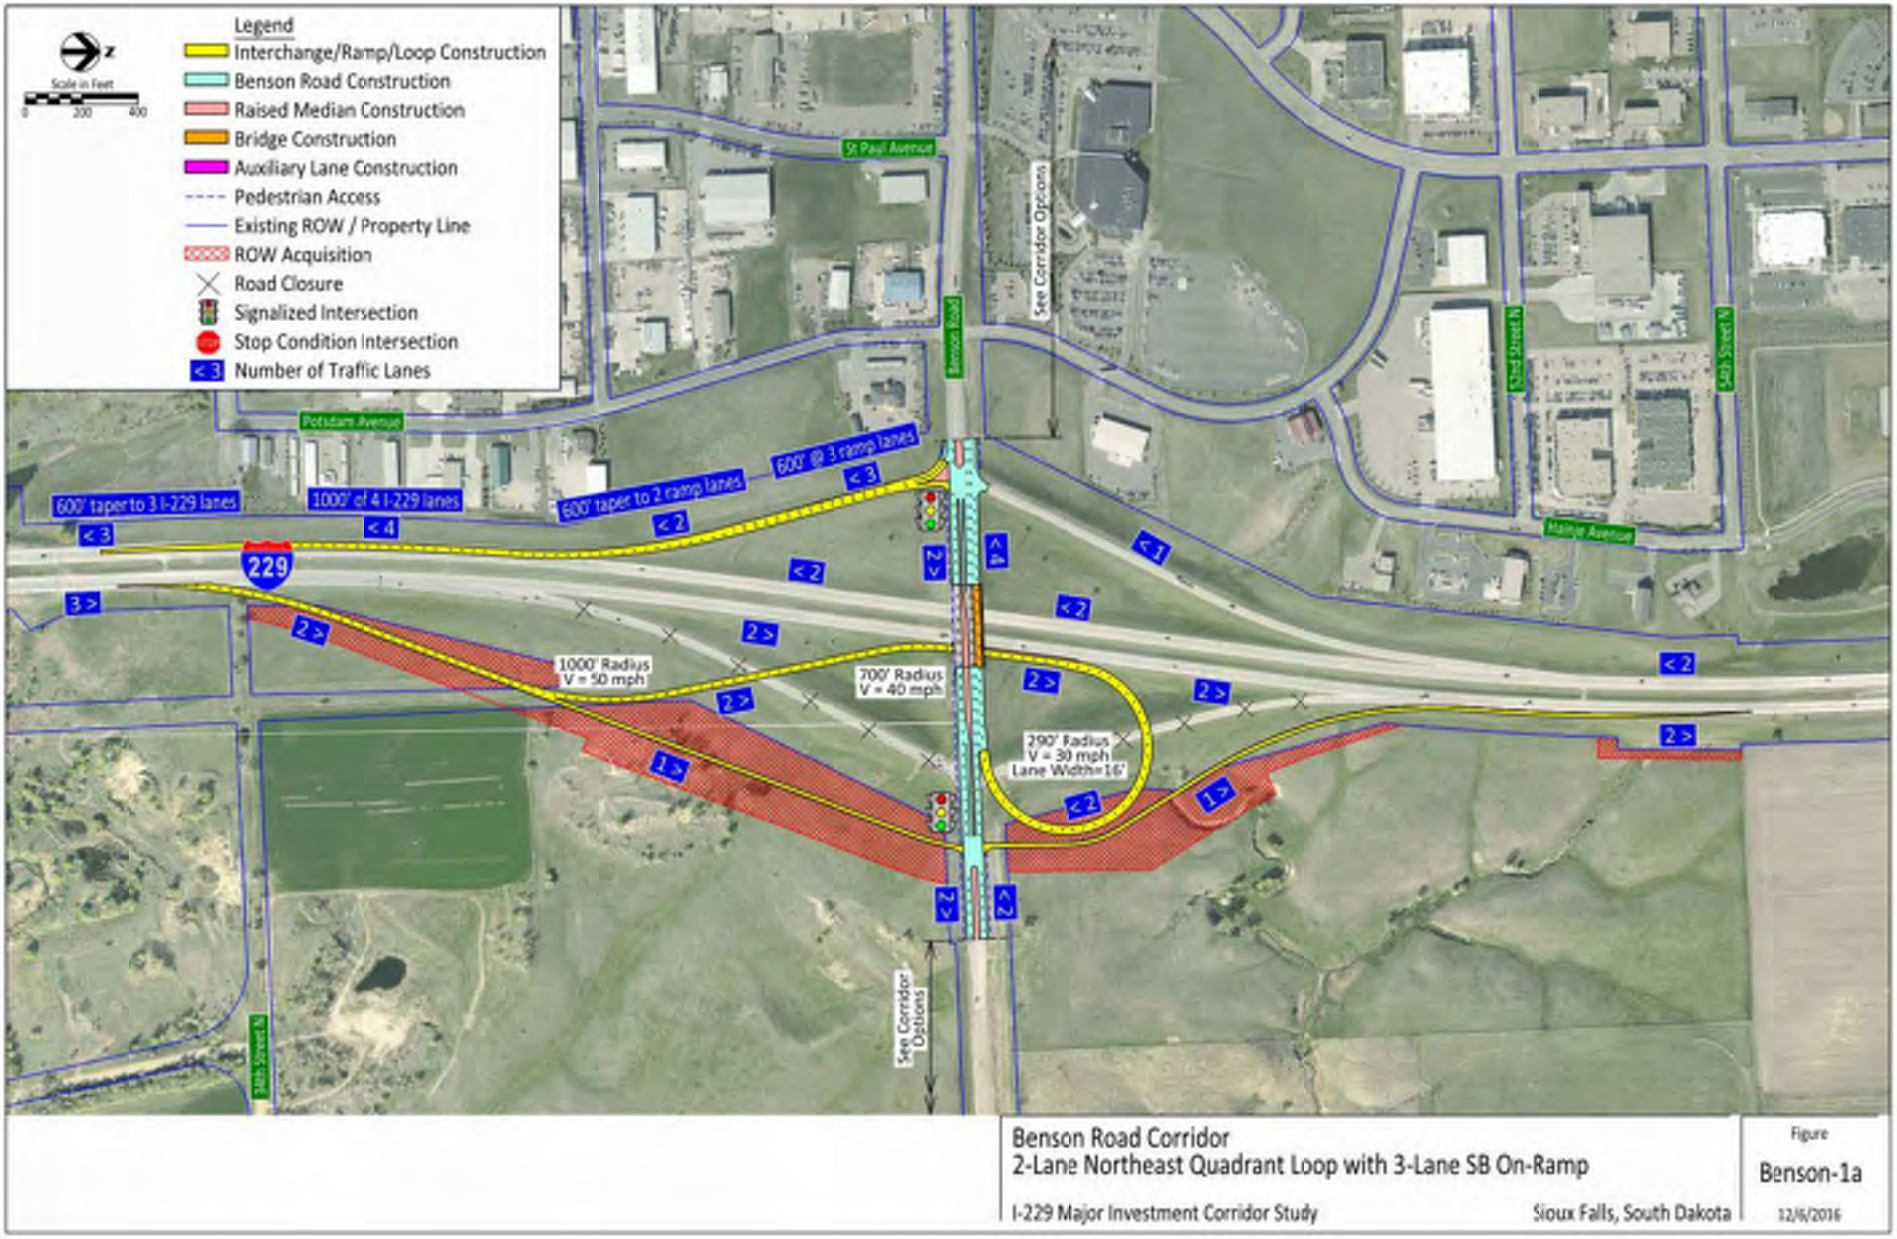


CONCEPTS FOR FURTHER CONSIDERATION

BENSON ROAD – 1B

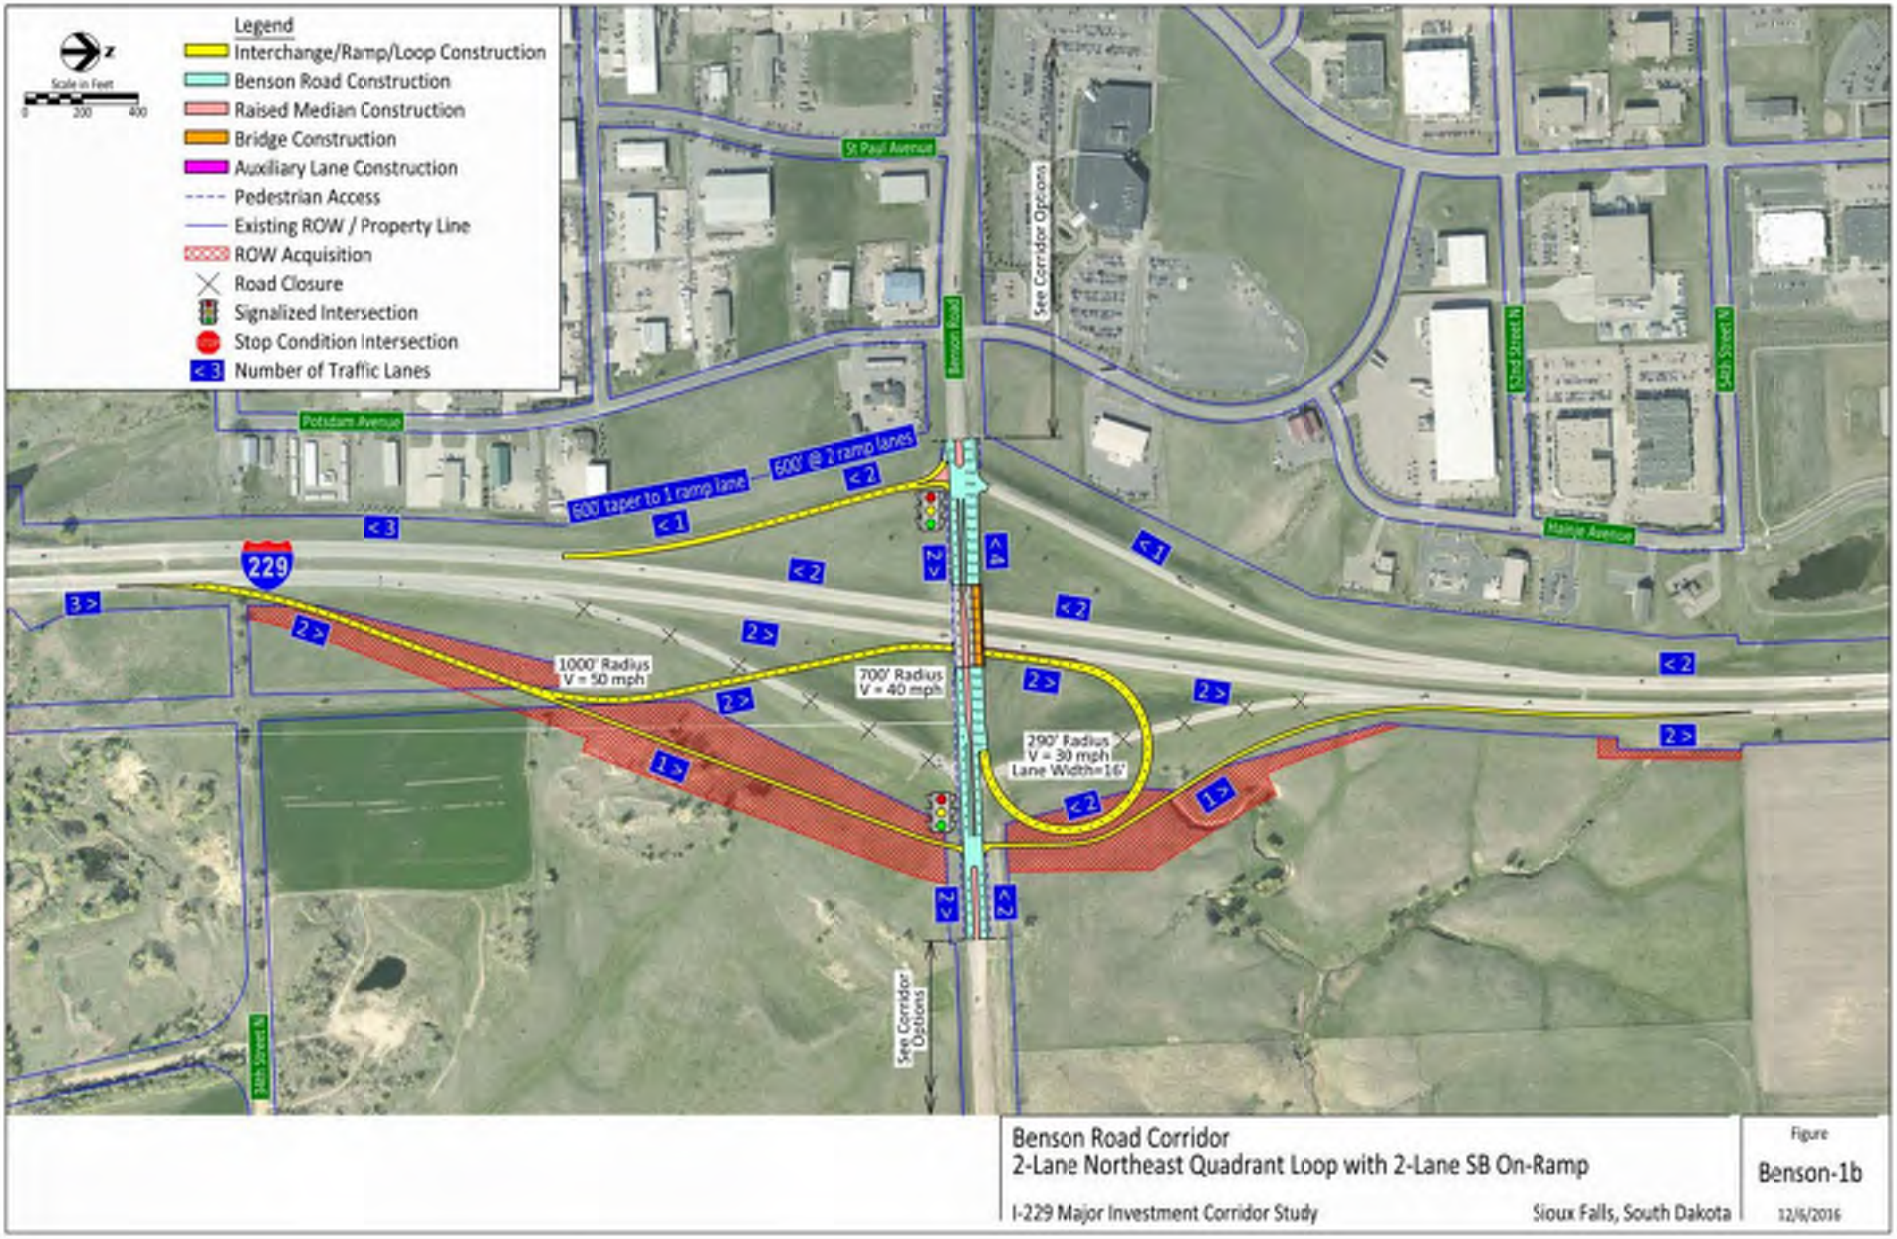



CONCEPTS FOR FURTHER CONSIDERATION

BENSON ROAD – 4

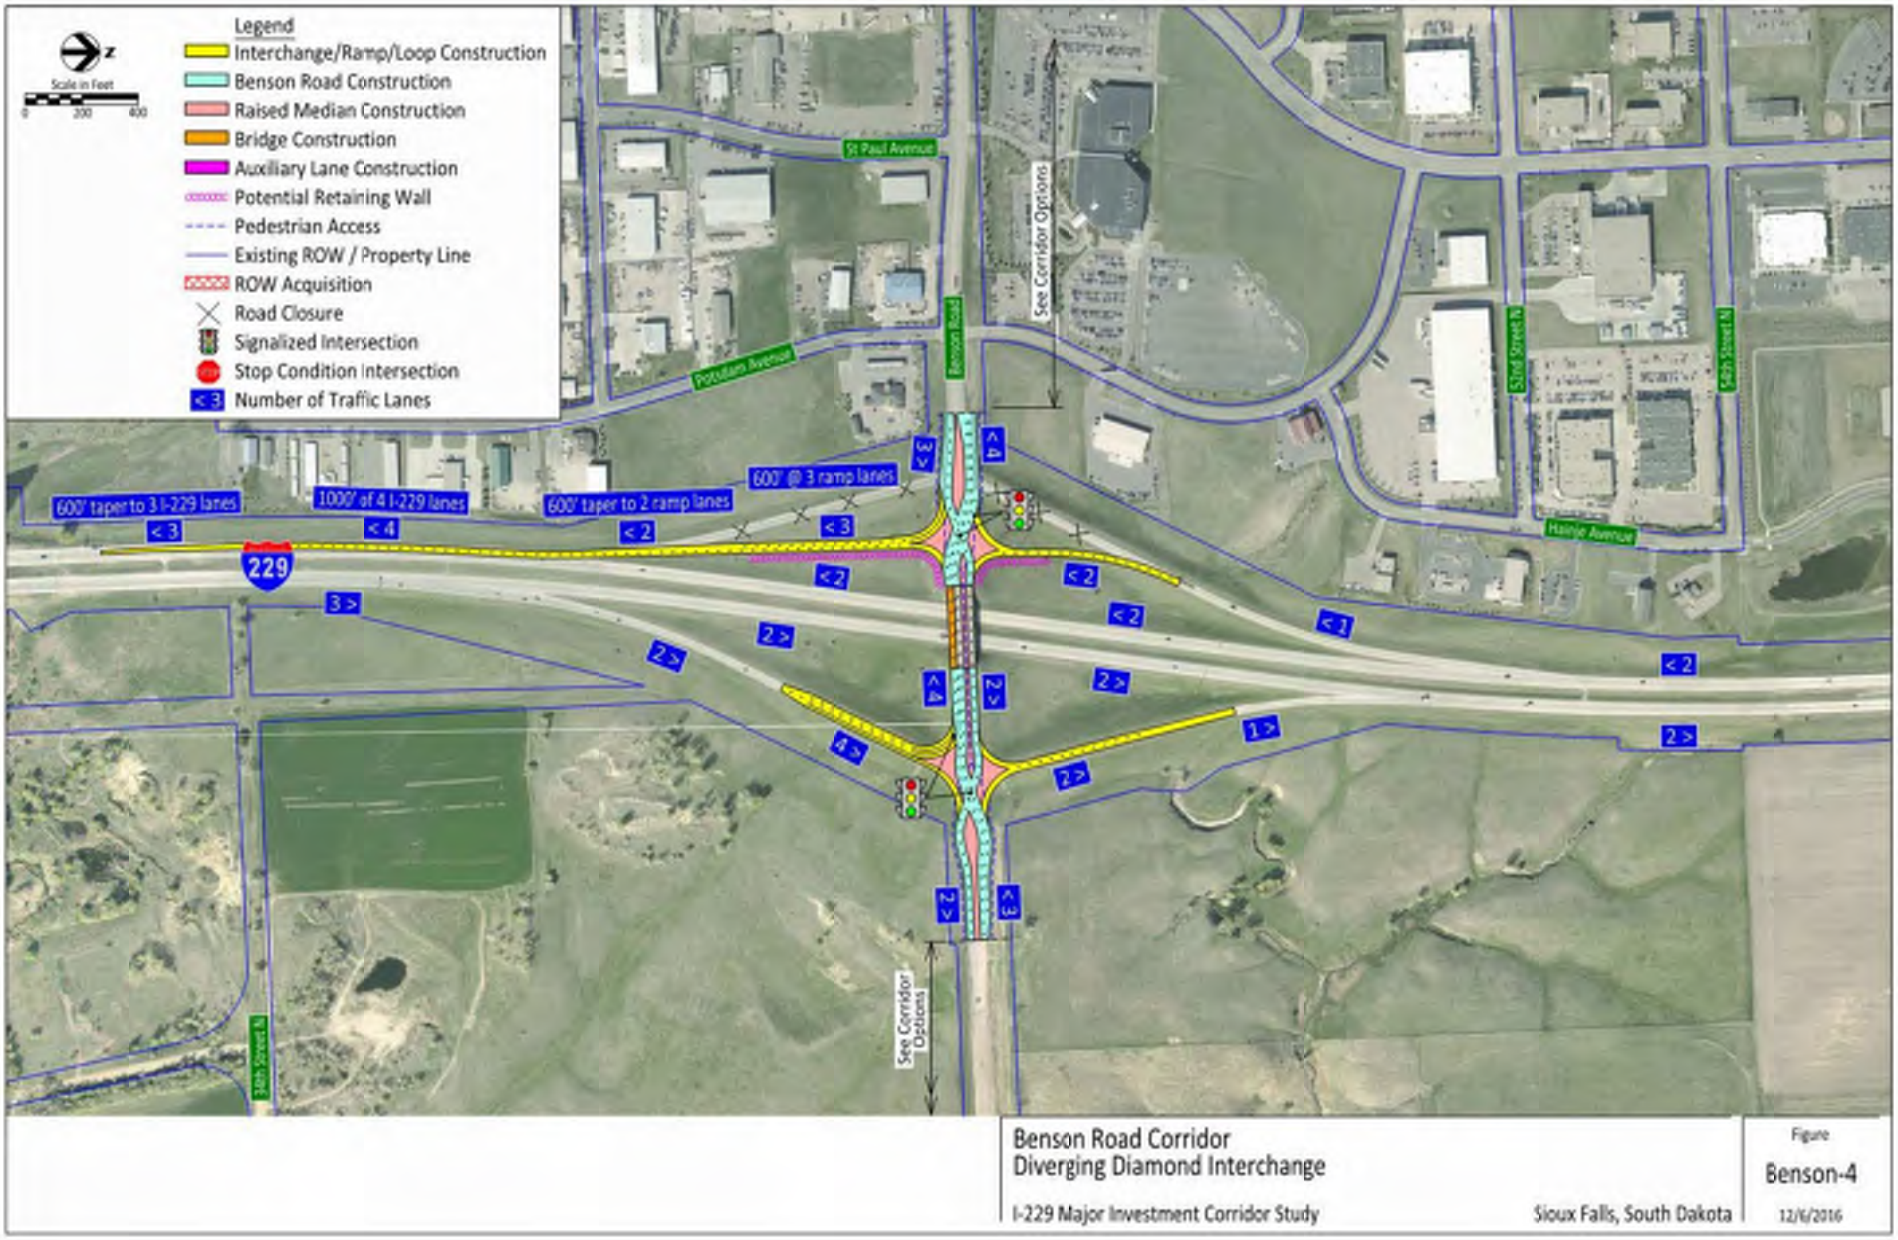

CONCEPT EVALUATION RESULTS


BENSON ROAD

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Benson-1A	2-Lane Northeast Quadrant Loop with 3-Lane SB On-Ramp						Advance
Benson-1B	2-Lane Northeast Quadrant Loop with 2-Lane SB On-Ramp						Advance
Benson-4	Diverging Diamond Interchange						Advance

FUTURE I-229 CORRIDOR PROJECTS

PRELIMINARY PRIORITIZATION


- Minnesota Avenue
- Cliff Avenue
- 10th Street
- Rice Street
- Benson Road
- Other projects list

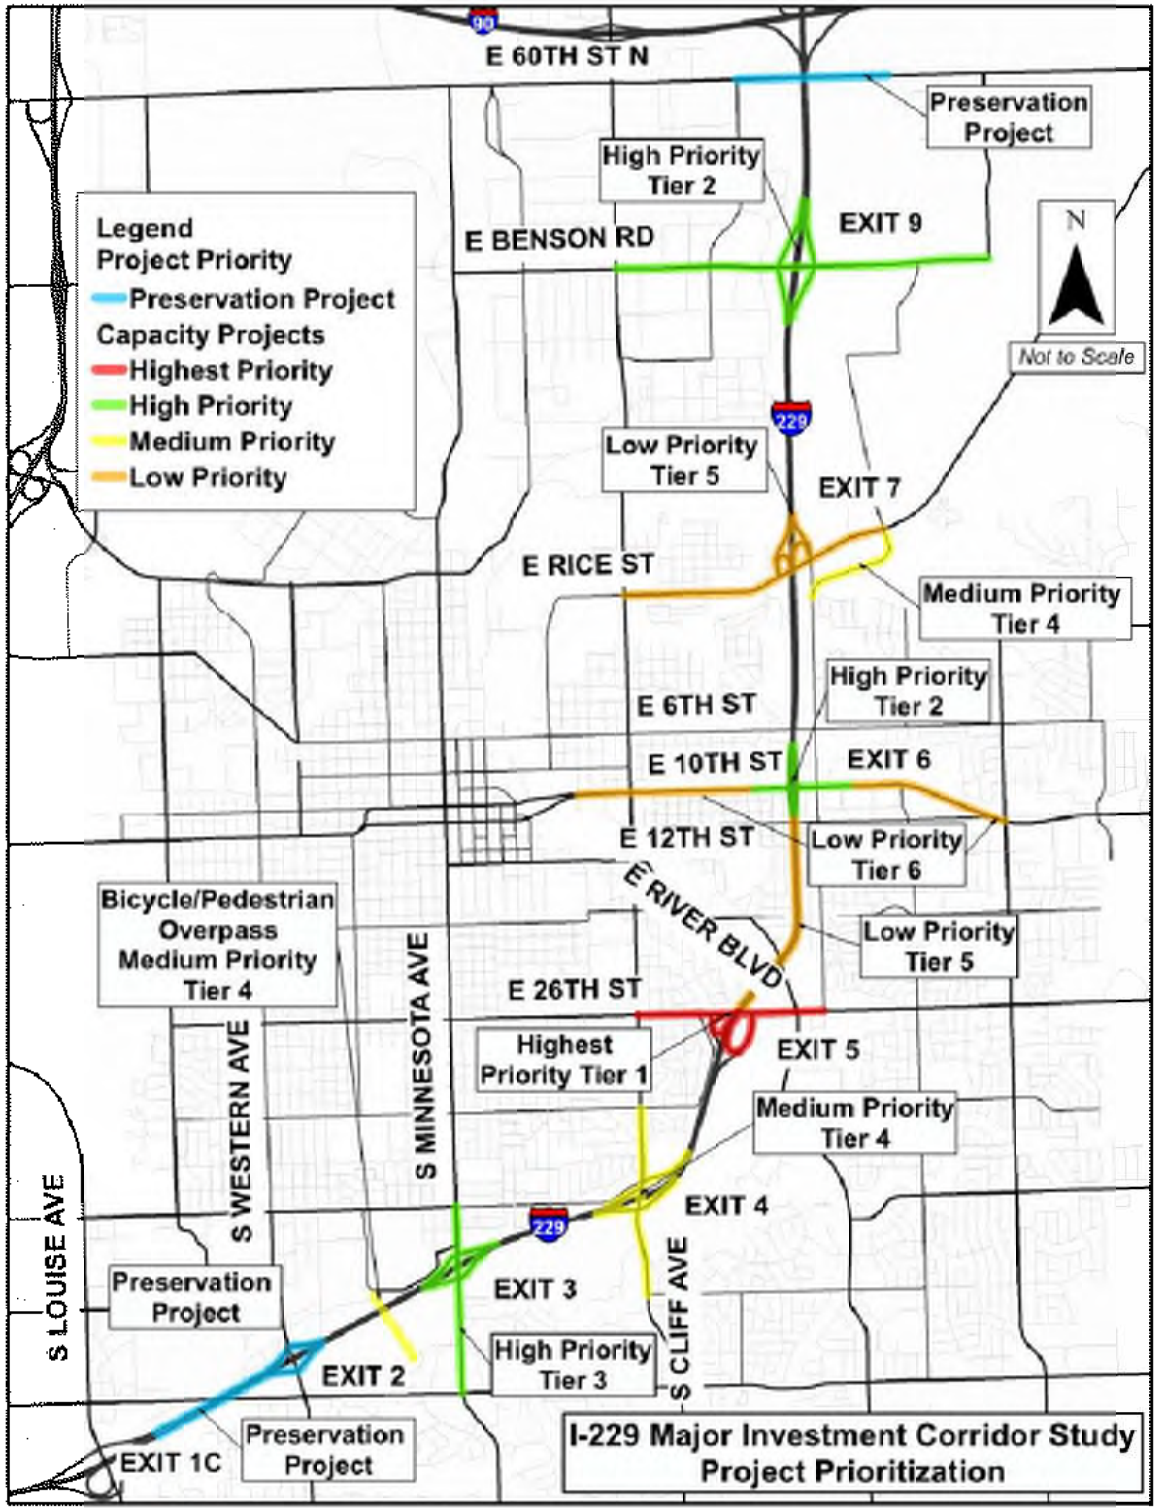

NEXT STEPS

- Assemble Stakeholder and Public Comments
- SDDOT / City Finalize Project Priorities
- Complete Study Reports
- SDDOT / City Program Projects
- Project Development Process = 5-6 year timeline when initiated by SDDOT & City
  - Prepare Interchange Modification Justification Report and Environmental Document
  - Develop Project Design
  - Acquire Right of Way
  - Construction

WWW.I229STUDY.COM

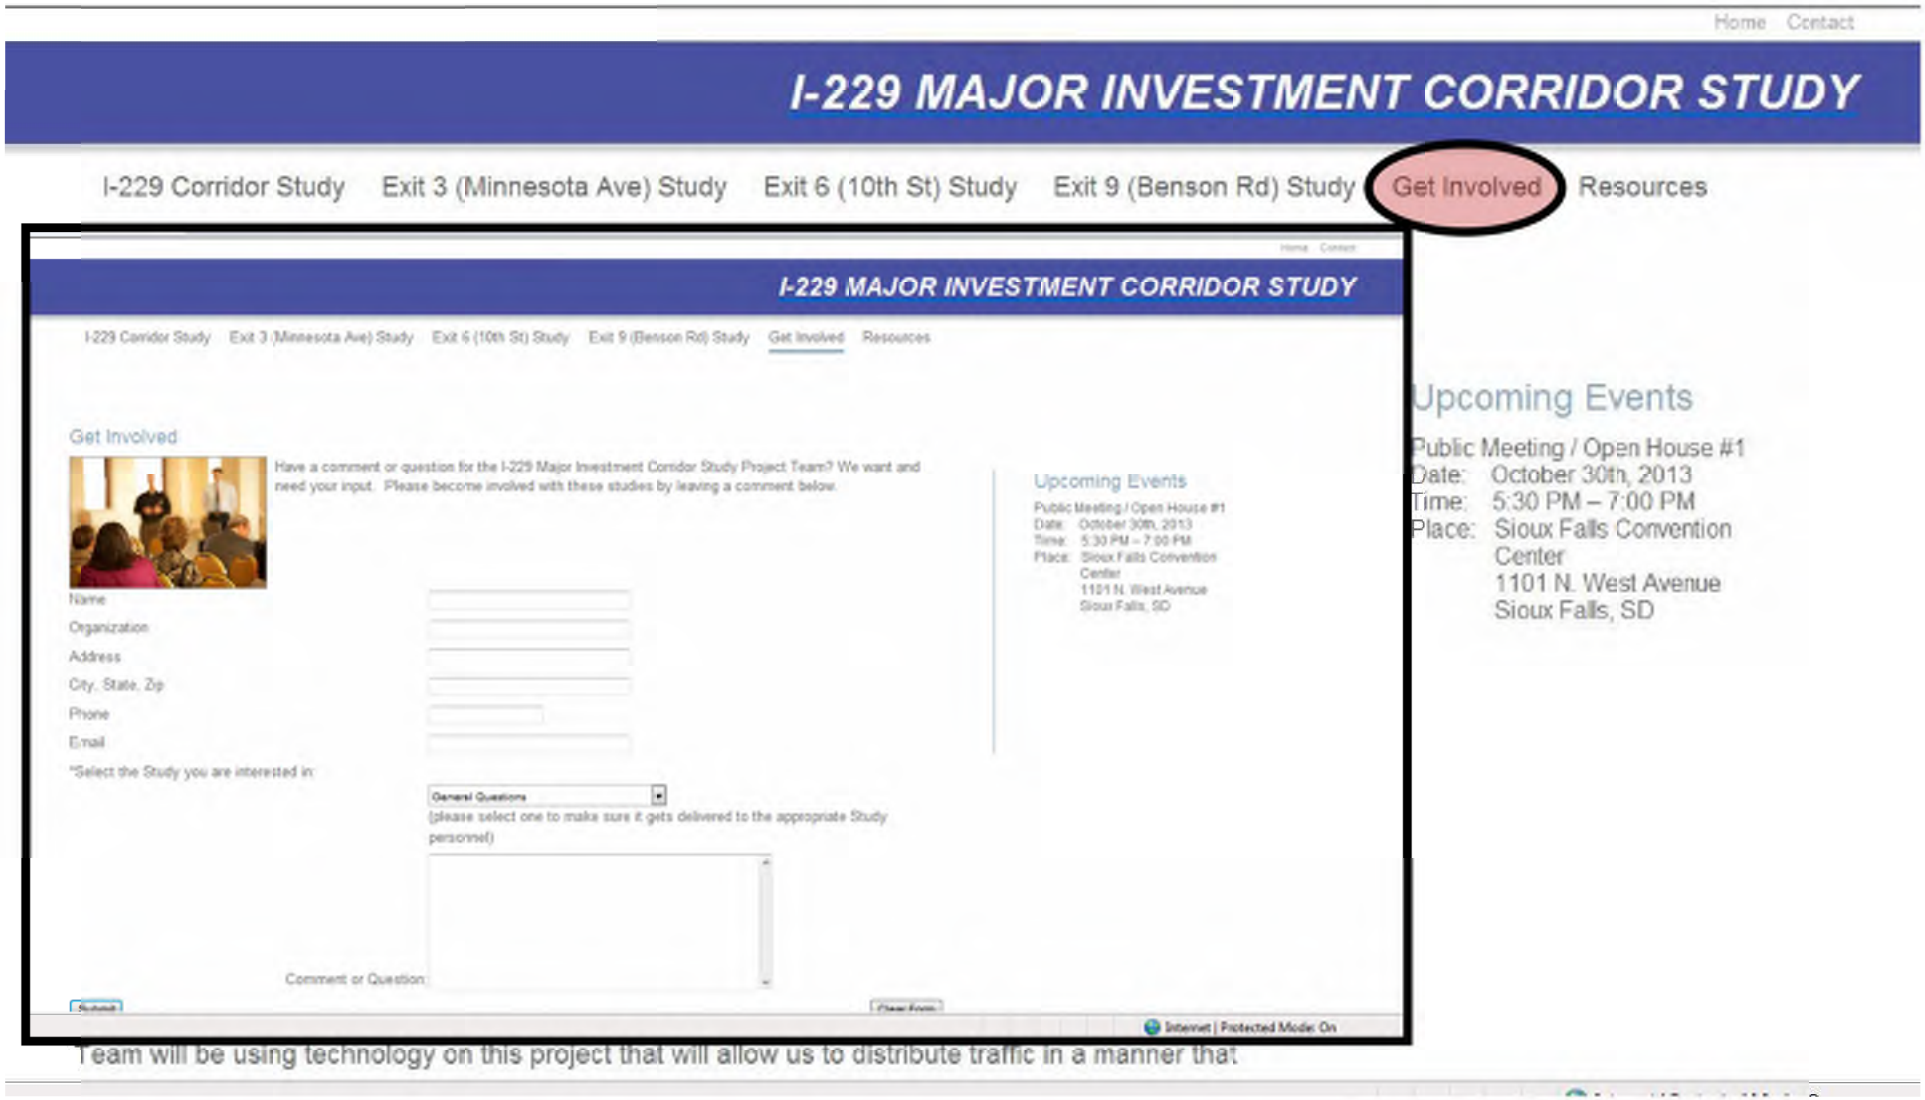

PROJECT CONTACTS:


Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Dave Meier – HDR Engineering, Inc.
402-399-1068 or dave.meier@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us



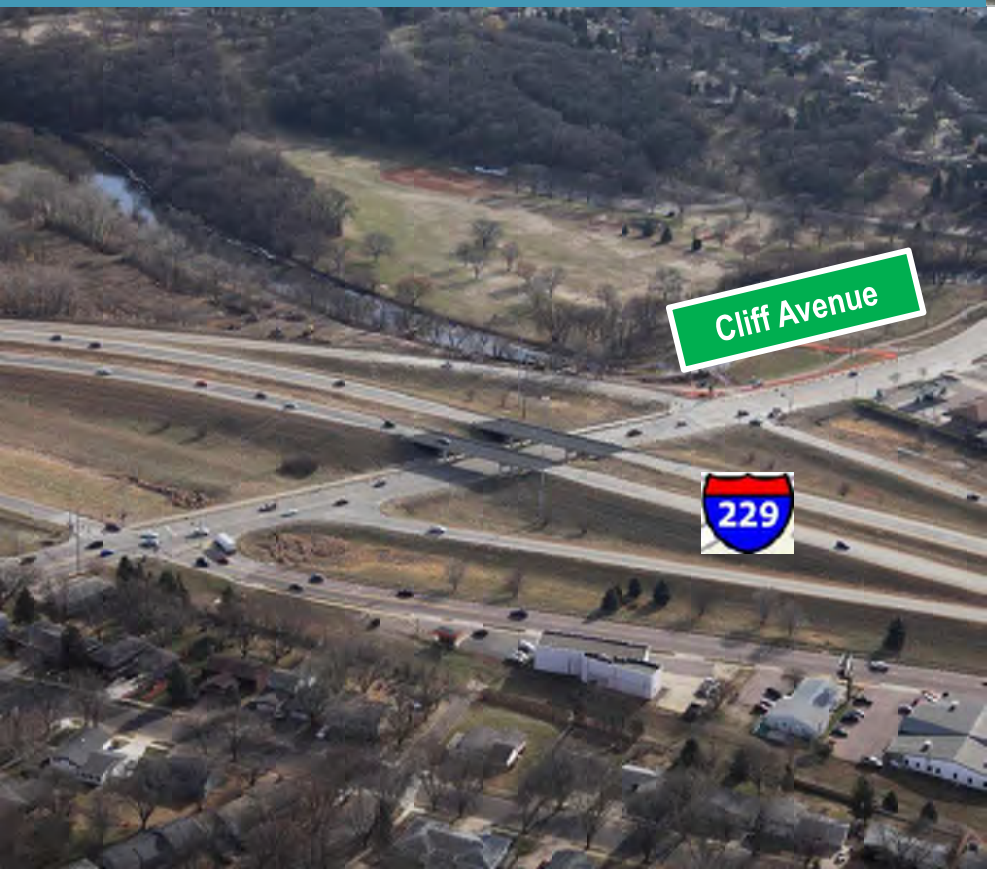

INTERSTATE 229 MAJOR INVESTMENT STUDY

Thanks for attending!

HDR HRGreen

APPENDIX -

STAKEHOLDER MEETINGS #1 –
DECEMBER 15TH & 16TH, 2014
JUNE 22ND, 2016 (CLIFF AVENUE & RICE STREET)

BENSON ROAD

DECEMBER 15TH, 2014

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES

Meeting Minutes

Project:	I-229 Major Investment Corridor Study; PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 4 (Benson Road from Cliff Avenue to Sycamore Avenue)
Date:	Monday, December 15, 2014
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	Paul Nikolas, Travis Dressen (SDDOT) Russ Robers (First National Bank) Heath Hoftiezer, (City of Sioux Falls) Jason Kjenstad, James Unruh (HDR)

Jason Kjenstad covered the PowerPoint slides (attached to meeting notes).

Follow-up discussion items included:

1. Existing Benson Road traffic observations:
   - 1.1 A.M. peak hour – Westbound traffic on Benson Road west of I-229 is heavy and limits access from the I-229 SB off-ramp and from driveways along Benson Road.
   - 1.2 P.M. peak hour – Eastbound traffic is heavy but flows reasonably well under normal traffic conditions (if there is no traffic diverted from other areas).
     - The EB to SB movement at the I-229 SB on-ramp is at capacity.
     - There is a high volume of left turning traffic from Potsdam Avenue to Benson Road. It is difficult for this traffic to find gaps in the Benson Road traffic.
   - 1.3 Off-peak periods – The Lewis Avenue/Benson Road intersection is busy but not congested.
2. Existing I-229 traffic observations
   - 2.1 Traffic coming from the on-ramps tends to merge into I-229 traffic before getting up to adequate speeds rather than staying in the auxiliary lane. The worst location for this is the 26th Street SB on-ramp where the ramp traffic speeds are slow due to the tight ramp curve. It was noted that the preferred 26th Street interchange configuration will improve this condition.
   - 2.2 At 10th Street, the trucks turning from the SB off-ramp to EB 10th Street make the turn through the single point intersection slowly and cause the SB off-ramp traffic to back up to I-229 during peak hour traffic. Hoftiezer noted that this is partly due to how the loop detectors sense the truck traffic.
3. Existing geometric constraints
   - 3.1 The south leg of the Lewis Avenue intersection is too narrow for the trucks that turn onto and off of Benson Road.
4. Benson Road improvement considerations
   - 4.1 If a 3rd WB lane is added from I-229 to Lewis Avenue, the Potsdam Avenue intersection may need to be right-in/right-out or a ¾ access condition with restriction of left-out movements. Potsdam traffic would re-route to Lewis Avenue. A signalized intersection along Lewis Avenue would be required to accommodate this traffic. Rob suggested that a signal may be most effective at 54th Street.
   - 4.2 A 3rd EB lane may be necessary from Lewis Avenue to I-229 with free-flow conditions for the SB on-ramp movement. Dual right turns at the SB on-ramp would require signalization and may reduce capacity in comparison to an unrestricted movement.

4.3 The forecast traffic volumes for the MIS project assume that Benson Road will be extended to the east from Sycamore Avenue across the Big Sioux River. The timeframe for this is not known.

5. I-229 improvement considerations
   5.1 60th Street access to/from I-229 would help divert traffic from Benson Road. It was noted the Federal Highway Administration limits the type of access at 60th Street due to the close proximity to I-90 to the north.
   5.2 Benson Road/I-229 ramp terminals will likely need to be signalized.
   5.3 Various interchange configurations are being considered for Benson Road. The configurations will be presented at the next public meeting.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for Benson Road Sub-Study


Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3516P, PCN 044K **Project No.:** 207030

Meeting Date Monday, December 15, 2014 5:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	James Unruh	HDR, Inc. 1300 S. Old Village Pl	605-977-7766	James.unruh@hdrinc.com
2	Jason Kjenstad	"		
3	Heath Hoftiezer	City of Sioux Falls		
4	Paul Nikolas	SDDOT		
5	Travis Dresser	SDDOT		
6	Russ Roberts First Nat'l Bank	1901 E. Benson Rd Sf= SD 57104	605-782-5801	rsroberts@fnbsf.com
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

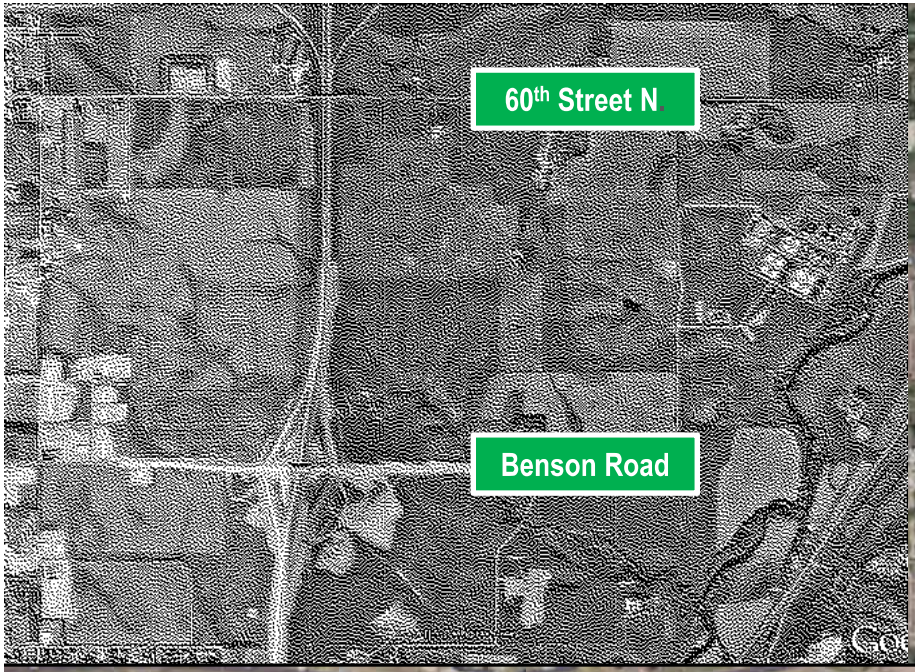





Interstate 229 Major Investment Study

Exit 9 – Benson Rd

Stakeholder Meeting
December 15th, 2014
5:30 pm to 6:30 pm

HDR

HRGreen

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road

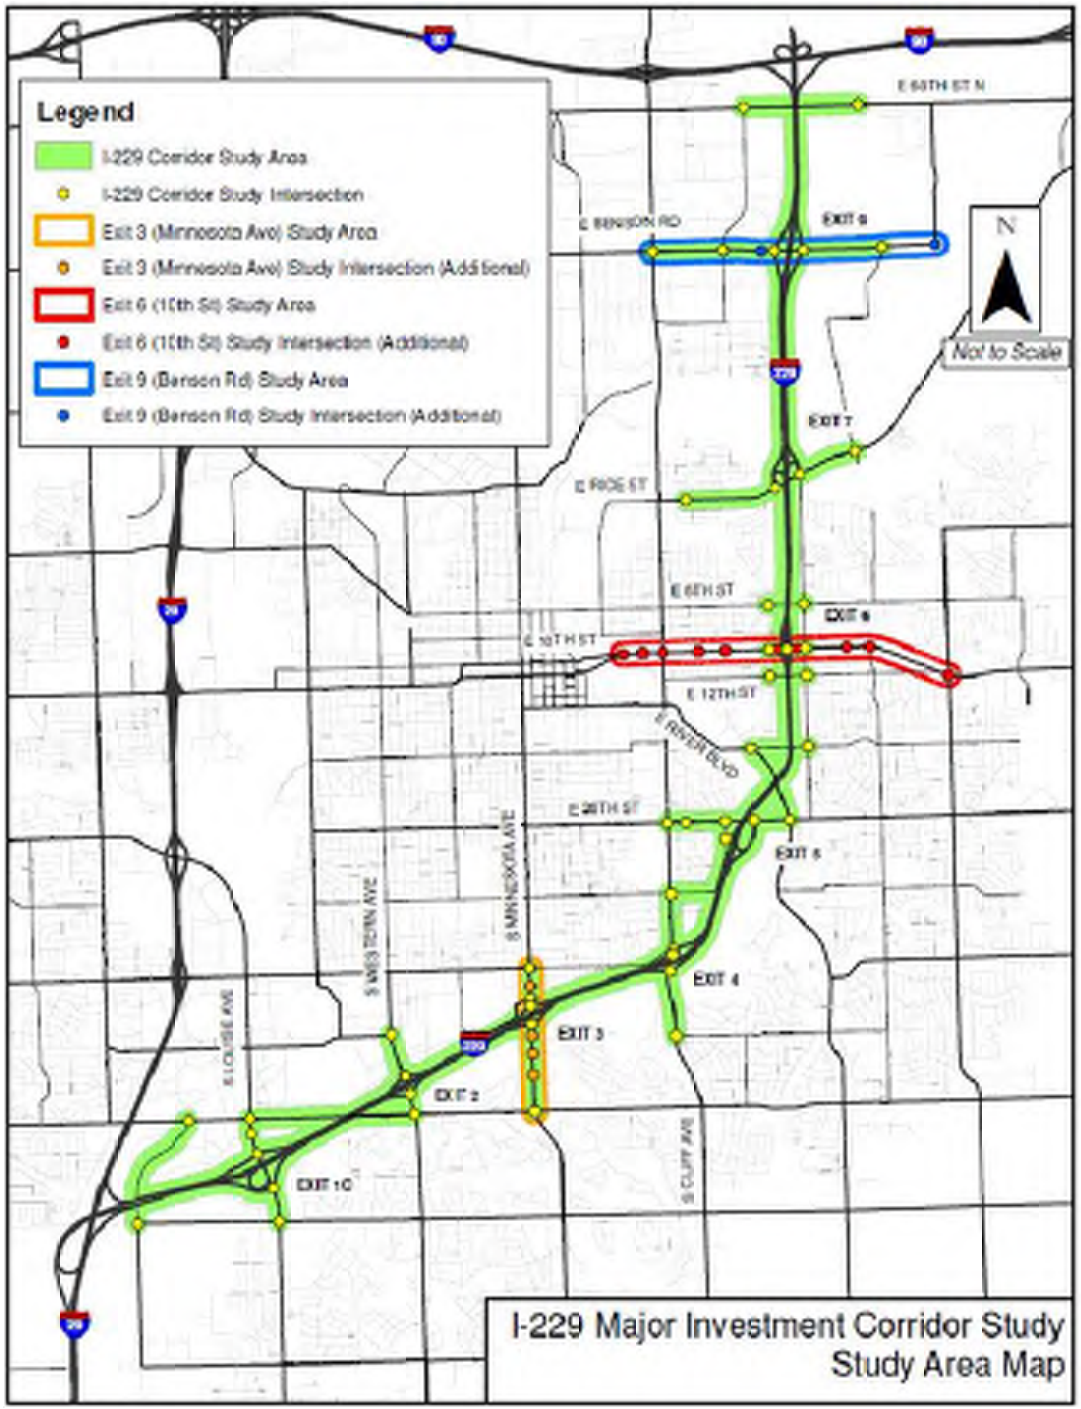

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

Exit 9 (Benson Road) Crossroad Study Goals

- Reduce traffic congestion at NB on/off interchange ramp terminal
- Develop Corridor Growth Plan to meet traffic demands from development taking place east of I-229
- Improve pedestrian mobility
- Make recommendations to improve corridor intersections
- Develop interchange alternatives to meet future traffic demands








Benson Rd Corridor Overview



Benson Rd Corridor Overview

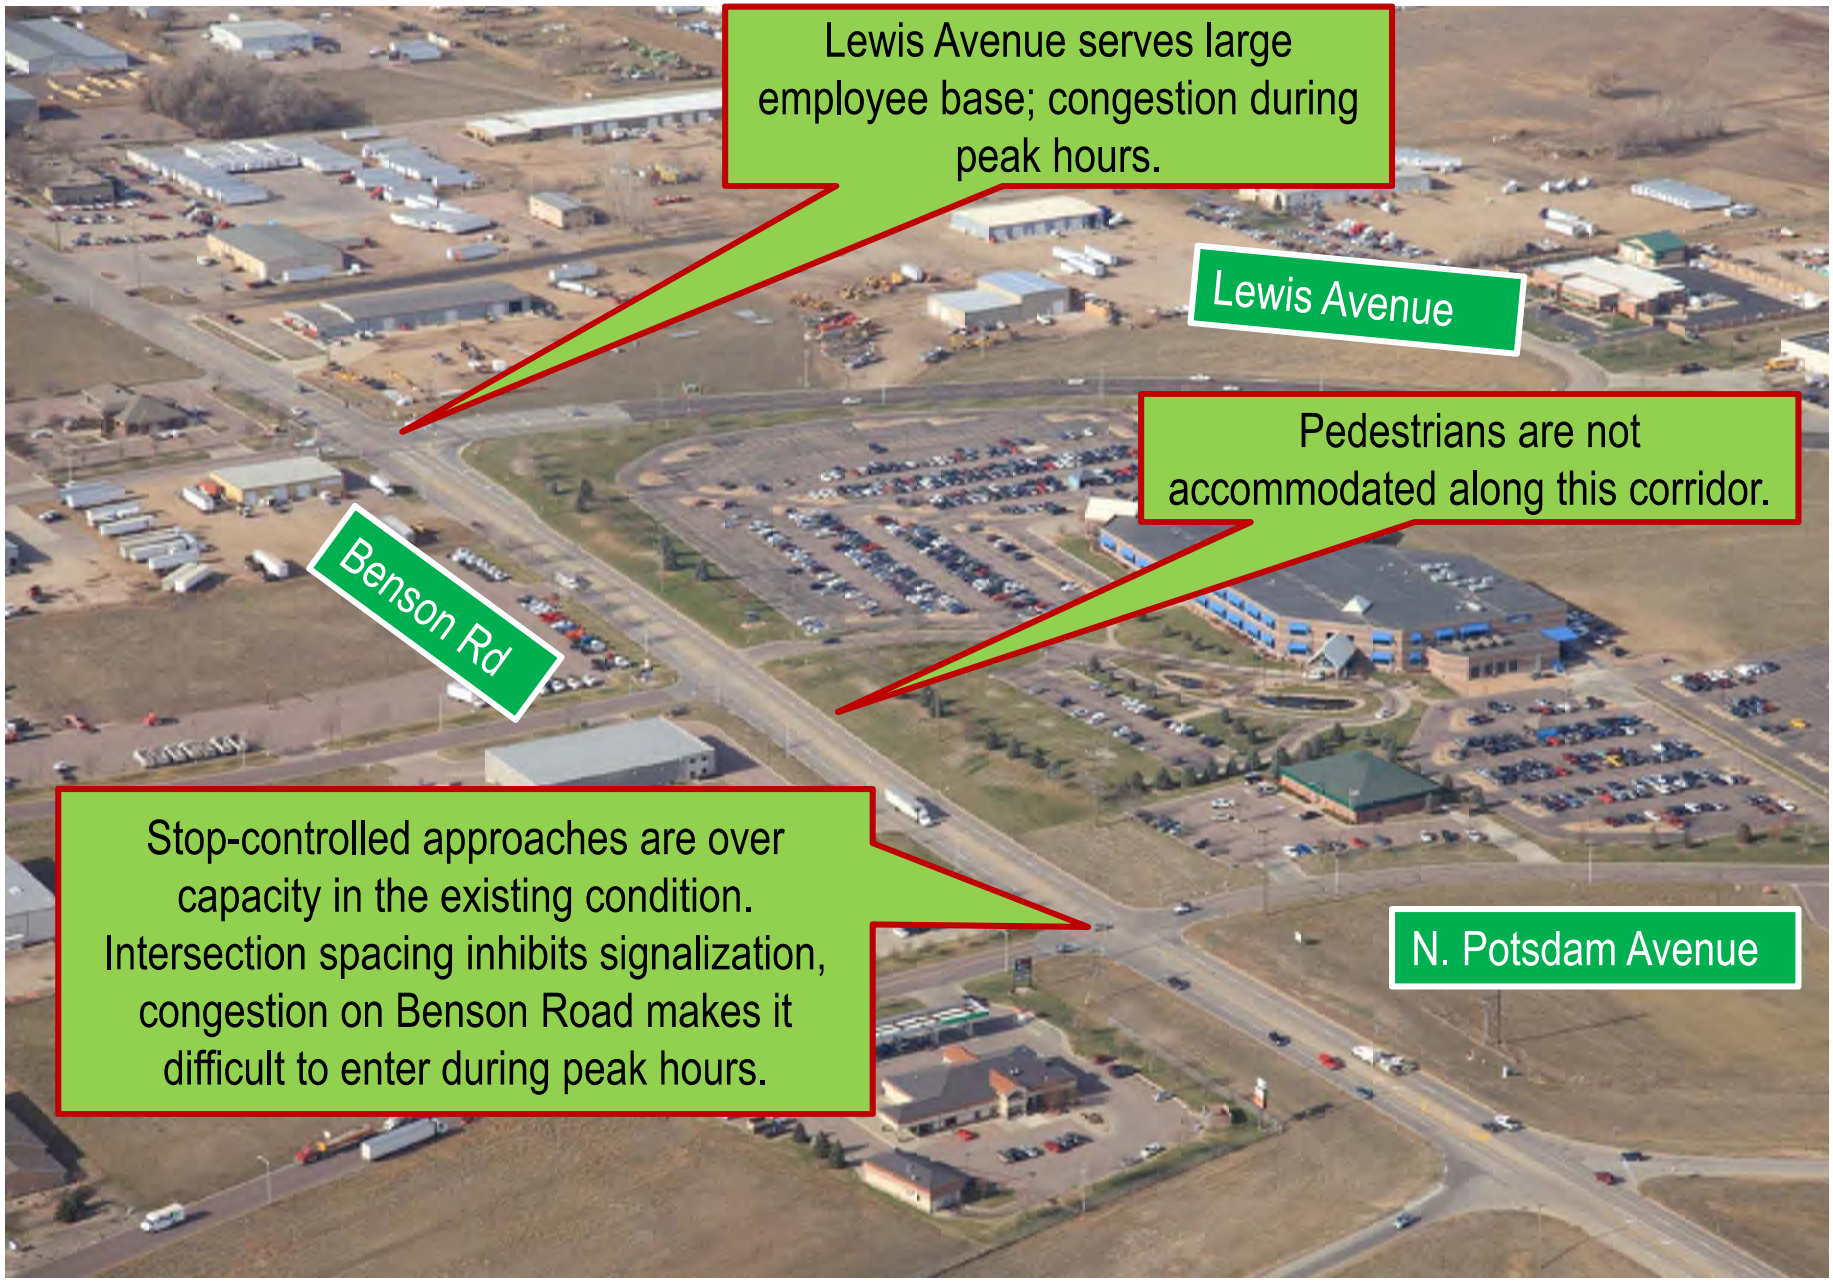

Benson Rd Corridor Overview

Stop-controlled approach projected to be over capacity by 2035.

I229 Southbound


229

In
be


Concept from 2006 I-229 and I-90 Study



Concept from 2010 Decennial Study

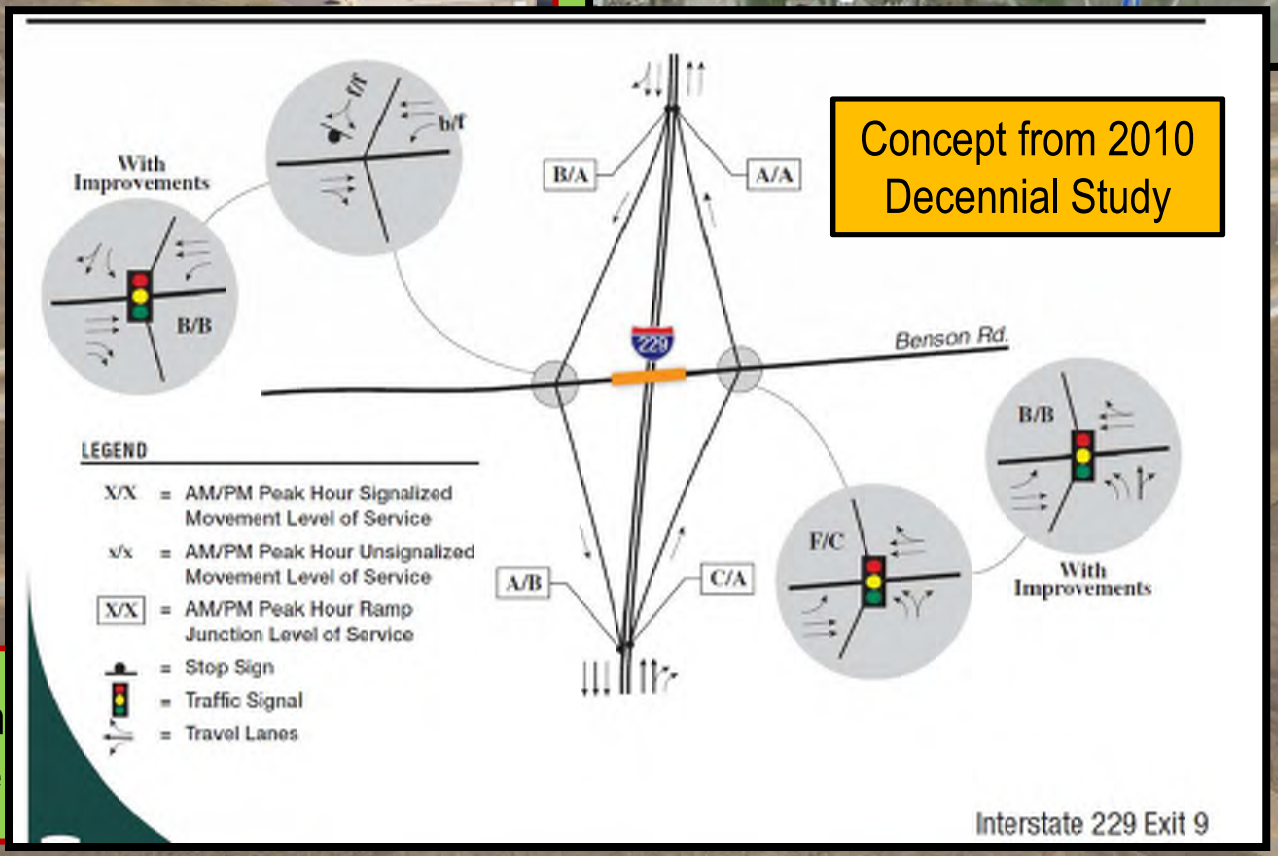

Benson Rd Corridor Overview

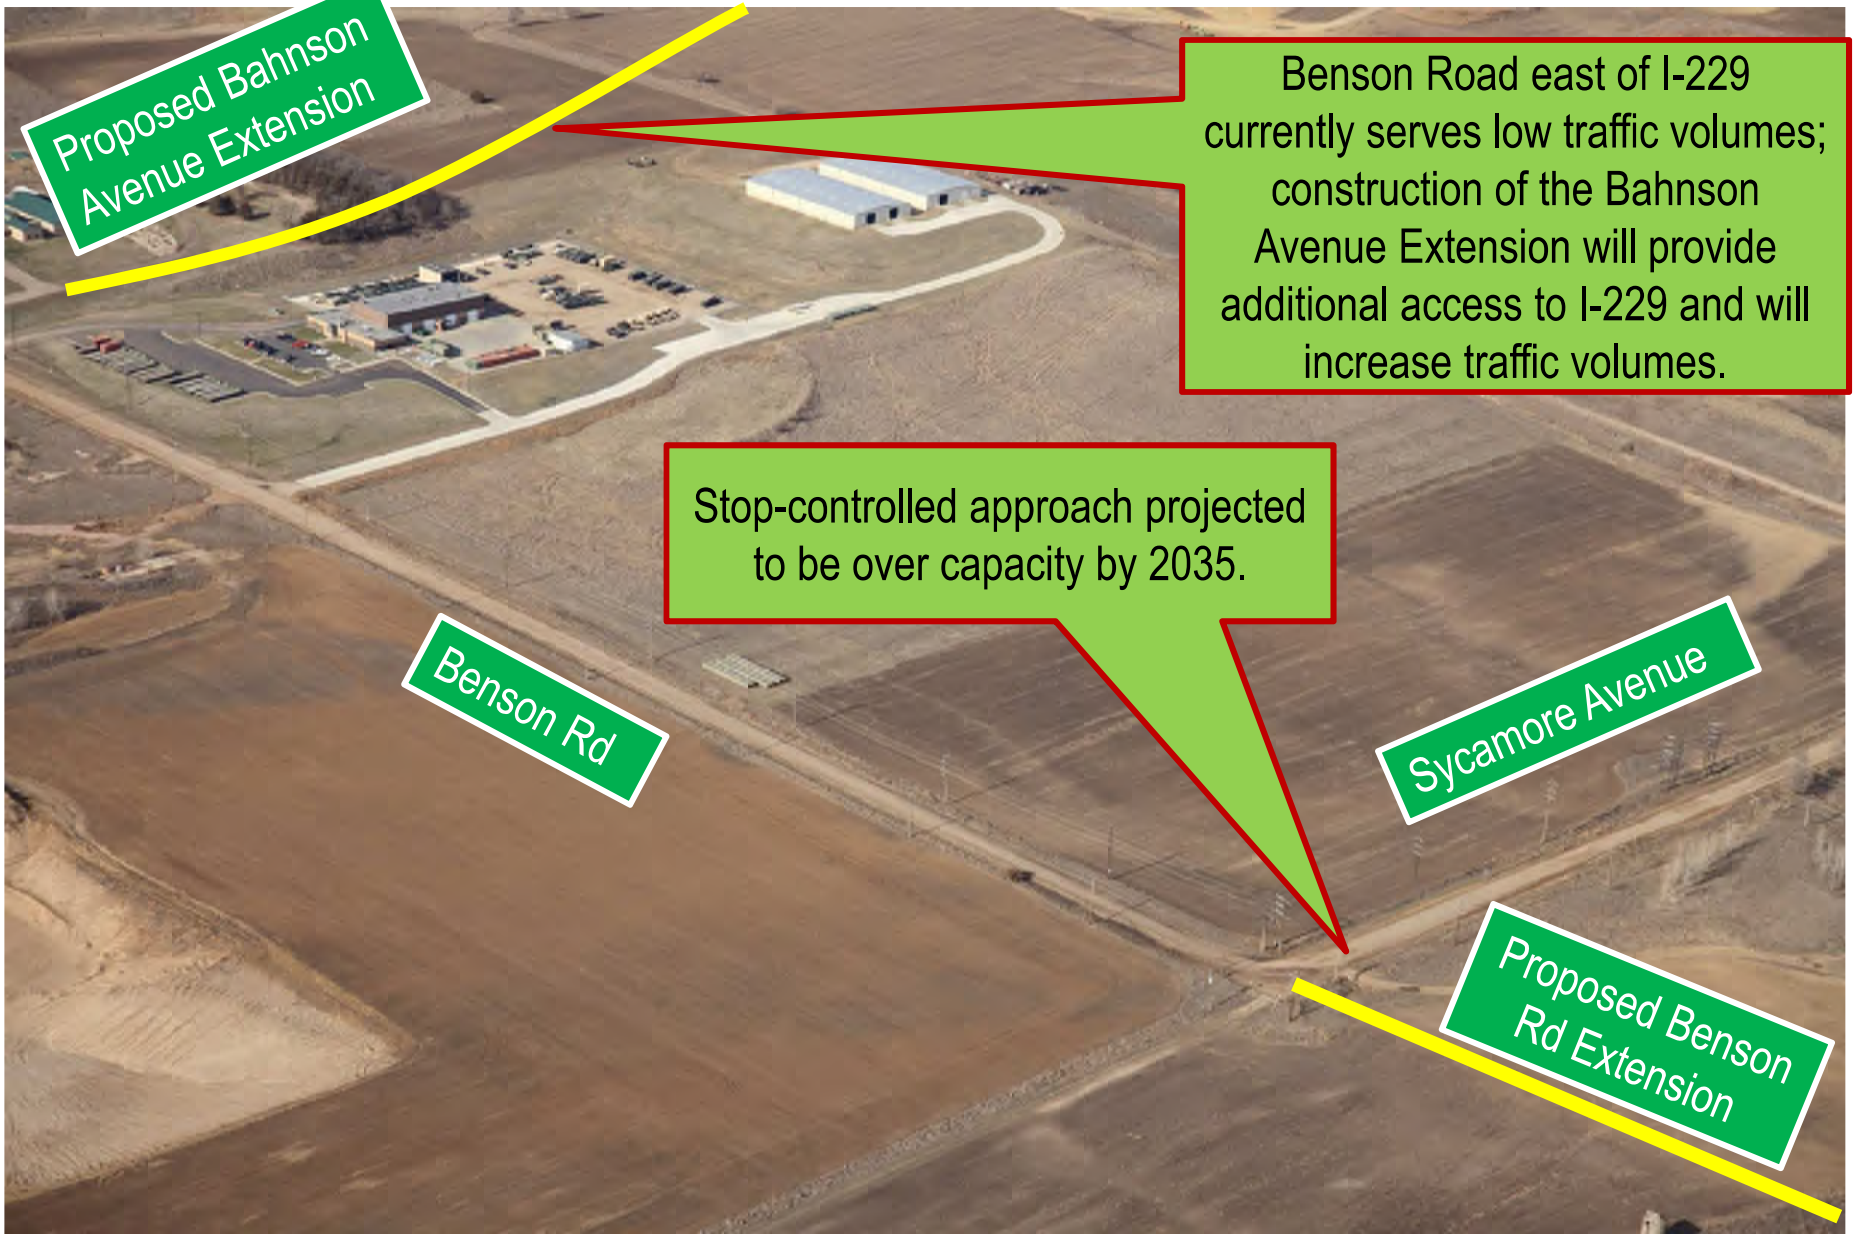

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

James Unruh – HDR Engineering, Inc.
605-977-7740 or james.unruh@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study
Exit 9 – Benson Rd

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

10TH STREET

DECEMBER 16TH, 2014

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES

Meeting Minutes

Project:	I-229 Major Investment Corridor Study; PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 3 (10th Street from Downtown Viaducts to Sycamore Avenue)
Date:	Tuesday, December 16, 2014
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See attached Sign In sheets

Jason Kjenstad covered the PowerPoint slides (attached to meeting notes).

Follow-up discussion items included:

1. Existing 10th Street traffic observations:
   - 1.1 A.M. peak hour – Congestion on 10th Street in vicinity of interchange, WB through traffic queues can be obsessive from Cleveland to Hy-Vee.
   - 1.2 P.M. peak hour – Congestion on 10th Street in vicinity of interchange, WB & EB through traffic queues can be obsessive near I-229. High demand for turning traffic at 10th and Cleveland causes signal coordination issues with the I-229 interchange. Traffic queues on the interchange ramps are a concern.
2. Existing I-229 traffic observations
   - 2.1 Interchange congestion is noticed during the AM and PM peak hours.
   - 2.2 Crashes on the NB off ramp at 10th Street a problem, has been better since SDDOT lengthened ramps onto the mainline.
3. Existing geometric constraints
   - 3.1 The 10th Street and I-229 Single Point Urban Interchange is restricted to single lefts in lieu of dual lefts which is a capacity limitation and leads to additional single lane queuing.
   - 3.2 Proper queue lengths are not provided at 10th Street and Cleveland causing overlaps with I-229 and 10th Street.
   - 3.3 10th and Sycamore was a high crash intersection due to the horizontal curvature, 2014 the intersection was reconstructed that changed all the lefts to dual movements that are protected movements. This will remove the crash trends.
4. 10th Street improvement considerations
   - 4.1 Place a raised median to improve traffic flow by removing conflict locations
   - 4.2 Possibility widen to 6 lanes to increase capacity
   - 4.3 Develop interchange alternatives that improve traffic flow a ¼ mile either side of I-229
   - 4.4 Restrict turning movements at specific intersections to improve traffic flow
5. I-229 improvement considerations
   - 5.1 Various interchange configurations are being considered for Minnesota Avenue. The configurations will be presented at the next public meeting.
   - 5.2 Add an additional lane from 26th Street to 10th Street on I-229 to provide increased capacity.

The following notes were gathered during the discussion with the adjacent landowners and business owners. The statements below are questions asked by the meeting attendees for us to consider as we develop options:

- Biggest problems with 10th St traffic operations are during morning and afternoon peak hours.
- Need to get commuters to use 6th St, 12th St and 18th St to access downtown to relieve 10th St.
- Would raising the posted speed limit on 10th St help traffic flow?
- Why was the traffic signal installed at Lowell?
- 10th St should be widened only at the I-229 interchange.
- Constructing medians slow businesses down.
- If there were ramps from I-229 to 6th and 12th those streets would be viable alternatives to 10th for downtown access. More exists on I-229 would be a cheaper investment than elevated lanes on 10th.
- At Cleveland, traffic from the north is the problem.
- Widening on Cleveland should be done on the east side.
- Relocate Old Home (from the east side of Cleveland).
- A median on Cleveland is not the answer.
- Improvements made at 10th and Sycamore was a good project.
- Relocate the Pizza Hut.
- I-229 should be connected to River Blvd with ramps.
- 6th St should be used instead of 12th St for a split diamond interchange with 10th St.
- Westbound to southbound left turns from 10th St to Cleveland are difficult to make.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for 10th Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Tuesday, December 16, 2014 3:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	HARSH PATEL	2616 E 10TH STREET SIOUX FALLS SD 57103	605 338 8881	gm@supers1oux falls.com
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for 10th Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(67) 36167; PCN 044K **Project No.:** 207000

Meeting Date Tuesday, December 16, 2014 3:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.


	Name	Address	Best Contact Phone	Email
1	Tami Johnson	Casey's General Store 1901 East 10th St.	515 971-7184	jajr4p630gmail.com
2	Mark Elsion	101 S. Cleveland Ave	605-338-8151	melsion@sio.midco.net
3	Mike Bruns	2310 E 10th	605-728-1570	mike@buildersnw.com
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for 10th Street Sub Study
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0103(87) 3019P, PCN 044K **Project No.:** 207330
Meeting Date Tuesday, December 16, 2014 3:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Gary Bysselman	SF SD 57110 7201 E Madison ST	605 334 5692	gary@garybuss.com
2	CHUCK GUSTAFSON	745 E. RIDGE RD SFSD 57105	332-1000	CGUSTAFSON@MMC.COM
3	Travis Dressen	SF Area POT	367-5100	travis.dressen@state.sd.us
4	Lynne Beatty	2520 W. 8th St SF SD 57104	339-1057	lynne.beatty@midcontinent.com
5	Shannon Ausen	224 [illegible] St	367-8607	sausen@siouxfalls.org
6	Gayle Nelson	2901 S [illegible] 57103	366-5782	DEKDAD@AOL.COM
7	Layton Stroub	301 S. Phillips	3382206	
8	Quality Efficiencies Lillian Hart	3503 S Western Ave Sioux Falls, SD 57105	339-3382	lhart@qualityefficiencies.com
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

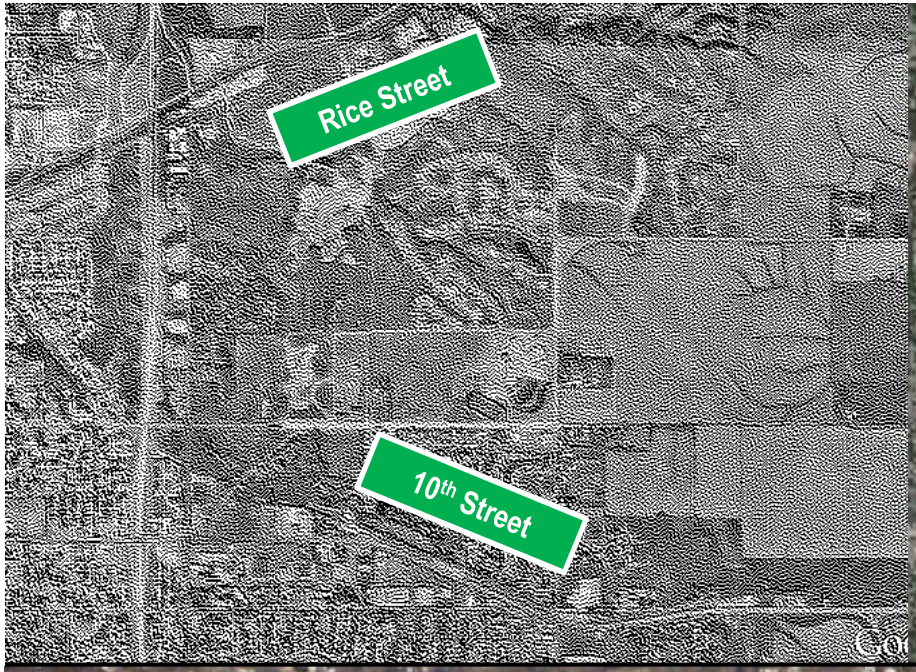





Interstate 229 Major Investment Study

Exit 6 – 10th Street

Stakeholder Meeting
December 16th, 2014
3:30 pm to 4:30 pm

HDR

HRGreen

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road

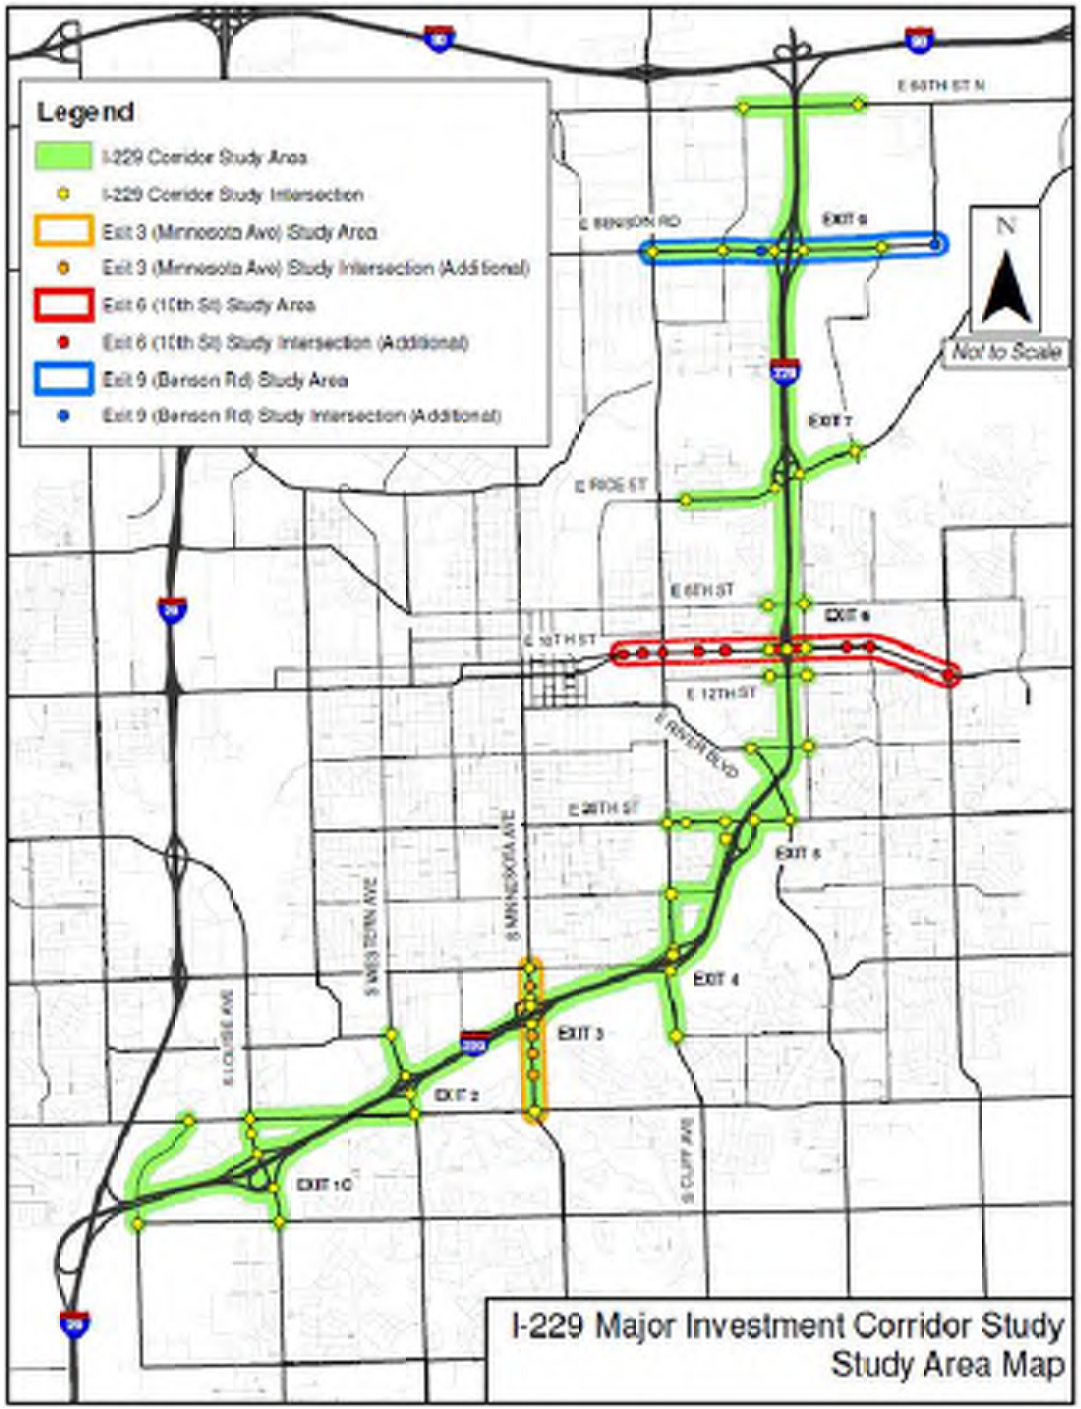

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls


Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

Exit 6 (10th Street) Crossroad Study Goals


- Reduce traffic congestion
- Develop Corridor Growth Plan to meet traffic demands but minimizing impacts to developed properties
- Improve pedestrian mobility
- Improve safety for corridor users
- Identify improvements to the interchange as well as the 10th Street and Cleveland Ave intersection



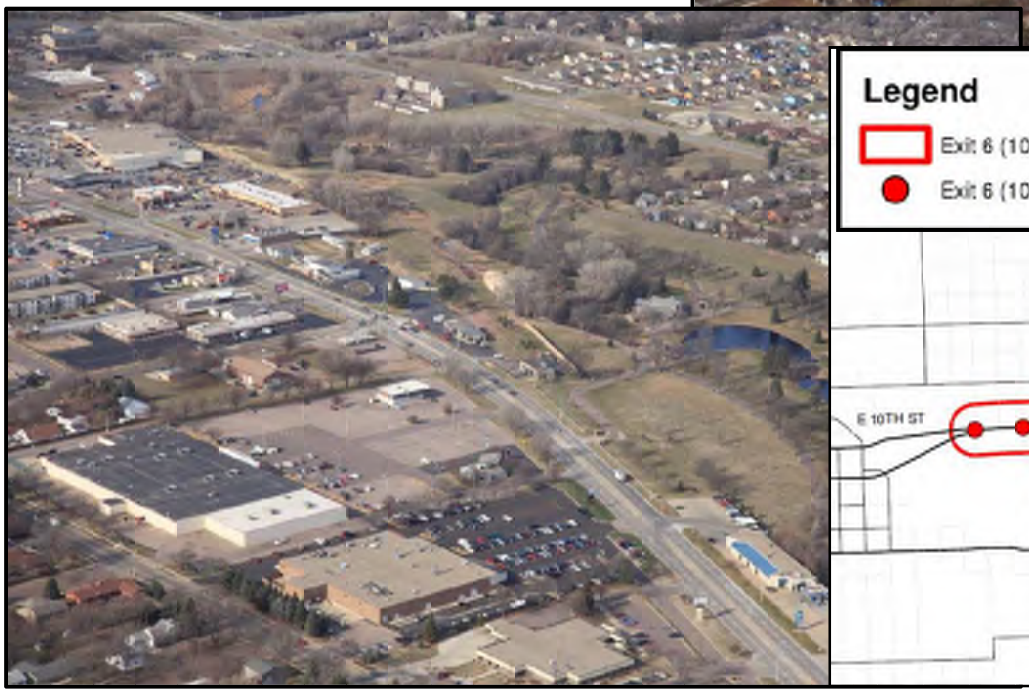




10th Street Corridor Overview

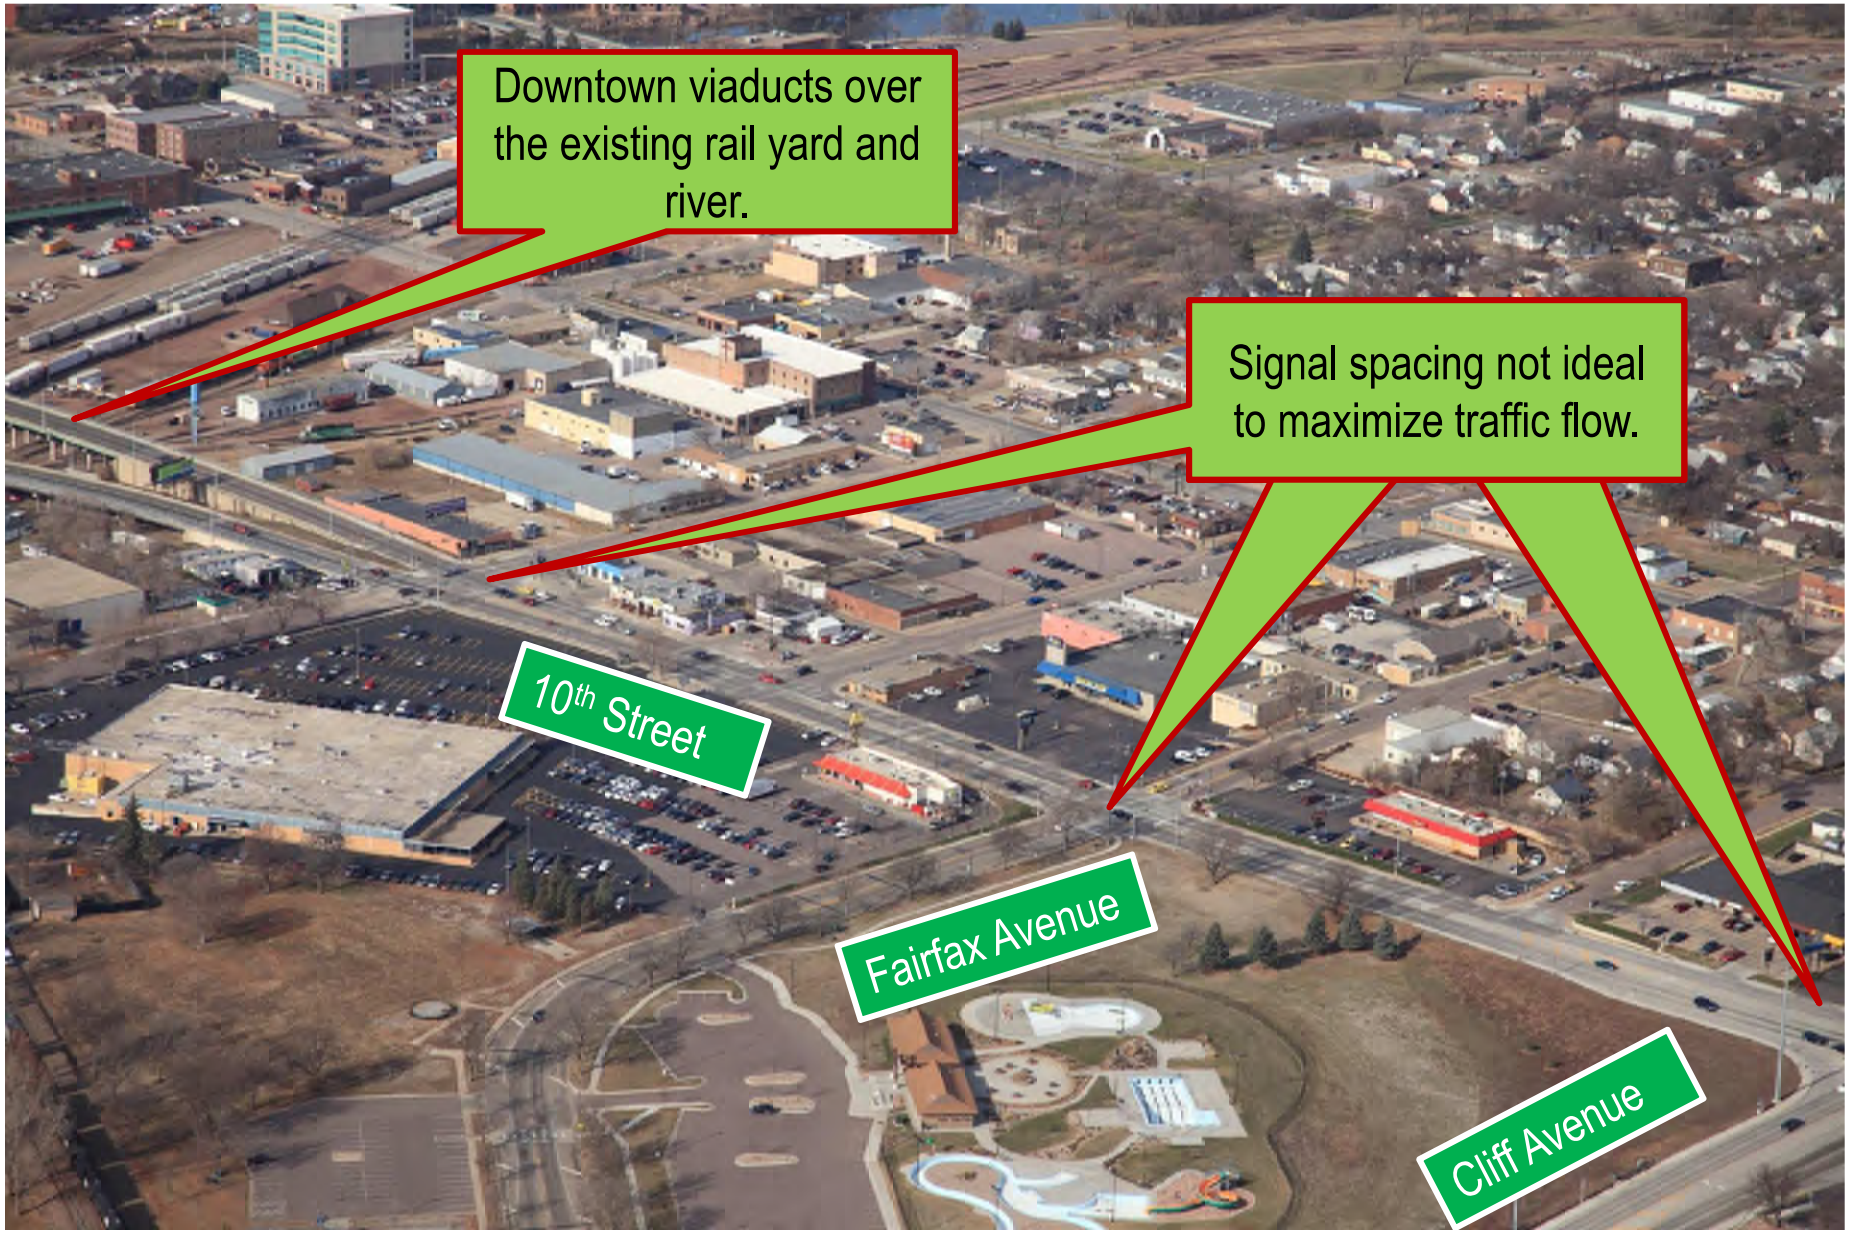


10th Street Corridor Overview

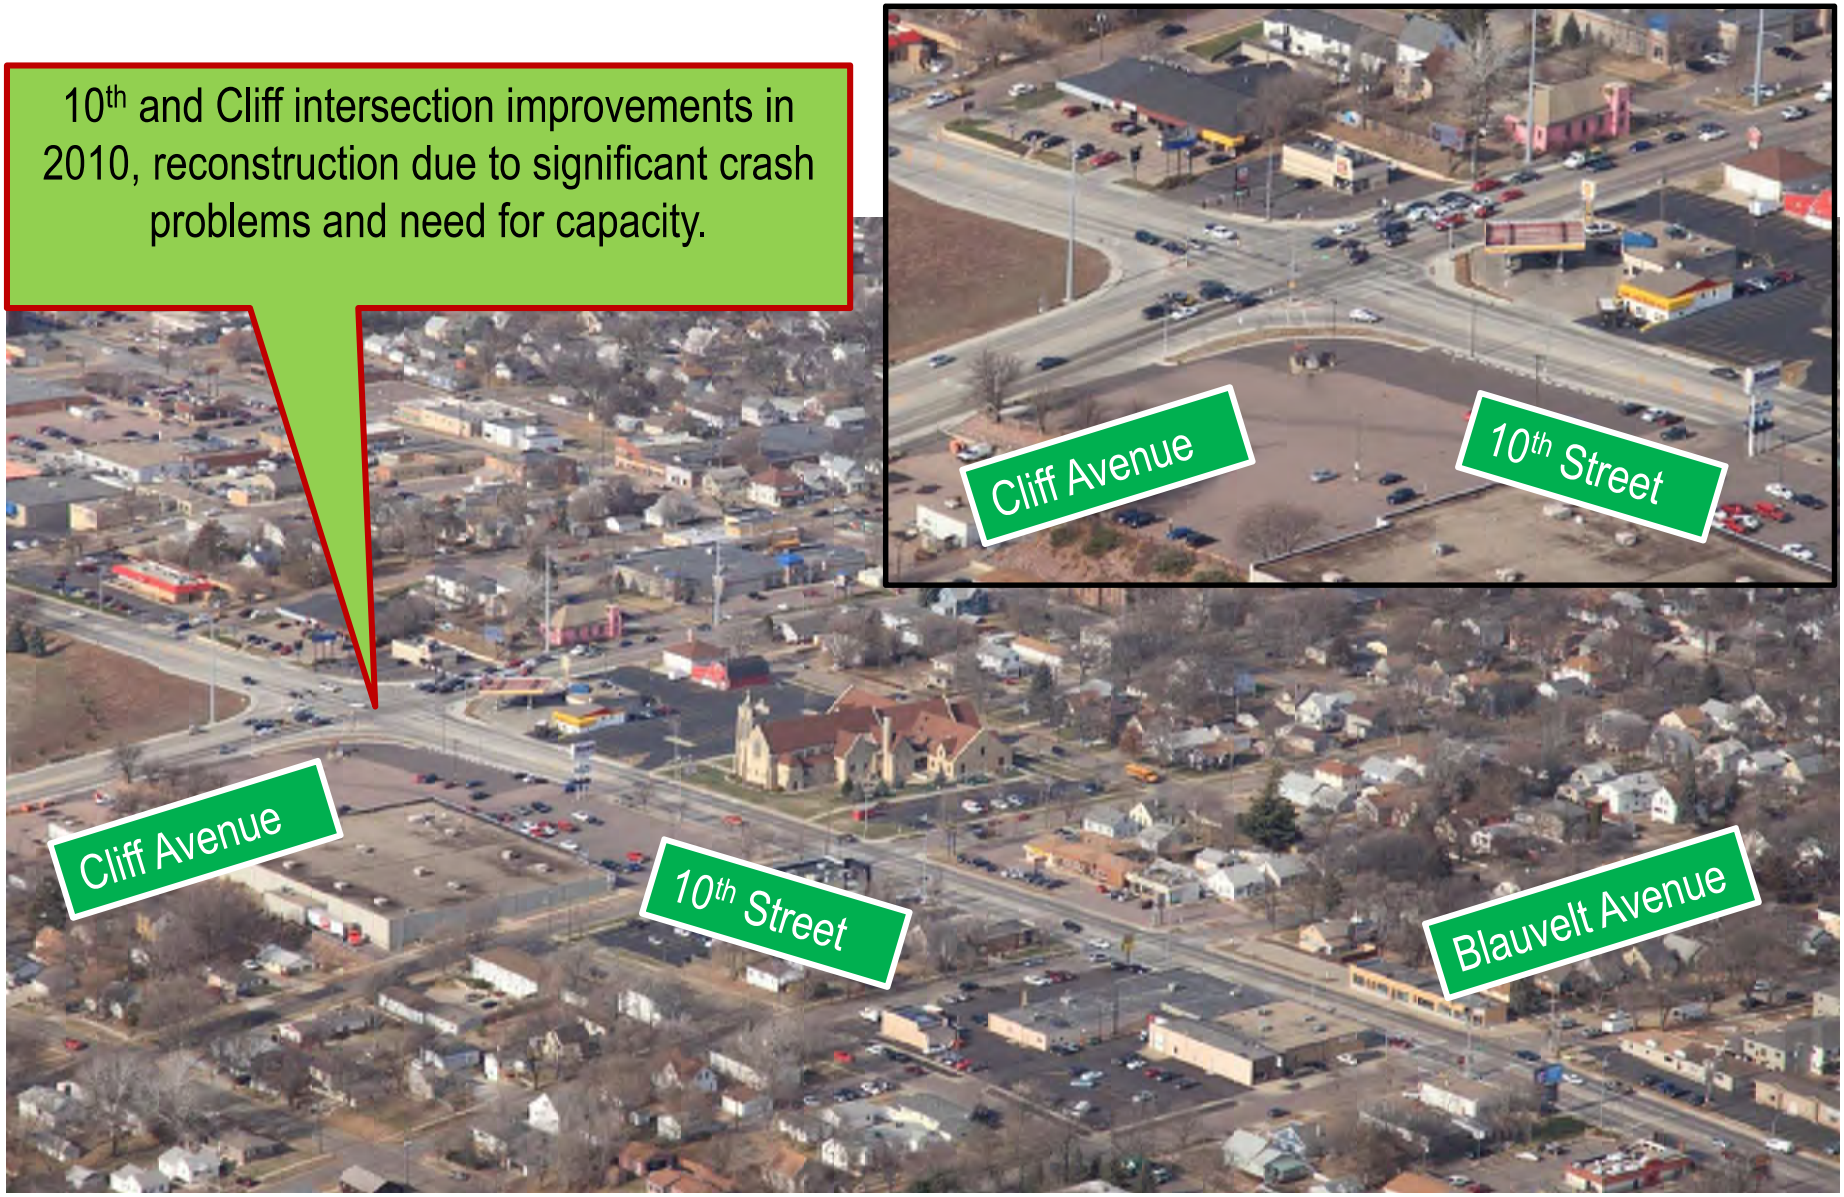


10th Street Corridor Overview




10th Street Corridor Overview

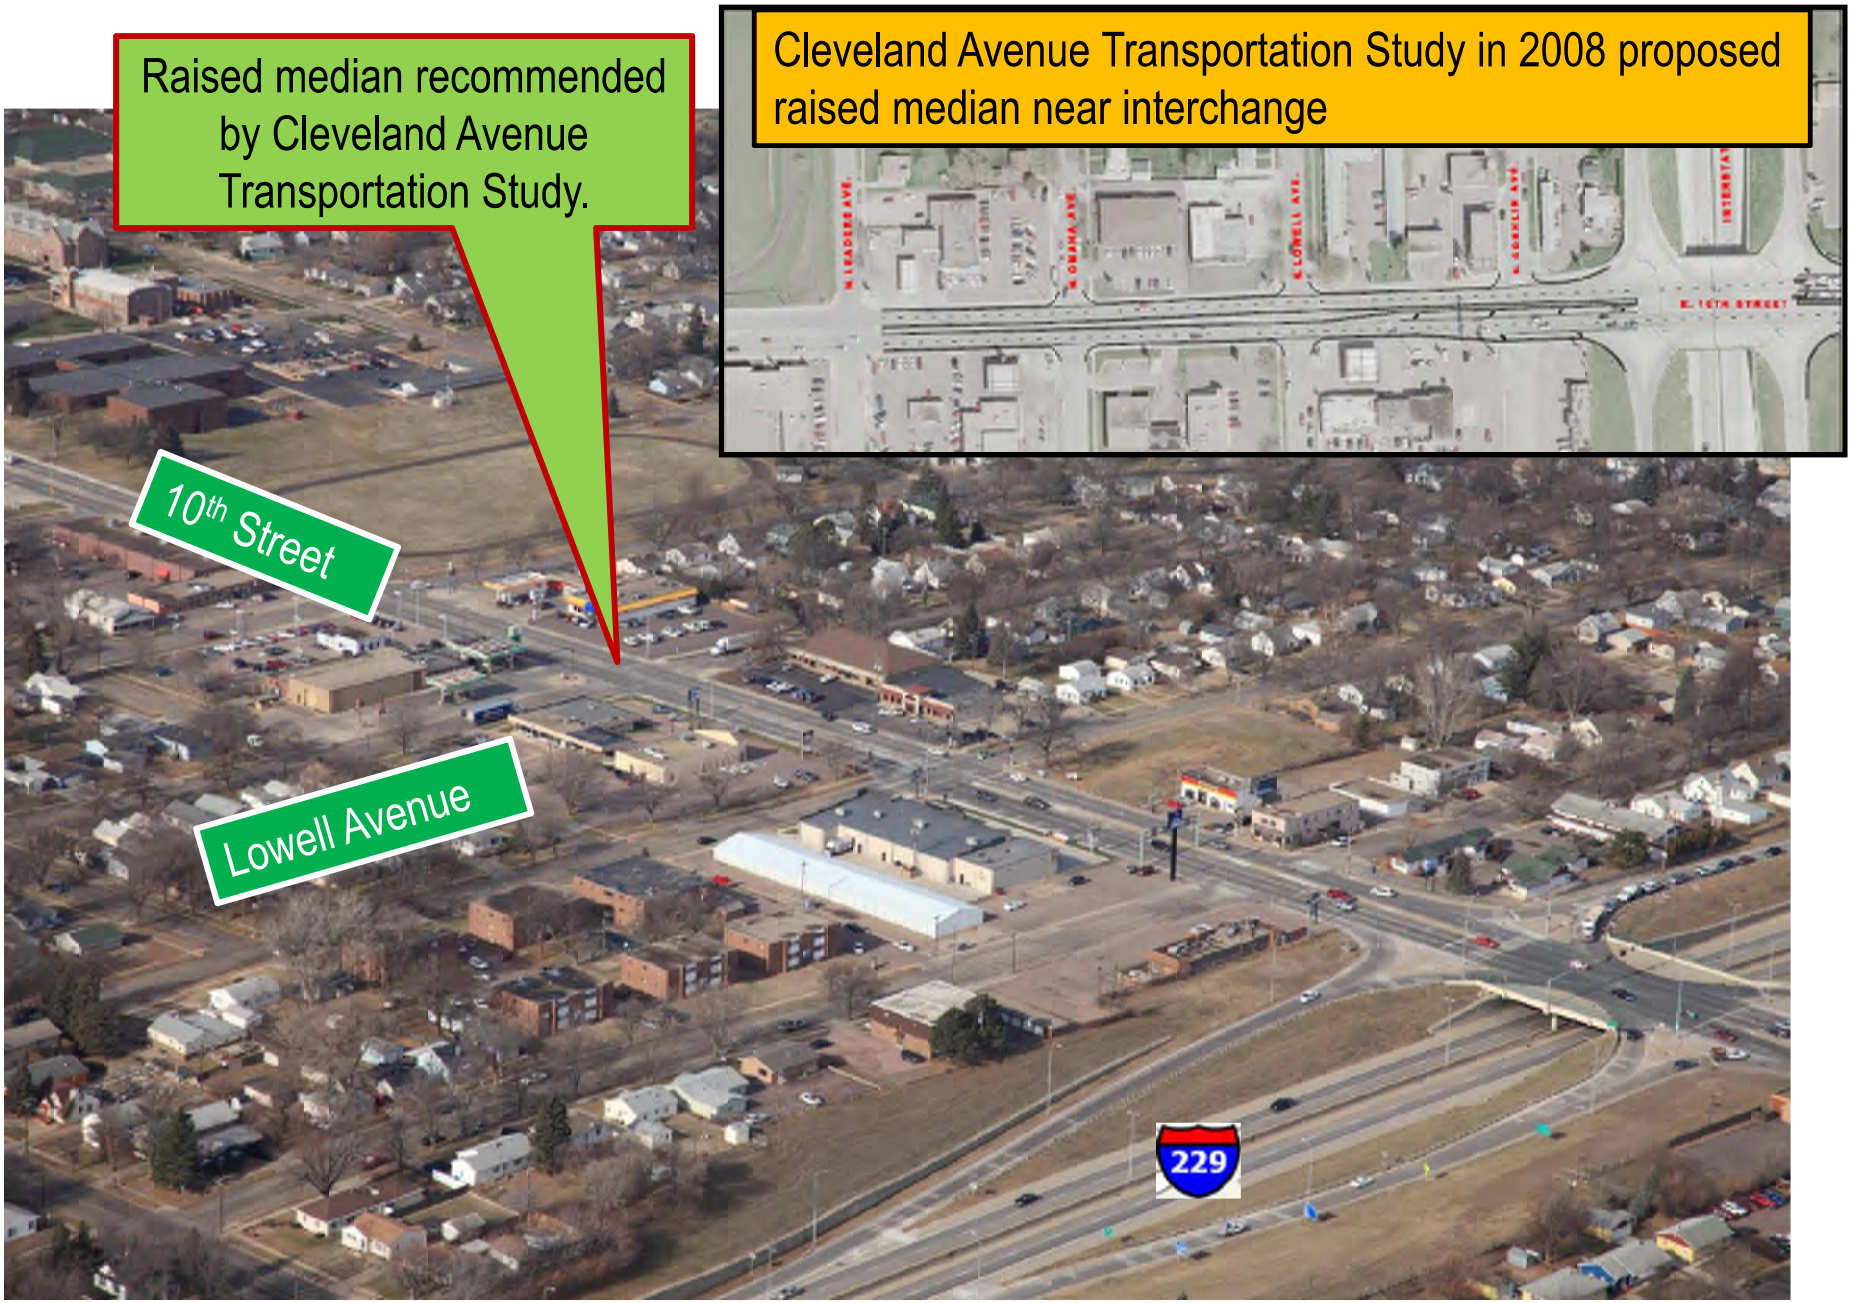

10th Street Corridor Overview

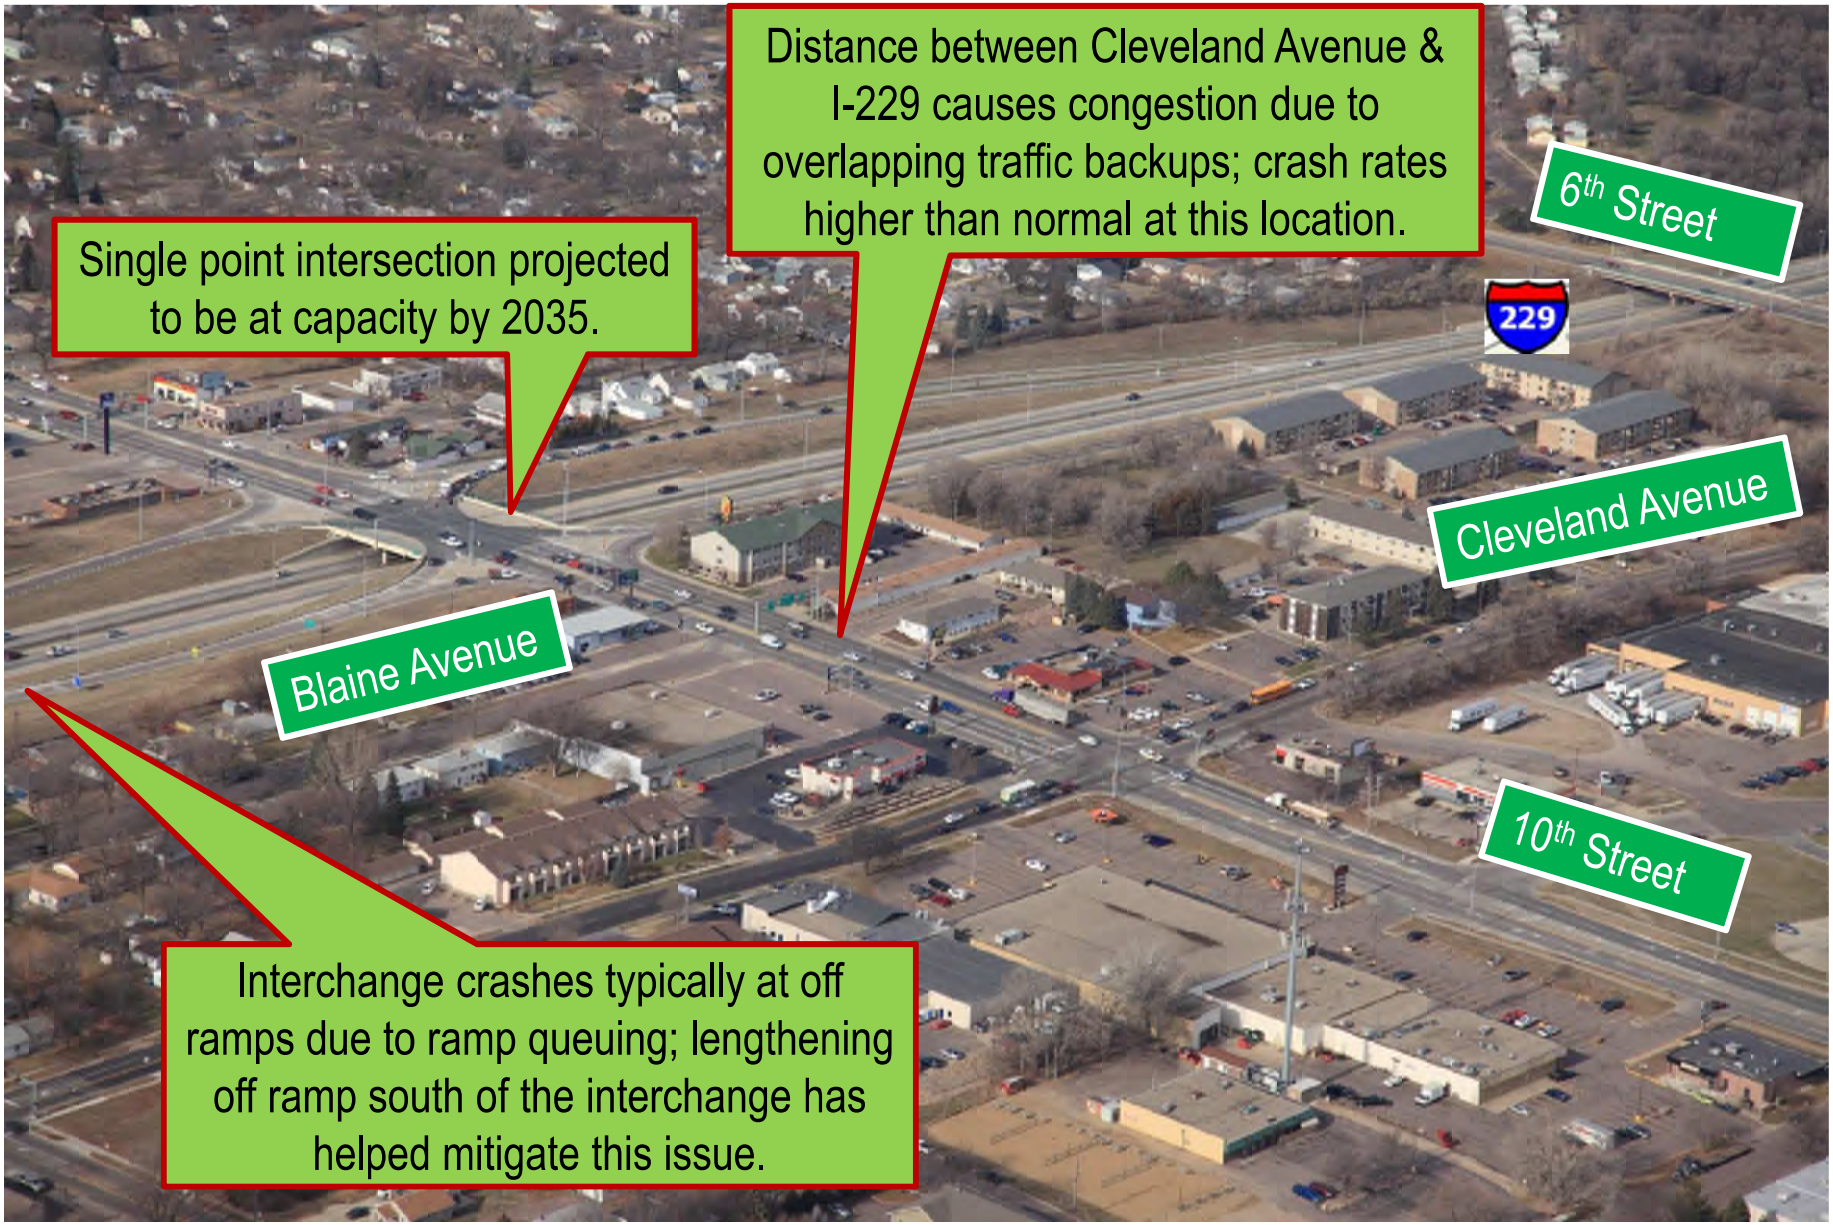


10th Street Corridor Overview

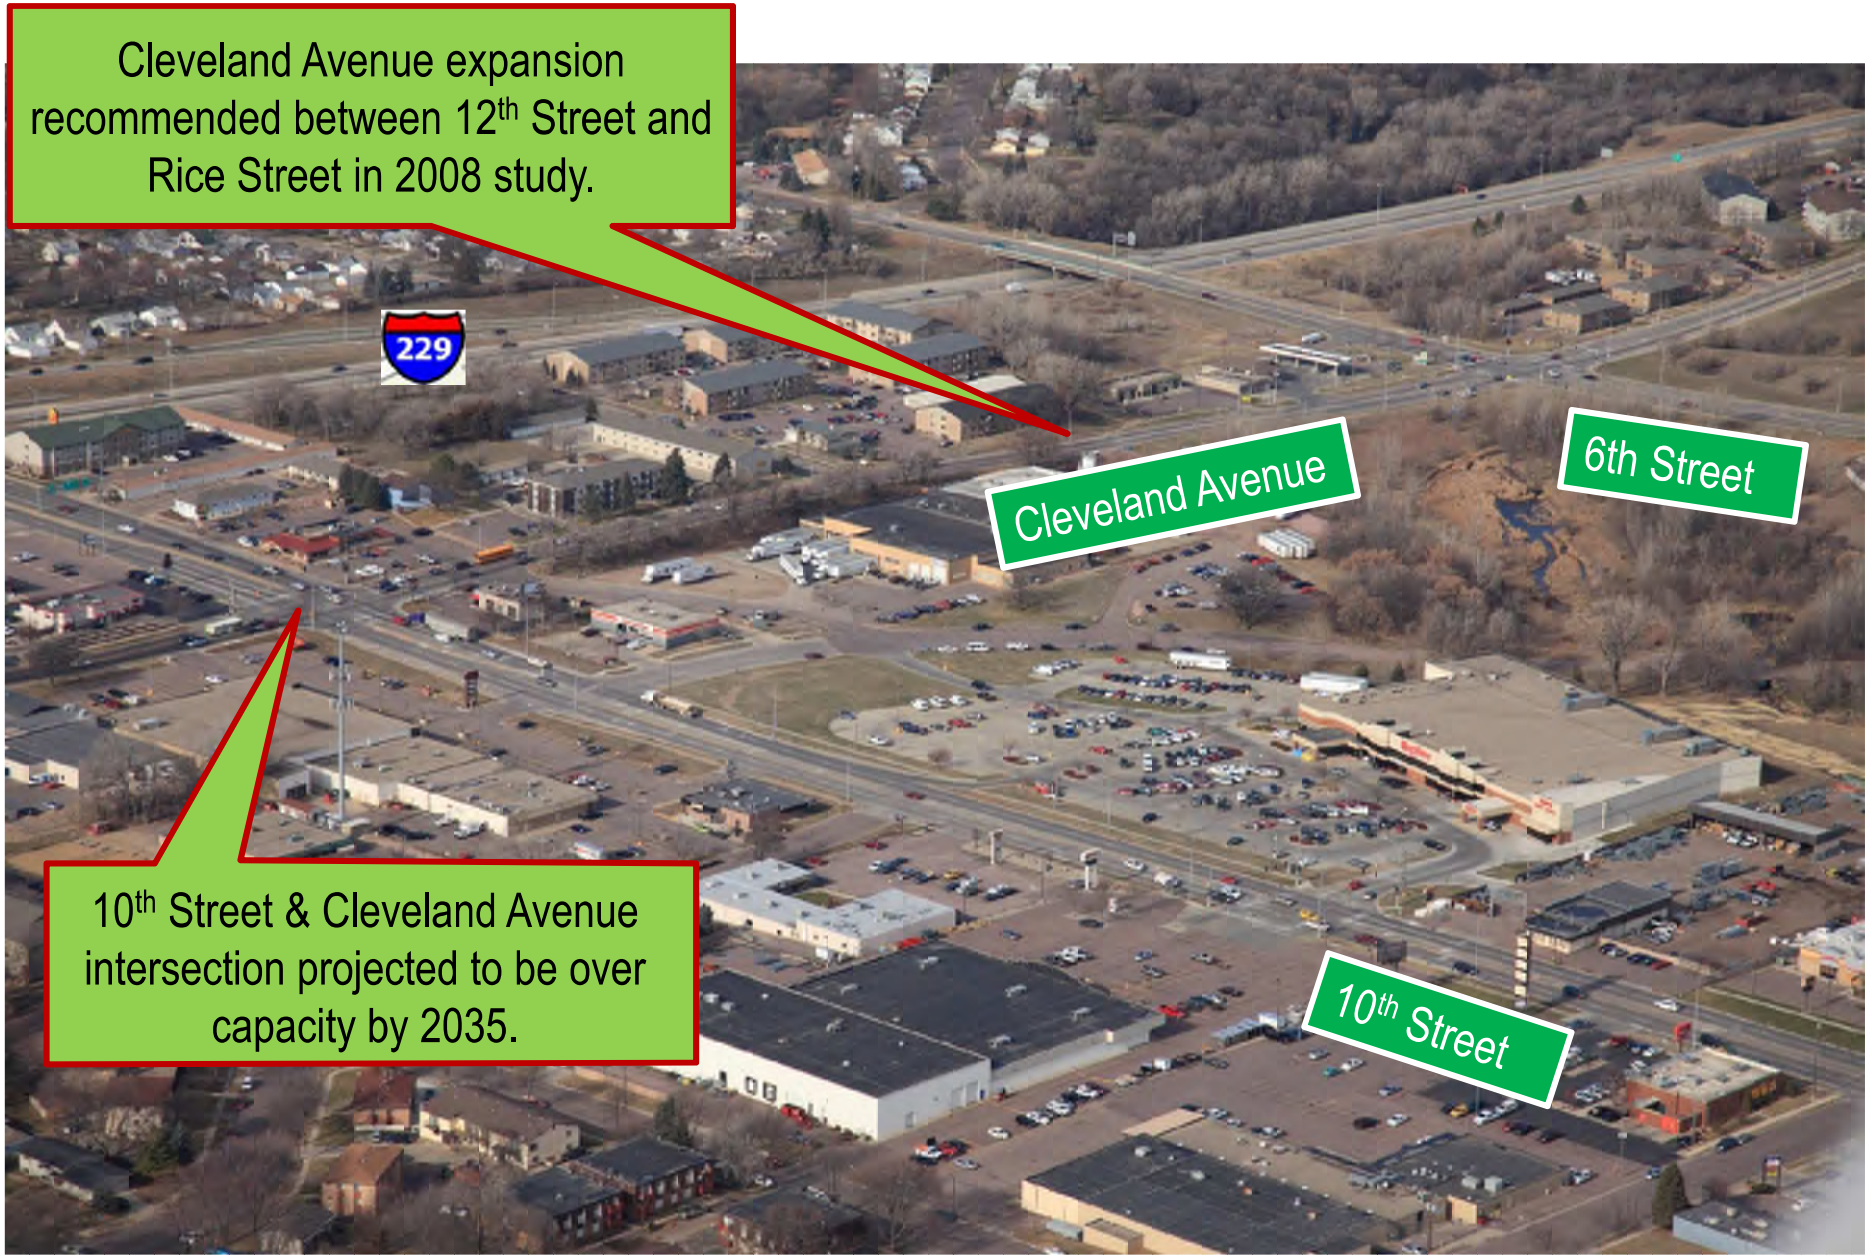

10th Street Corridor Overview




10th Street Corridor Overview

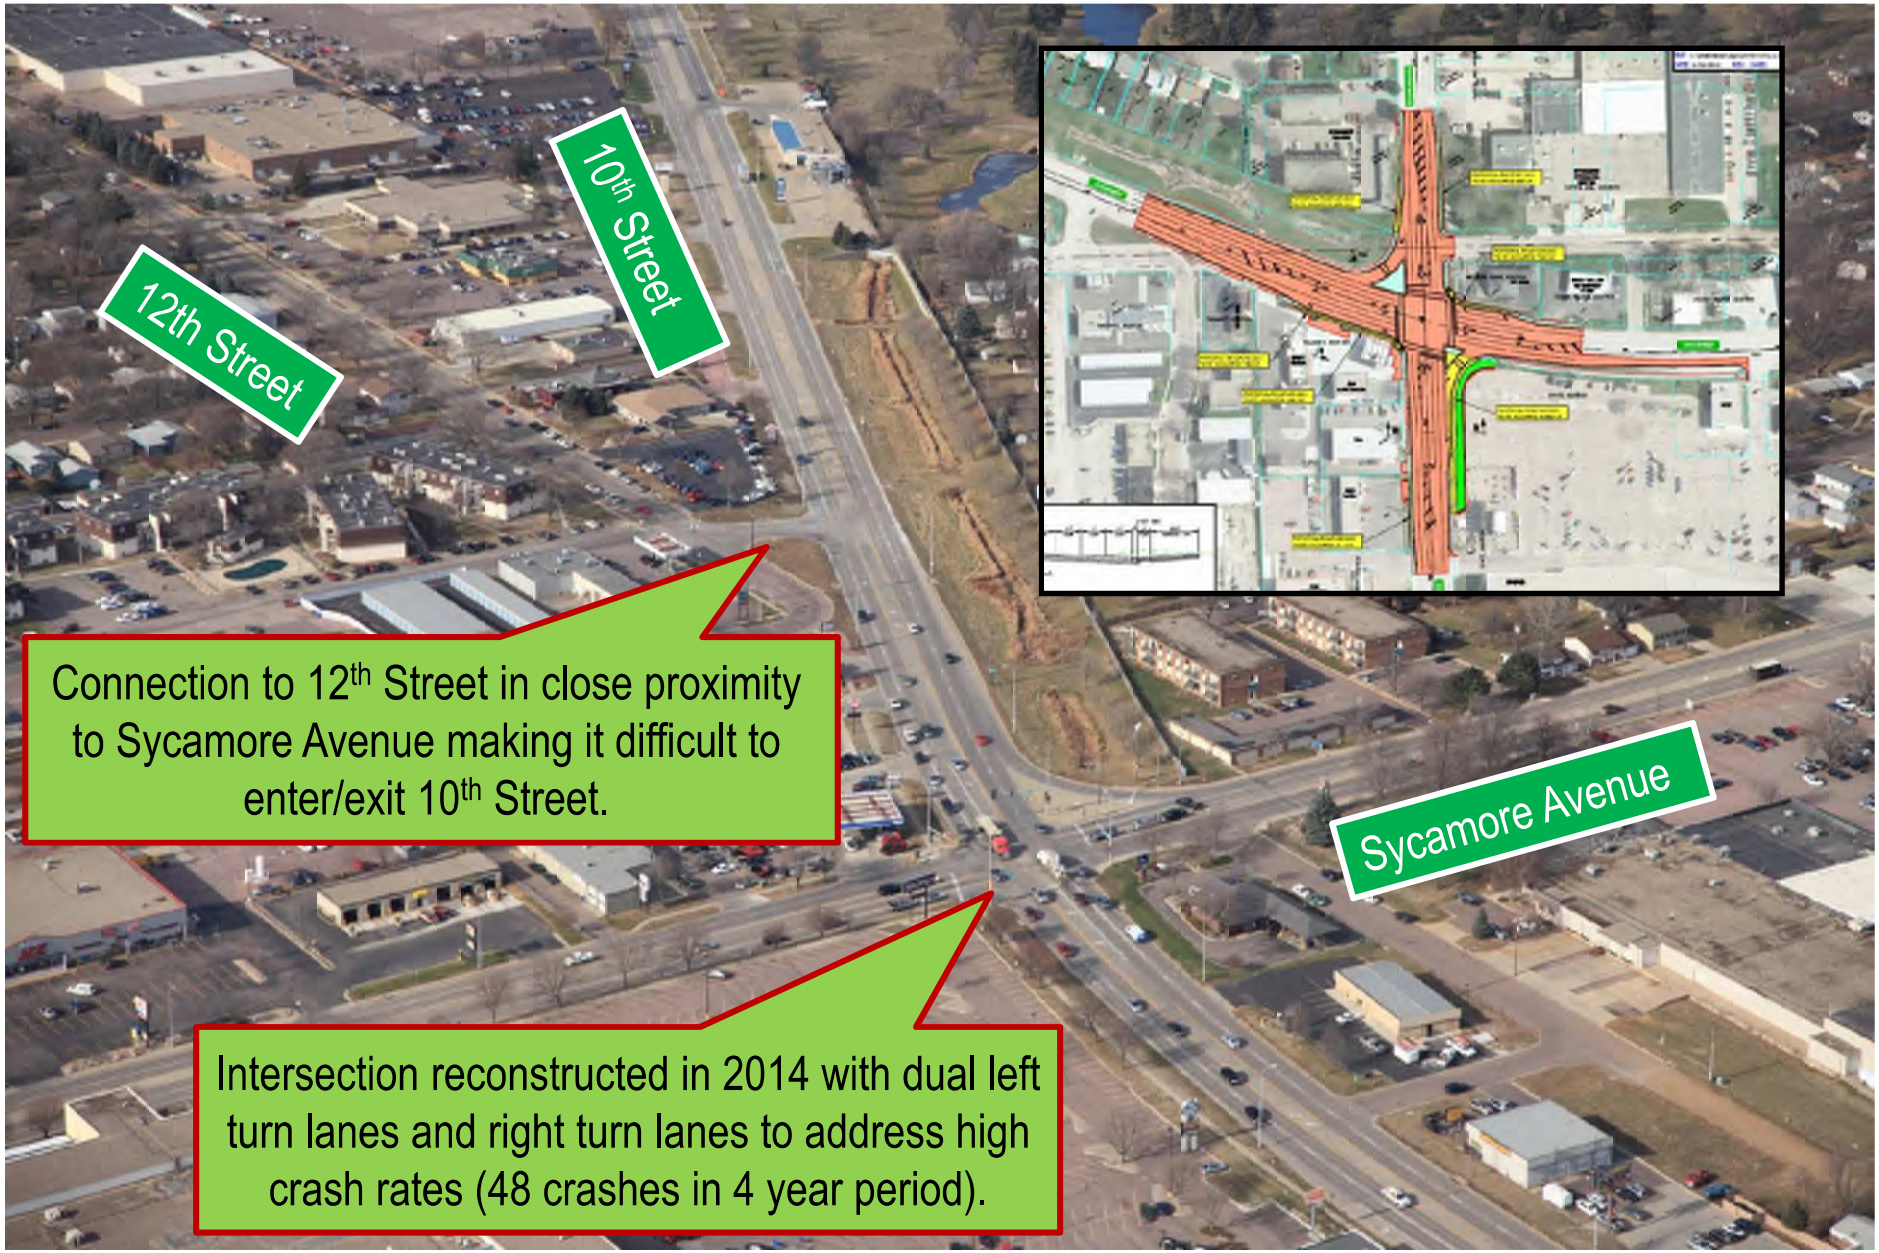


Previous Study Ideas for 10th Street Corridor

- Cleveland Ave. Transportation Study

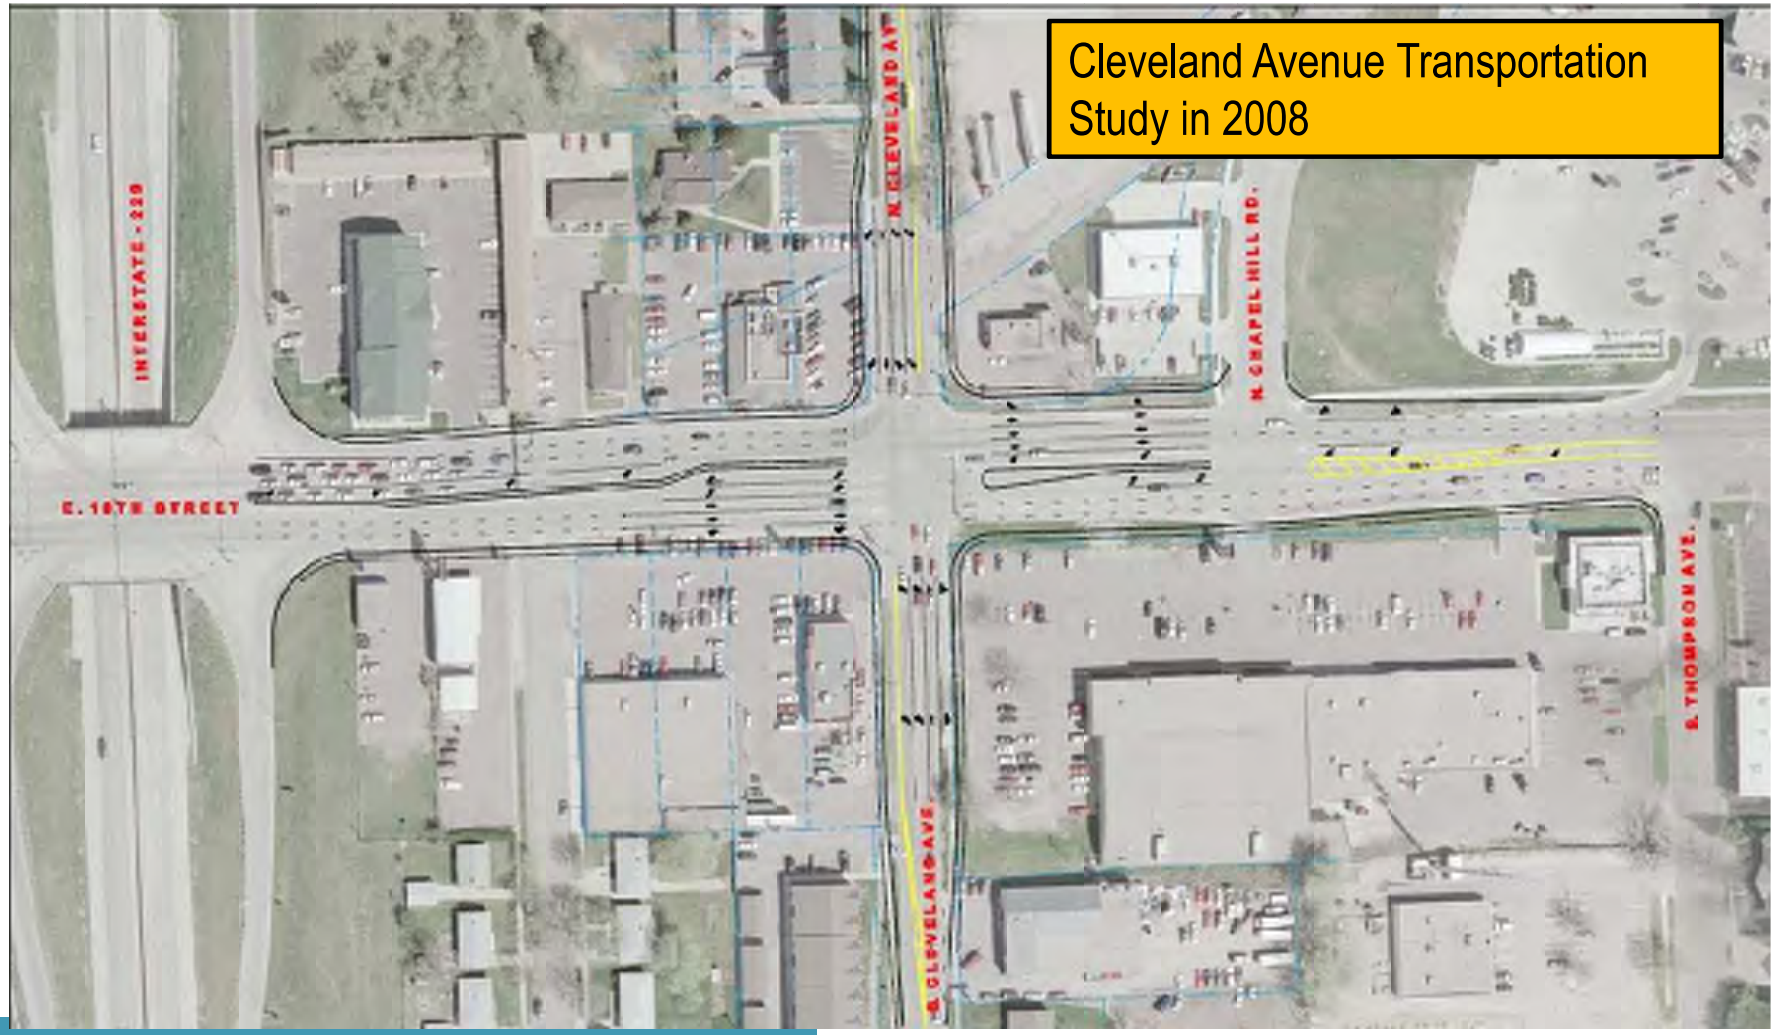


Previous Study Ideas for 10th Street Corridor

- **Northeast Transportation Study**

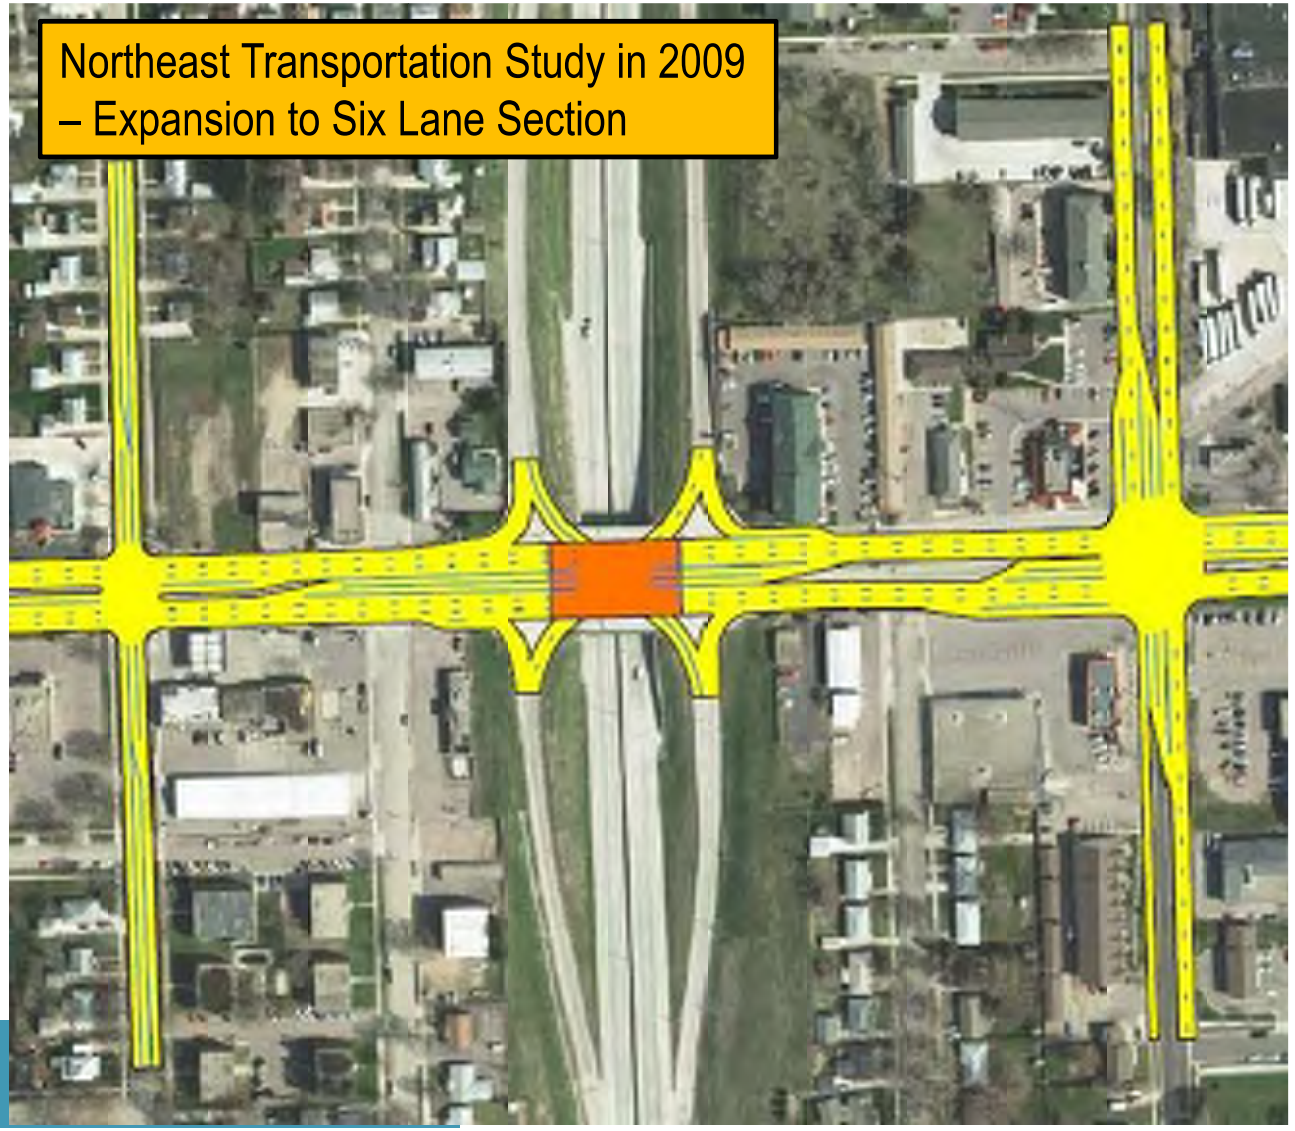

Previous Study Ideas for 10th Street Corridor

- Northeast Transportation Study

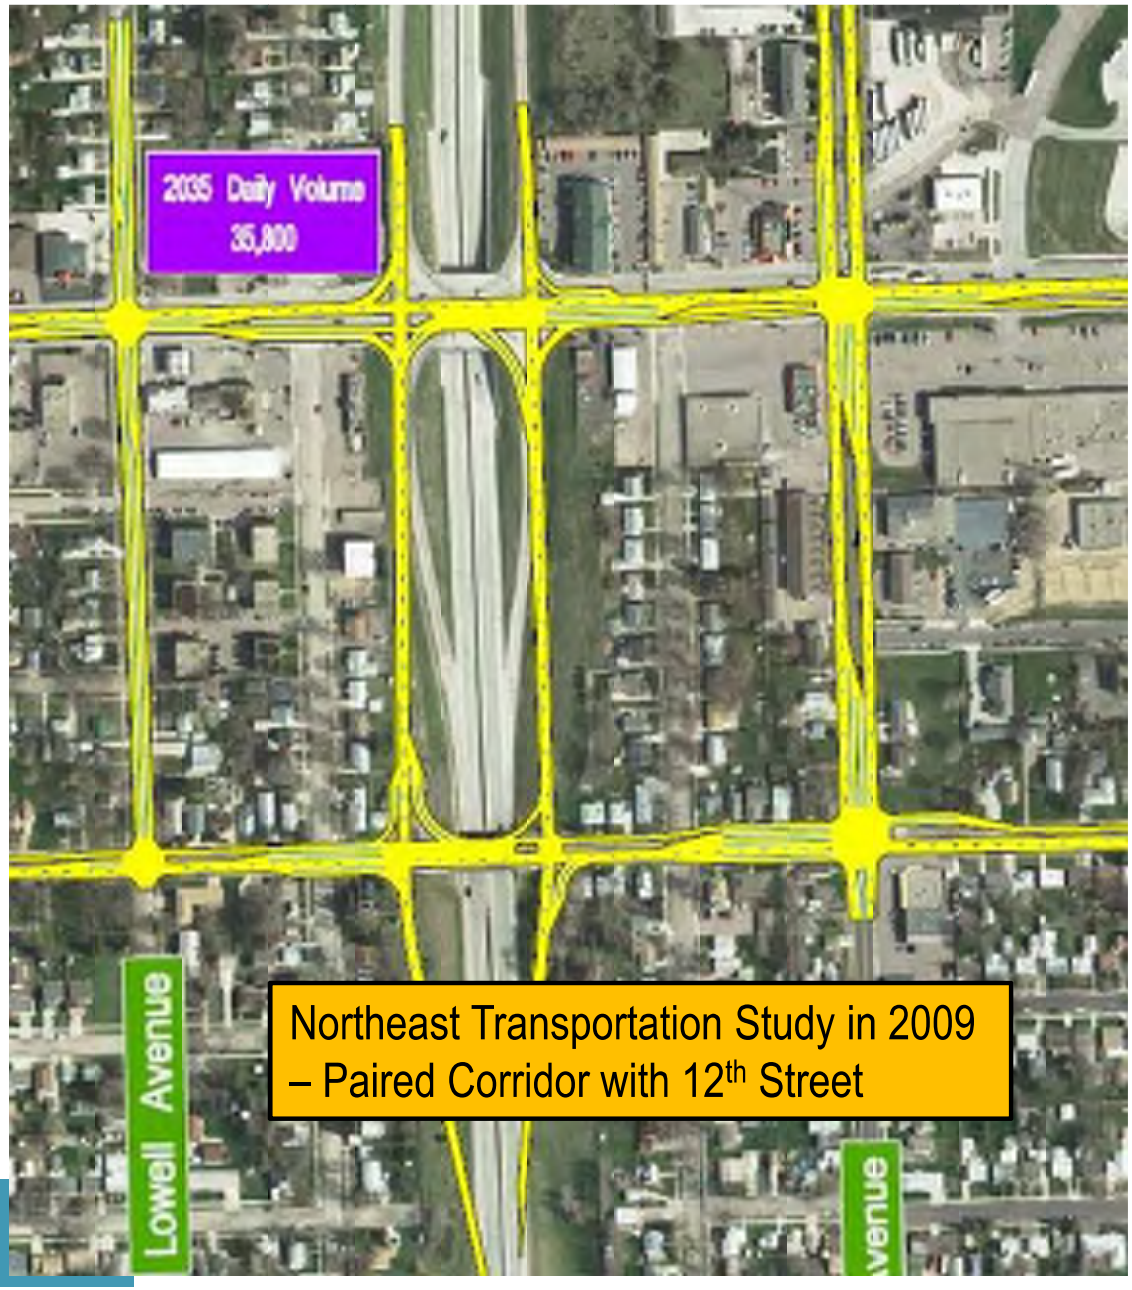

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Chris Malmberg – HDR Engineering, Inc.
402-399-4959 or chris.malmberg@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 6 – 10th Street

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

MINNESOTA AVENUE

DECEMBER 16TH, 2014

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES

Meeting Minutes

Project:	I-229 Major Investment Corridor Study; PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 2 (Minnesota Ave from 57th Street to 41st Street)
Date:	Tuesday, December 16, 2014
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See attached Sign In sheets

Jason Kjenstad covered the PowerPoint slides (attached to meeting notes).

Follow-up discussion items included:

1. Existing Minnesota Avenue traffic observations:
   - 1.1 A.M. peak hour – NB traffic on Minnesota Queues at I-229 and 41st Street. 57th Street traffic queues on East approach (WB) at Minnesota Avenue.
   - 1.2 P.M. peak hour – SB traffic on Minnesota is extremely congested between 41st Street and I-229. The 49th Street extension is blocked due to this.
2. Existing I-229 traffic observations
   - 2.1 Traffic queues at the NB off ramp in both AM and PM peak hours and SB off ramp in the AM peak hour.
   - 2.2 Travel Time runs on I-229 indicate capacity is good on the mainline.
   - 2.3 Crashes are highly noticed along the NB off ramp.
3. Existing geometric constraints
   - 3.1 Driveway from Yankton trail park is a concern in relationship to the I-229 ramps
   - 3.2 Proximity of 49th Street extension in relation to interchange.
4. Minnesota Avenue improvement considerations
   - 4.1 Place a raised median to improve traffic flow by removing conflict locations
   - 4.2 Possibility widen to 6 lanes to increase capacity
   - 4.3 Develop interchange alternatives that work with the 49th Street extension location on Minnesota Avenue
   - 4.4 Possibility relocate Yankton Trail Park entrance further south
5. I-229 improvement considerations
   - 5.1 Various interchange configurations are being considered for Minnesota Avenue. The configurations will be presented at the next public meeting.

The following notes were gathered during the discussion with the adjacent landowners and business owners.

- 57th Street and Minnesota: Commenters noted that the angle of the curve in the intersection and the topographic changes create safety concerns – can't see when vehicles are in turning lanes. It was explained that a break in the section line (platting) was the original issue that caused the current misalignment and that it is being slowly corrected each time improvements are made. Angle crashes at the intersection and speed limit changes at the intersection approach were also discussed.

- Lotta Street concerns: (multiple mentions, compiled below) – also see handout provided by Aspen Condominiums representative (attached).
    - Left turning movement safety from Lotta Street at Minnesota Avenue (driver delay and speed of approaching vehicles)
    - Speed on Minnesota Avenue at Lotta Street, particularly northbound (picking up speed heading down the hill)
    - Safety (turning gaps, speed, driveways and pedestrians/bicyclists)
    - Offset drives can lead to some confusion on turning movements
    - Residents at Aspen Condominiums are largely retired and many are elderly.
- Discussion on legal access: Southern building, east of the 49th Street intersection, has separate ownership than the others within the development. If they lose their access to Minnesota Avenue, they would lose their legal access to the property.
- Traffic volumes on 49th: Comment that there has been much more traffic on 49th over last couple years due to new construction and operation of Costco and a new apartment complex.
- Truck Parking West of Minnesota Avenue: A comment was made that Midco trucks park on- streets, creating safety concerns. It was noted that Midco is planning to build a separate facility with off-street parking in the near future, which could potentially alleviate this issue.
- Plans for 49th Street: It was noted the City plans to construct 49th Street beginning in 2017, starting on the west end. Multiple phases will over next several years. The final phase that ties into the existing 49th Street segment would be last, and will be dependent on the committed Minnesota Avenue interchange design.
- New Development Traffic (Walmart, Costco, and Apartments): It was noted that each of these new developments have been accounted for in the travel demand model.
- Safe Access to Minnesota Avenue: A property owner of building immediately adjacent to southbound exit ramp mentioned it was very difficult to turn left out of the property onto Minnesota Avenue.
- Interior cross parcel access: One commenter noted that motorists cut across parking lots west of Minnesota Avenue (North of 49th Street) via cross easements or interior driveways to avoid Minnesota Avenue.

- Center Median Proposed: City of Sioux Falls staff noted that they have begun to look at a median along Minnesota Avenue, starting near the airport and heading south along Minnesota Avenue.

- Bicyclist Safety: A commenter noted that there is a safety issue at the park access driveway with the number/frequency of bicyclists/pedestrians traveling north-south along Minnesota Avenue, across the park driveway. City staff noted they will continue with this study, at bike/ped bridges or overpasses for crossings of I-229.

- Adaptive Traffic Signal Control: City staff noted they plan to implement an adaptive traffic signal control system along Minnesota (from 18th to the southern ramp terminal intersection).

- 41st and Minnesota: City staff mentioned the intent to construct a new eastbound lane at 41st Street, for approximately one to three blocks. This will create an EBL, EBL, EBT, and EBR lane configuration at the Minnesota intersection. Looking at construction as early as 2016. The City plans to replace the existing 5-section heads at Minnesota to remove the Dallas phasing, thereby replacing it with the flashing yellow signal head.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3516P, PCN 044K — **Project No.:** 207030

Meeting Date Tuesday, December 16, 2014 1:30 PM — **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Shannon Aussen	224 W. 9th St SF SD	367-8607	Sauss@siouxfallsmpo.org
2	Bob Bottin	3600 S Dakota Ave	334-4220	robert.bottin@cilcsdabilities.org
3	Pam Taylor	5000 S. Sunnymede Cir. Sioux Falls	332-6509	Pam.Jansa@gmail.com
4	Steve Sherman	3800 S. Grange	359-7857	ssherman@jackheny.com
5	Cindy Strawbridge	4300 S. Pine Lane	Phone 367-8711	Cabroad@AOL.com
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3615P, PCN 044K **Project No.:** 2070030

Meeting Date Tuesday, December 16, 2014 1:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Diane Mott	4304 S. Minn Ave	339-2864	MottL@sio.midco.net
2	Thomas Hein	6100 E. Hein Place SF 57110	361-8401	Theinmail@gmail.com
3	Paul Nikolas	5316 N. 60th St. N.	367-5680	Paul.Nikolas@state.sd.us
4	Ann Kelly	4100 S. Minn Ave.	334-2838	
5	Nemmandbe Hagi	4600 W. 12th.	605-366-3233	normdehaai@billionantoLaw
6	BRIAN SATHER	3308 S. Minn, 57105 Sioux Falls GOOD AUTUMN LN	338-3295	qfentitled@hotmail.com
7	Dohn Hart	1309 W. 51st	444 6320	j.hart@usa-d.state.sd.us
8	MARK KOZIC	4040 S. Grange Ave	336.0860	mkozic@lumberyards.com
9	Richard Elmen	3501 S. Minnesota	366 0252	relmen@rentall-inc.com
10	Kelly Vis	404 S. Grange Ave	336-6866	kvis@lumberAlumber.com
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







Interstate 229 Major Investment Study

Exit 3 – Minnesota Avenue

Stakeholder Meeting
December 16th, 2014
1:30 pm to 2:30 pm

HDR

HRG
HRGreen

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road

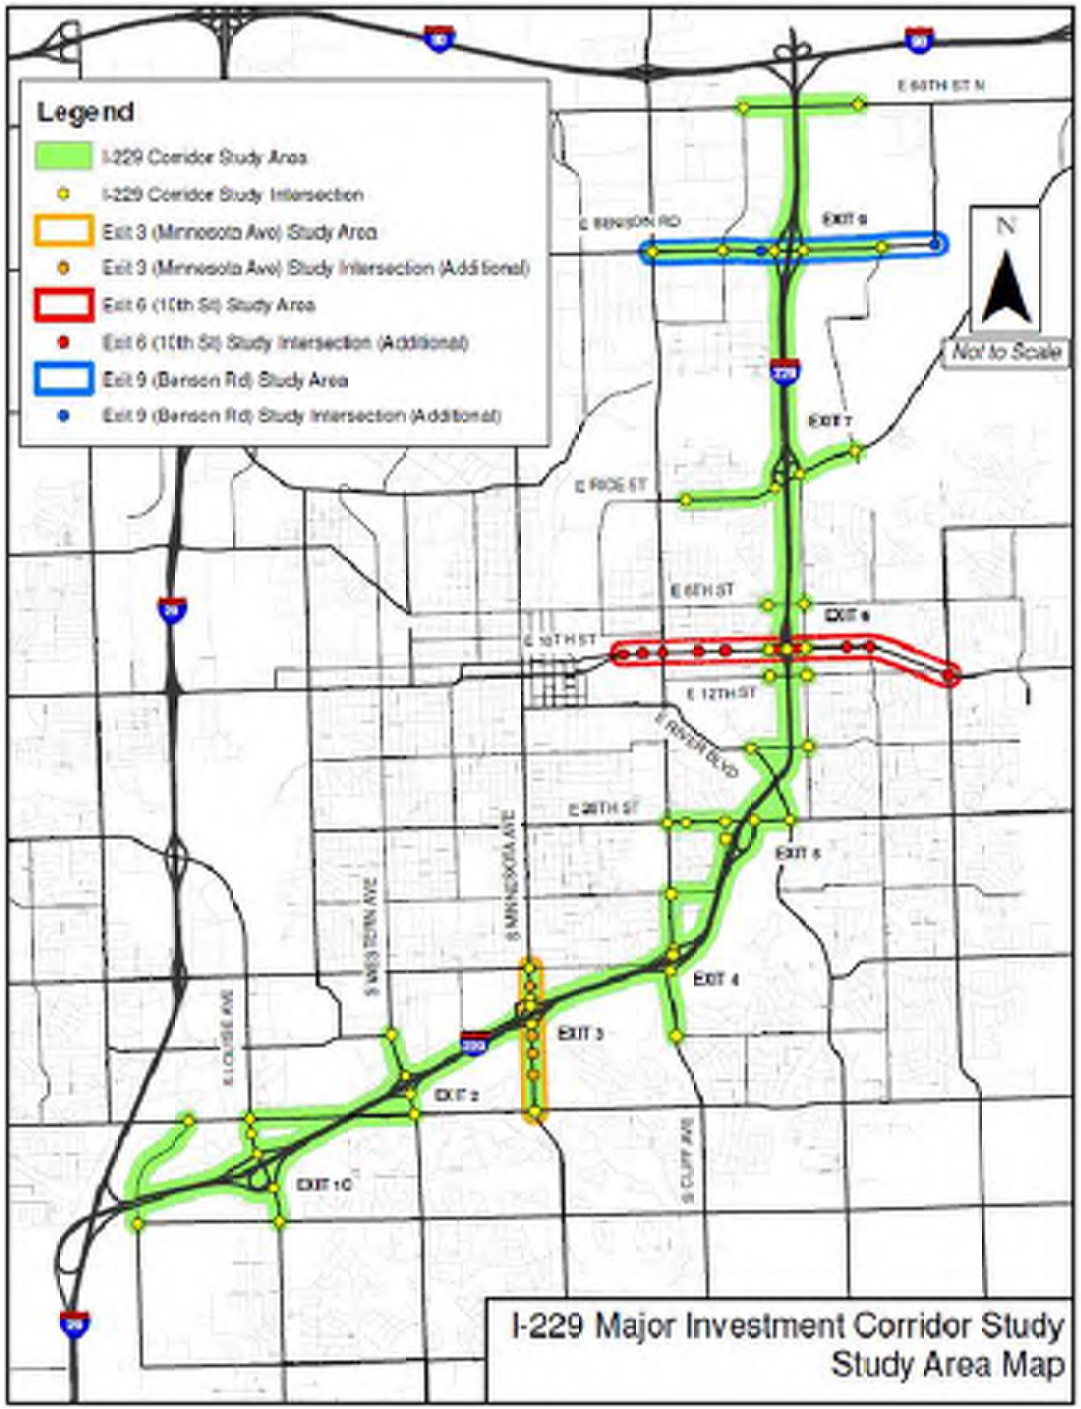

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

Exit 3 (Minnesota Avenue) Crossroad Study Goals

- Reduce traffic congestion
- Evaluate interchange options
- Integrate plans for the 49th Street Extension with the interchange options developed
- Improve pedestrian and bike access to the Big Sioux River Pathway
- Improve safety for corridor users
- Improve vehicle safety to Yankton Trail Park









Minnesota Avenue Corridor Overview



Minnesota Avenue Corridor Overview

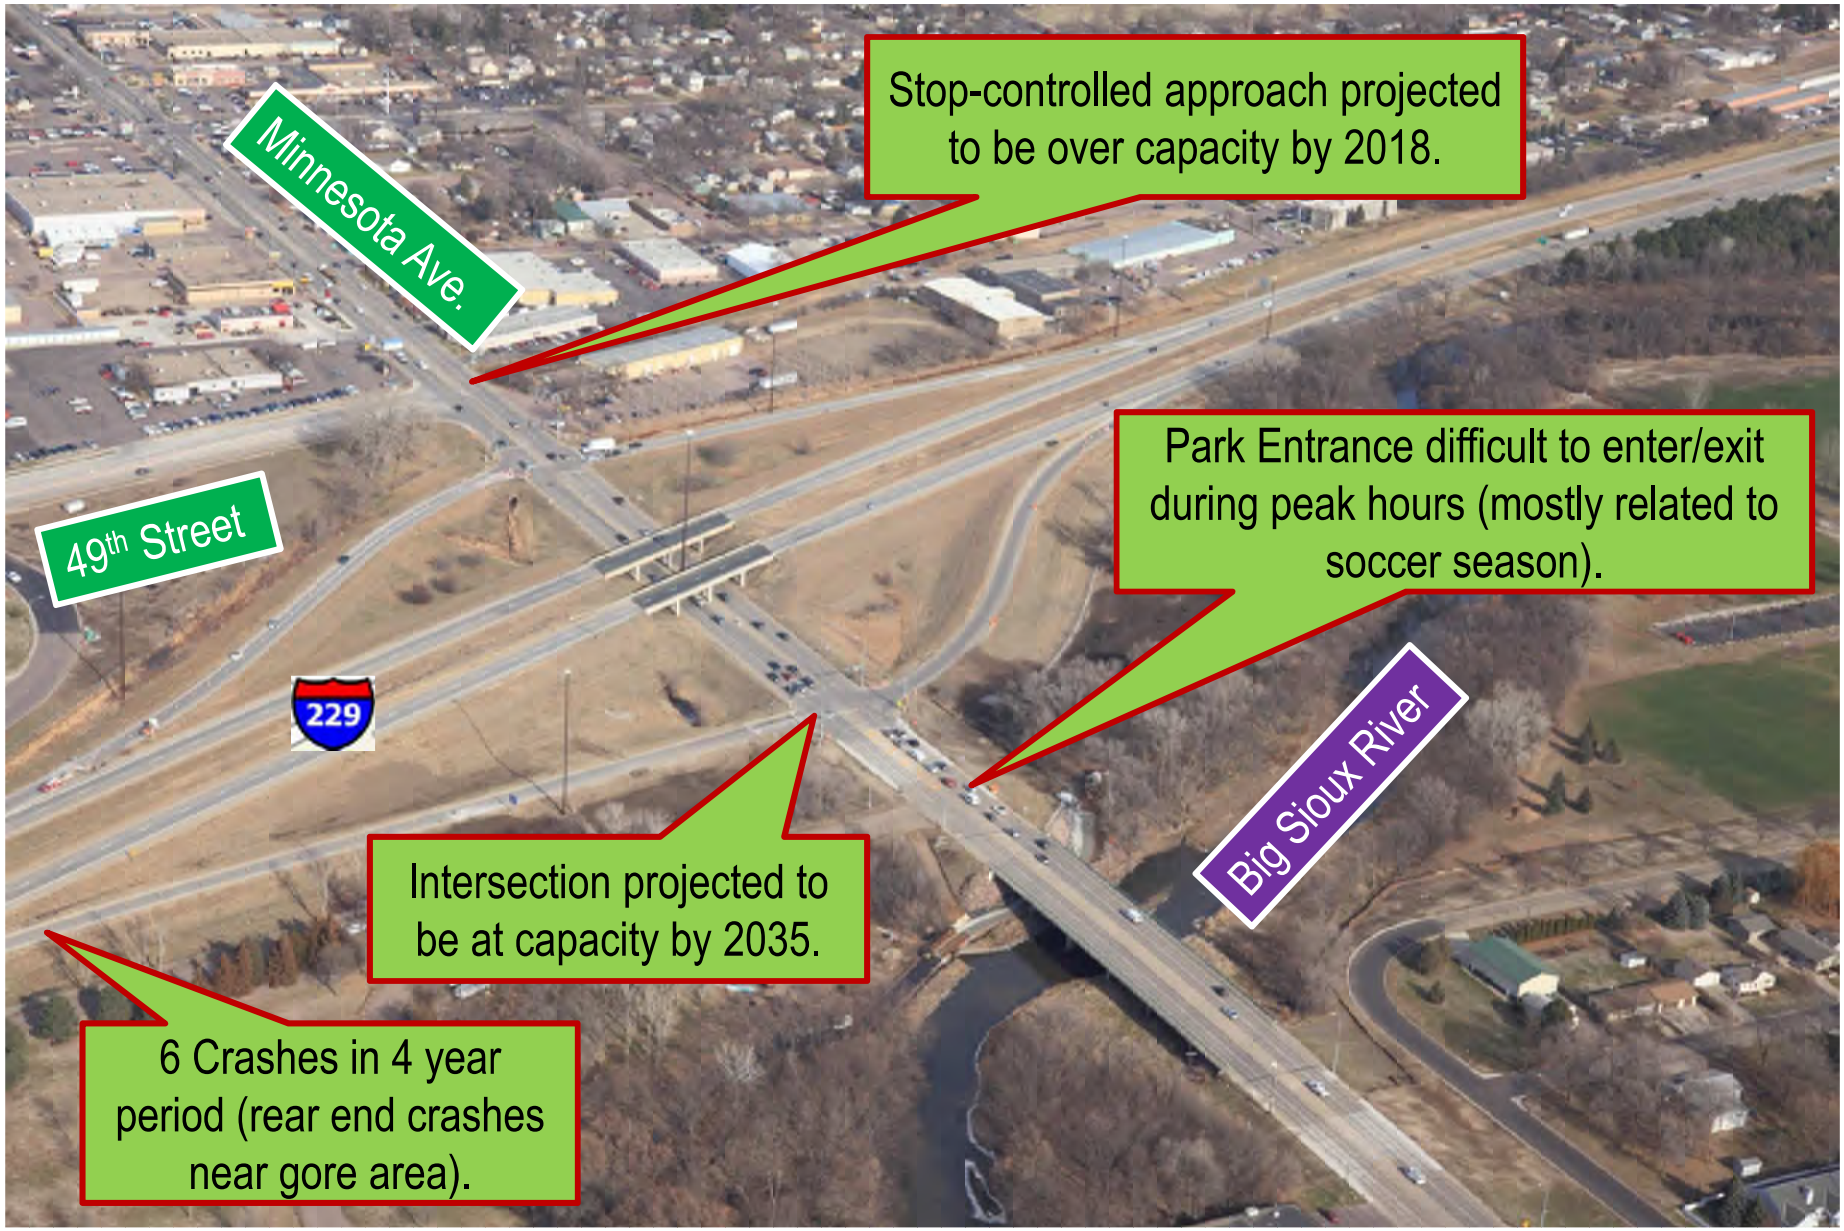

Minnesota Avenue Corridor Overview

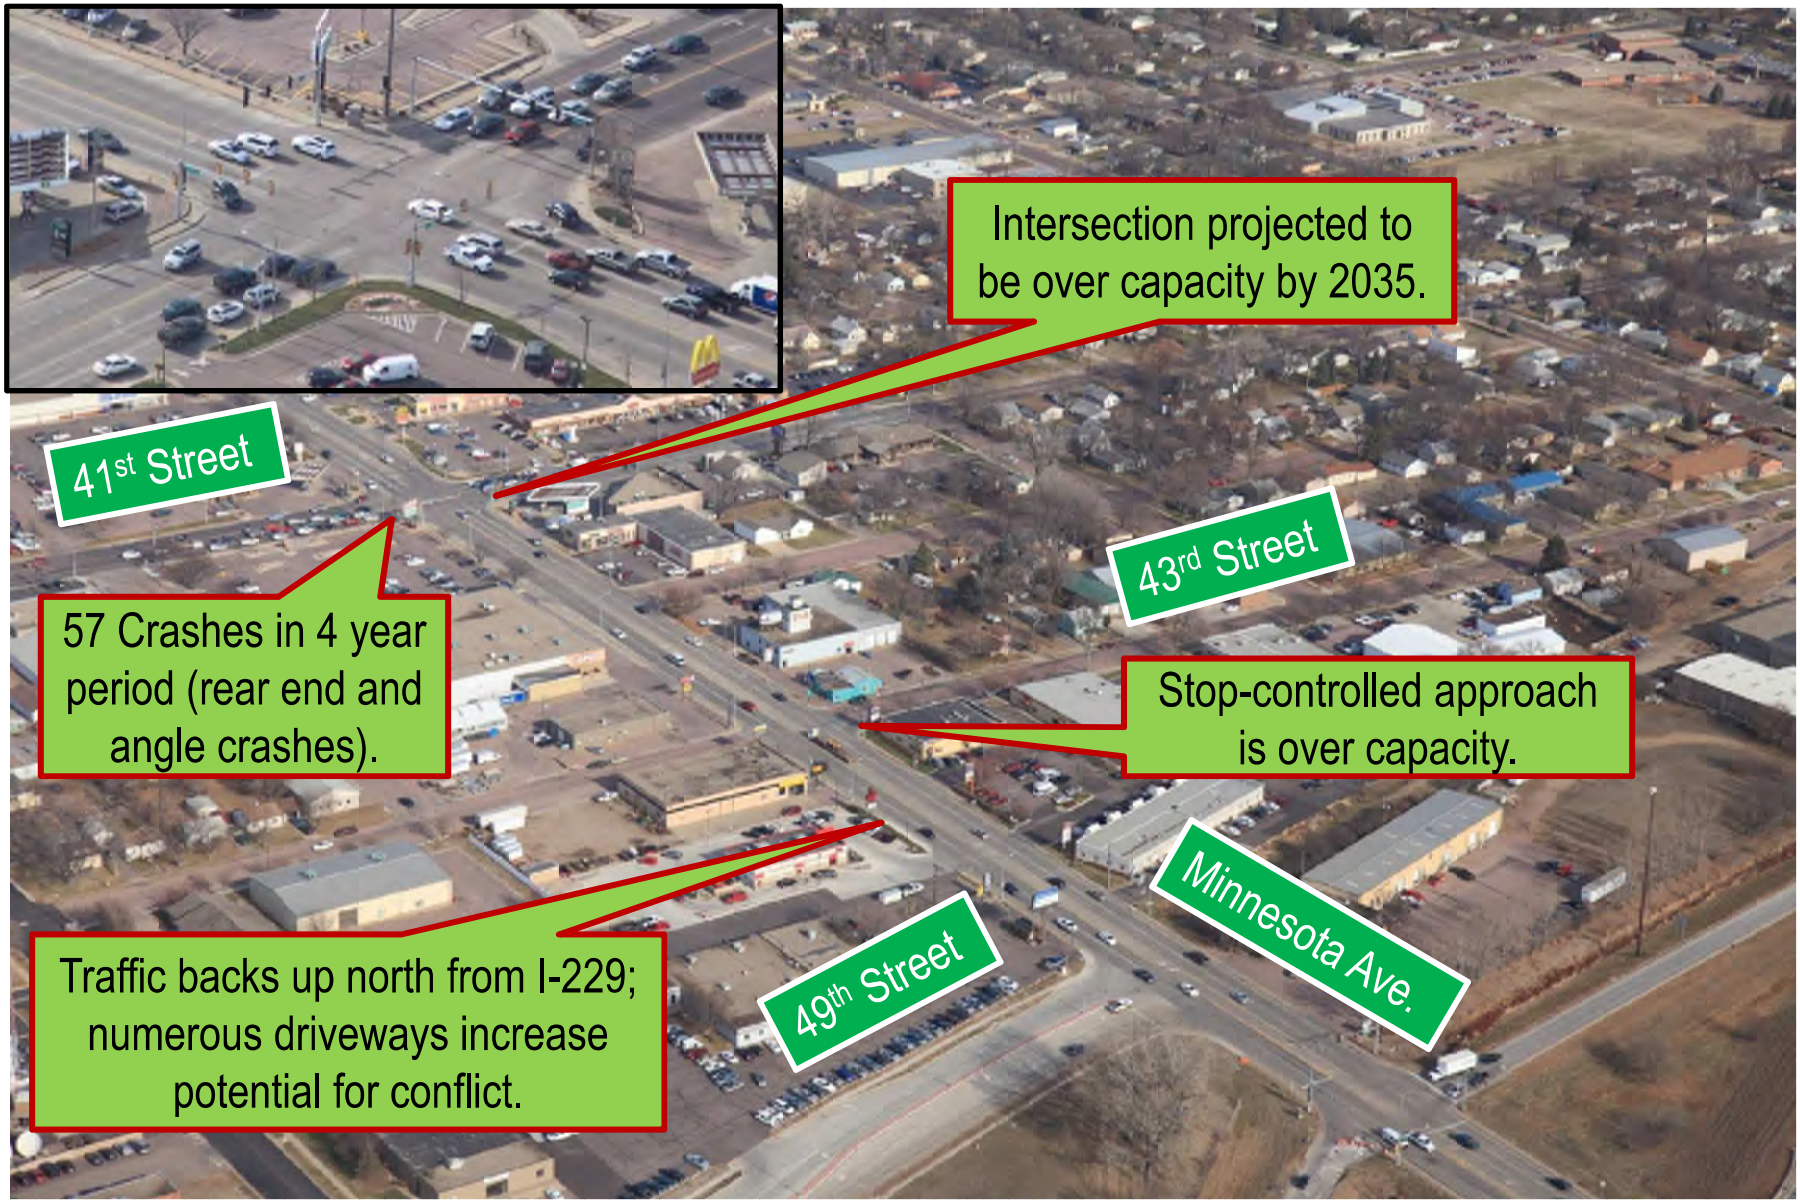

Relevant Previous Studies

Preliminary local street extensions, interchange concepts, and traffic impact analyses in the vicinity of I-229 & Minnesota Avenue were identified in the following studies:

- 41st Street Corridor Study
- Sioux Falls Major Street and Access Management Plan
- 2000 and 2010 Decennial Interstate Corridor Studies
- 49th Street Extension Study
- Traffic Impact Studies – Costco, Scheels, and Walmart

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Ross Harris– HR Green, Inc.
515-657-5263 or rharris@hrgreen.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 3 – Minnesota Avenue

Thanks for Attending!!!!!

HDR

HRGreen

© 2014 HDR, all rights reserved.

RICE STREET

JUNE 22ND, 2016

- SIGN-IN SHEETS
- POWERPOINT SLIDES
- MEETING NOTES (SEE CLIFF AVENUE AND RICE STREET PUBLIC MEETINGS APPENDIX)
- COMMENTS (SEE CLIFF AVENUE AND RICE STREET PUBLIC MEETINGS APPENDIX)

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for Rice Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Wednesday, June 22, 2016 1:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Patty Nohr Mgr Le Roy's Paving	1300 N. Johnson Ave	334-3204	Patty.n@lemarving.com
2	DARREL HOYER	1300 N. JOHNSON AVE SFSD	534-3204	daunal.hoyer@midwestroadpave.com
3	MILT NUSSBAUM	2900 EAST RICE ST SFSD	605-338.0053	[illegible]
4	DAN KEARNEY	47046 259 ST SFSD	351-5705	[illegible]
5	Howard Doyle	1509 E 39 STN	366 3139	
6	James St Clair	1409/1413 E Rice	605 359-0005	jensenport@hotmail.com
7	Peggy Jensen	" "	605 310-0740	"
8	Jason Kjenstad	6300 S. Old Village Pl	605-977-7740	jason.kjenstad@stbinc.com
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







Interstate 229 Major Investment Study

Exit 7 – Rice Street

Stakeholder Meeting
June 22nd, 2016
1:00 pm to 2:00 pm

HDR

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road
Added Exit 4 – Cliff Avenue
Added Exit 7 – Rice Street

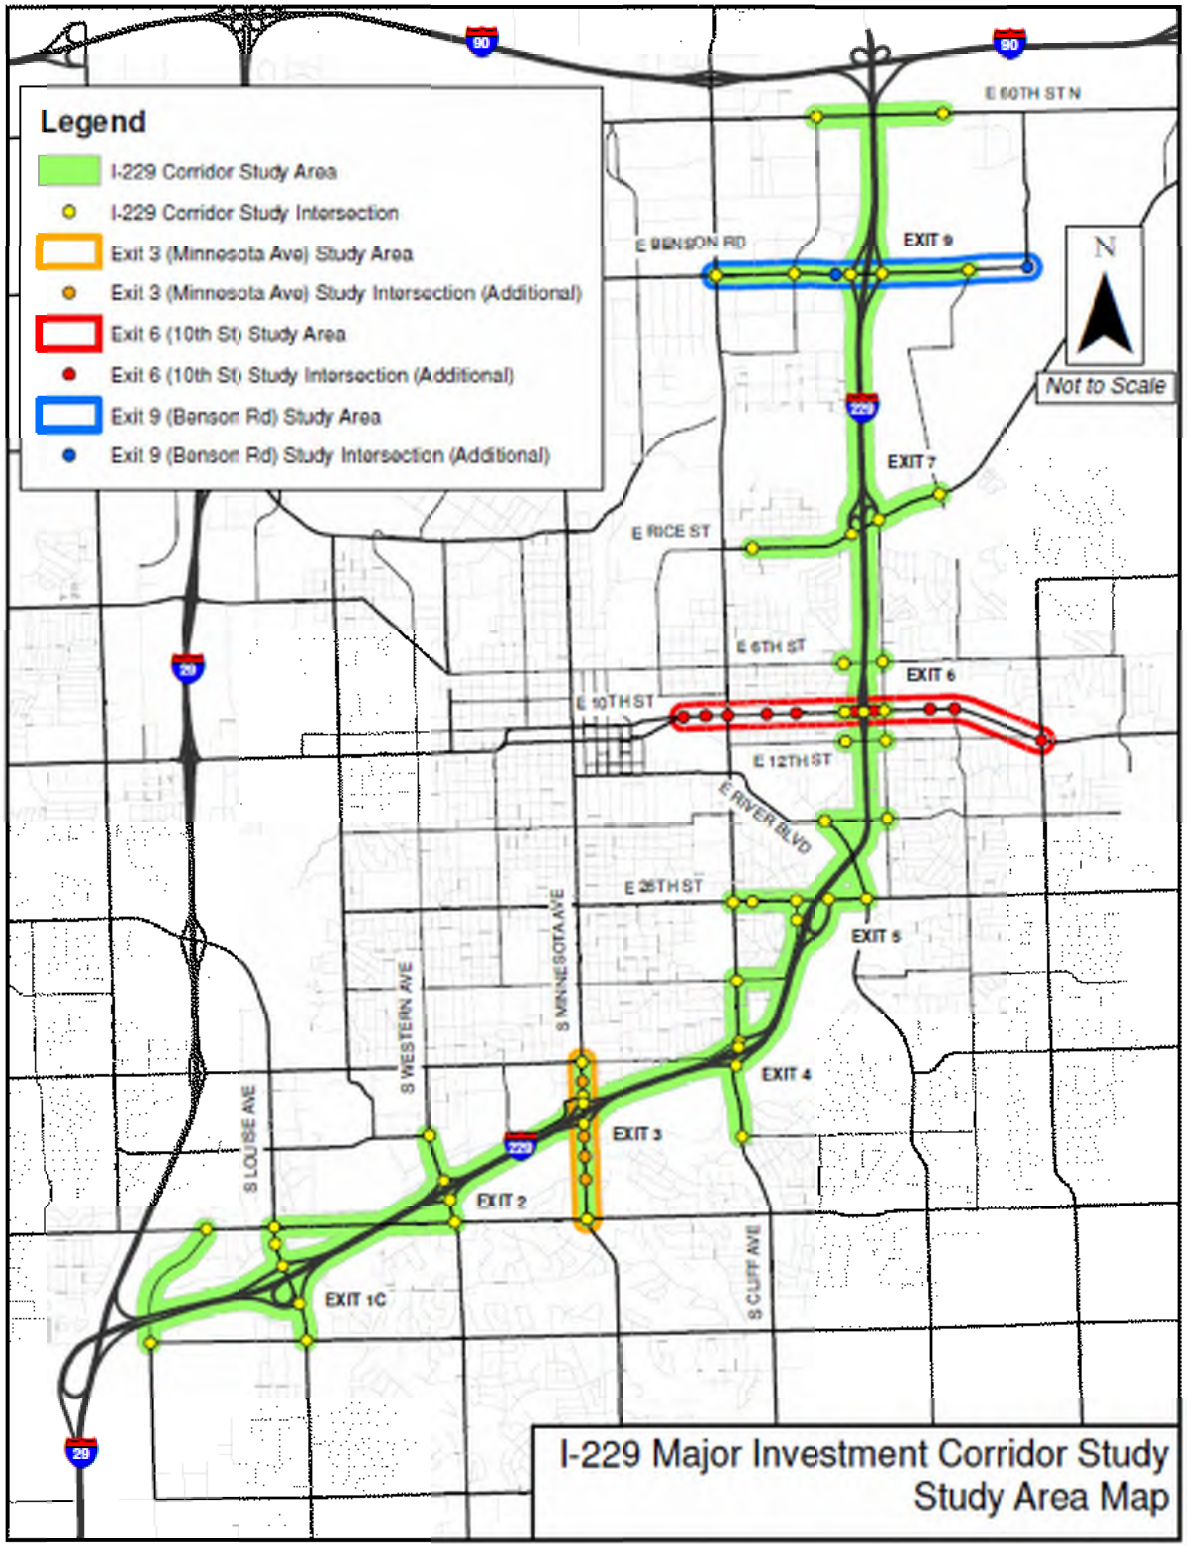

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)


Exit 7 (Rice Street) Crossroad Study Goals


- Reduce traffic congestion
- Provide and Interchange that will meet the future capacity requirements
- Improve pedestrian mobility
- Improve safety for corridor users







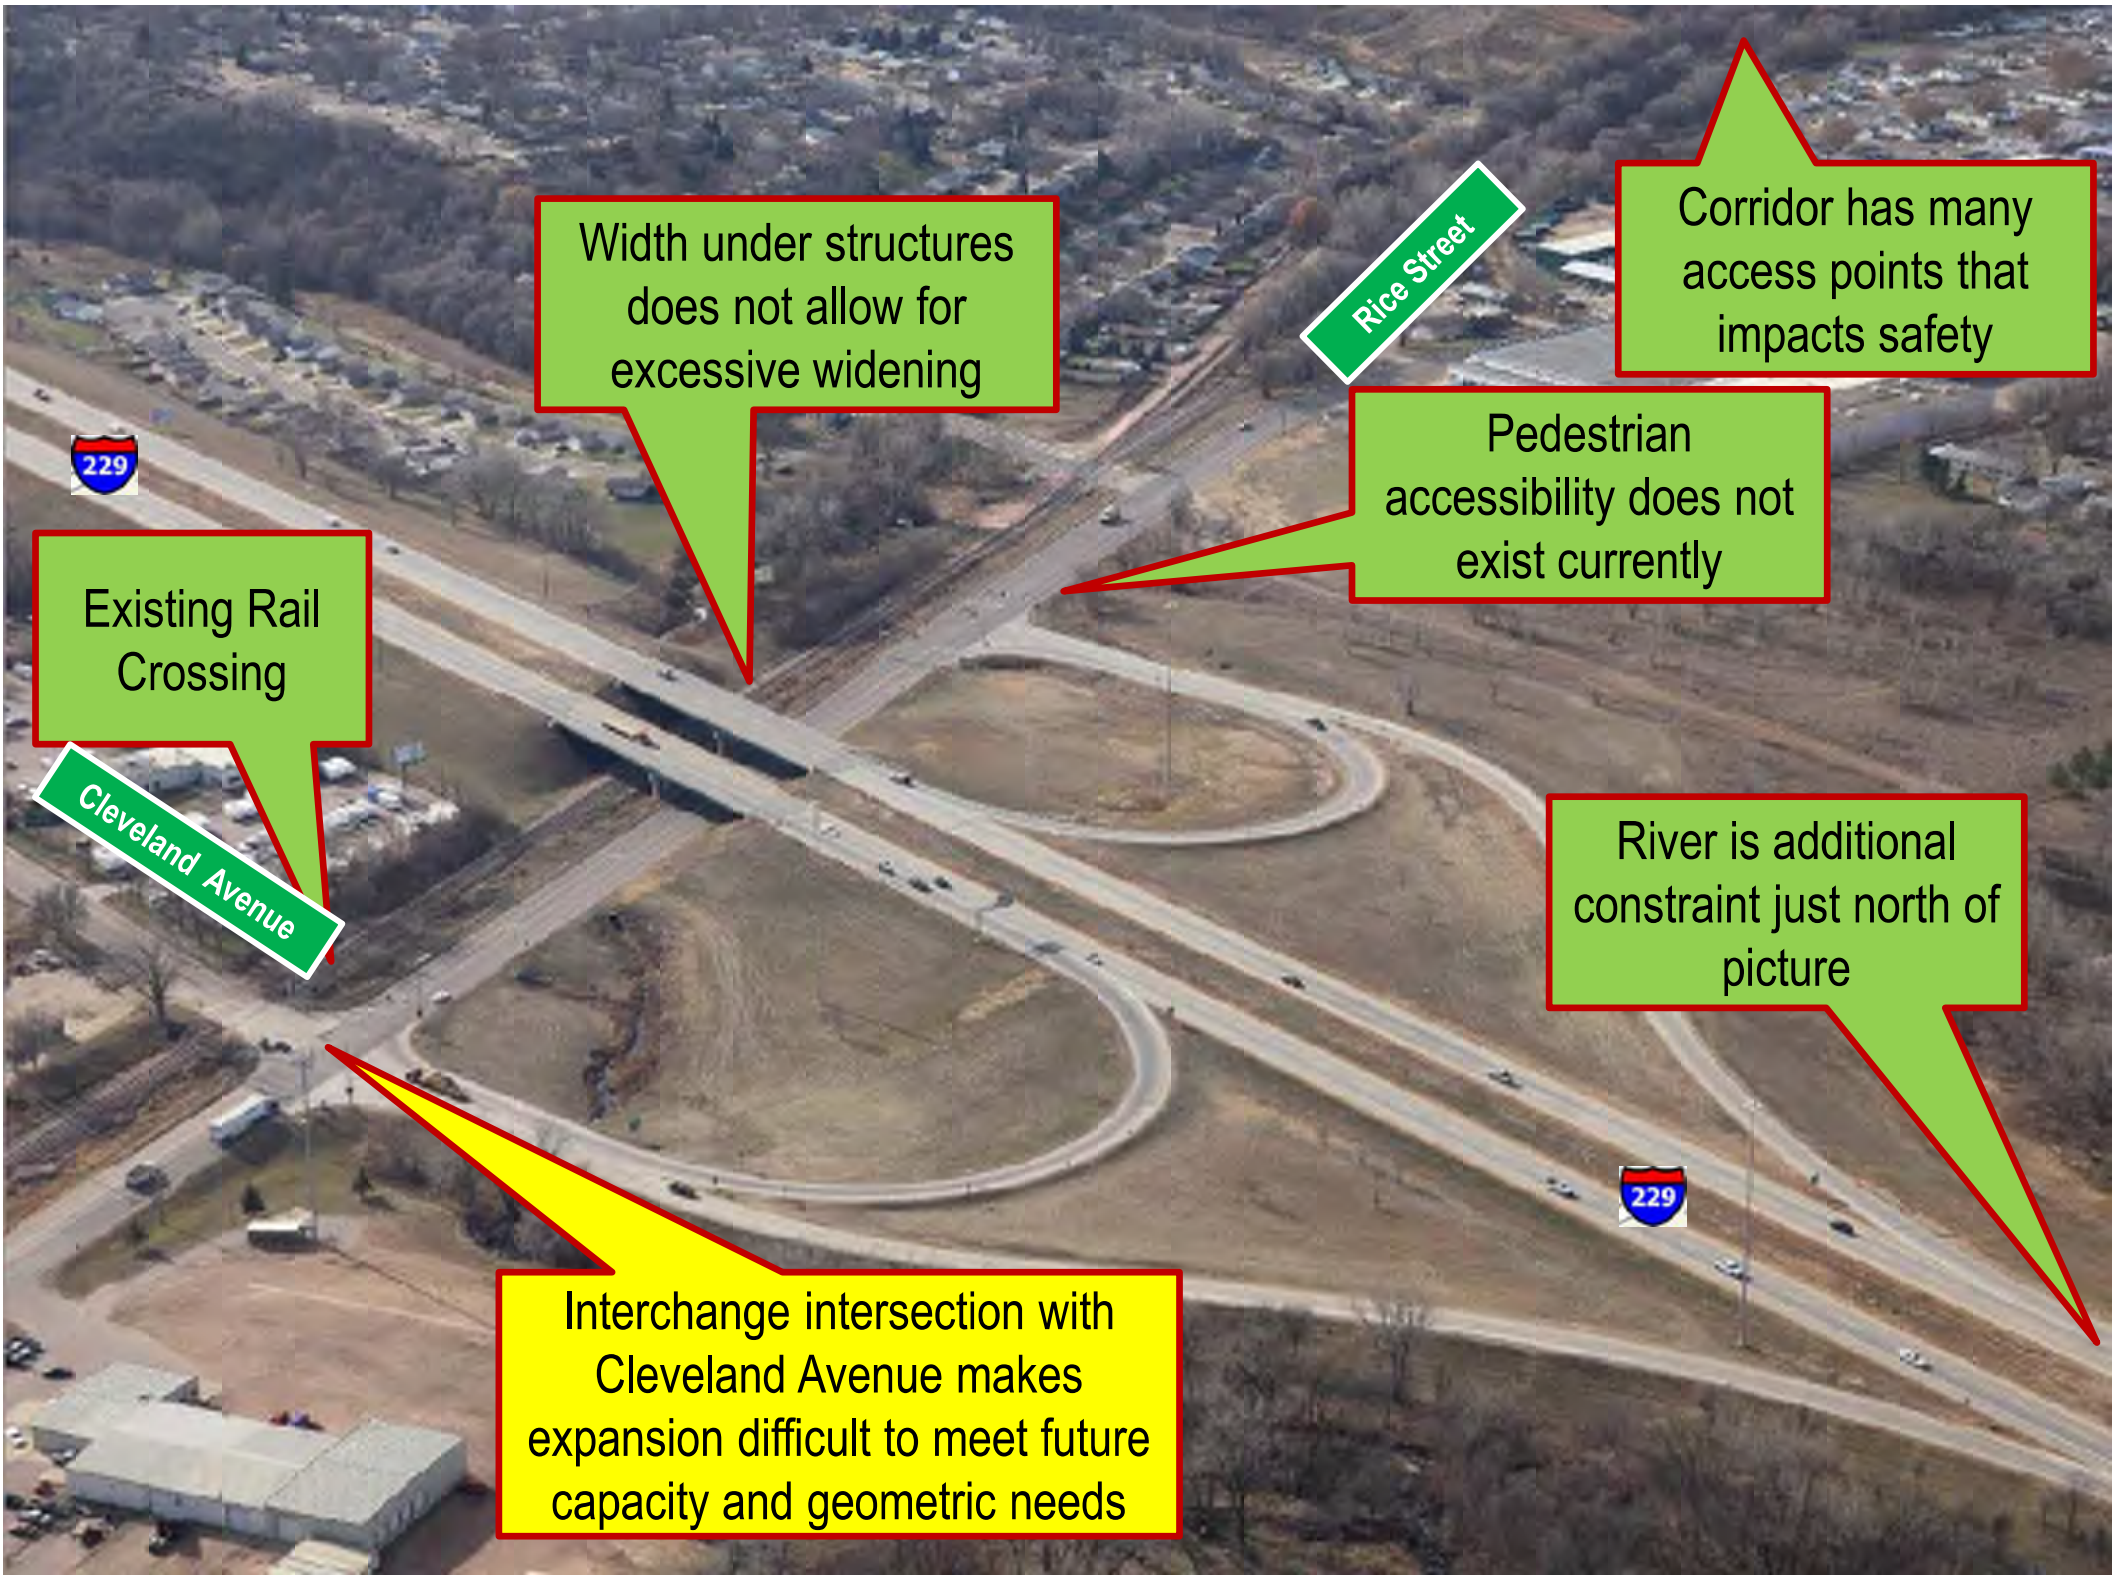




Width under structures does not allow for excessive widening
Rice Street
Corridor has many access points that impacts safety
229
Pedestrian accessibility does not exist currently
Existing Rail Crossing
Cleveland Avenue
River is additional constraint just north of picture
229
Interchange intersection with Cleveland Avenue makes expansion difficult to meet future capacity and geometric needs

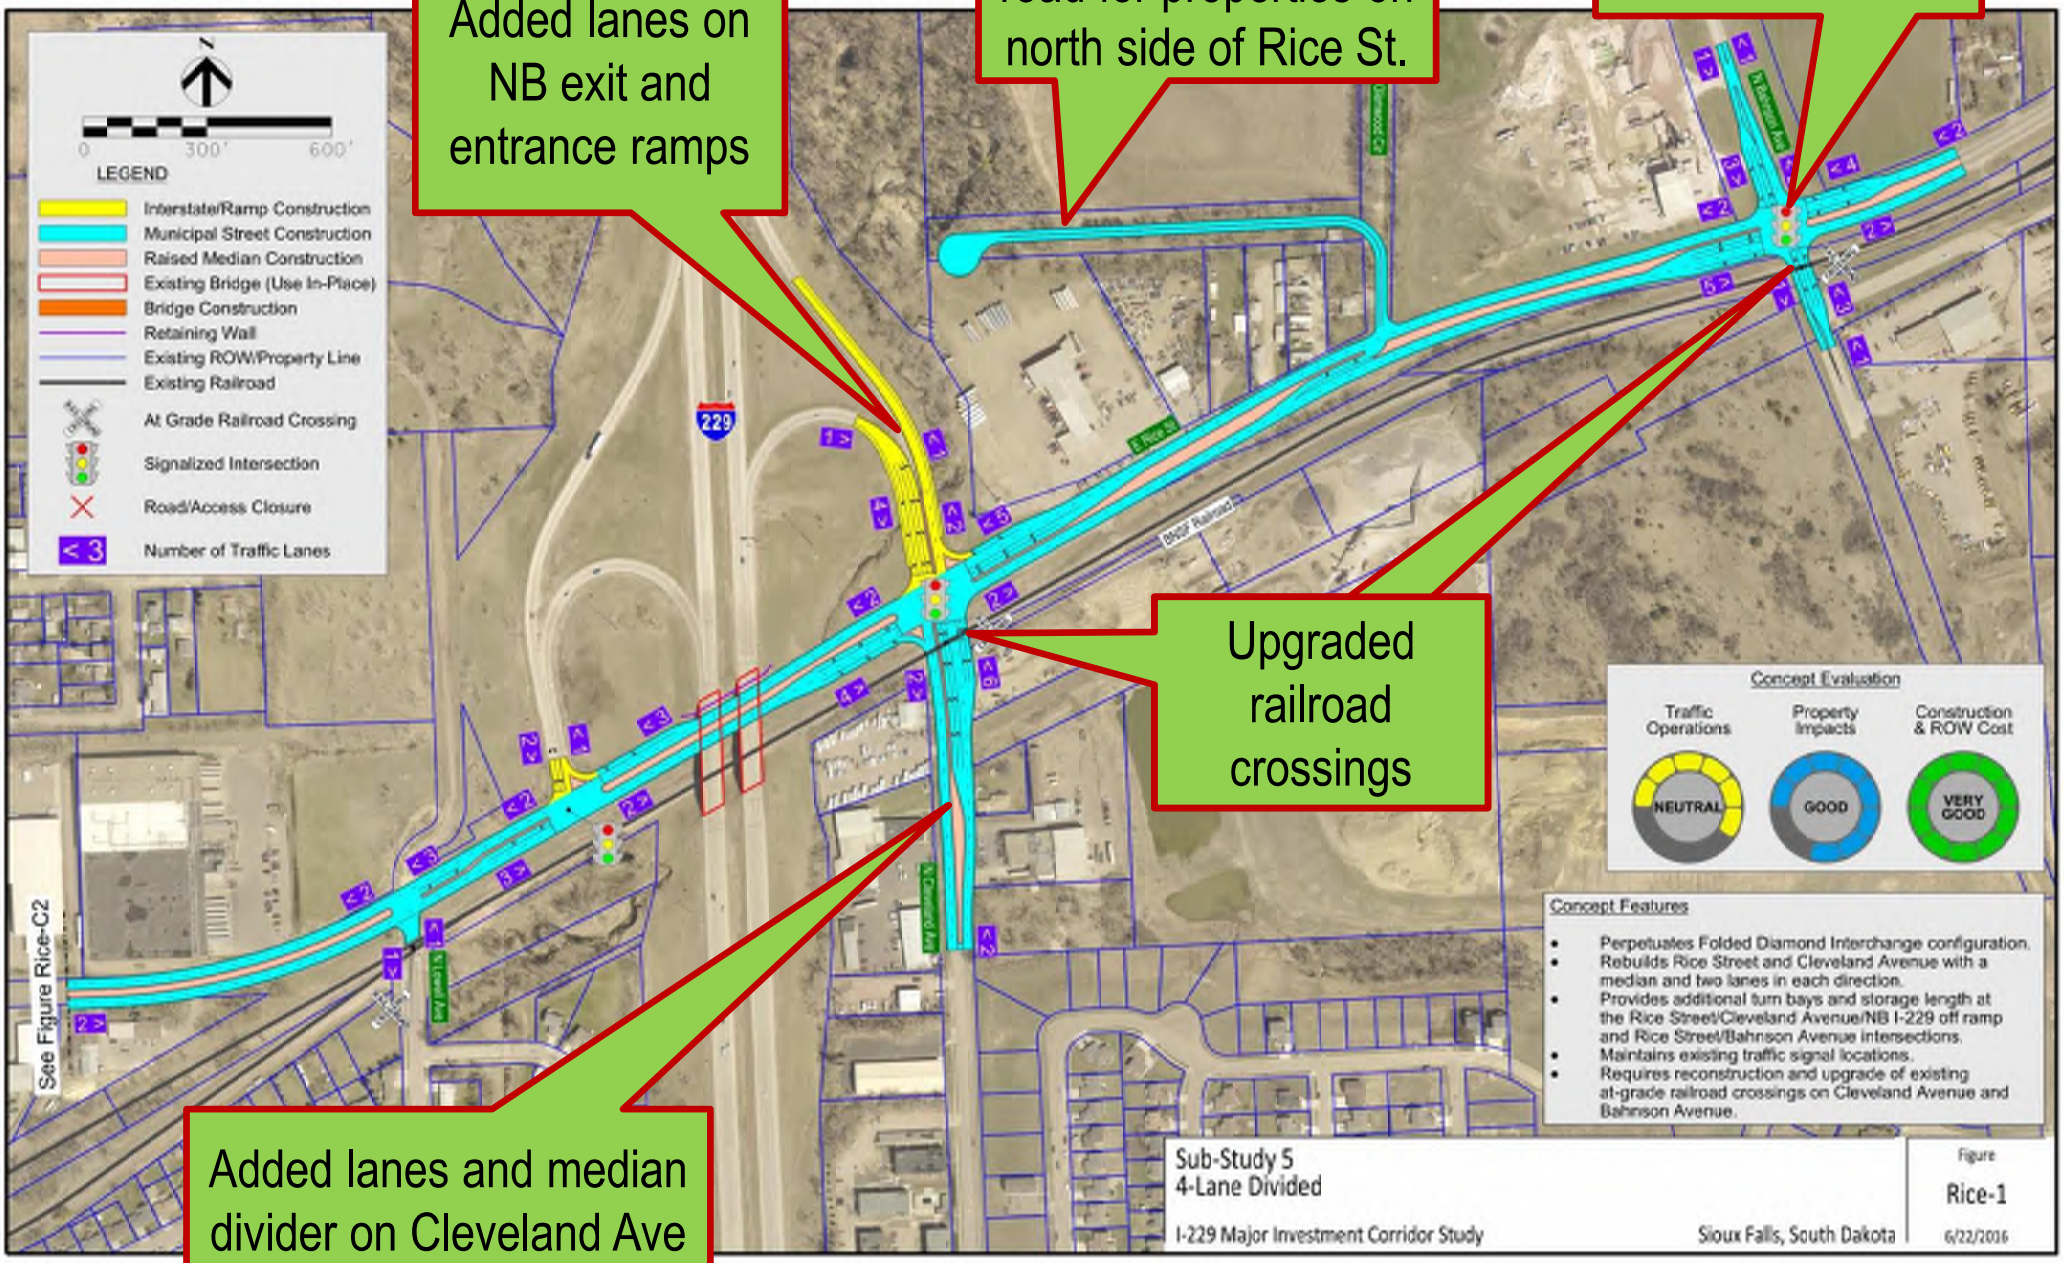

Added lanes on NB exit and entrance ramps
New back access road for properties on north side of Rice St.
Turn lanes added at Bahnson Ave
Upgraded railroad crossings
Added lanes and median divider on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
NEUTRAL
GOOD
VERY GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street and Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Maintains existing traffic signal locations.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
4-Lane Divided
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-1
6/22/2016

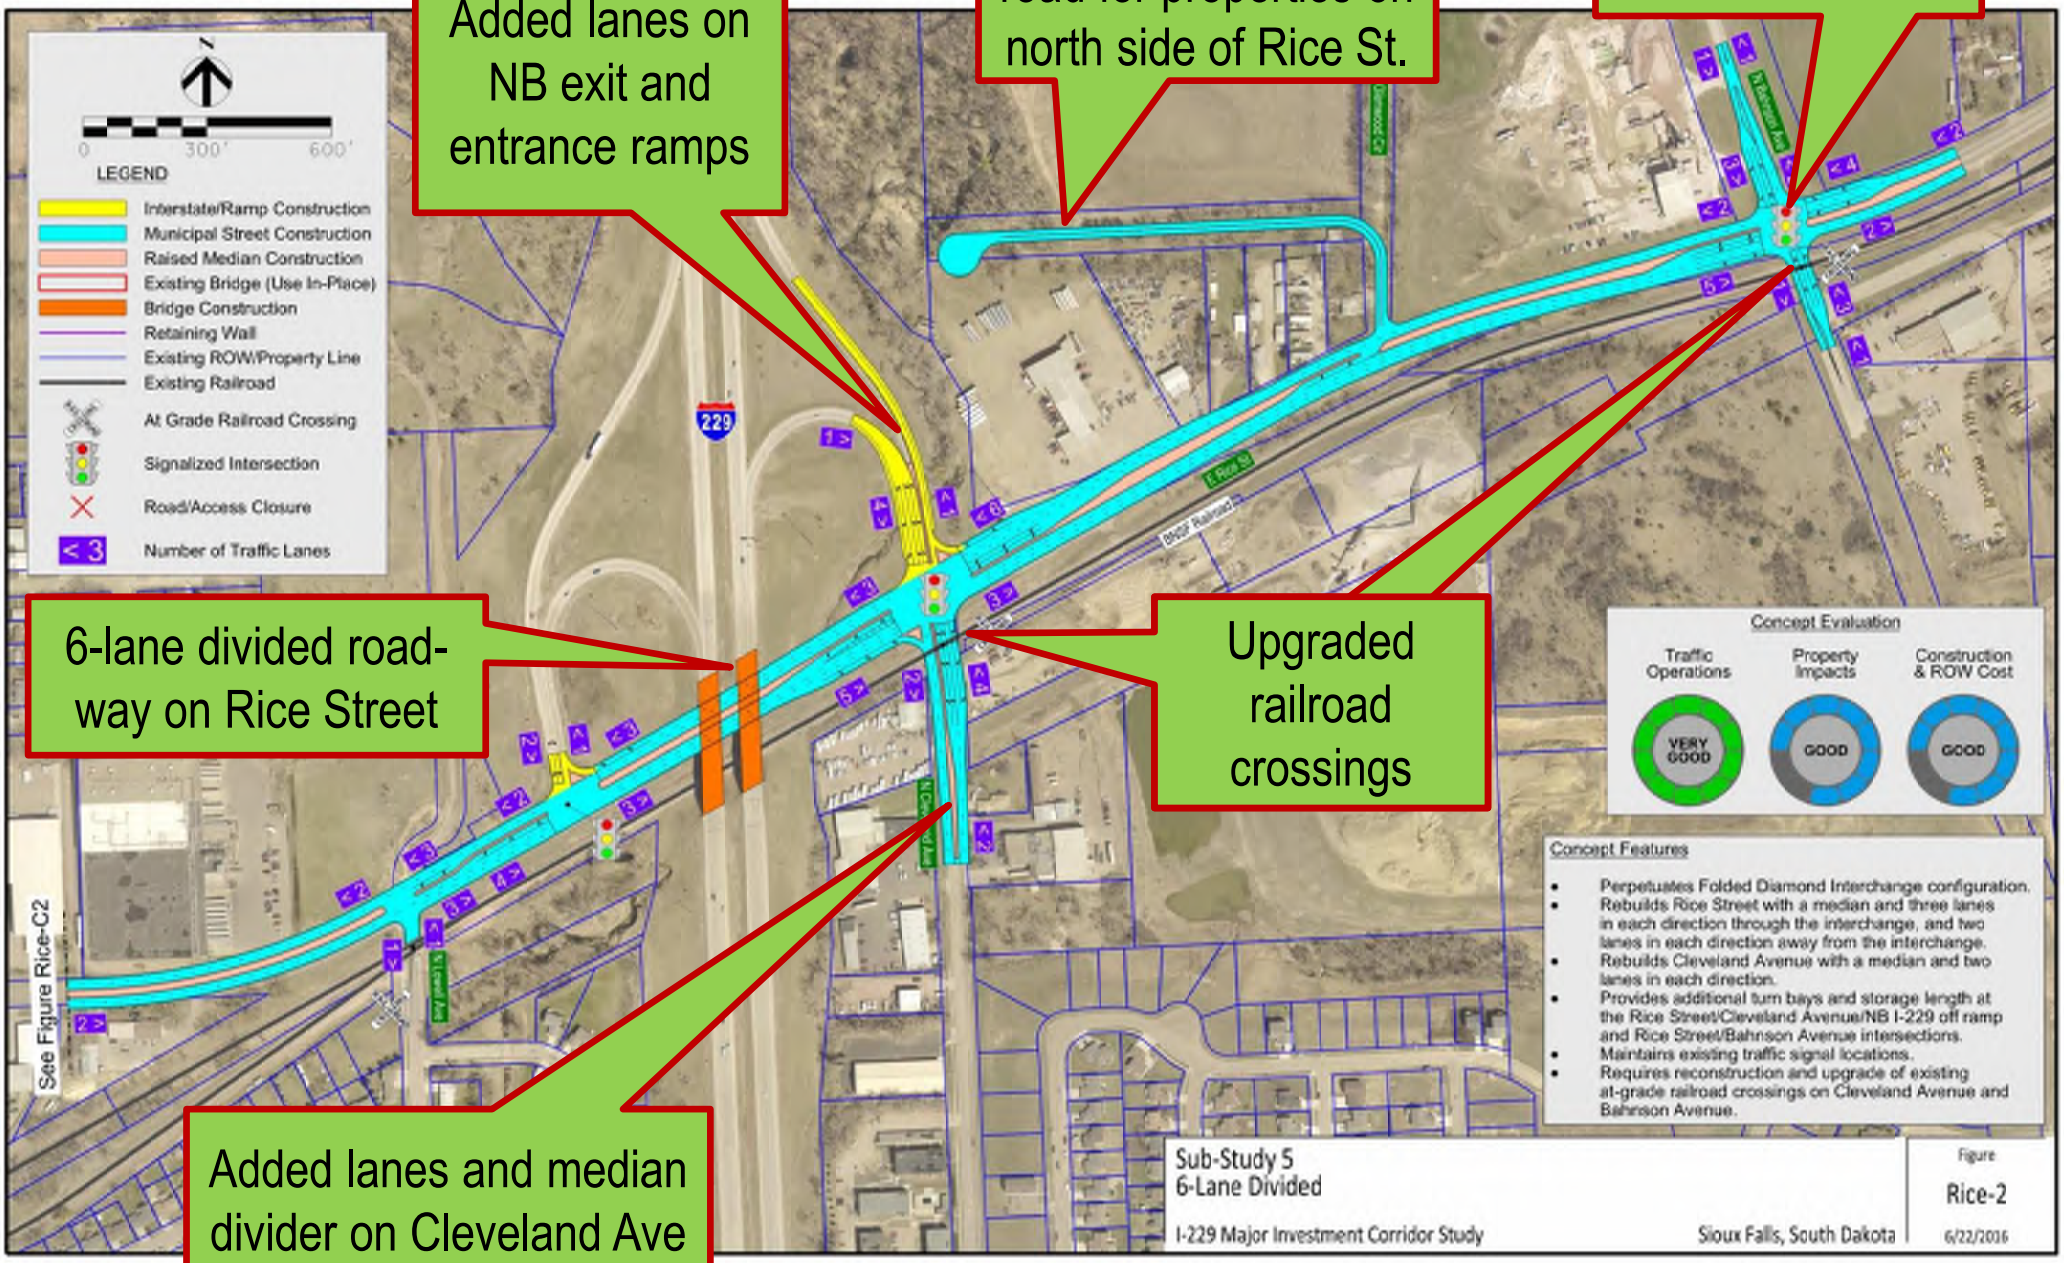

Added lanes on NB exit and entrance ramps
New back access road for properties on north side of Rice St.
Turn lanes added at Bahnson Ave
6-lane divided road-way on Rice Street
Upgraded railroad crossings
Added lanes and median divider on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
GOOD
GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
Rebuilds Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Maintains existing traffic signal locations.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
6-Lane Divided
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-2
6/22/2016

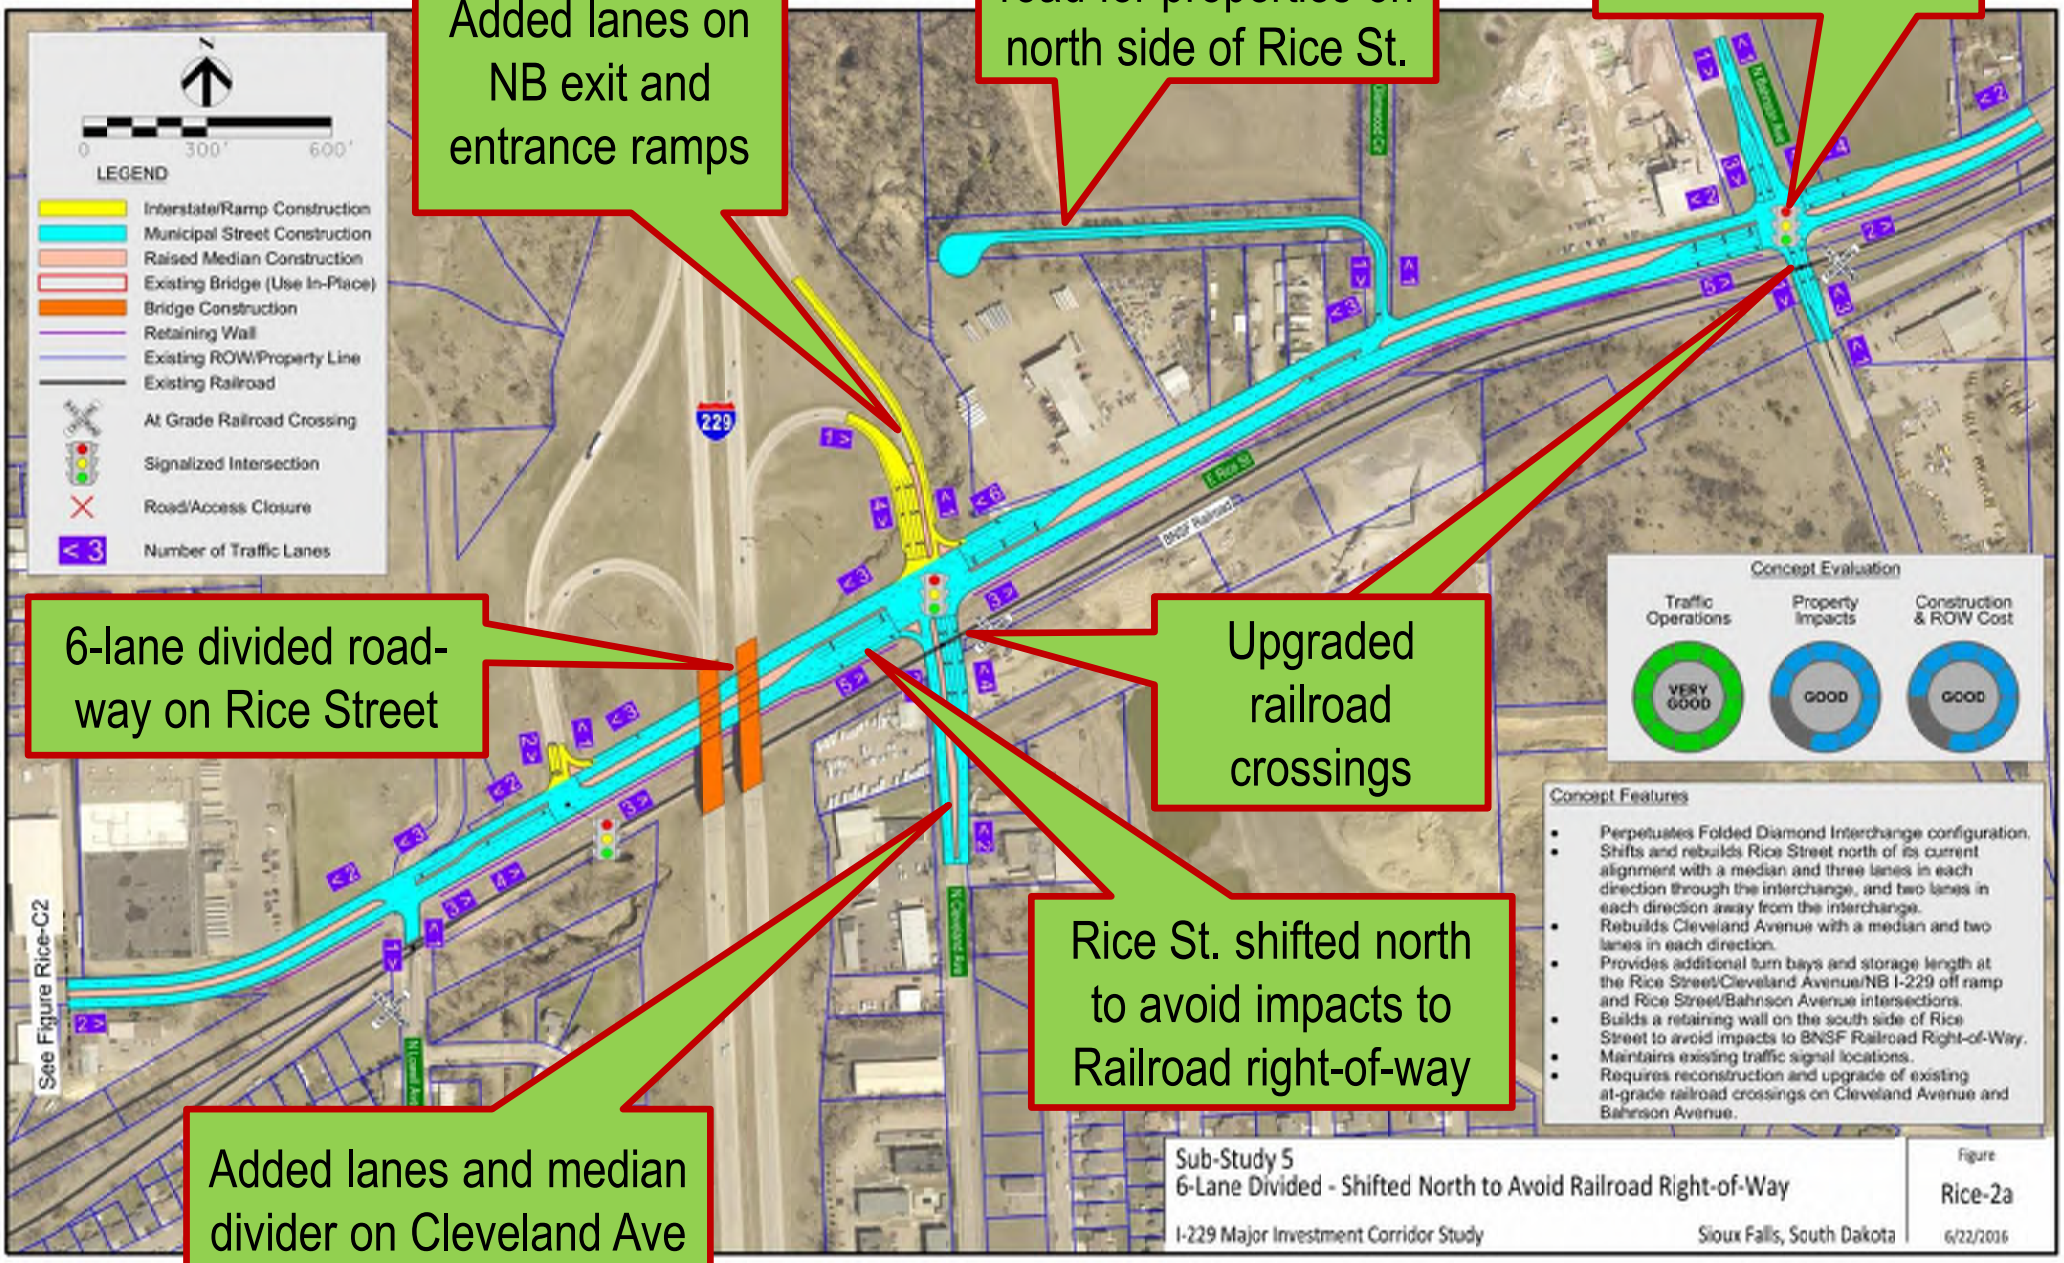

Added lanes on NB exit and entrance ramps
New back access road for properties on north side of Rice St.
Turn lanes added at Bahnson Ave
6-lane divided road-way on Rice Street
Upgraded railroad crossings
Rice St. shifted north to avoid impacts to Railroad right-of-way
Added lanes and median divider on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
GOOD
GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Shifts and rebuilds Rice Street north of its current alignment with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
Rebuilds Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Builds a retaining wall on the south side of Rice Street to avoid impacts to BNSF Railroad Right-of-Way.
Maintains existing traffic signal locations.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
6-Lane Divided - Shifted North to Avoid Railroad Right-of-Way
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-2a
6/22/2016

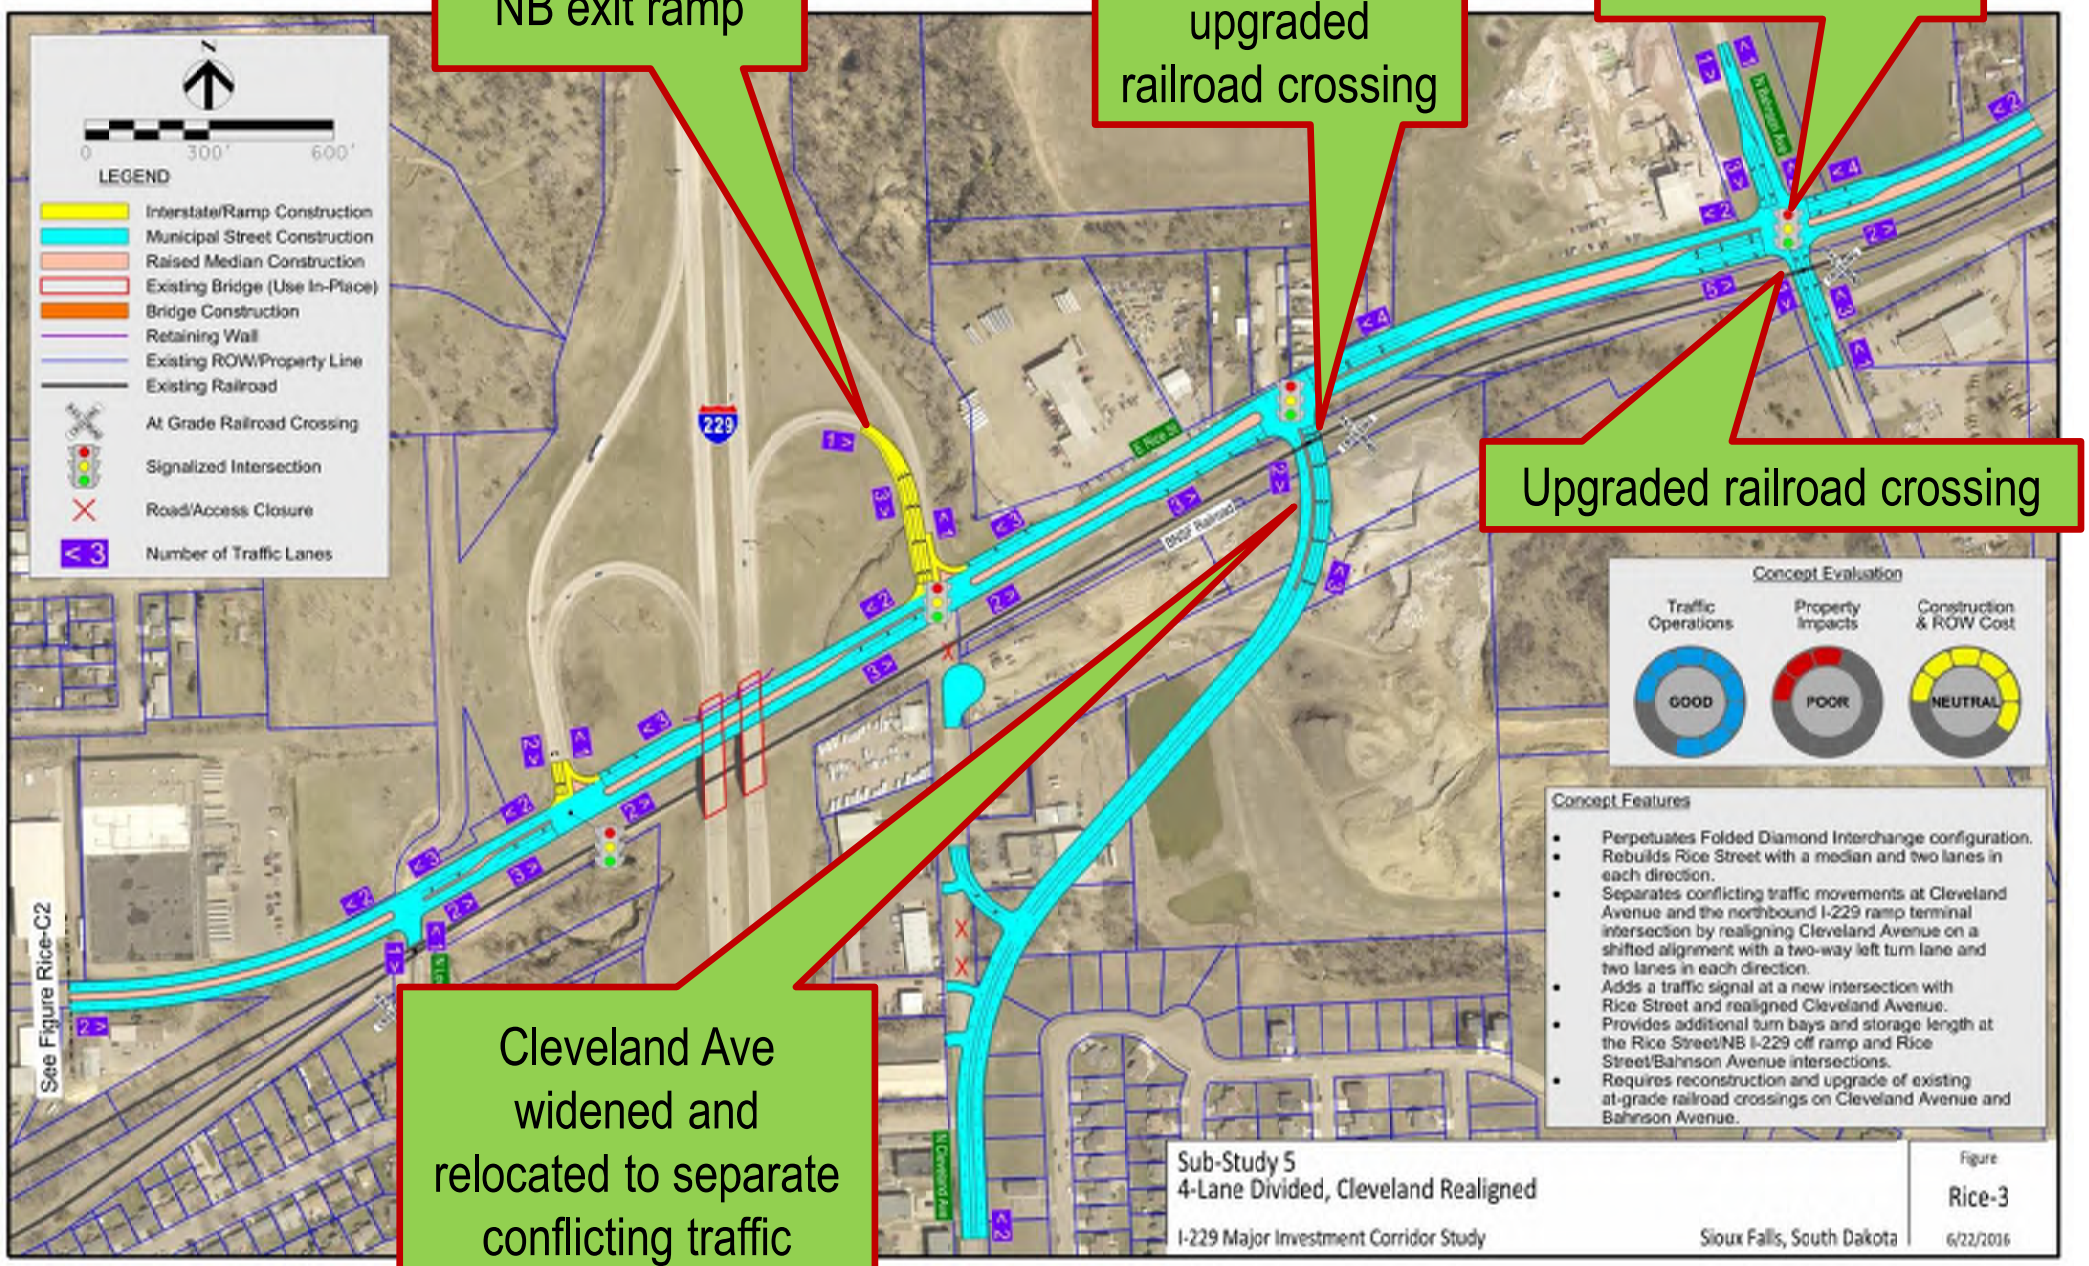

Added lane on NB exit ramp
Relocated and upgraded railroad crossing
Turn lanes added at Bahnson Ave
Upgraded railroad crossing
Cleveland Ave widened and relocated to separate conflicting traffic movements at I-229
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
POOR
NEUTRAL
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street with a median and two lanes in each direction.
Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
Adds a traffic signal at a new intersection with Rice Street and realigned Cleveland Avenue.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue intersections.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
4-Lane Divided, Cleveland Realigned
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-3
6/22/2016

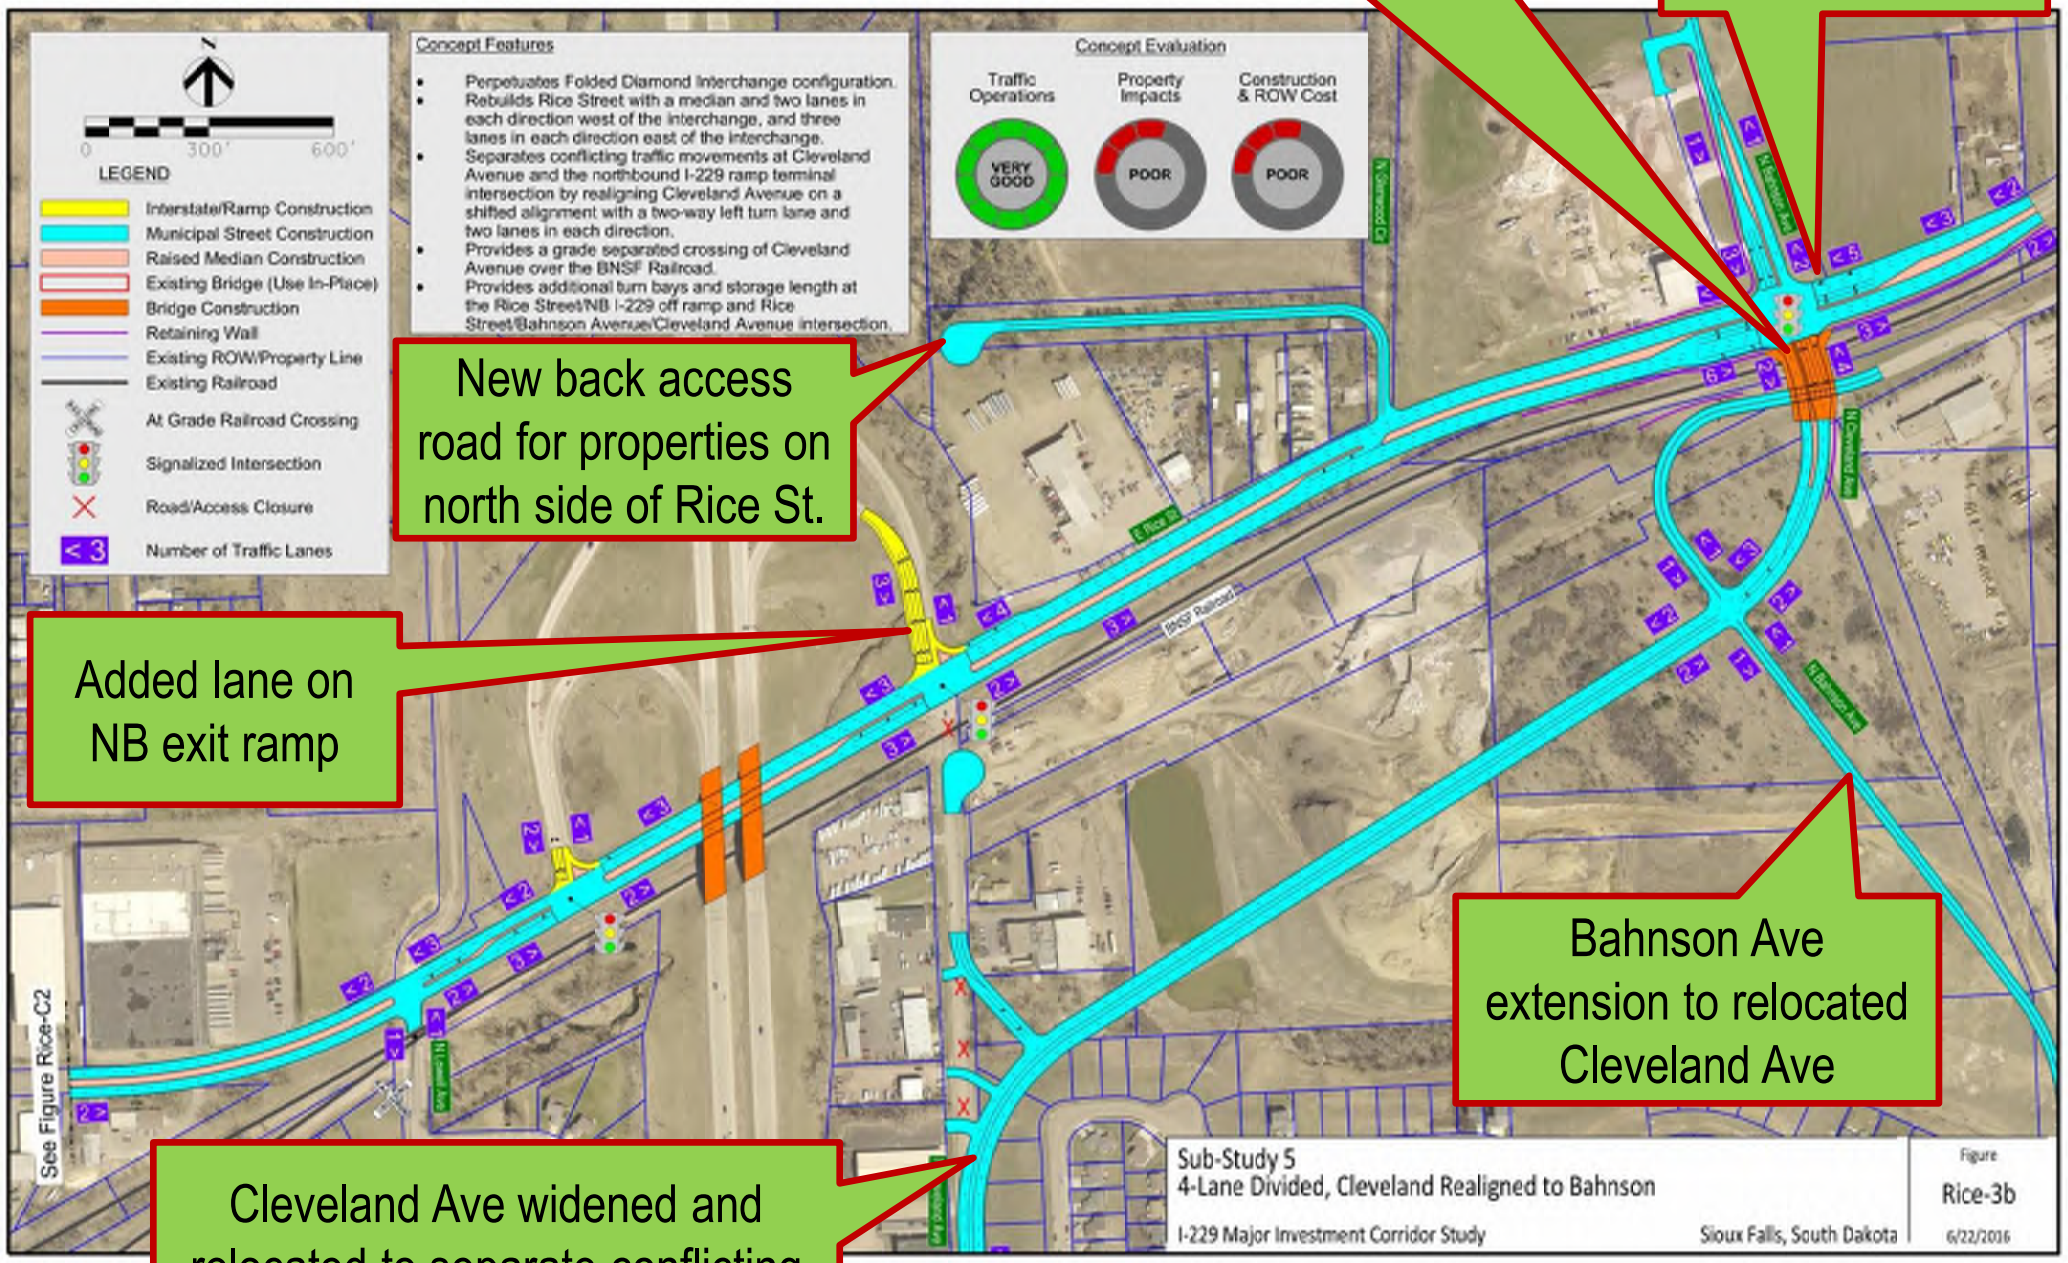

New grade separated railroad crossing
Turn lanes added at Bahnson Ave
New back access road for properties on north side of Rice St.
Added lane on NB exit ramp
Bahnson Ave extension to relocated Cleveland Ave
Cleveland Ave widened and relocated to separate conflicting traffic movements at I-229
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Features
Perpetuates Folded Diamond interchange configuration.
Rebuilds Rice Street with a median and two lanes in each direction west of the interchange, and three lanes in each direction east of the interchange.
Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection.
Concept Evaluation
Traffic Operations
VERY GOOD
Property Impacts
POOR
Construction & ROW Cost
POOR
See Figure Rice-C2
Sub-Study 5
4-Lane Divided, Cleveland Realigned to Bahnson
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-3b
6/22/2016

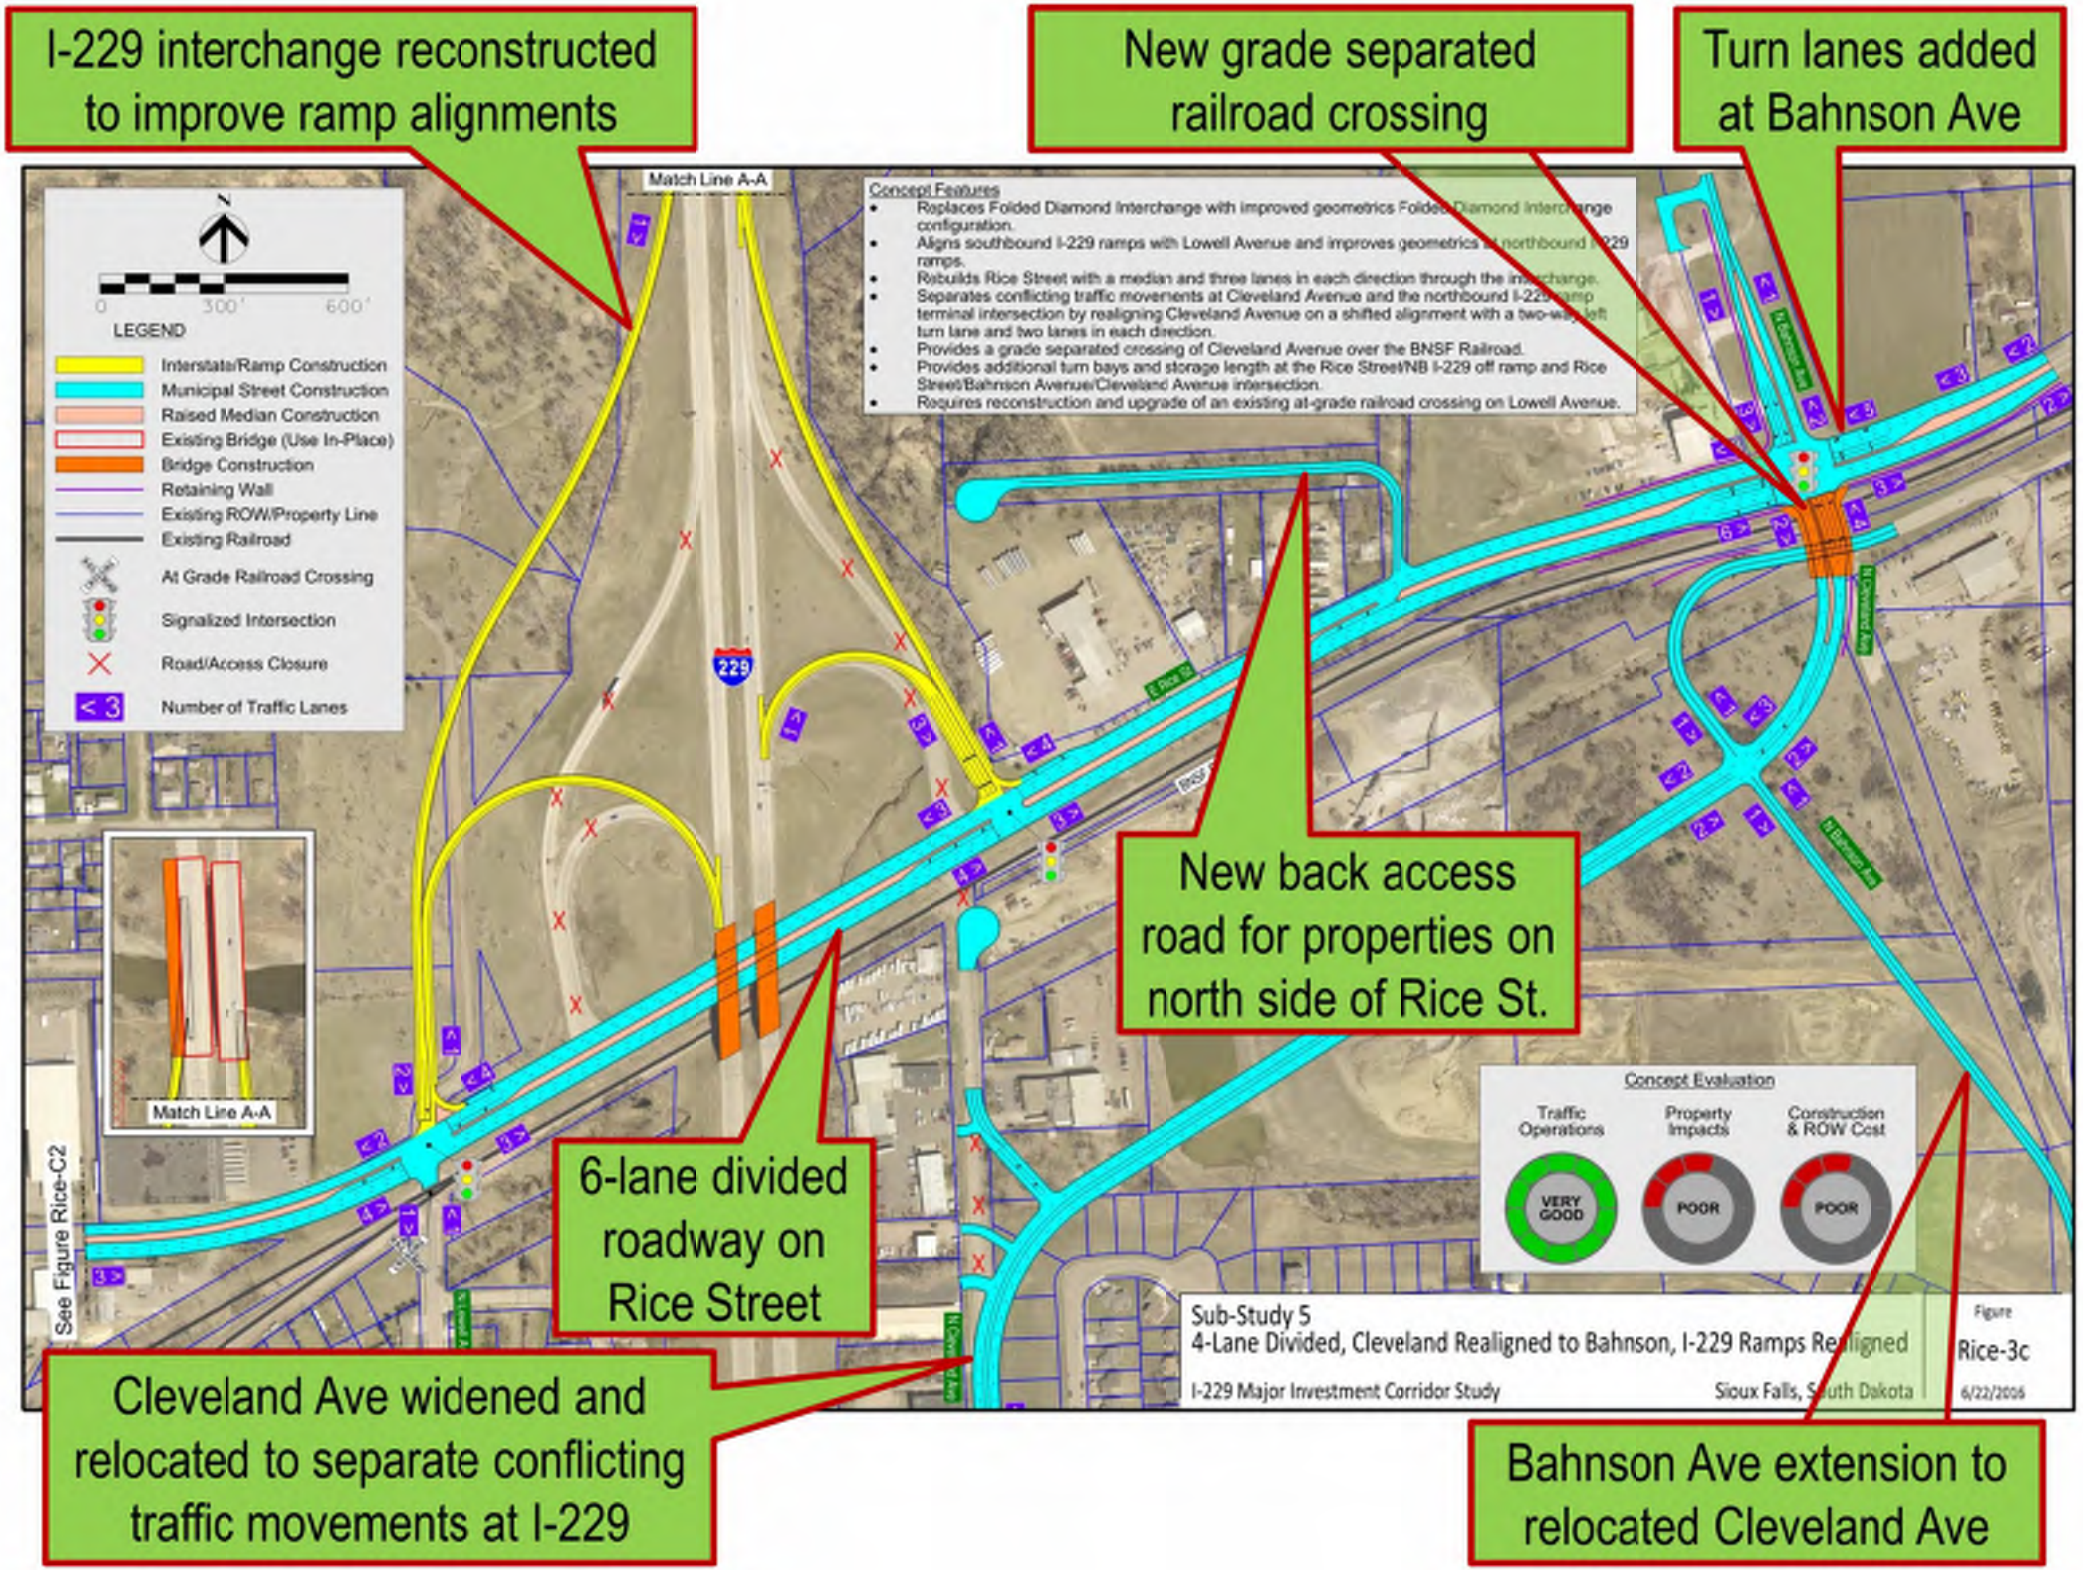
I-229 interchange reconstructed to improve ramp alignments
New grade separated railroad crossing
Turn lanes added at Bahnson Ave
New back access road for properties on north side of Rice St.
6-lane divided roadway on Rice Street
Cleveland Ave widened and relocated to separate conflicting traffic movements at I-229
Bahnson Ave extension to relocated Cleveland Ave
Match Line A-A
Concept Features
Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration.
Aligns southbound I-229 ramps with Lowell Avenue and improves geometrics at northbound I-229 ramps.
Rebuilds Rice Street with a median and three lanes in each direction through the interchange.
Separates conflicting traffic movements at Cleveland Avenue and the northbound I-229 ramp terminal intersection by realigning Cleveland Avenue on a shifted alignment with a two-way left turn lane and two lanes in each direction.
Provides a grade separated crossing of Cleveland Avenue over the BNSF Railroad.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice Street/Bahnson Avenue/Cleveland Avenue intersection.
Requires reconstruction and upgrade of an existing at-grade railroad crossing on Lowell Avenue.
LEGEND
0 300' 600'
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
< 3 Number of Traffic Lanes
229
E Rice St
BNSF
N Cleveland Ave
N Bahnson Ave
N Lowell Ave
Concept Evaluation
Traffic Operations
VERY GOOD
Property Impacts
POOR
Construction & ROW Cost
POOR
See Figure Rice-C2
Sub-Study 5
4-Lane Divided, Cleveland Realigned to Bahnson, I-229 Ramps Realigned
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-3c
6/22/2016

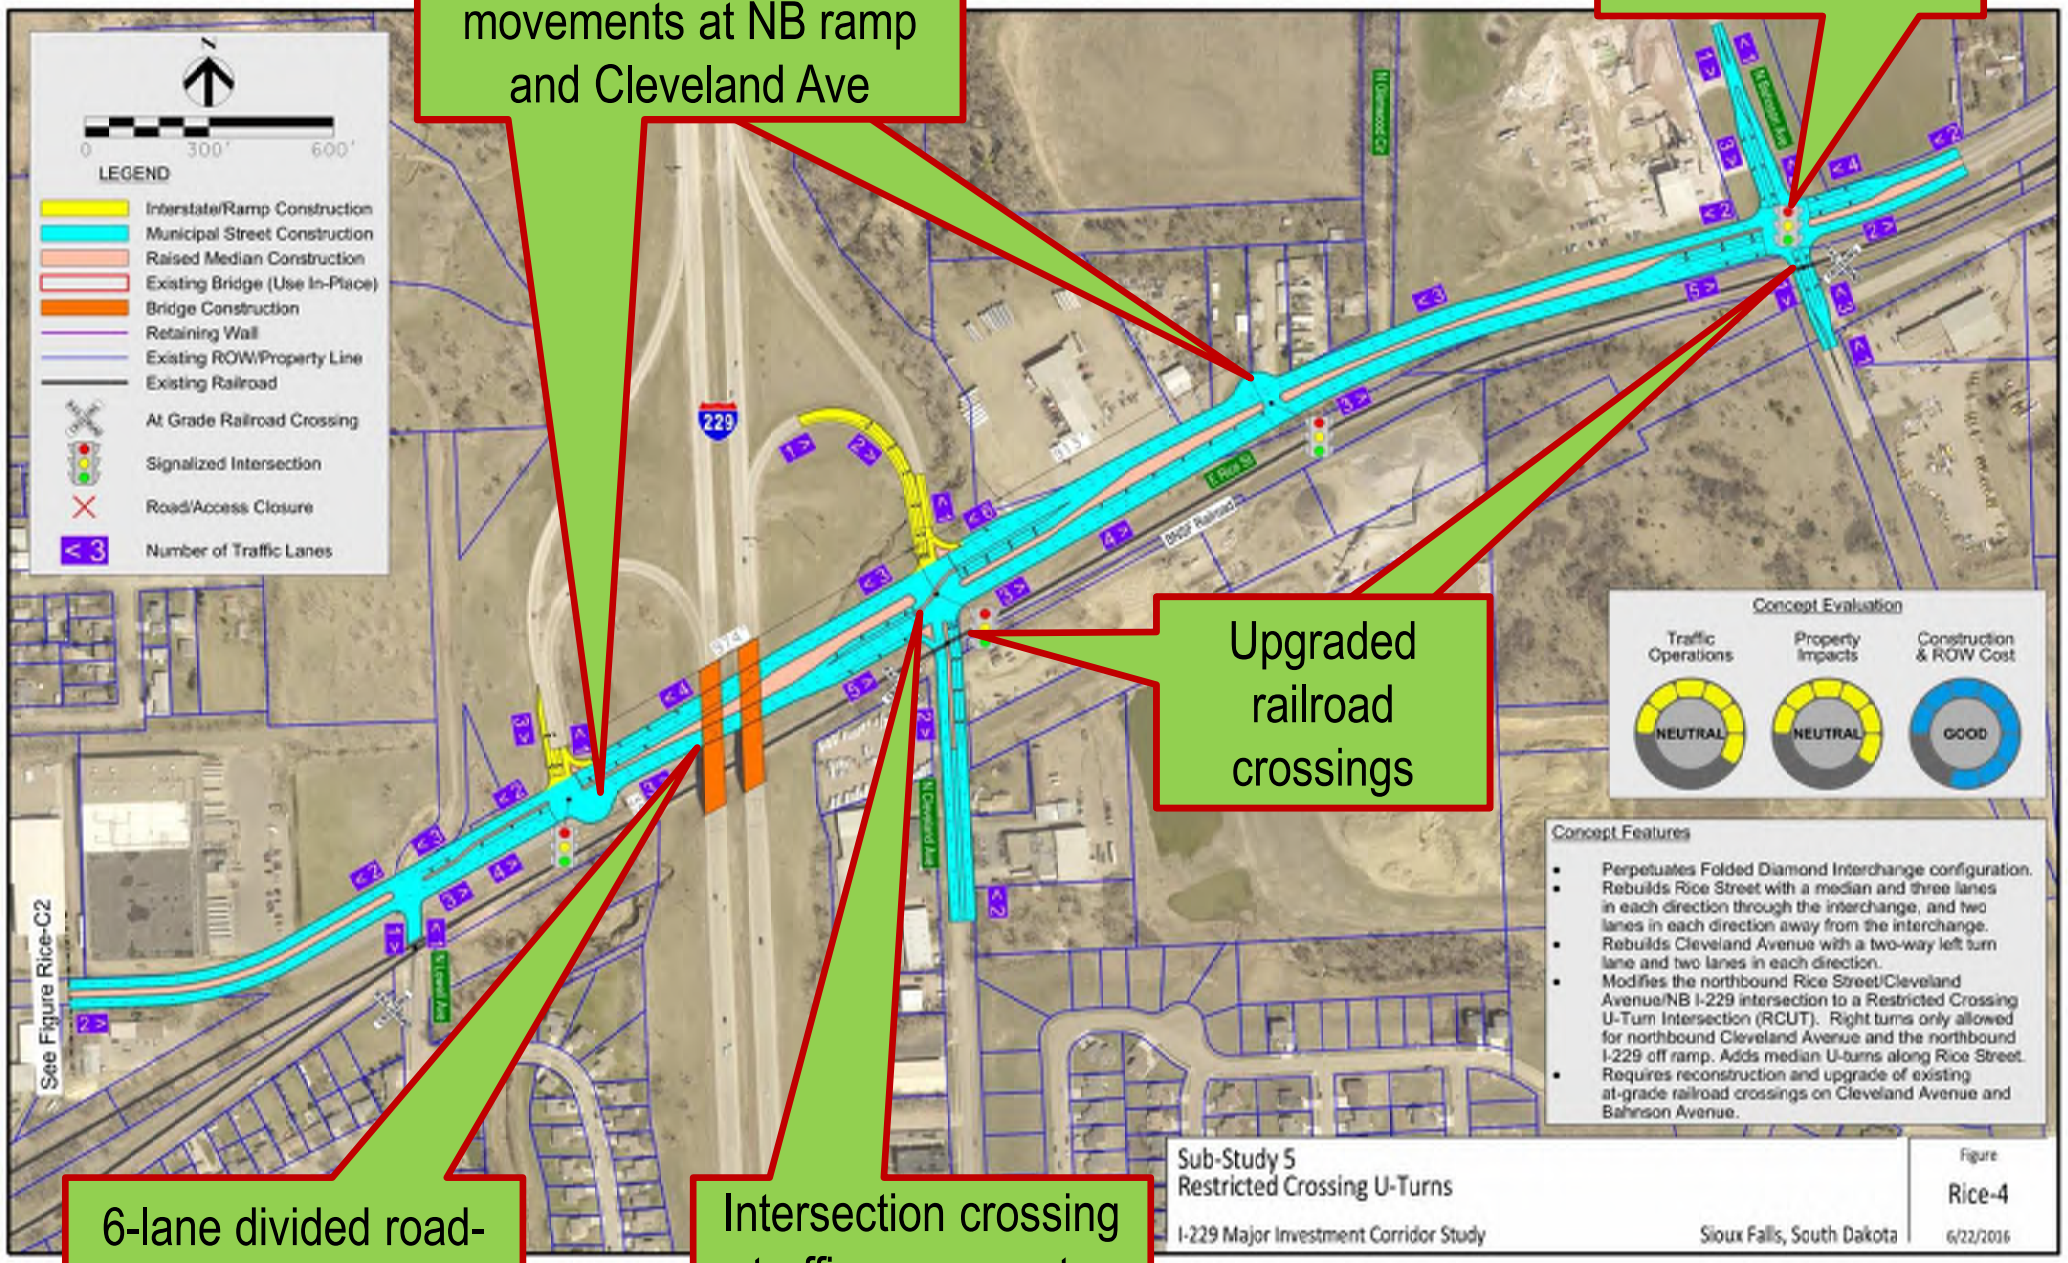
Median U-turns provided to replace crossing movements at NB ramp and Cleveland Ave
Turn lanes added at Bahnson Ave
Upgraded railroad crossings
6-lane divided road-way on Rice Street
Intersection crossing traffic movements restricted
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
NEUTRAL
NEUTRAL
GOOD
Concept Features
Perpetuates Folded Diamond Interchange configuration.
Rebuilds Rice Street with a median and three lanes in each direction through the interchange, and two lanes in each direction away from the interchange.
Rebuilds Cleveland Avenue with a two-way left turn lane and two lanes in each direction.
Modifies the northbound Rice Street/Cleveland Avenue/NB I-229 intersection to a Restricted Crossing U-Turn Intersection (RCUT). Right turns only allowed for northbound Cleveland Avenue and the northbound I-229 off ramp. Adds median U-turns along Rice Street.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Cleveland Avenue and Bahnson Avenue.
See Figure Rice-C2
Sub-Study 5
Restricted Crossing U-Turns
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-4
6/22/2016

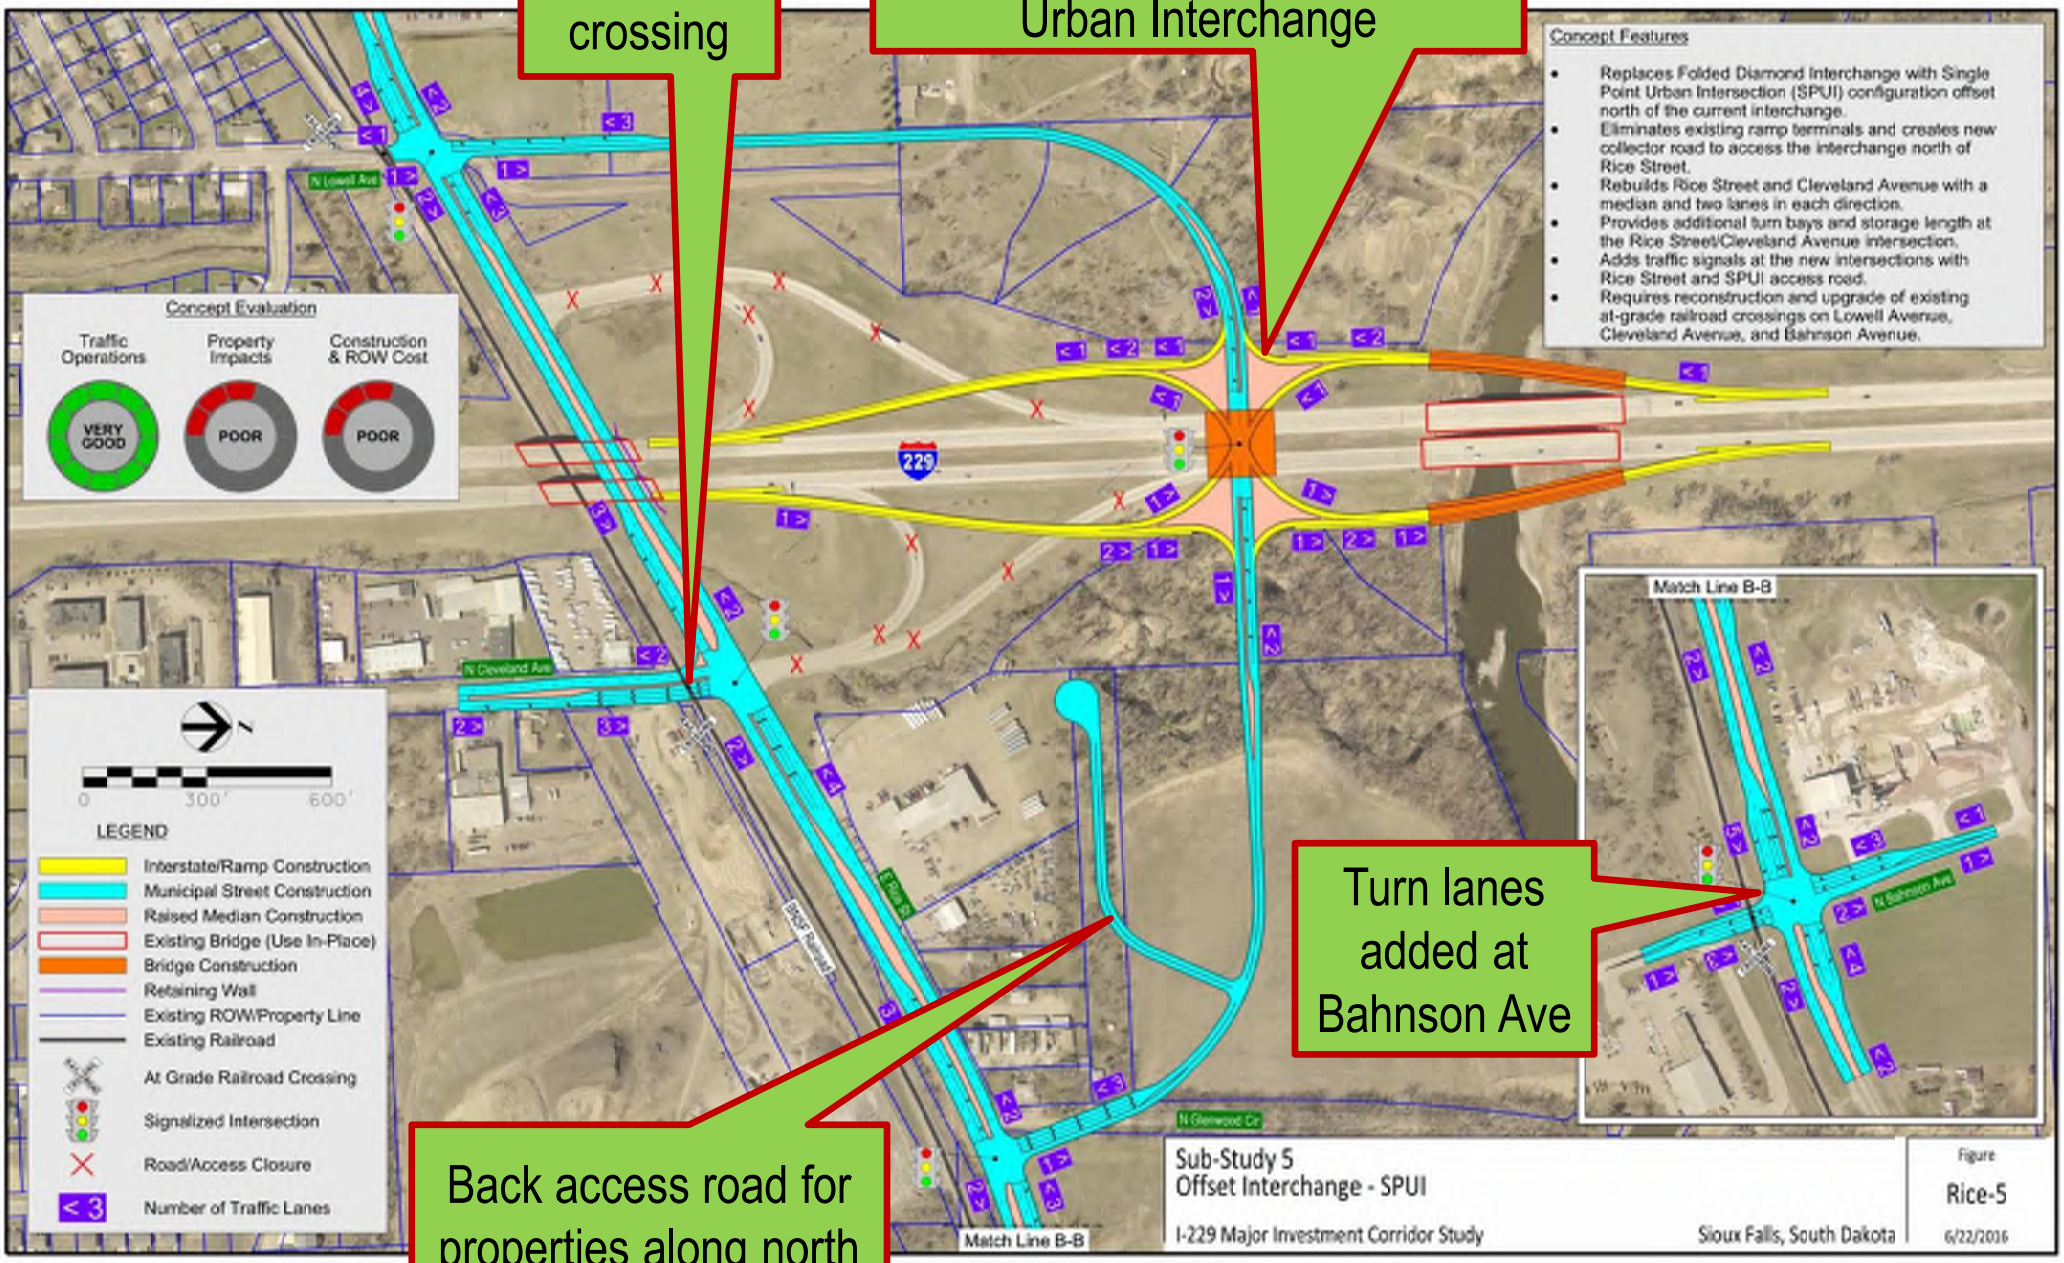
Upgraded railroad crossing
Relocated Rice St. interchange constructed as Single Point Urban Interchange
Concept Features
Replaces Folded Diamond Interchange with Single Point Urban Intersection (SPUI) configuration offset north of the current interchange.
Eliminates existing ramp terminals and creates new collector road to access the interchange north of Rice Street.
Rebuilds Rice Street and Cleveland Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the Rice Street/Cleveland Avenue intersection.
Adds traffic signals at the new intersections with Rice Street and SPUI access road.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Lowell Avenue, Cleveland Avenue, and Bahnson Avenue.
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
POOR
POOR
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Match Line B-B
Turn lanes added at Bahnson Ave
Back access road for properties along north side of Rice St.
Sub-Study 5
Offset Interchange - SPUI
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-5
6/22/2016

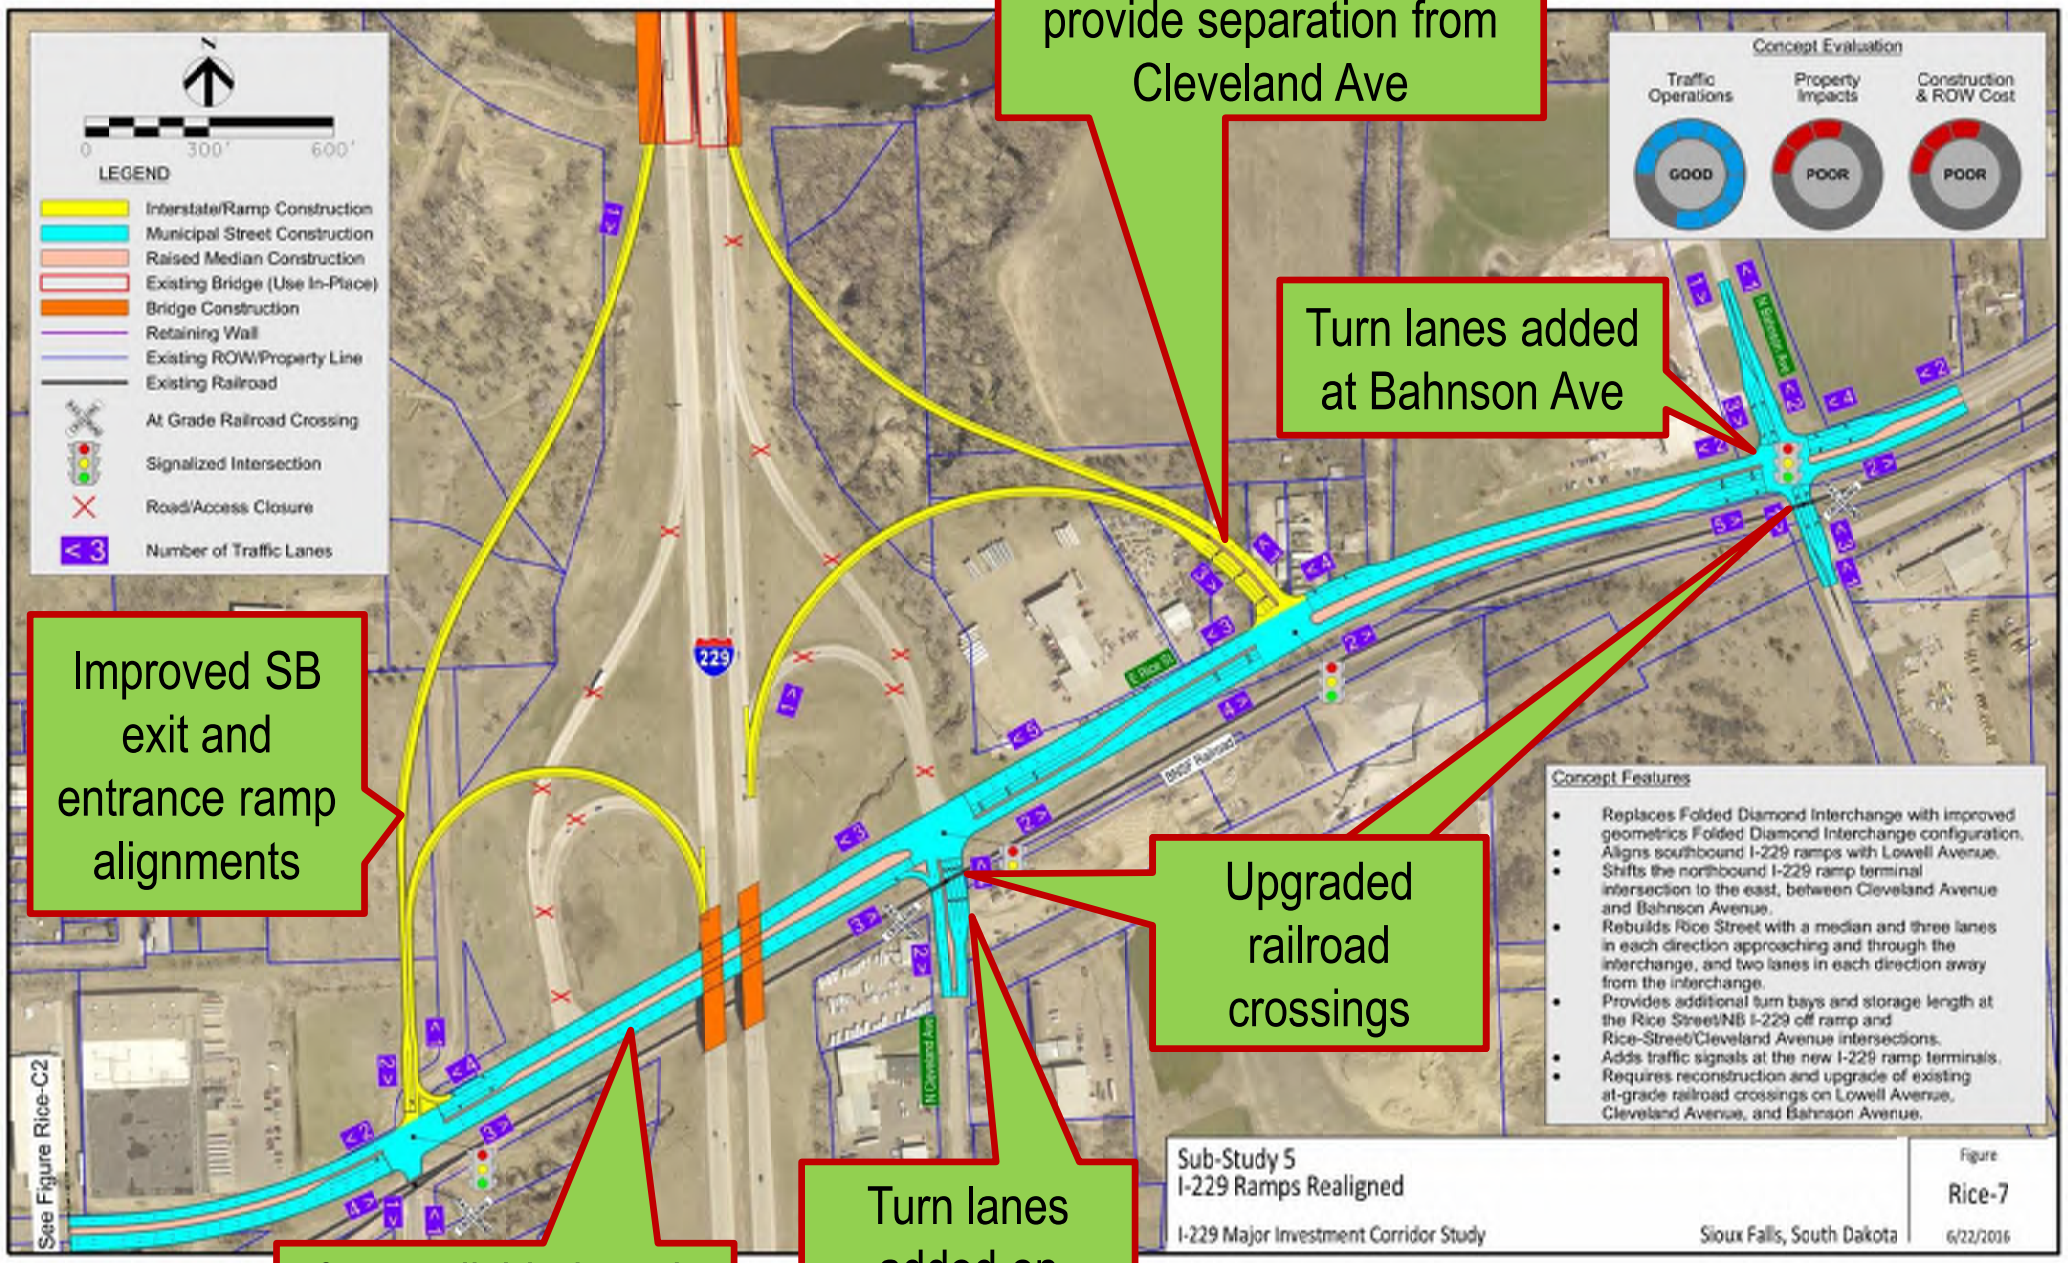
Relocated SB exit and entrance ramps to provide separation from Cleveland Ave
Turn lanes added at Bahnson Ave
Improved SB exit and entrance ramp alignments
Upgraded railroad crossings
6-lane divided road-way on Rice Street
Turn lanes added on Cleveland Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
POOR
POOR
Concept Features
Replaces Folded Diamond Interchange with improved geometrics Folded Diamond Interchange configuration.
Aligns southbound I-229 ramps with Lowell Avenue.
Shifts the northbound I-229 ramp terminal intersection to the east, between Cleveland Avenue and Bahnson Avenue.
Rebuilds Rice Street with a median and three lanes in each direction approaching and through the interchange, and two lanes in each direction away from the interchange.
Provides additional turn bays and storage length at the Rice Street/NB I-229 off ramp and Rice-Street/Cleveland Avenue intersections.
Adds traffic signals at the new I-229 ramp terminals.
Requires reconstruction and upgrade of existing at-grade railroad crossings on Lowell Avenue, Cleveland Avenue, and Bahnson Avenue.
Sub-Study 5
I-229 Ramps Realigned
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-7
6/22/2016
See Figure Rice-C2

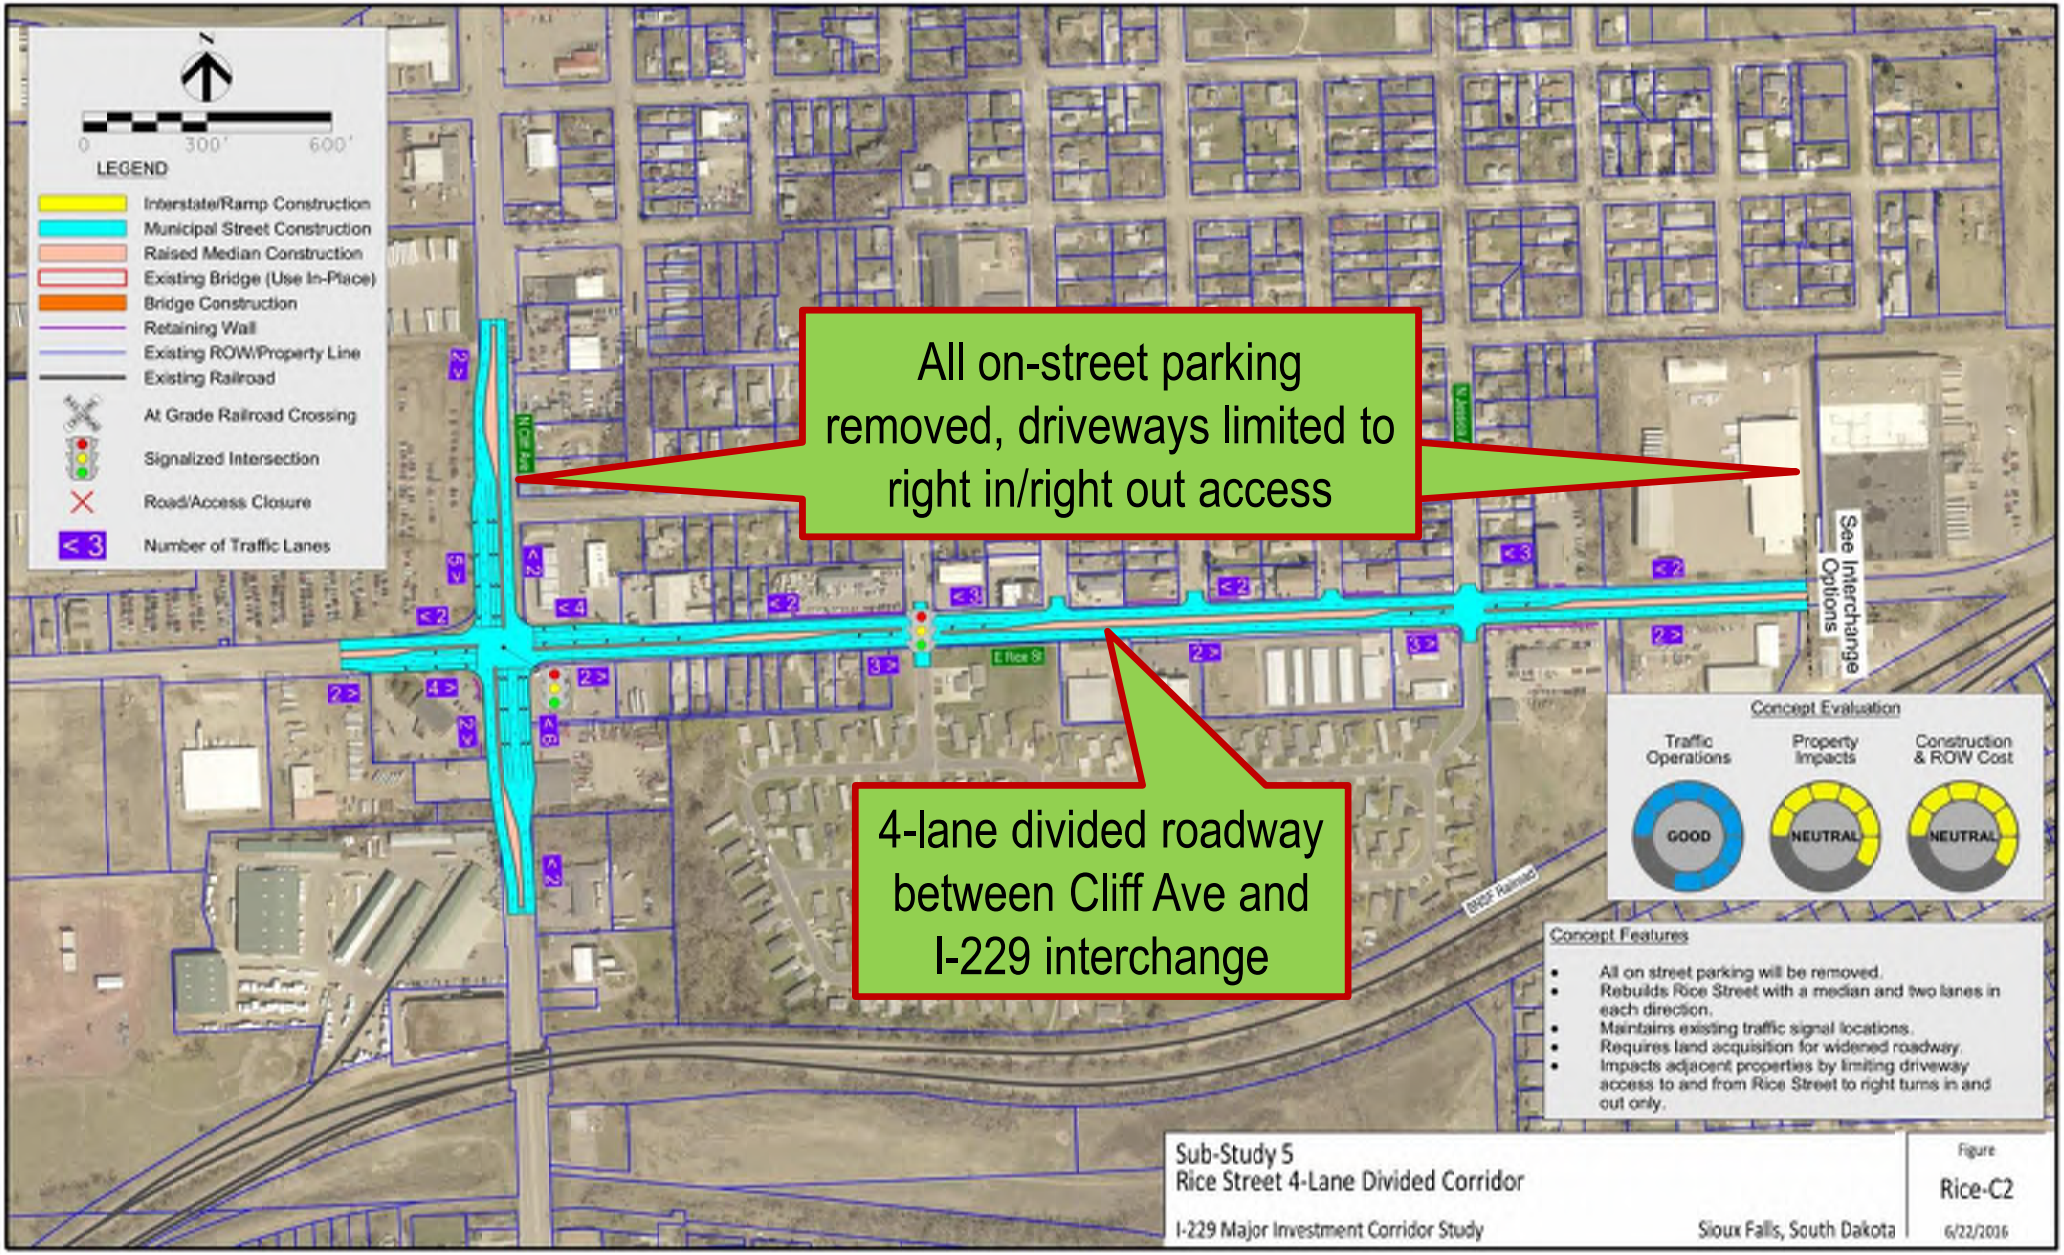
0
300'
600'
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Existing Railroad
At Grade Railroad Crossing
Signalized Intersection
Road/Access Closure
Number of Traffic Lanes
All on-street parking removed, driveways limited to right in/right out access
4-lane divided roadway between Cliff Ave and I-229 interchange
See Interchange Options
E Rice St
BNSF Railway
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
NEUTRAL
NEUTRAL
Concept Features
All on street parking will be removed.
Rebuilds Rice Street with a median and two lanes in each direction.
Maintains existing traffic signal locations.
Requires land acquisition for widened roadway.
Impacts adjacent properties by limiting driveway access to and from Rice Street to right turns in and out only.
Sub-Study 5
Rice Street 4-Lane Divided Corridor
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Rice-C2
6/22/2016

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Dave Meier – HDR Engineering, Inc.
402-399-1068 or Dave.Meier@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us



Interstate 229 Major Investment Study

Exit 7 – Rice Street

Thanks for Attending!!!!!

© 2014 HDR, all rights reserved.

CLIFF AVENUE

JUNE 22ND, 2016

- SIGN-IN SHEETS
- POWERPOINT SLIDES
- MEETING NOTES (SEE CLIFF AVENUE AND RICE STREET PUBLIC MEETINGS APPENDIX)
- COMMENTS (SEE CLIFF AVENUE AND RICE STREET PUBLIC MEETINGS APPENDIX)

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for Cliff Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Wednesday, June 22, 2016 2:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Linda Mickelson Dodson	4001 S Cliff Ave	605 940-4186	lindamcad.com
2	Jason Igerstad	6240 S. Old Village Pl	977-7740	jason.igerstad@hdrinc.com
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meetings for Cliff Avenue Sub Study
Client City of Sioux Falls/South Dakota Department of Transportation
Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030
Meeting Date Wednesday, June 22, 2016 2:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Gene Napier	1109 & 1111 E. Park Rd	377-0377	napierio@sio.midco.net
2	Jim Becker for E.J. King	2507 S. Big Timber Pl 2611 S. Big Timber Pl	334-7091	jrbecker25@hotmail.com
3	Dwight Smidt	3216 S. Phillips	201-1299	PWHRAN1340@s.o.midco.net
4	Jeff Koeter	1101 N. Western Ave	367-7965	Jeffect-Koeter@kfi.sdn.us
5	Marsha Biggar Minnehaha Property	3000 S. 10th Ave	929-7637	MSB3000@sio.midco.net
6	Phil Johnson	100 S Phillips Ave	782-4011	pfjohnson@fuhrfs.com
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







Interstate 229 Major Investment Study

Exit 4 – Cliff Avenue

Stakeholder Meeting
June 22nd, 2016
2:30 pm to 3:30 pm

HDR

© 2014 HDR, all rights reserved.


Study Area Map

I-229 Corridor Study

Solberg Avenue Overpass
to
60th Street N. Overpass

Additional Studies

Exit 3 – Minnesota Ave
Exit 6 – 10th Street
Exit 9 – Benson Road
Added Exit 4 – Cliff Avenue
Added Exit 7 – Rice Street

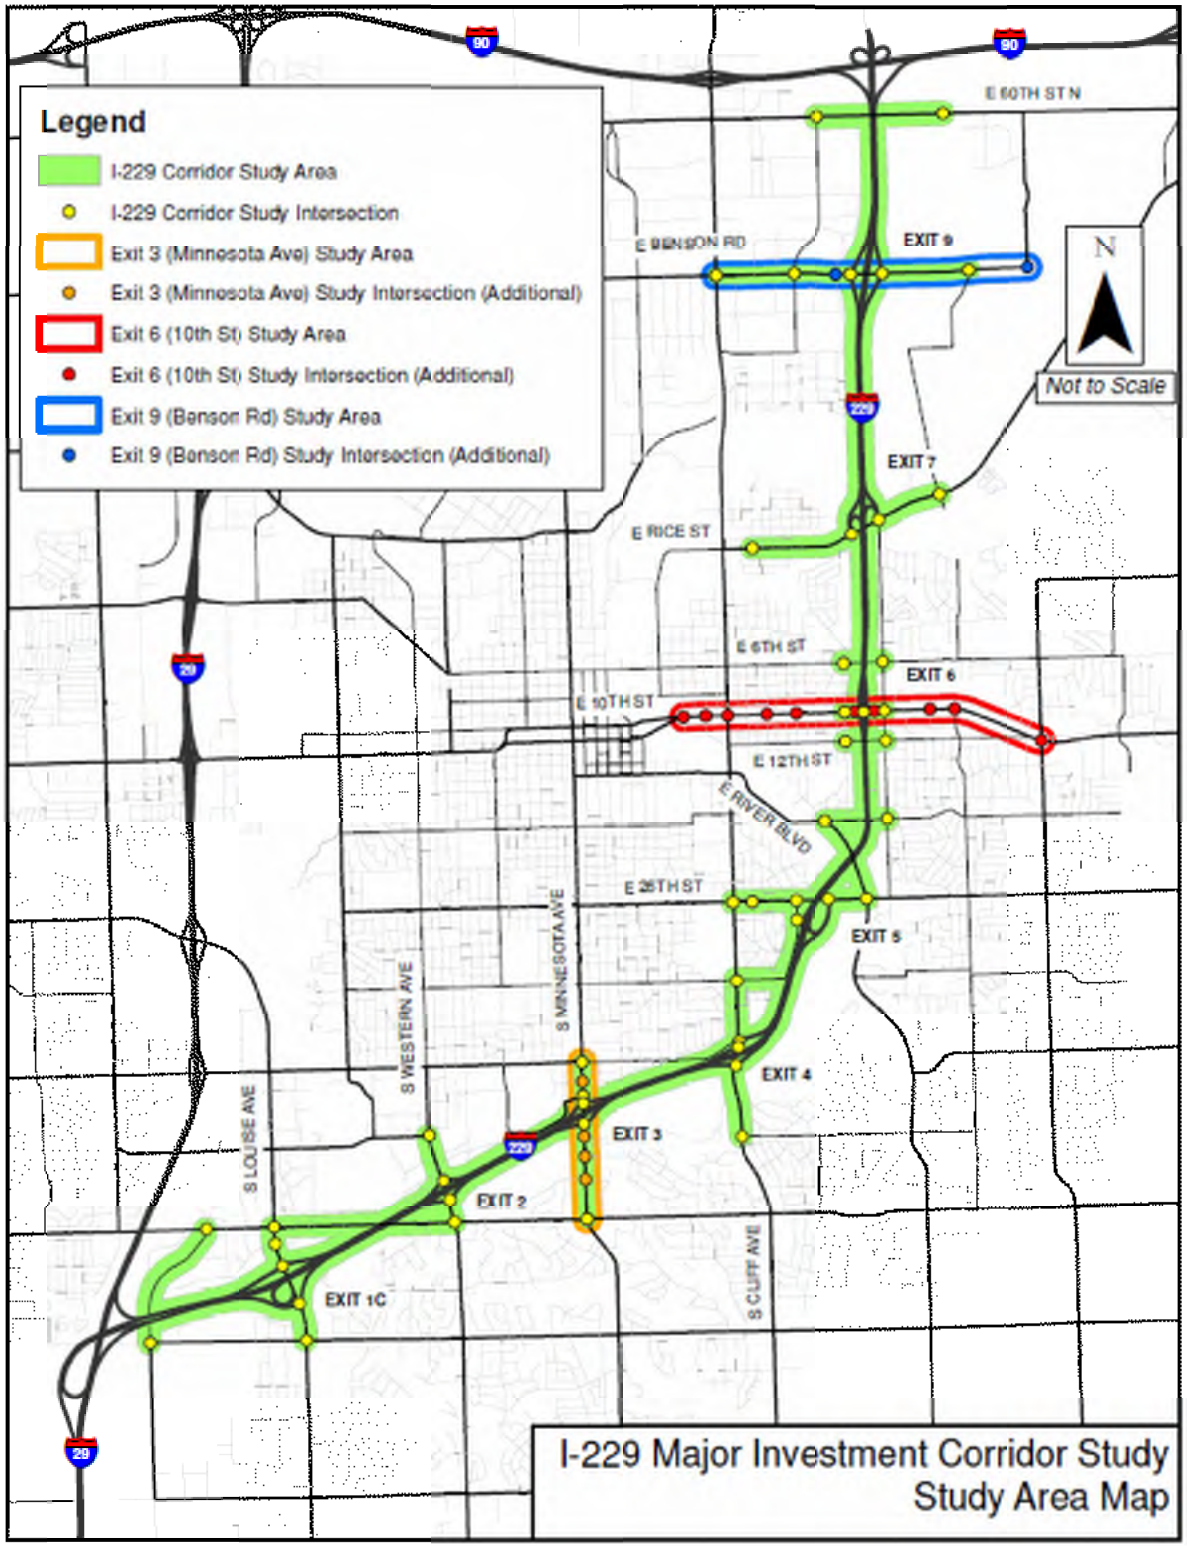

Study Advisory Partners

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls


Sioux Falls Metropolitan Planning Organization (MPO)


Federal Highway Administration (FHWA)

Exit 4 (Cliff Avenue) Sub - Study Goals


- Reduce traffic congestion
- Develop new geometrics to improve capacity at 41st Street and Interchange
- Improve pedestrian mobility
- Improve safety for corridor users




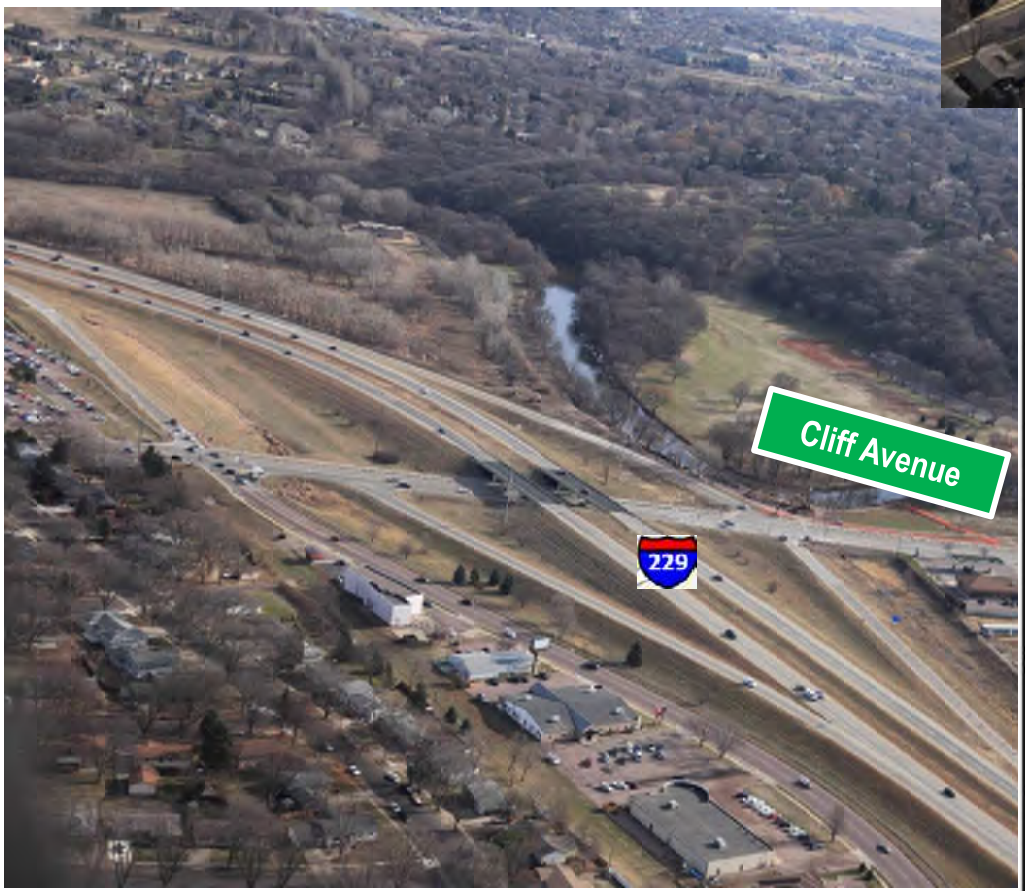


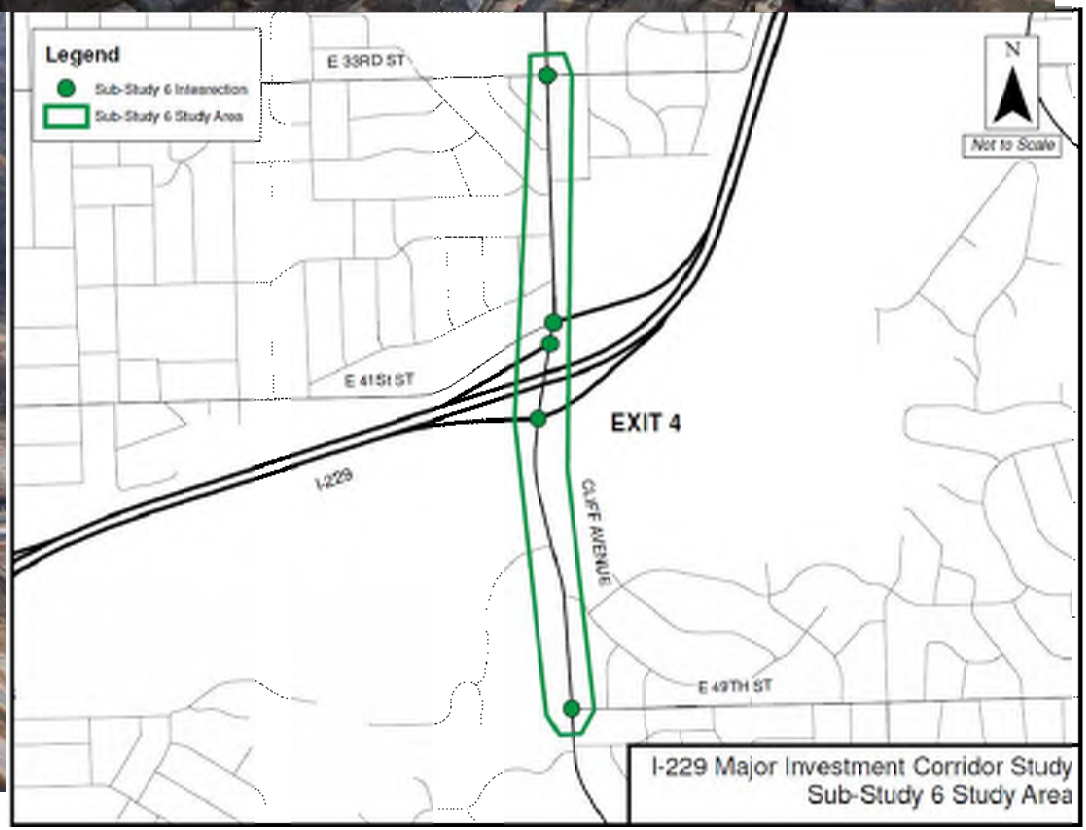




Access to Park close to interchange makes it difficult to exit during peak hour periods
Turn Lane short and few gaps exist to complete left turn movement
Cliff Avenue
229
Cliff Avenue
High Right Turn Volume in the PM Peak Hour
Congestion due to close proximity of 41st Street to I229 SB ON Ramp

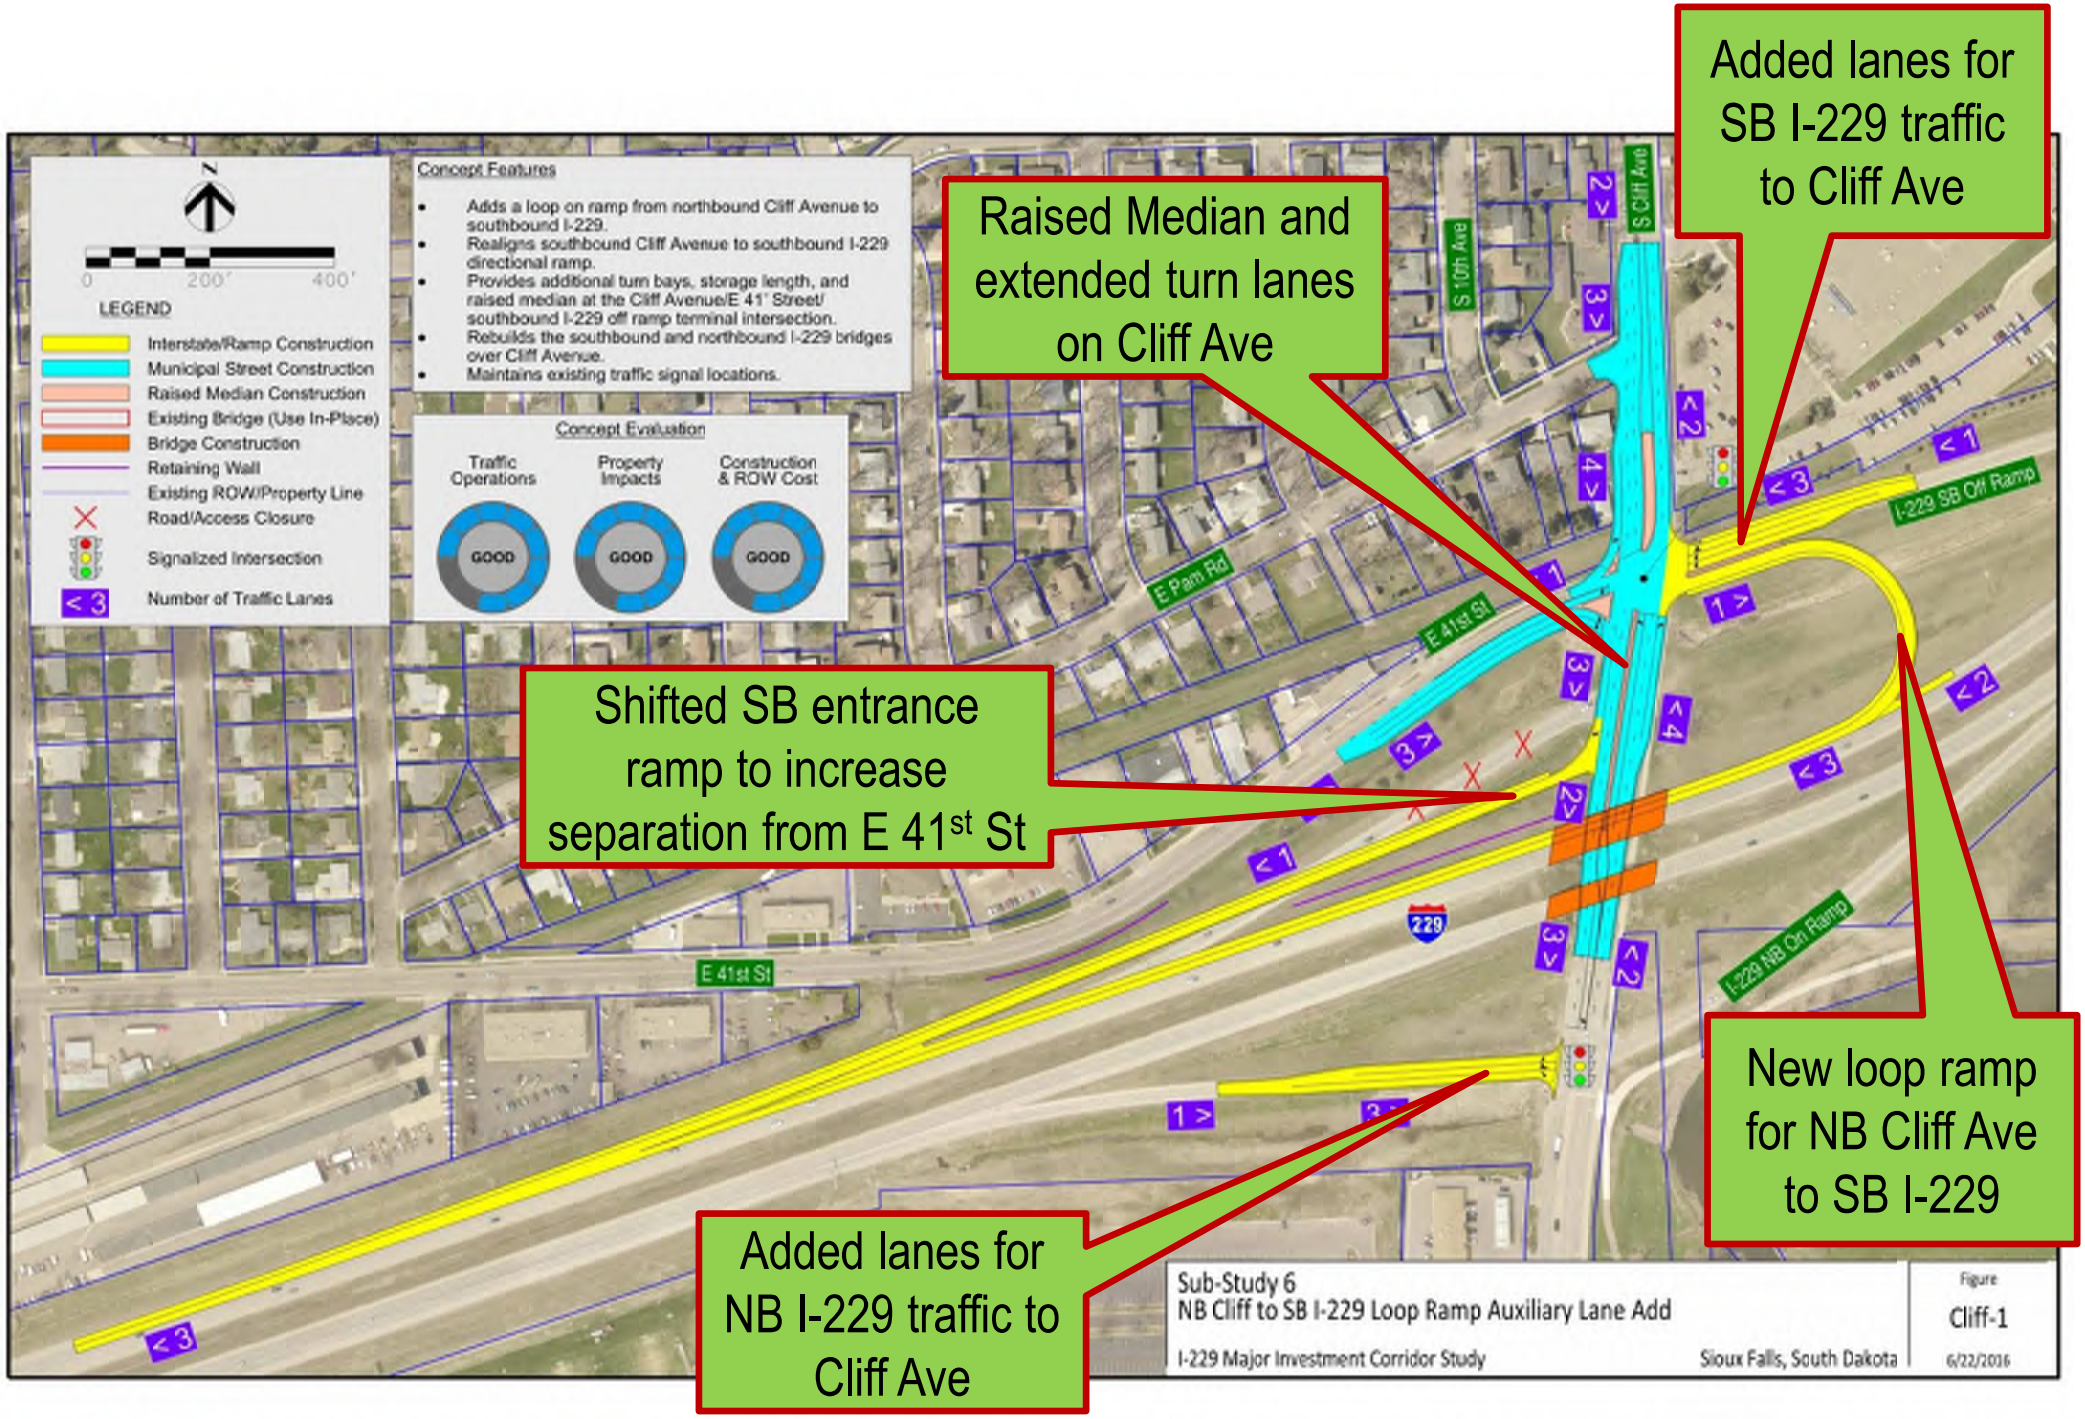

Added lanes for SB I-229 traffic to Cliff Ave
Raised Median and extended turn lanes on Cliff Ave
Shifted SB entrance ramp to increase separation from E 41st St
New loop ramp for NB Cliff Ave to SB I-229
Added lanes for NB I-229 traffic to Cliff Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
Concept Features
Adds a loop on ramp from northbound Cliff Avenue to southbound I-229.
Realigns southbound Cliff Avenue to southbound I-229 directional ramp.
Provides additional turn bays, storage length, and raised median at the Cliff Avenue/E 41st Street/ southbound I-229 off ramp terminal intersection.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Maintains existing traffic signal locations.
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
GOOD
GOOD
GOOD
E Pam Rd
E 41st St
S 10th Ave
S Cliff Ave
I-229 SB Off Ramp
I-229 NB On Ramp
229
Sub-Study 6
NB Cliff to SB I-229 Loop Ramp Auxiliary Lane Add
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-1
6/22/2016

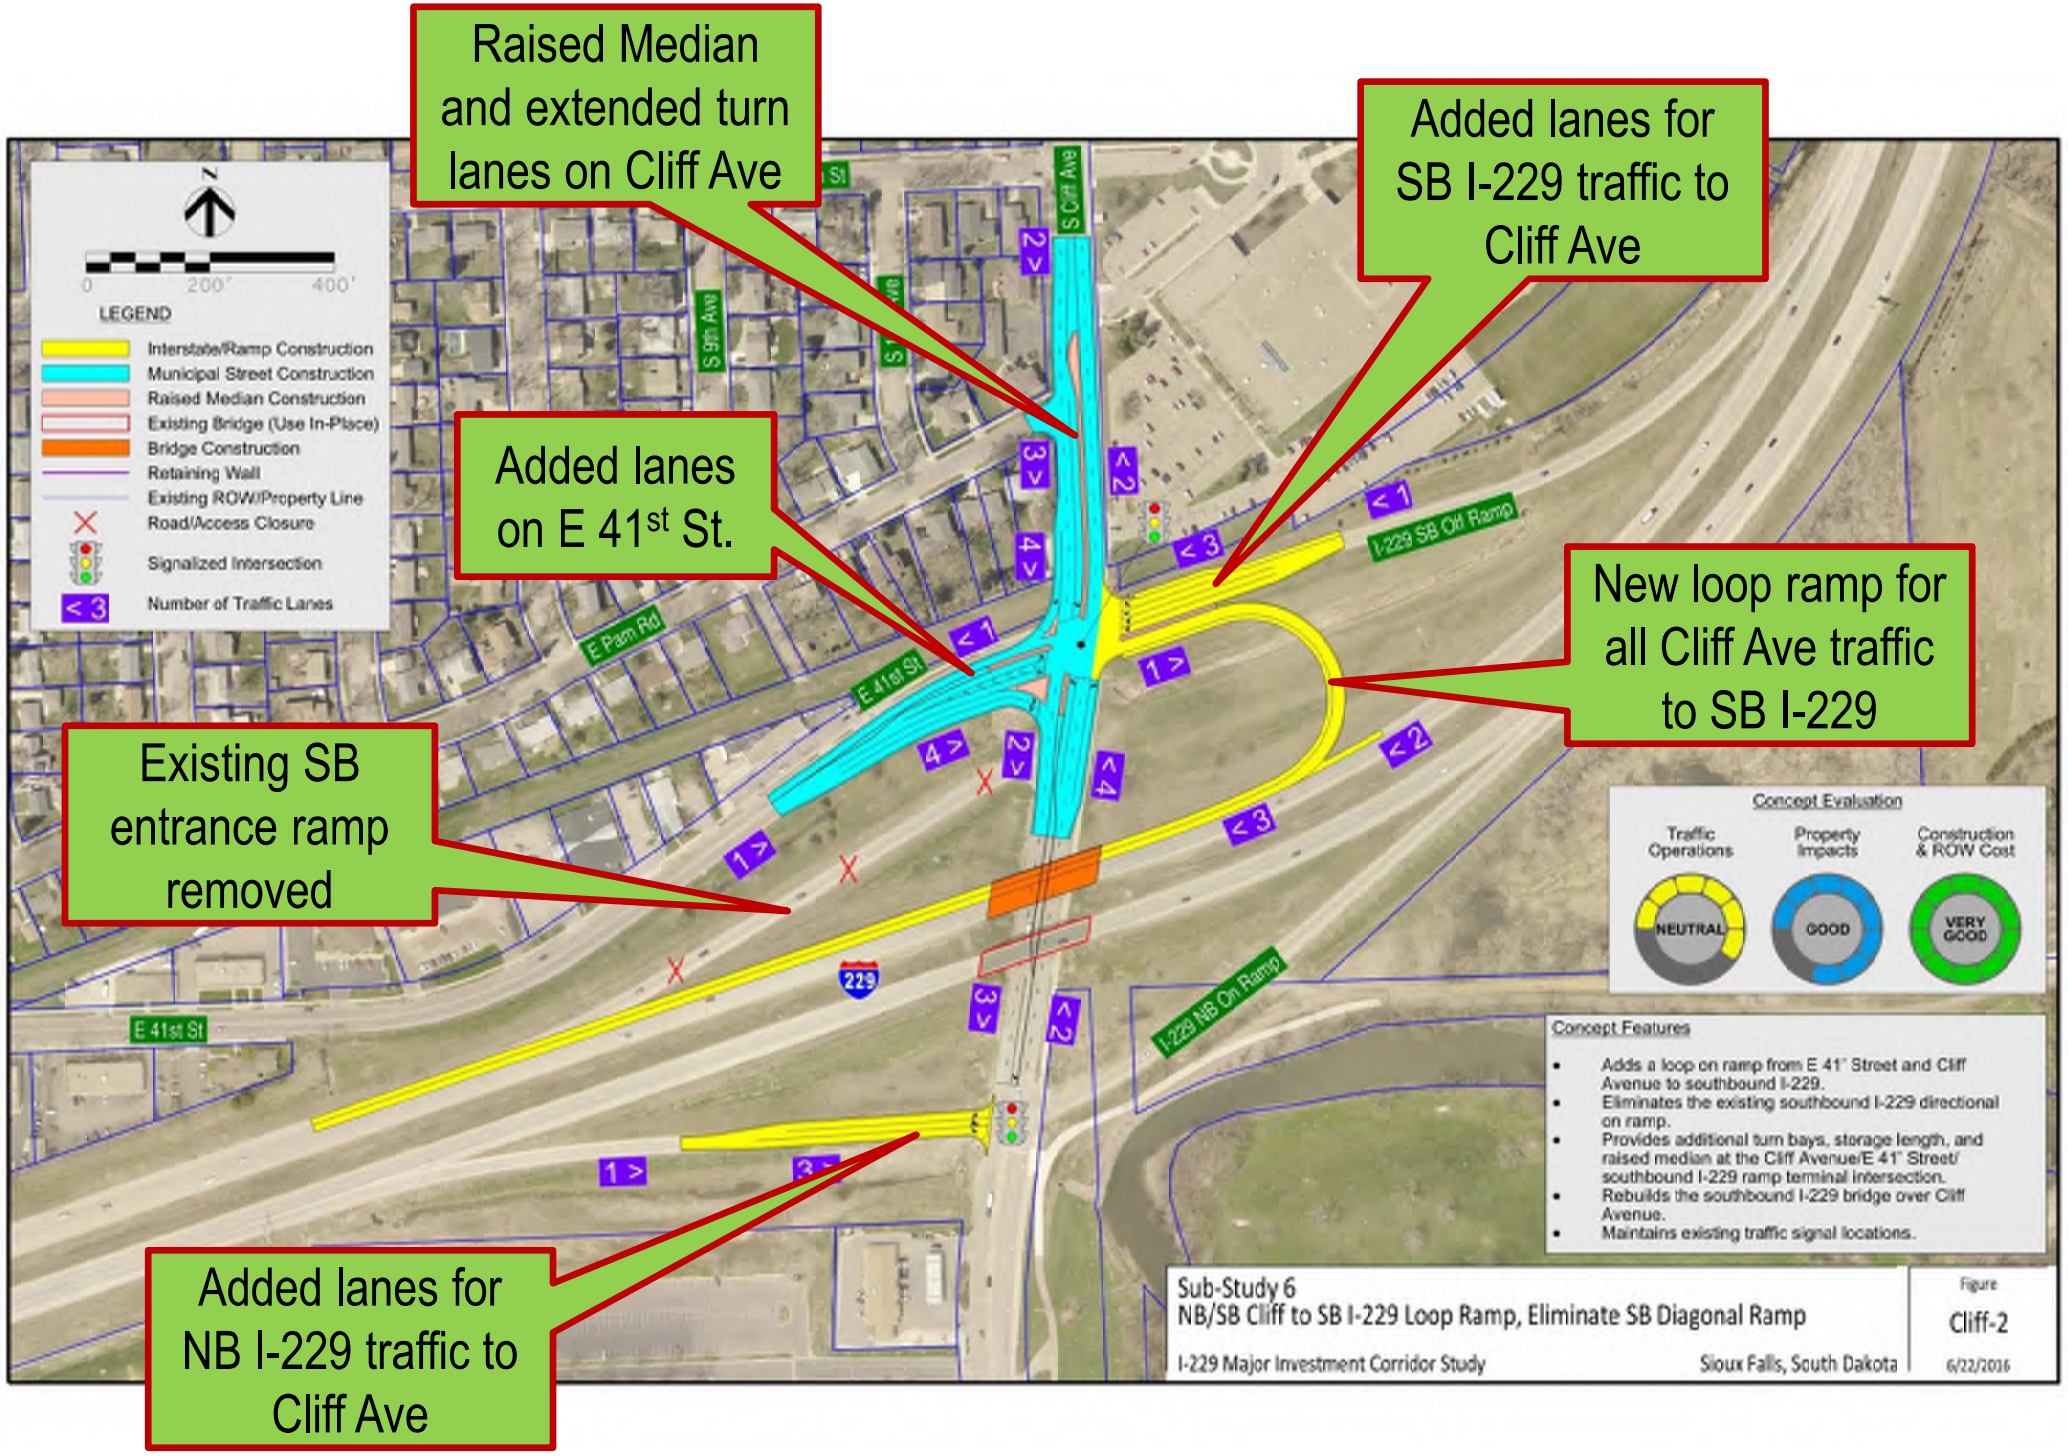
Raised Median and extended turn lanes on Cliff Ave
Added lanes for SB I-229 traffic to Cliff Ave
Added lanes on E 41st St.
New loop ramp for all Cliff Ave traffic to SB I-229
Existing SB entrance ramp removed
Added lanes for NB I-229 traffic to Cliff Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
S Cliff Ave
S 9th Ave
E Pam Rd
E 41st St
I-229 SB On Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
NEUTRAL
GOOD
VERY GOOD
Concept Features
Adds a loop on ramp from E 41st Street and Cliff Avenue to southbound I-229.
Eliminates the existing southbound I-229 directional on ramp.
Provides additional turn bays, storage length, and raised median at the Cliff Avenue/E 41st Street/ southbound I-229 ramp terminal intersection.
Rebuilds the southbound I-229 bridge over Cliff Avenue.
Maintains existing traffic signal locations.
Sub-Study 6
NB/SB Cliff to SB I-229 Loop Ramp, Eliminate SB Diagonal Ramp
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-2
6/22/2016

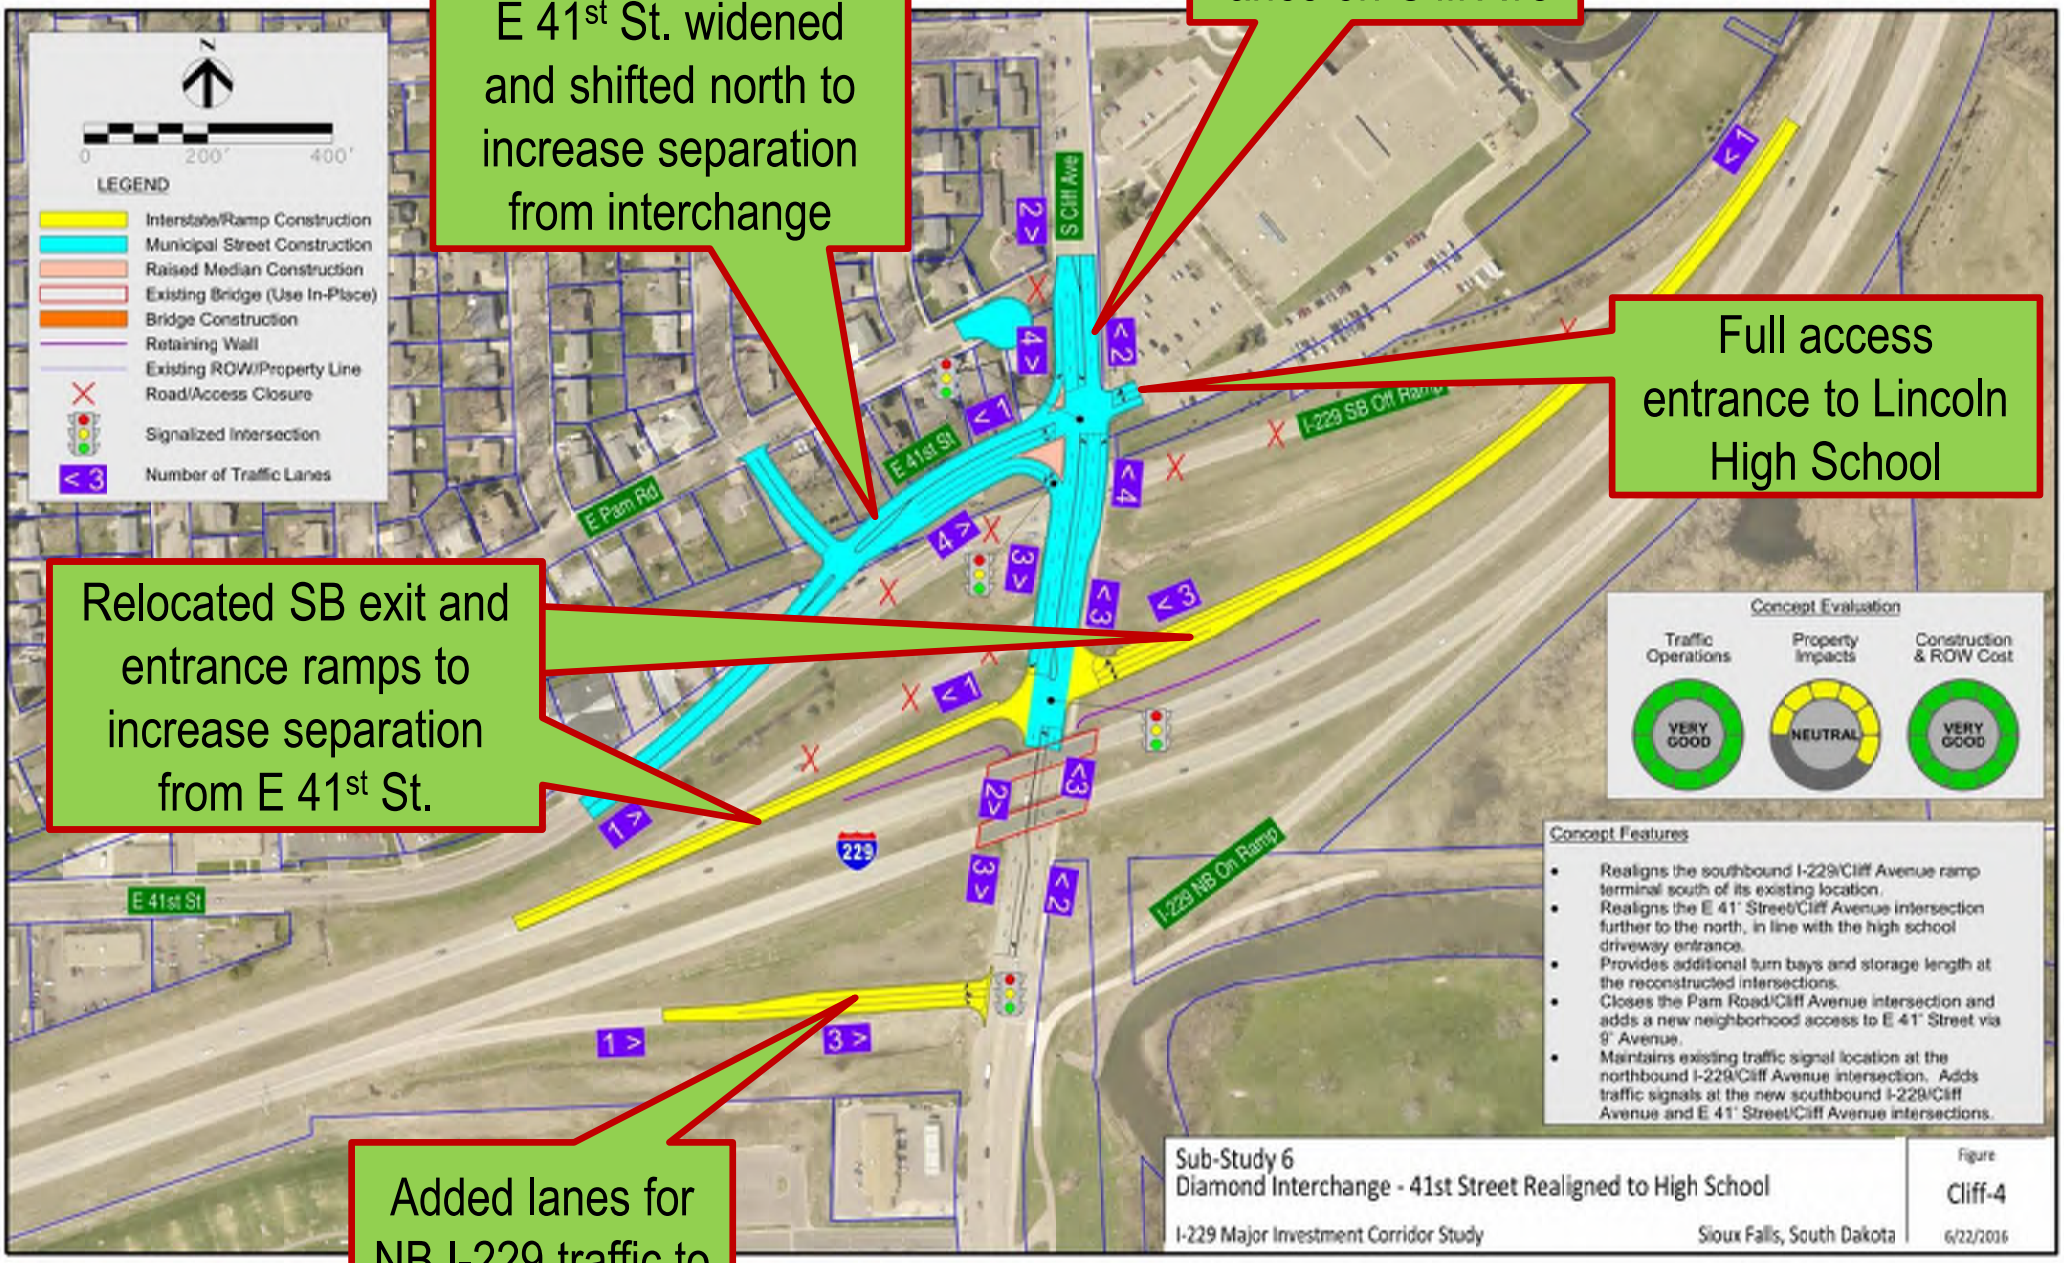
E 41st St. widened and shifted north to increase separation from interchange
Extended turn lanes on Cliff Ave
Full access entrance to Lincoln High School
Relocated SB exit and entrance ramps to increase separation from E 41st St.
Added lanes for NB I-229 traffic to Cliff Ave
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
S Cliff Ave
E 41st St
E Pam Rd
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
NEUTRAL
VERY GOOD
Concept Features
Realigns the southbound I-229/Cliff Avenue ramp terminal south of its existing location.
Realigns the E 41st Street/Cliff Avenue intersection further to the north, in line with the high school driveway entrance.
Provides additional turn bays and storage length at the reconstructed intersections.
Closes the Pam Road/Cliff Avenue intersection and adds a new neighborhood access to E 41st Street via 9th Avenue.
Maintains existing traffic signal location at the northbound I-229/Cliff Avenue intersection. Adds traffic signals at the new southbound I-229/Cliff Avenue and E 41st Street/Cliff Avenue intersections.
Sub-Study 6
Diamond Interchange - 41st Street Realigned to High School
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-4
6/22/2016

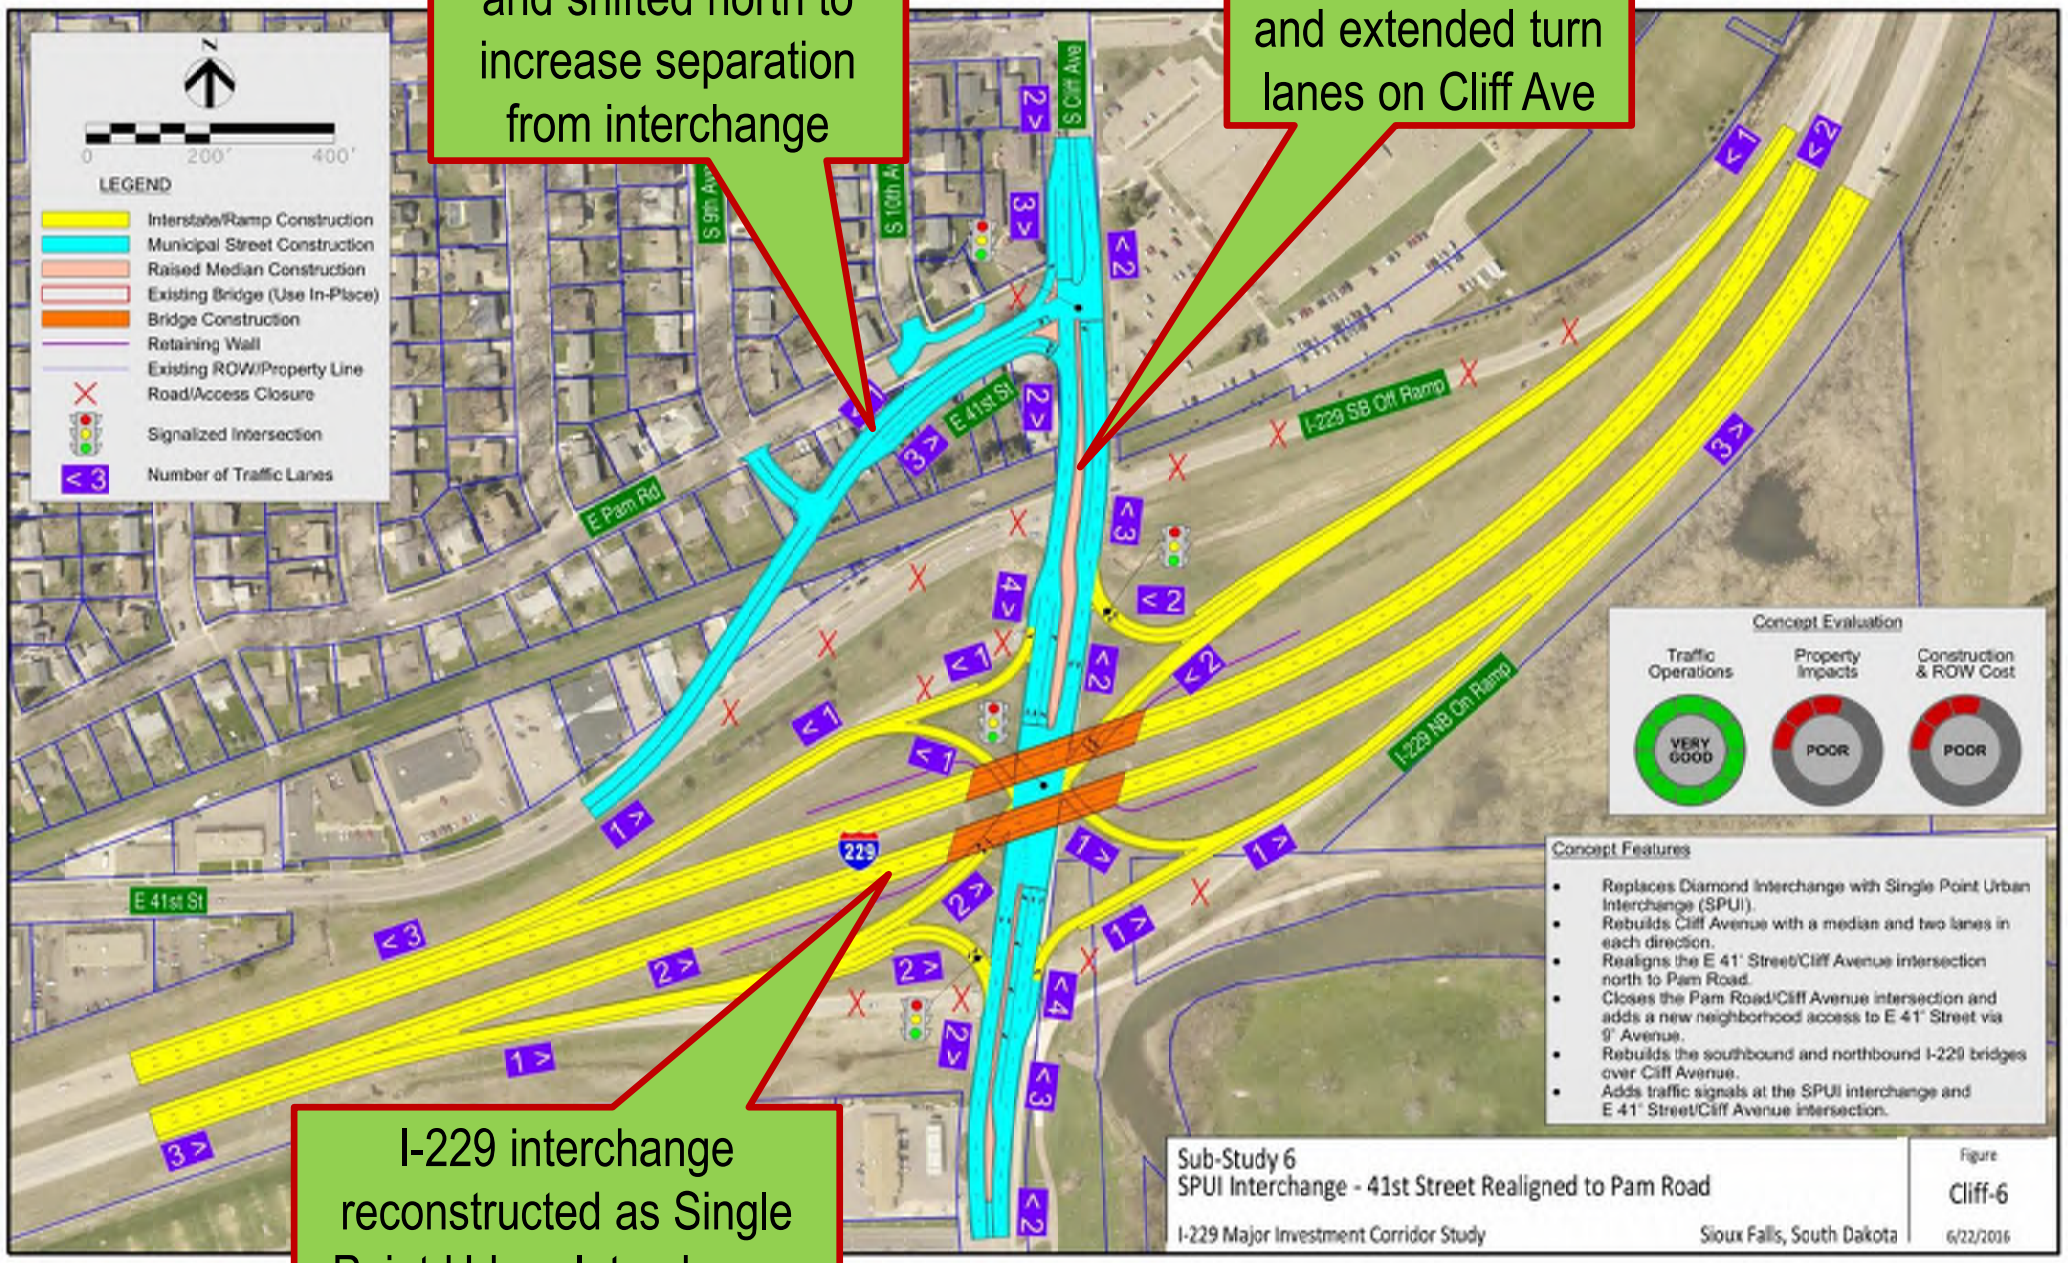
E 41st St. widened and shifted north to increase separation from interchange
Raised Median and extended turn lanes on Cliff Ave
I-229 interchange reconstructed as Single Point Urban Interchange for added capacity
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
0
200'
400'
S Cliff Ave
E 41st St
E Pam Rd
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
VERY GOOD
Property Impacts
POOR
Construction & ROW Cost
POOR
Concept Features
Replaces Diamond Interchange with Single Point Urban Interchange (SPUI).
Rebuilds Cliff Avenue with a median and two lanes in each direction.
Realigns the E 41st Street/Cliff Avenue intersection north to Pam Road.
Closes the Pam Road/Cliff Avenue intersection and adds a new neighborhood access to E 41st Street via 9th Avenue.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Adds traffic signals at the SPUI interchange and E 41st Street/Cliff Avenue intersection.
Sub-Study 6
SPUI Interchange - 41st Street Realigned to Pam Road
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-6
6/22/2016

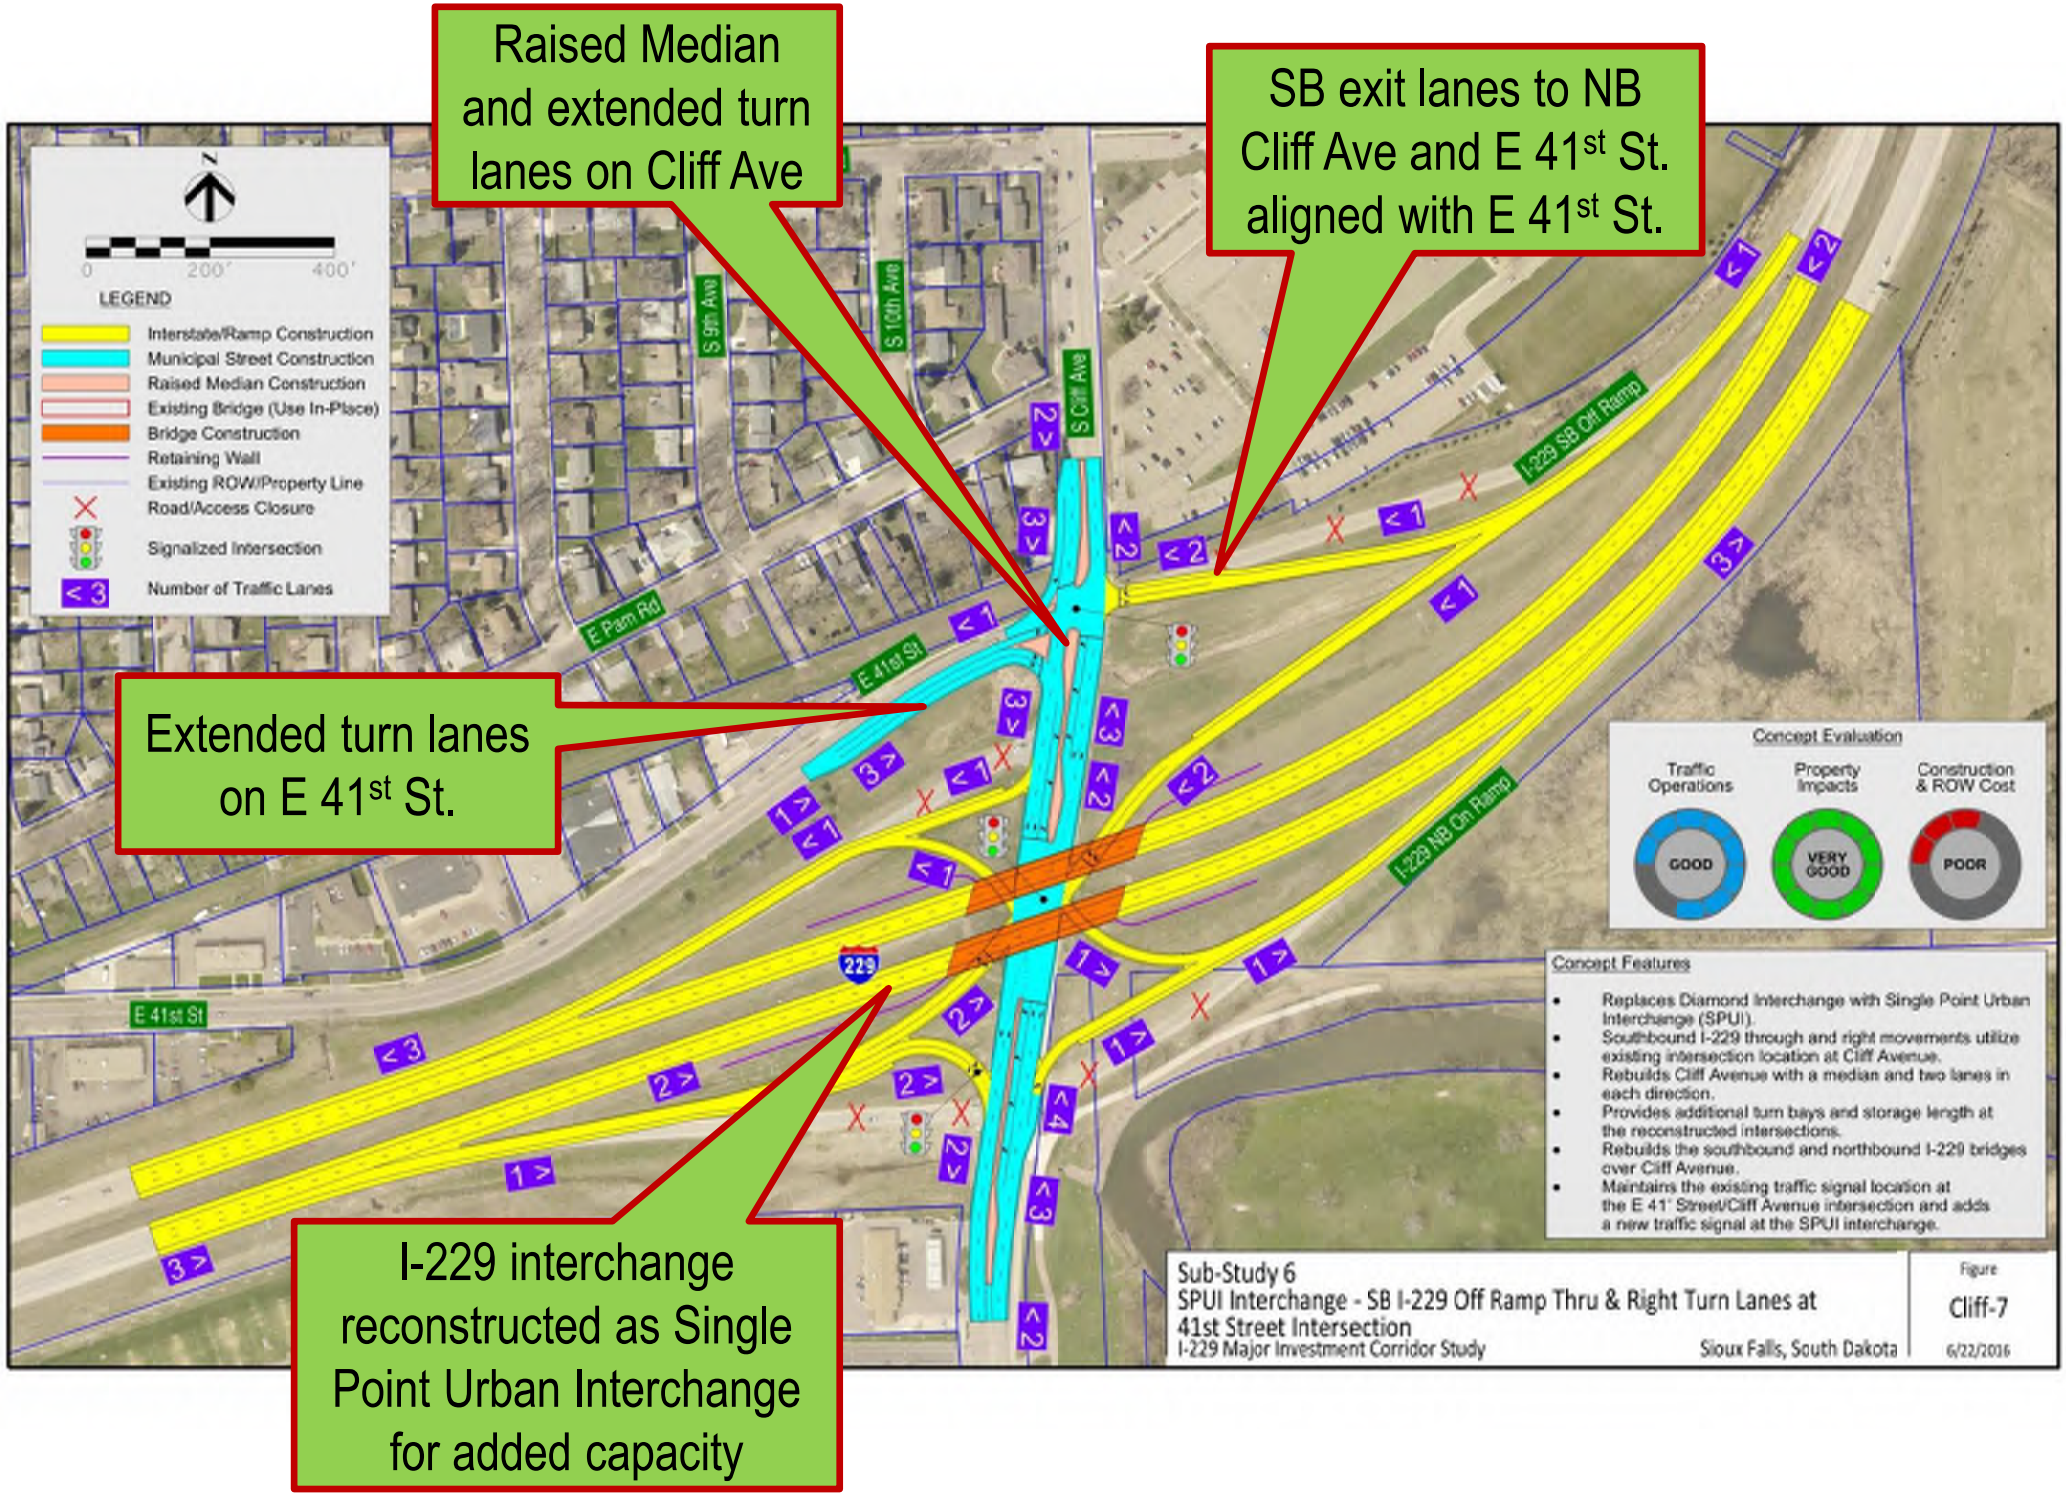
Raised Median and extended turn lanes on Cliff Ave
SB exit lanes to NB Cliff Ave and E 41st St. aligned with E 41st St.
Extended turn lanes on E 41st St.
I-229 interchange reconstructed as Single Point Urban Interchange for added capacity
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
S Cliff Ave
S 9th Ave
S 10th Ave
E Pam Rd
E 41st St
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
GOOD
Property Impacts
VERY GOOD
Construction & ROW Cost
POOR
Concept Features
Replaces Diamond Interchange with Single Point Urban Interchange (SPUI).
Southbound I-229 through and right movements utilize existing intersection location at Cliff Avenue.
Rebuilds Cliff Avenue with a median and two lanes in each direction.
Provides additional turn bays and storage length at the reconstructed intersections.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Maintains the existing traffic signal location at the E 41' Street/Cliff Avenue intersection and adds a new traffic signal at the SPUI interchange.
Sub-Study 6
SPUI Interchange - SB I-229 Off Ramp Thru & Right Turn Lanes at 41st Street Intersection
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-7
6/22/2016

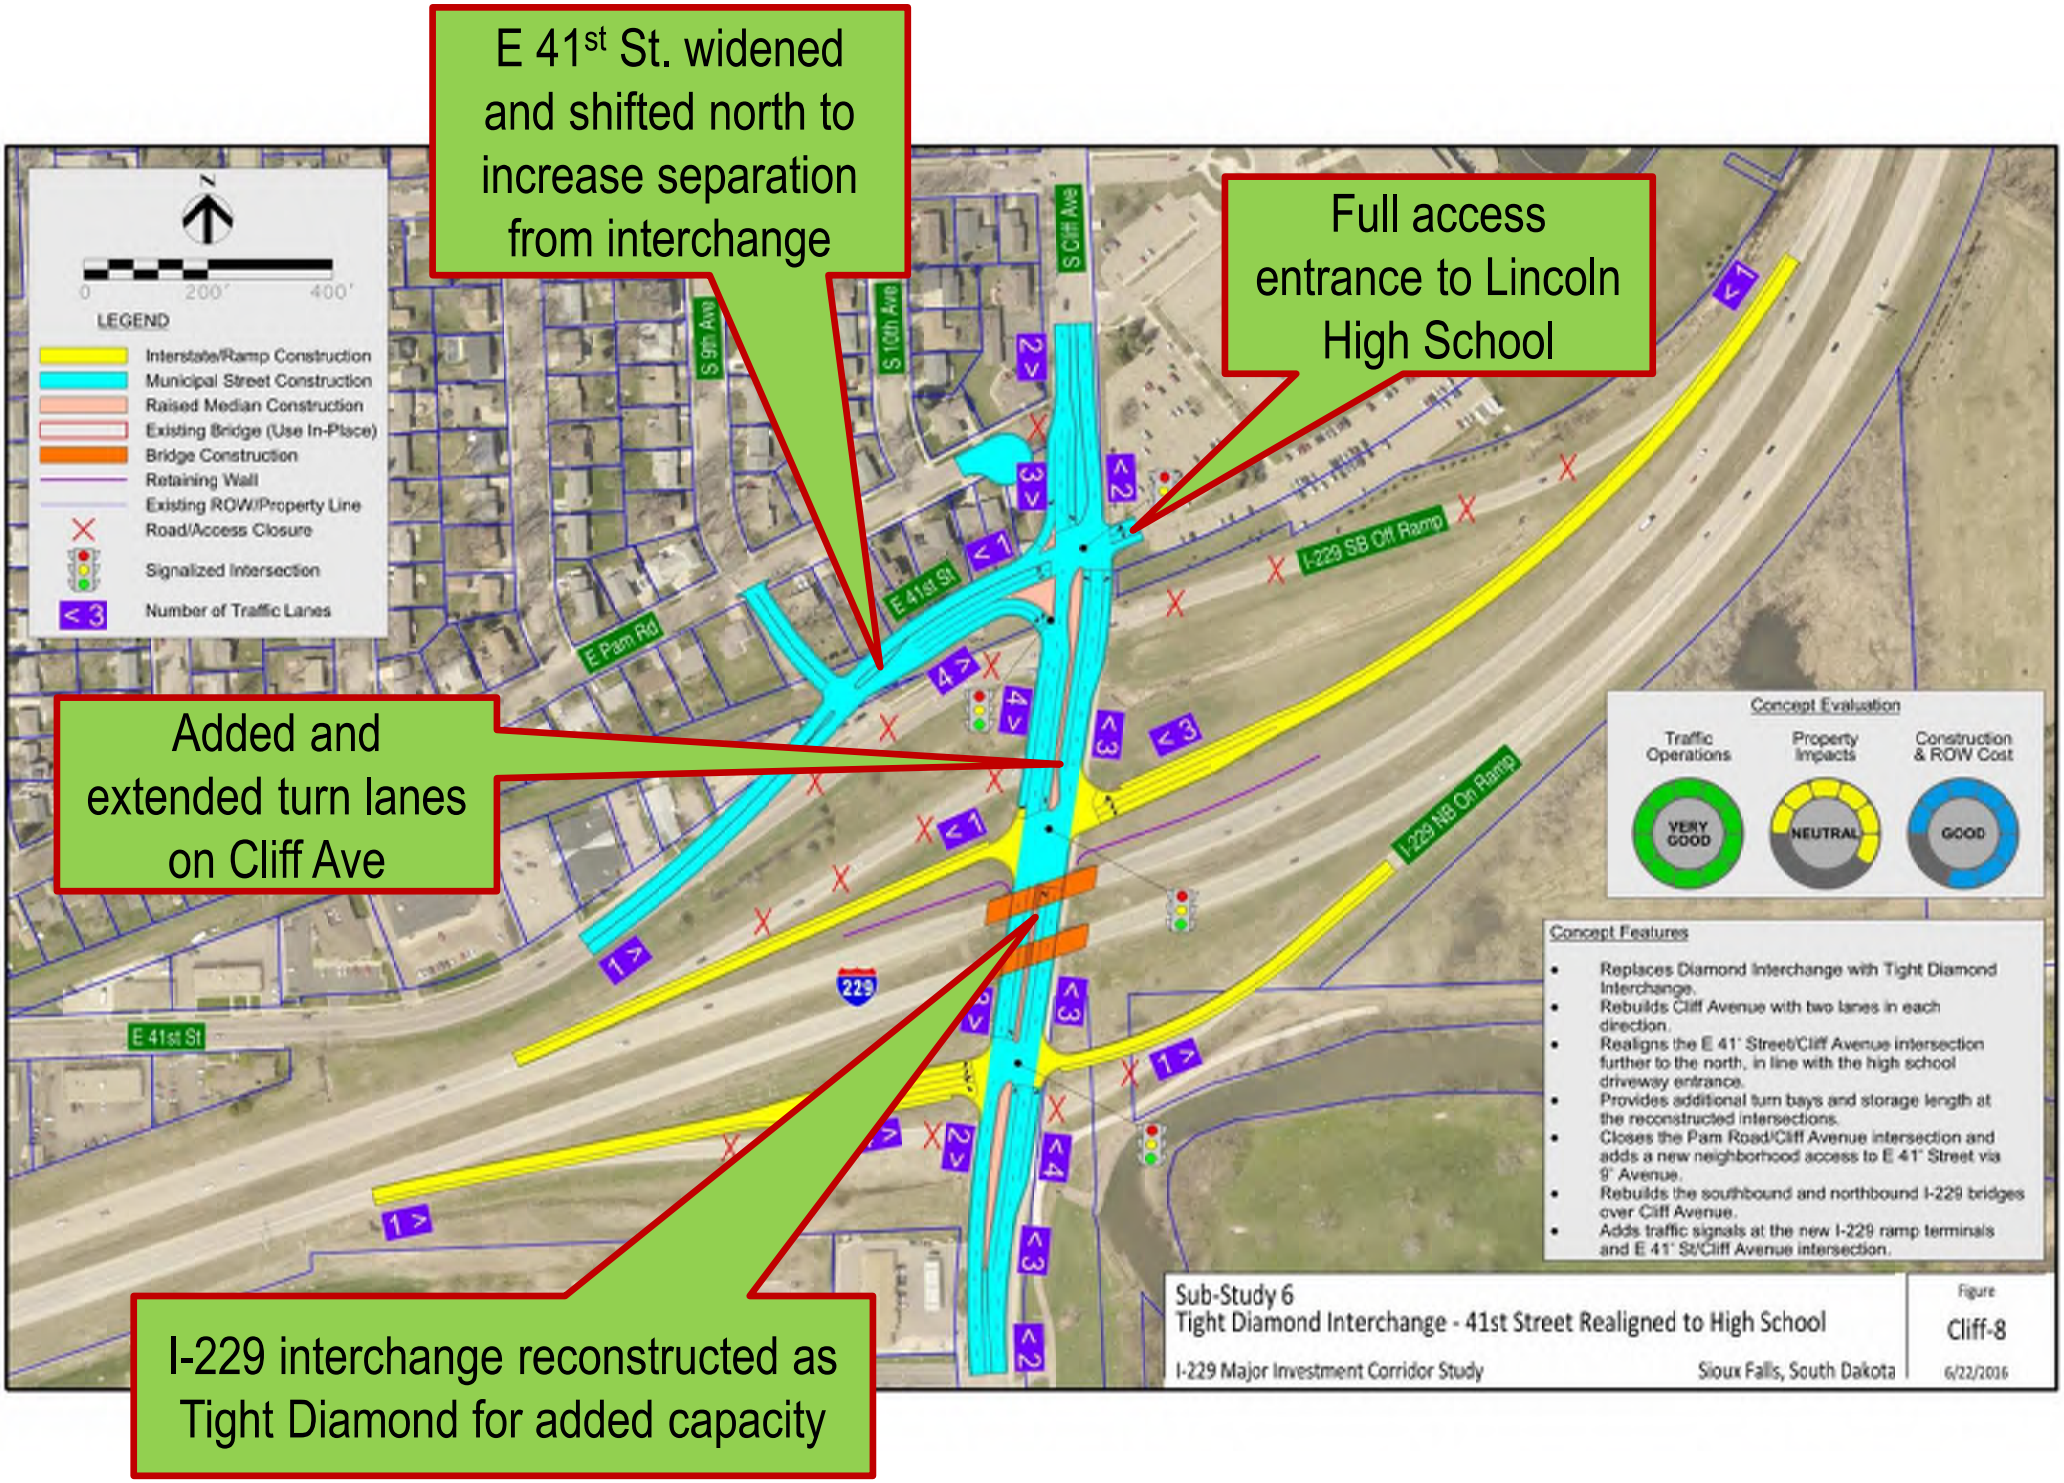
E 41st St. widened and shifted north to increase separation from interchange
Full access entrance to Lincoln High School
Added and extended turn lanes on Cliff Ave
I-229 interchange reconstructed as Tight Diamond for added capacity
LEGEND
Interstate/Ramp Construction
Municipal Street Construction
Raised Median Construction
Existing Bridge (Use In-Place)
Bridge Construction
Retaining Wall
Existing ROW/Property Line
Road/Access Closure
Signalized Intersection
Number of Traffic Lanes
0
200'
400'
S Cliff Ave
S 9th Ave
S 10th Ave
E 41st St
E Pam Rd
I-229 SB Off Ramp
I-229 NB On Ramp
229
Concept Evaluation
Traffic Operations
Property Impacts
Construction & ROW Cost
VERY GOOD
NEUTRAL
GOOD
Concept Features
Replaces Diamond Interchange with Tight Diamond Interchange.
Rebuilds Cliff Avenue with two lanes in each direction.
Realigns the E 41st Street/Cliff Avenue intersection further to the north, in line with the high school driveway entrance.
Provides additional turn bays and storage length at the reconstructed intersections.
Closes the Pam Road/Cliff Avenue intersection and adds a new neighborhood access to E 41st Street via 9th Avenue.
Rebuilds the southbound and northbound I-229 bridges over Cliff Avenue.
Adds traffic signals at the new I-229 ramp terminals and E 41st St/Cliff Avenue intersection.
Sub-Study 6
Tight Diamond Interchange - 41st Street Realigned to High School
I-229 Major Investment Corridor Study
Sioux Falls, South Dakota
Figure
Cliff-8
6/22/2016

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Brian Ray– HDR Engineering, Inc.
402-548-5066 or Brian.Ray@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





Interstate 229 Major Investment Study

Exit 4 – Cliff Avenue

Thanks for Attending!!!!!

HDR

© 2014 HDR, all rights reserved.

APPENDIX -

STAKEHOLDER MEETINGS #2 – DECEMBER 5TH & 6TH, 2016

BENSON ROAD

DECEMBER 5TH, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES
- COMMENTS (SEE PUBLIC MEETING #3 APPENDIX)

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 4 – Benson Road Exit 9
Date:	Monday, December 05, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 5 Participants

Stakeholder comments and questions noted:

1. Stakeholders representing Boyer Trucks (West side of St Paul Ave, south of Benson Rd) – The proposed concept will prevent westbound traffic on Benson Rd from turning left at St Paul Ave to go south. Concern noted in particular for westbound semi-trailer truck traffic headed for businesses along St Paul Ave. That traffic would have to turn onto Potsdam Ave or Lewis Ave and find their way to St Paul Ave via 39th St N. Truck drivers headed for businesses along St Paul Ave may get lost along the way. The routing is too inconvenient. Boyer Truck has no access to Lewis Ave.

2. At least half of the businesses located south of Benson Rd and west of I-229 are trucking-related.

3. Opposed to proposed median treatment on Benson Rd at Potsdam Avenue.

4. Stakeholder opinion - Crashes on Benson Road at intersections are due to speed on Benson Road (the existing posted speed limit is 40 mph).

5. Will Concept Benson-4 impact the property to the northeast of the northbound I-229 entrance ramp at Benson Rd? Response: At this stage of concept development, it appears that property impacts along the northbound entrance ramp would be very limited.

6. Will right of way acquisition be needed for proposed widening at Benson Rd and Lewis Ave? Response: Probably.

7. How many years in the future will the proposed improvements be constructed? Response: At least six years.

Meeting Minutes

Project:	I-229 MIS; PL 0100 (87) 3616P, PCN 044K
Subject:	Sub-study 4 (Benson Road) Stakeholder Meeting Notes
Date:	Monday, December 05, 2016
Location:	SF Convention Center
Attendees:	See sign in sheets

1. Presentation by Jason Kjenstad. I229 MIS Set 2 Stakeholder Mtg_Benson Rd
2. Stakeholder questions/comments and *responses* during and after presentation:
    - Trucking company on south side of St. Paul Avenue is concerned about loss of access from the proposed raised center median on Benson Road. *Kjenstad response was that center median is needed for safety benefits; City design standards call for raised center median for roadways with 3 through lanes in each direction.*
    - With the proposed raised median at Benson Road/St. Paul Avenue intersection, trucks will be forced to use Lewis Avenue/Potsdam Avenue/39th Street combination to get to the trucking businesses along St. Paul Avenue. These streets do not now accommodate the widths and intersection radii required for truck movements. *Kjenstad response was that alternative access routes would have to be reviewed for truck traffic and potential improvements would need to be considered.*
    - Recommend speed control/reduction methods on Benson Road to address traffic speeds in excess of posted speed limits. *Kjenstad response was that besides speed limit enforcement, for arterial streets like Benson Road, the City typically does not incorporate speed control/reduction methods.*
    - South-side landowners were assessed for 2016 installation of sidewalk along the south side of Benson Road. Would landowners get assessed again for future sidewalk improvements associated with Benson Road reconstruction/widening? *City response was that there would not be additional assessments to landowners for sidewalk work.*
    - Recommended adding a traffic signal at Benson Road/St. Paul Avenue intersection. *Kjenstad response was that signals are spaced to facilitate traffic movements and a signal at the Benson Road/St. Paul Avenue intersection would not meet City or SDDOT signal spacing criteria.*
    - What is the timeframe for proposed Benson Road improvements? *Kjenstad response was 7 to 10 years from now before any construction begins.*
    - SF Development owns the property in the northeast quadrant of the I-29/Benson Road interchange. They are concerned about the additional roadway right-of-way needed for the interchange loop options. *Kjenstad response was that the City will work with the landowner throughout the development plan process.*
    - Benson Road traffic is not bad during off-peak hours; why is widening required? *Kjenstad response was that peak period traffic is the basis for design and 3 through traffic lanes in each direction are needed to accommodate predicted peak period traffic to meet City and SDDOT level of service criteria.*
    - What is the cost difference between the interchange options? *Response by Unruh was that DDI option is about $4M less that the loop options ($40M estimated cost for options with loops; $36M estimated cost for DDI option).*

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Benson Road Sub-Study


Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Monday, December 5th, 2016 3:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Shannon Aasen	224 W 9th St SFSD	367-8607	saasen@siouxfalls.org
2	James Unruh	HDR 6300 S. Old Village Pl. SFSD	605-977-7240	james.unruh@hdrinc.com
3	Jason Kjerstad	HDR 6300 S. old Village Pl SF	605-977-7240	jason.kjerstad@hdrinc.com
4	Steve Groann	700 E. Broadway Ave Pierre	605-773-6691	steve.groann@state.sd.us
5	Bruce Mutschler	3101 E. Benson Rd	605-334-6000	bmutschler@beyertrucks.com
6	Lon Blumenauer	SFDF 200 N. Phillips Ave	605-357-0783	lbm@siouxfalls.com
7	CHRIS RANS	3412 N POTSDAM AVE.	(605) 338-9110	CHRIS@SUNKOTACONSTRUCTION.COM
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

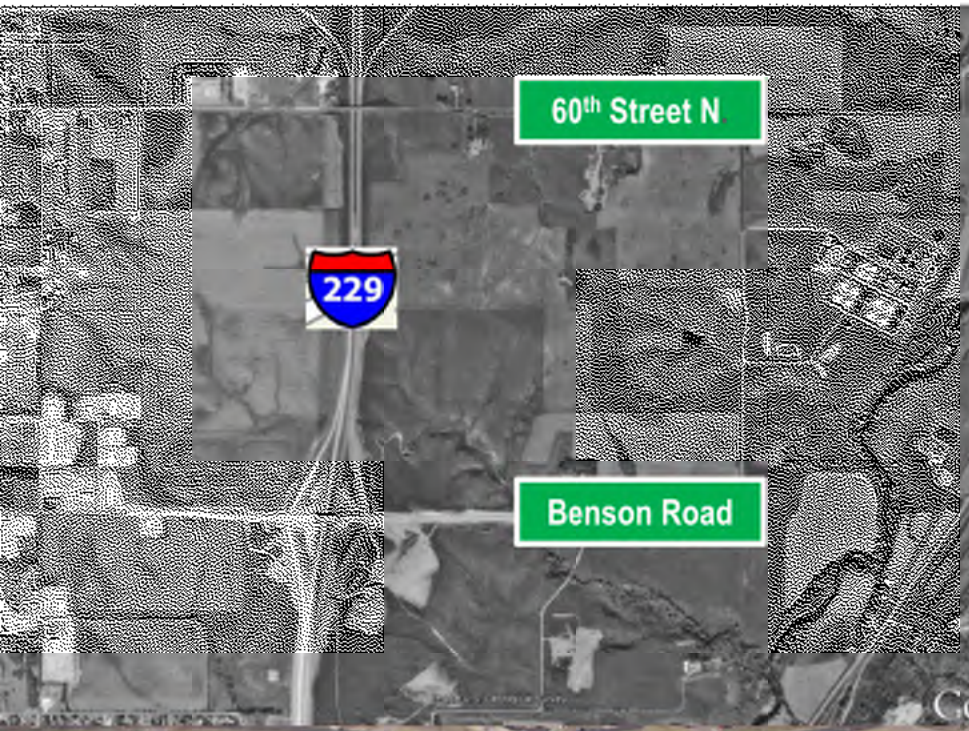





INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 9 – Benson Rd Sub-Study

Stakeholder Meeting

December 5th, 2016
3:00 pm to 4:00 pm

HDR


STUDY AREA MAP

I-229 Corridor Study

Solberg Avenue Overpass to 60th Street N Overpass

Meeting will focus on:

Exit 9 – Benson Road

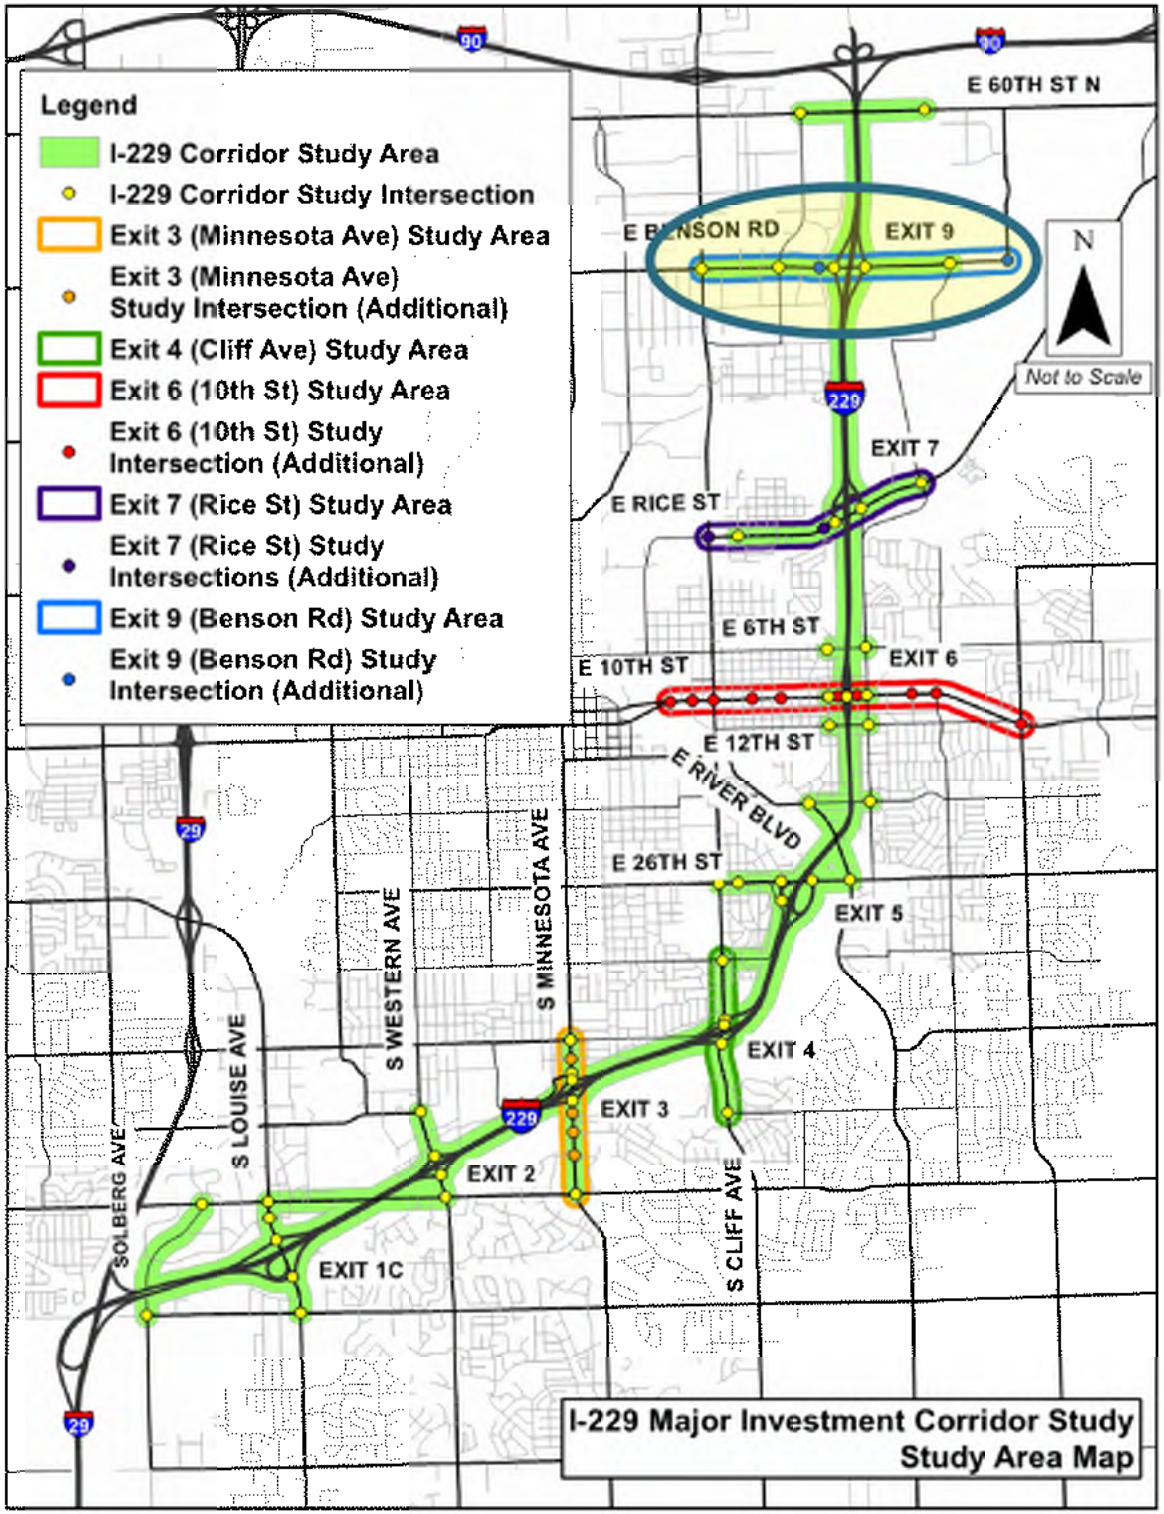

STUDY ADVISORY PARTNERS

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

PRESENTATION AGENDA

- Concept Evaluation Process
- Concept Evaluation Results
- Concepts Recommended for Further Consideration in Future Phases (Interchange & Corridor Improvements)
- Next Steps



CONCEPT EVALUATION PROCESS

- Evaluation Factors:

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Concept ID	Interchange and Corridor Type	•Traffic Delay •Level of Service •Interchange Year of Failure	Predicted Crash Reduction during 2012-2035	Potential impact to wetlands, historical resources, threatened and endangered species, public lands, and floodplains	Total Right of Way (ROW) Required and Acquisitions	Total Constuction Cost (including ROW)	**Advance or Eliminate**


- Evaluation Matrix to Compare Concepts
- Recommended Action

CONCEPT EVALUATION RESULTS

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Benson-1A	2-Lane Northeast Quadrant Loop with 3-Lane SB On-Ramp						Advance
Benson-1B	2-Lane Northeast Quadrant Loop with 2-Lane SB On-Ramp						Advance
Benson-4	Diverging Diamond Interchange						Advance


CONCEPTS FOR FURTHER CONSIDERATION

BENSON-1A

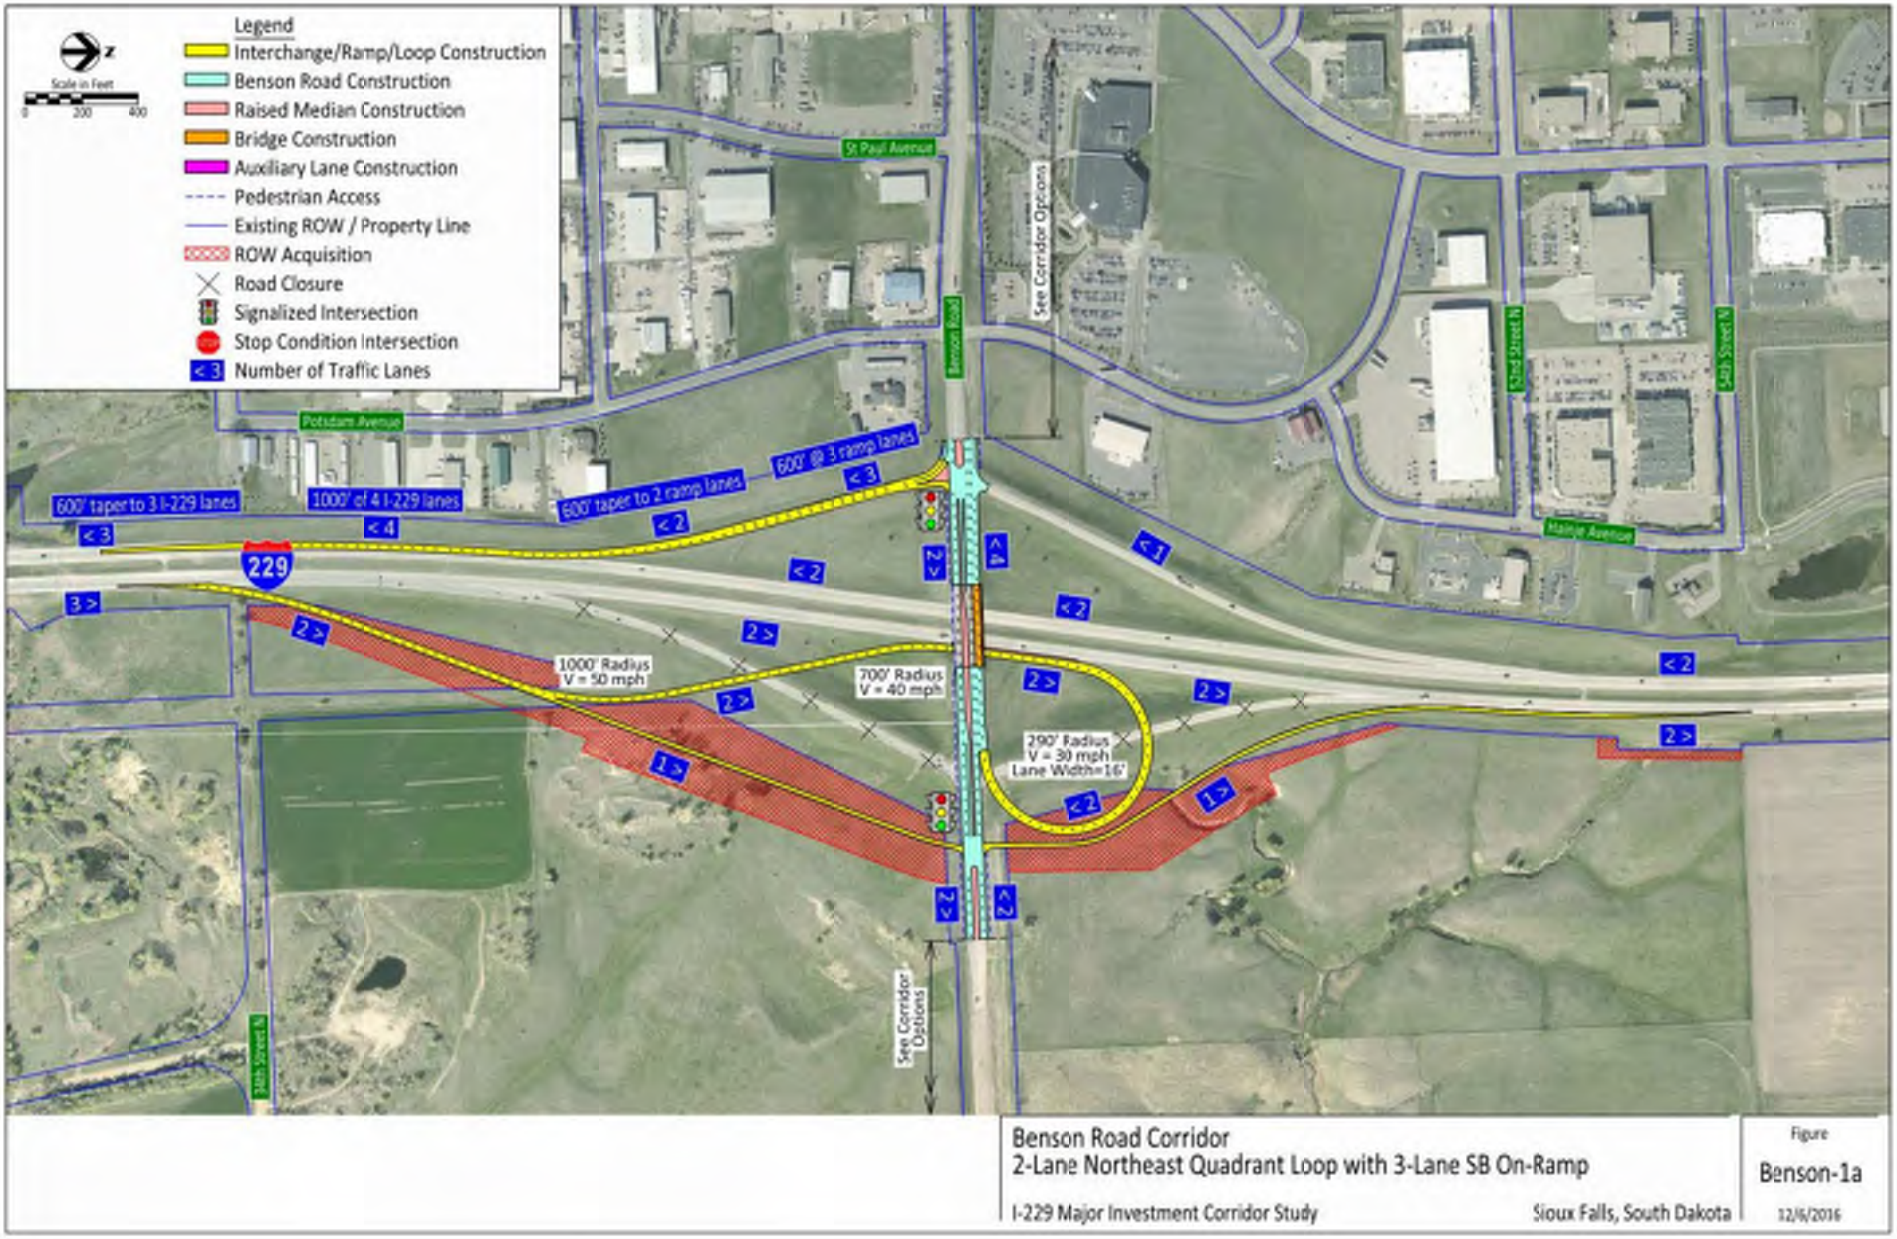


CONCEPTS FOR FURTHER CONSIDERATION

BENSON-1B

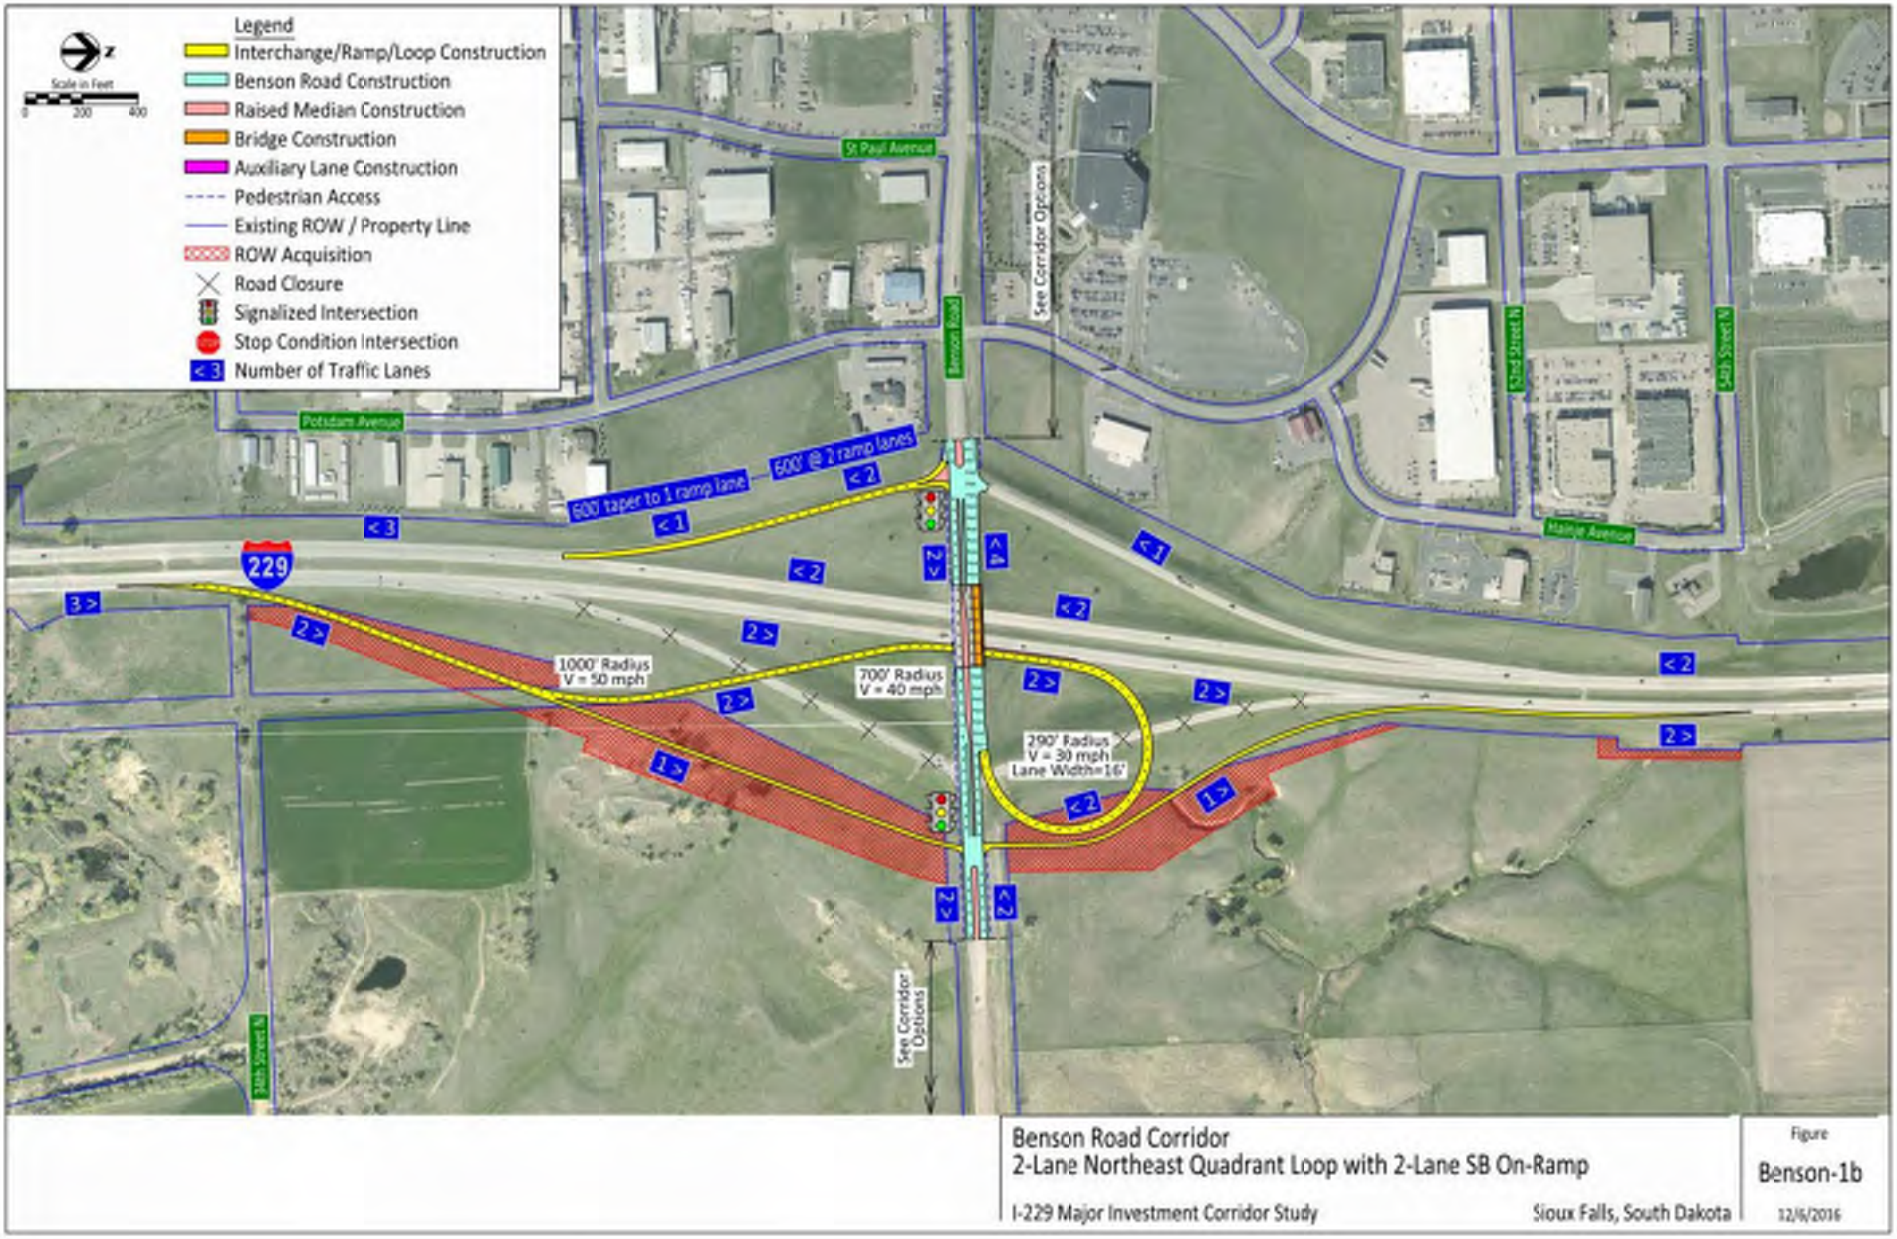


CONCEPTS FOR FURTHER CONSIDERATION

BENSON-4

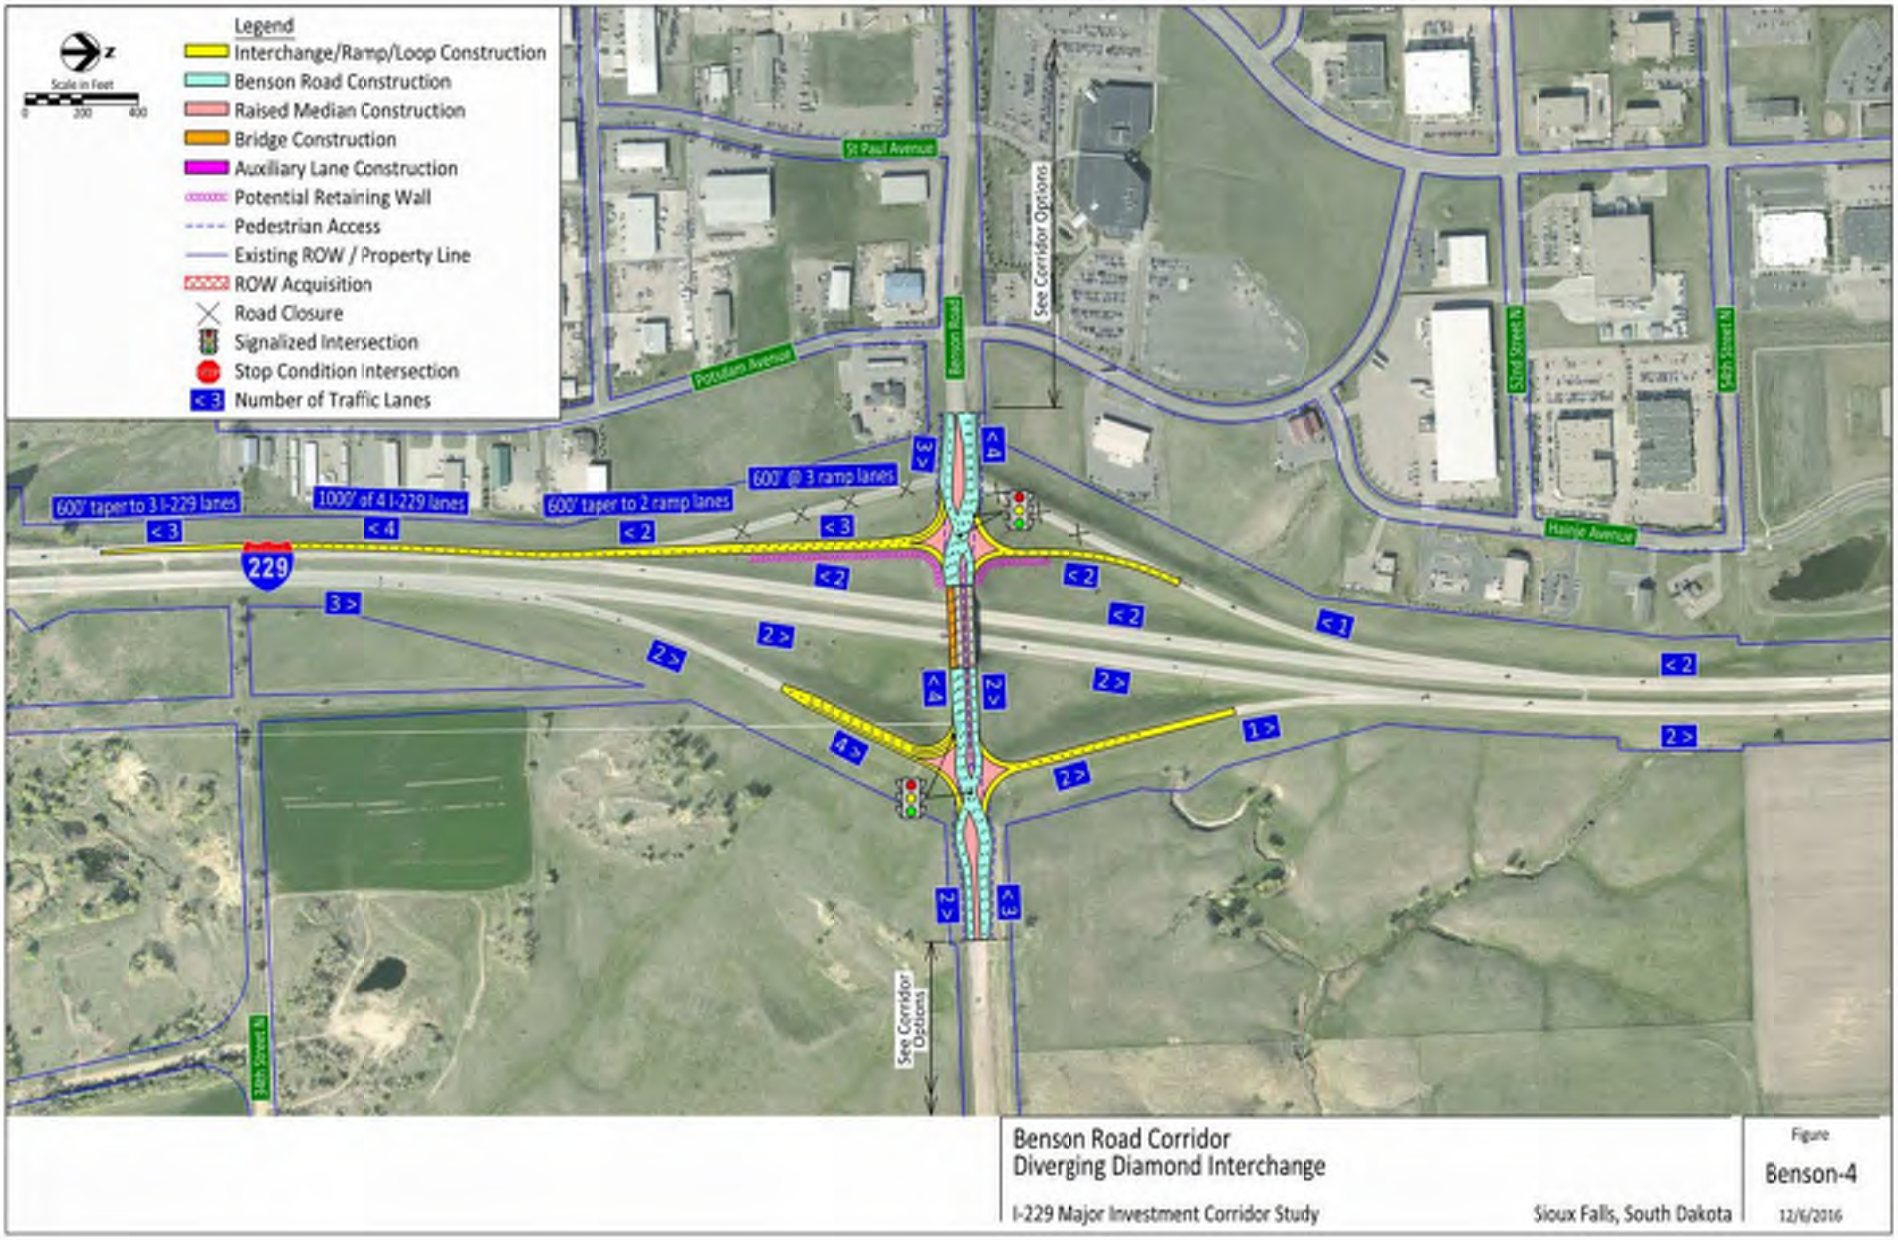

CONCEPTS FOR FURTHER CONSIDERATION

BENSON IMPROVEMENTS

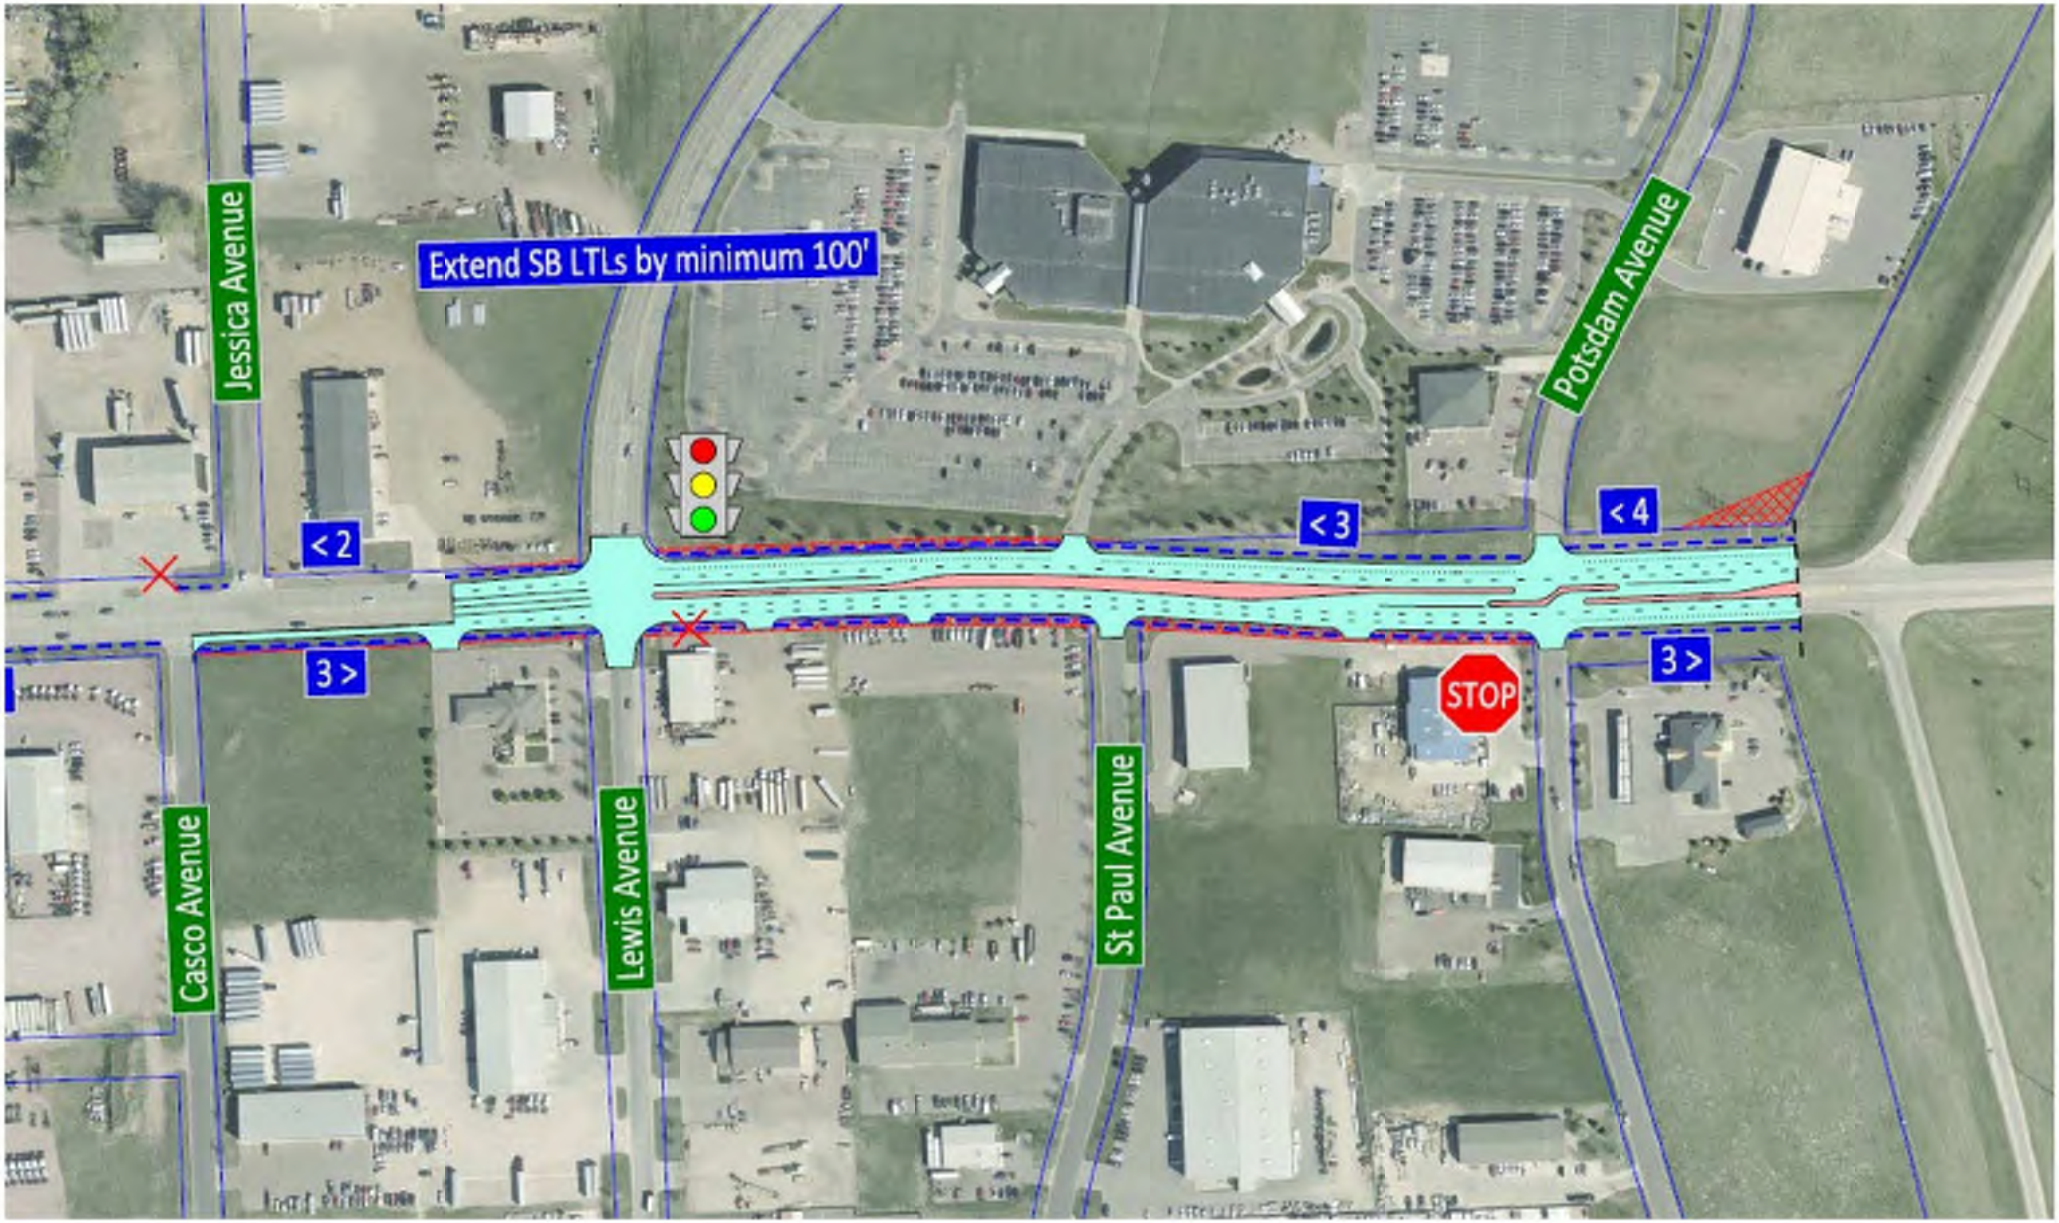

BENSON ROAD
PRELIMINARY PROJECT PRIORITY

- Priority recommendation based on existing and anticipated need and level of improvement and impacts associated with remaining concept options
- Benson Road Interchange and Corridor improvements = High Priority
- See exhibit board for additional information

NEXT STEPS

- Assemble Stakeholder and Public Comments
- Complete Study Report
- Project Development Process = 5-6 year timeline when initiated by SDDOT & City
  - Prepare Interchange Modification Justification Report and Environmental Document
  - Develop Project Design
  - Acquire Right of Way
  - Construction

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

James Unruh – HDR Engineering, Inc.
605-977-7740 or james.unruh@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 9 – Benson Rd Sub-Study

Thanks for attending!

HDR

10TH STREET

DECEMBER 5TH, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES
- COMMENTS (SEE PUBLIC MEETING #3 APPENDIX)

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 3 - Exit 6 (10th Street) Sub-Study
Date:	Monday, December 05, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 5 Participants

Stakeholder comments and questions noted:

1. Question from stakeholder associated with Fry'in Pan Restaurant (Northwest corner 10th & Cleveland) - Is a median proposed on Cleveland Avenue both north and south of 10th Street? Response: The alternatives include a median on Cleveland Avenue both north and south of 10th Street and dual left turn lanes are proposed on each Cleveland Ave approach to serve anticipated traffic.

The stakeholder noted that Cleveland Ave is only busy after school is dismissed, for about 45 minutes per day, so dual left turn lanes are not needed.

He stated that he does not support the proposed medians on Cleveland because he perceives that similar medians on 12th St "ruined" businesses there.

2. How will parking impacts will be addressed? Response: Replacement parking would be sought, but if replacement parking could not be identified, acquisition of the property would be considered.

3. What happens to the Super 8 Hotel on the northeast corner of I-229/10th Street? Response: It was noted that all of the alternatives impact the hotel similarly.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for 10th Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Monday, December 5th, 2016 4:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	gary bousselman	7201 E Madison ST Sioux Falls SD 57110	605 334 5692	gary@garybuss.com
2	HERSIL PATEL	2616 E 10TH ST Sioux Falls SD 57103	727 776 1476 605 358 8881	hersile yogi mgt.com
3	CHUCK GUSTAFSON	705 E RIDGE RD SFSD 57105	332-1000	CGUSTAFSON@MAC.COM
4	STAN MITZEL	2708 East 10th SF SD 57103	605-361-7804	Smitzel@ryanpm.net
5	~~JAMES NORD~~			
6	RYAN TYSDAL	LLOYD COMPANIES	376-0127	RYAN@LLOYDCOMPANIES.com
7	Jason Kjerstad	HDR 1300 S. Old Village Pl	977-7740	jason.kjerstad@hdrinc.com
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 6 – 10th Street Sub-Study

Stakeholder Meeting

December 5th, 2016
4:30 pm to 5:30 pm


STUDY AREA MAP

I-229 Corridor Study

Solberg Avenue Overpass to 60th Street N Overpass

Meeting will focus on:

Exit 6 – 10th Street

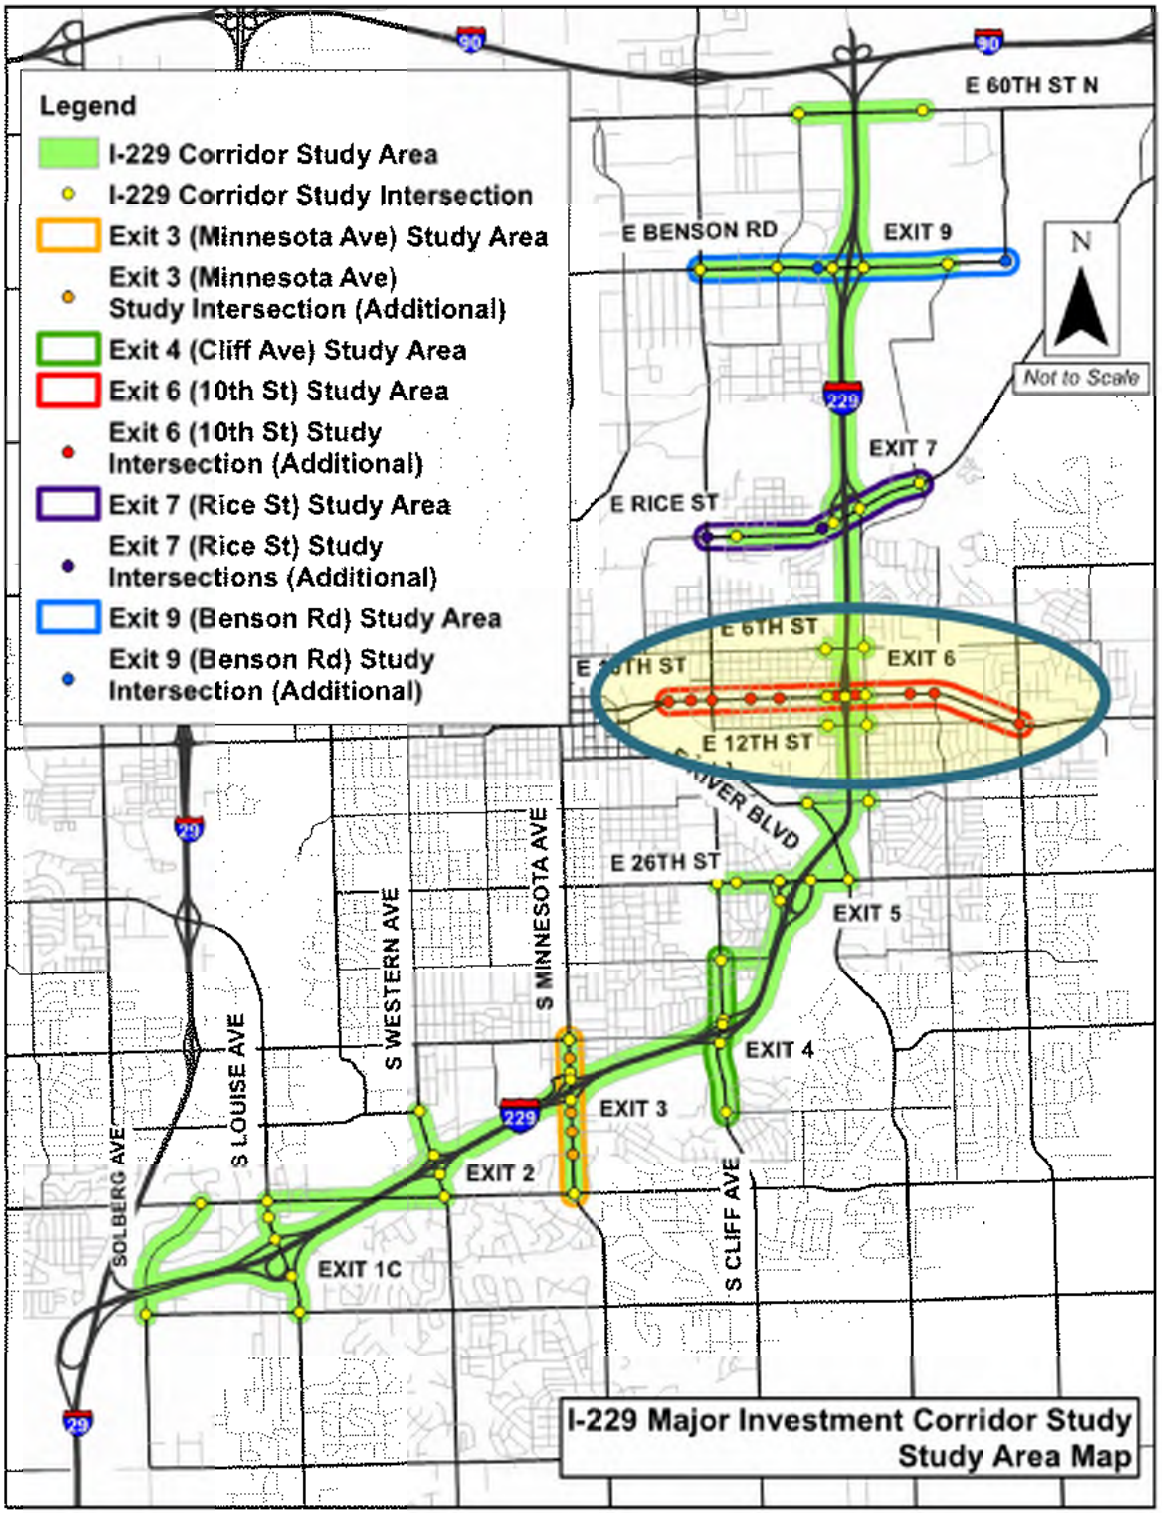

STUDY ADVISORY PARTNERS

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

PRESENTATION AGENDA

- Concept Evaluation Process
- Concept Evaluation Results
- Concepts Recommended for Further Consideration in Future Phases (Interchange & Corridor Improvements)
- Next Steps

CONCEPT EVALUATION PROCESS


- Evaluation Factors:

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Concept ID	Interchange and Corridor Type	•Traffic Delay •Level of Service •Interchange Year of Failure	Predicted Crash Reduction during 2012-2035	Potential impact to wetlands, historical resources, threatened and endangered species, public lands, and floodplains	Total Right of Way (ROW) Required and Acquisitions	Total Constuction Cost (including ROW)	**Advance or Eliminate**









- Evaluation Matrix to Compare Concepts
- Recommended Action

CONCEPTS FOR FURTHER CONSIDERATION

10TH-2 (B/C)

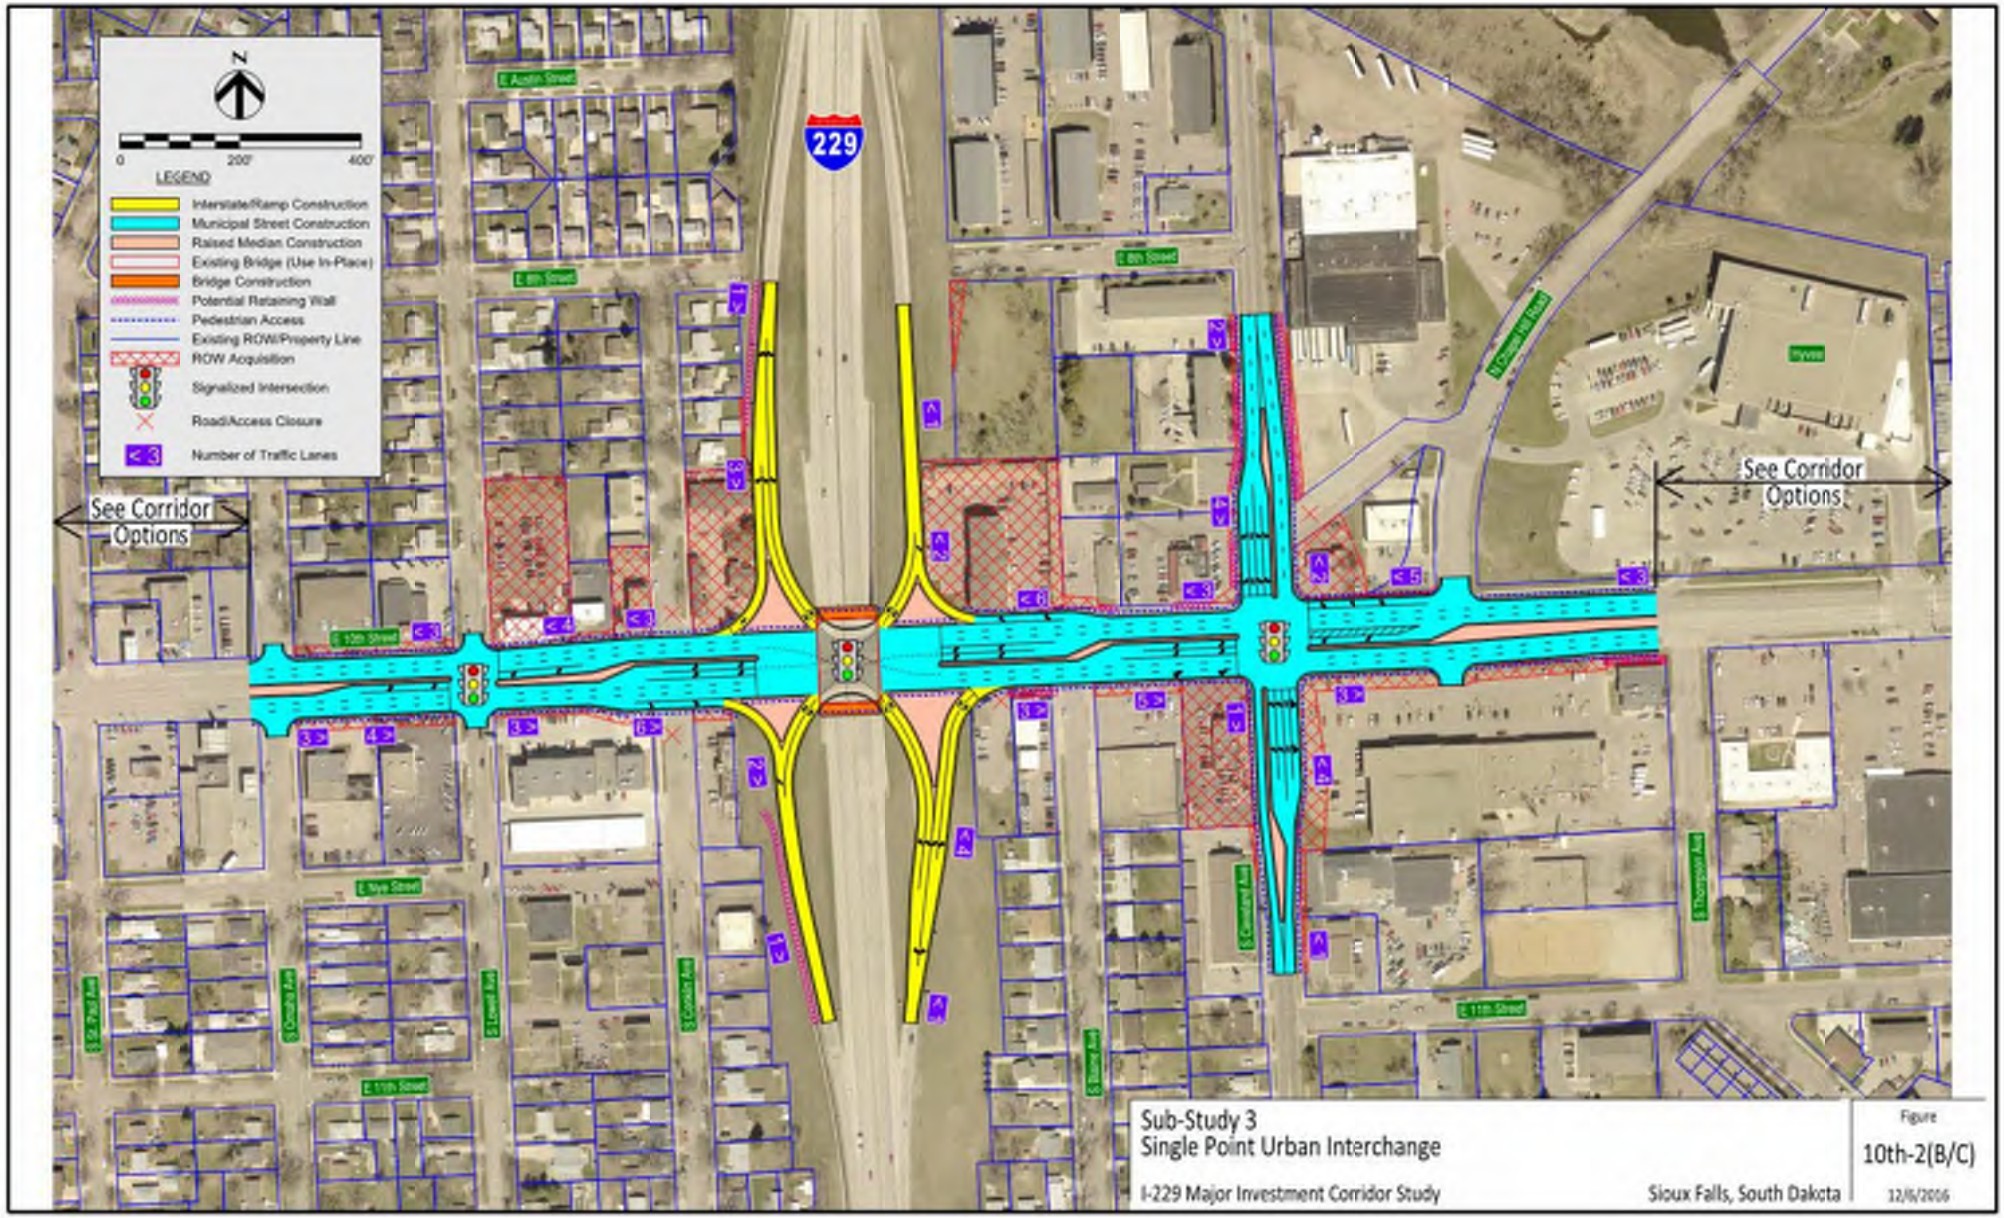


CONCEPT EVALUATION RESULTS















Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						**Advance**
10th-2A	Single Point Urban Interchange, 6-Lane Divided Corridor						**Eliminate** Property impacts, environmental impacts, and cost
10th-2B	Single Point Urban Interchange, 4-Lane Divided Corridor						**Advance**
10th-2C	Single Point Urban Interchange, 5-Lane Undivided Corridor						**Advance**

CONCEPTS FOR FURTHER CONSIDERATION

10TH-5 (B/C)

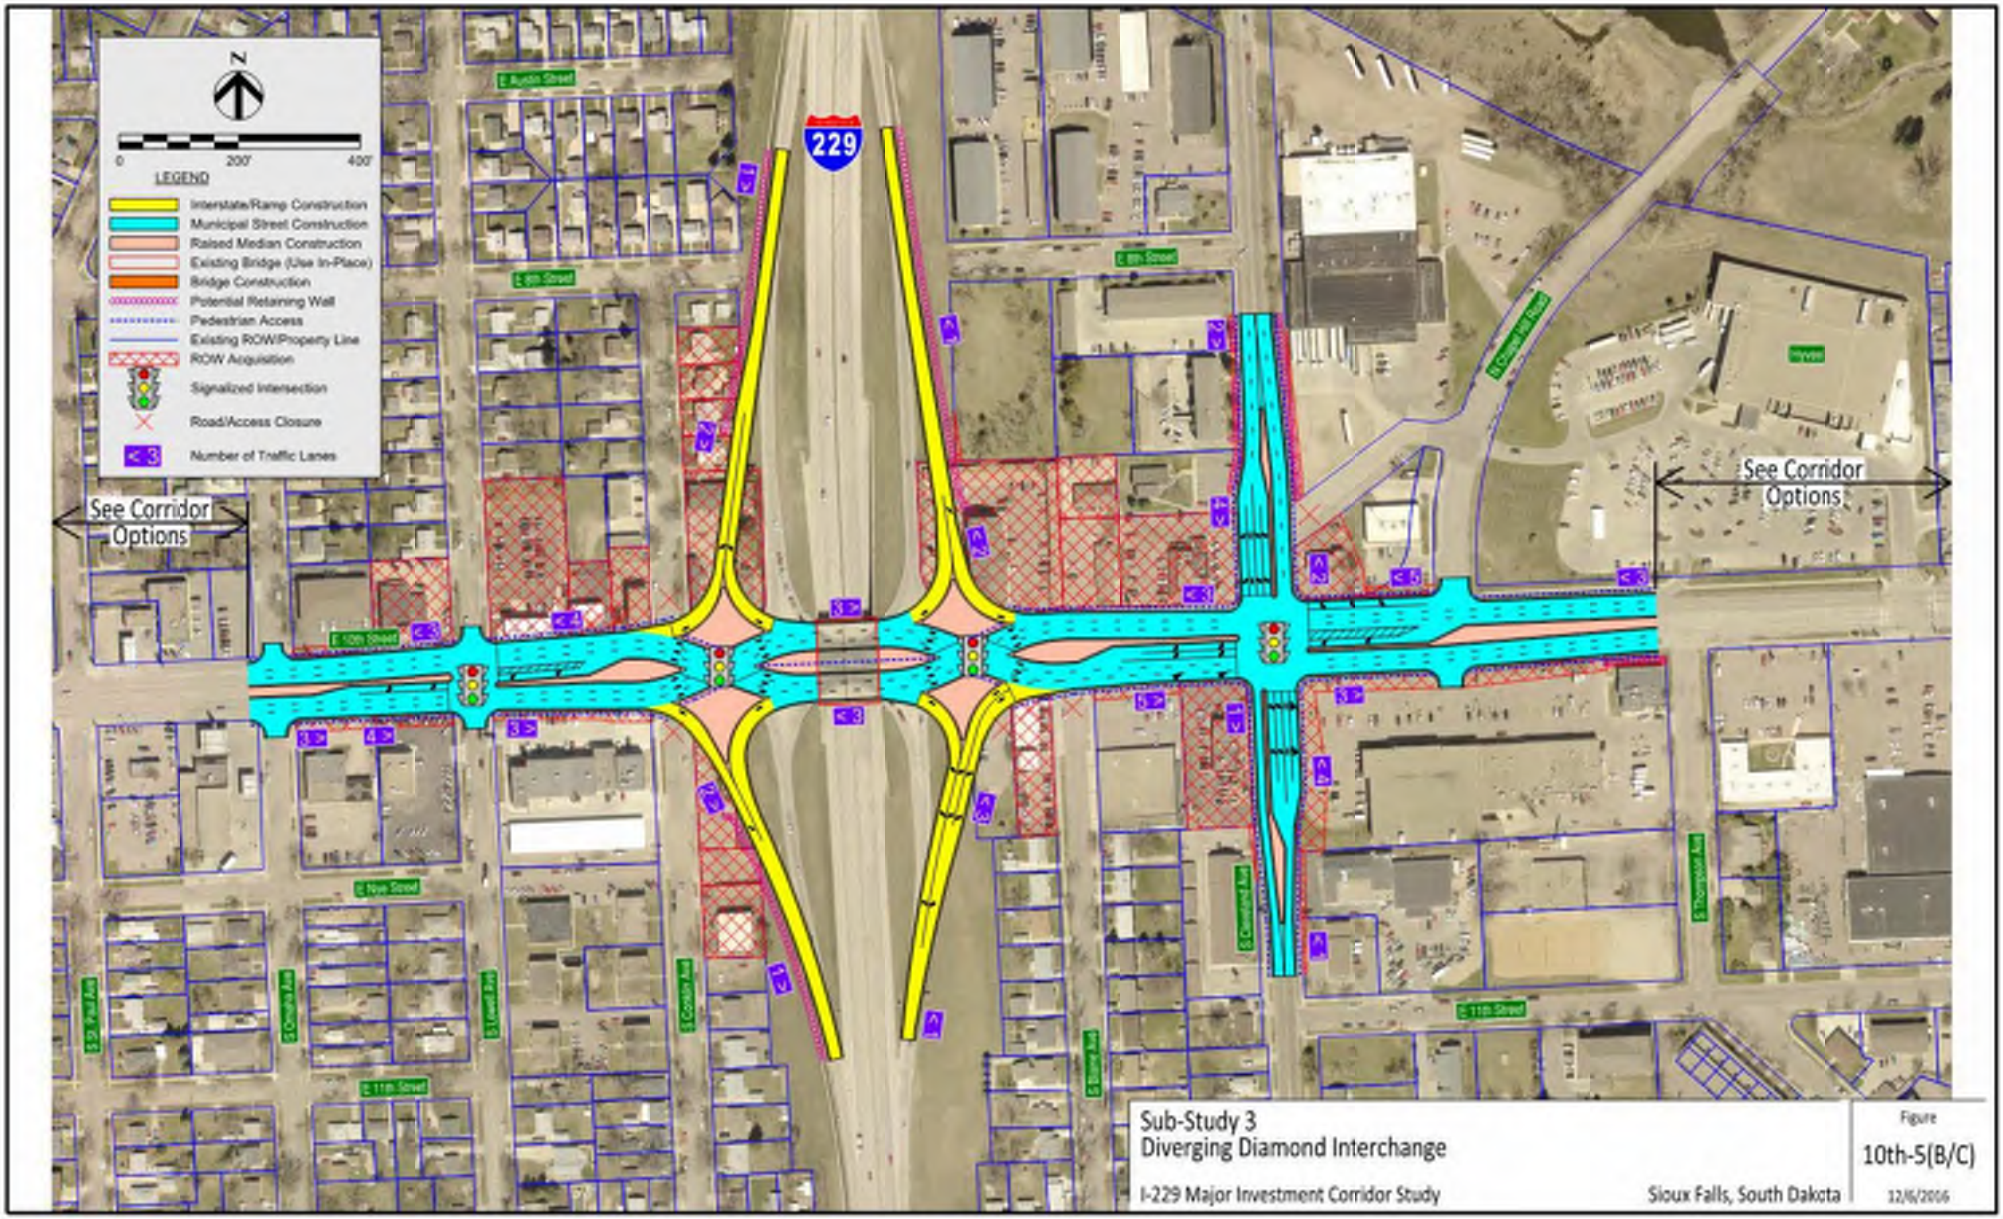


CONCEPT EVALUATION RESULTS (cont.)


Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
10th-5A	Diverging Diamond Interchange, 6-Lane Divided Corridor						**Eliminate** Property impacts, environmental impacts, and cost
10th-5B	Diverging Diamond Interchange, 4-Lane Divided Corridor						**Advance**
10th-5C	Diverging Diamond Interchange, 5-Lane Undivided Corridor						**Advance**
10th-9A	Tight Split Diamond, 6th St/10th St with 4-Lane Divided Corridor						**Eliminate** Environmental impacts, cost, and lower traffic & safety benefits
10th-9B	Tight Split Diamond, 6th St/10th St with 5-Lane Undivided Corridor						**Eliminate** Environmental impacts and lower traffic & safety benefits
10th-Var							**Advance**


CONCEPTS FOR FURTHER CONSIDERATION

10TH-Var

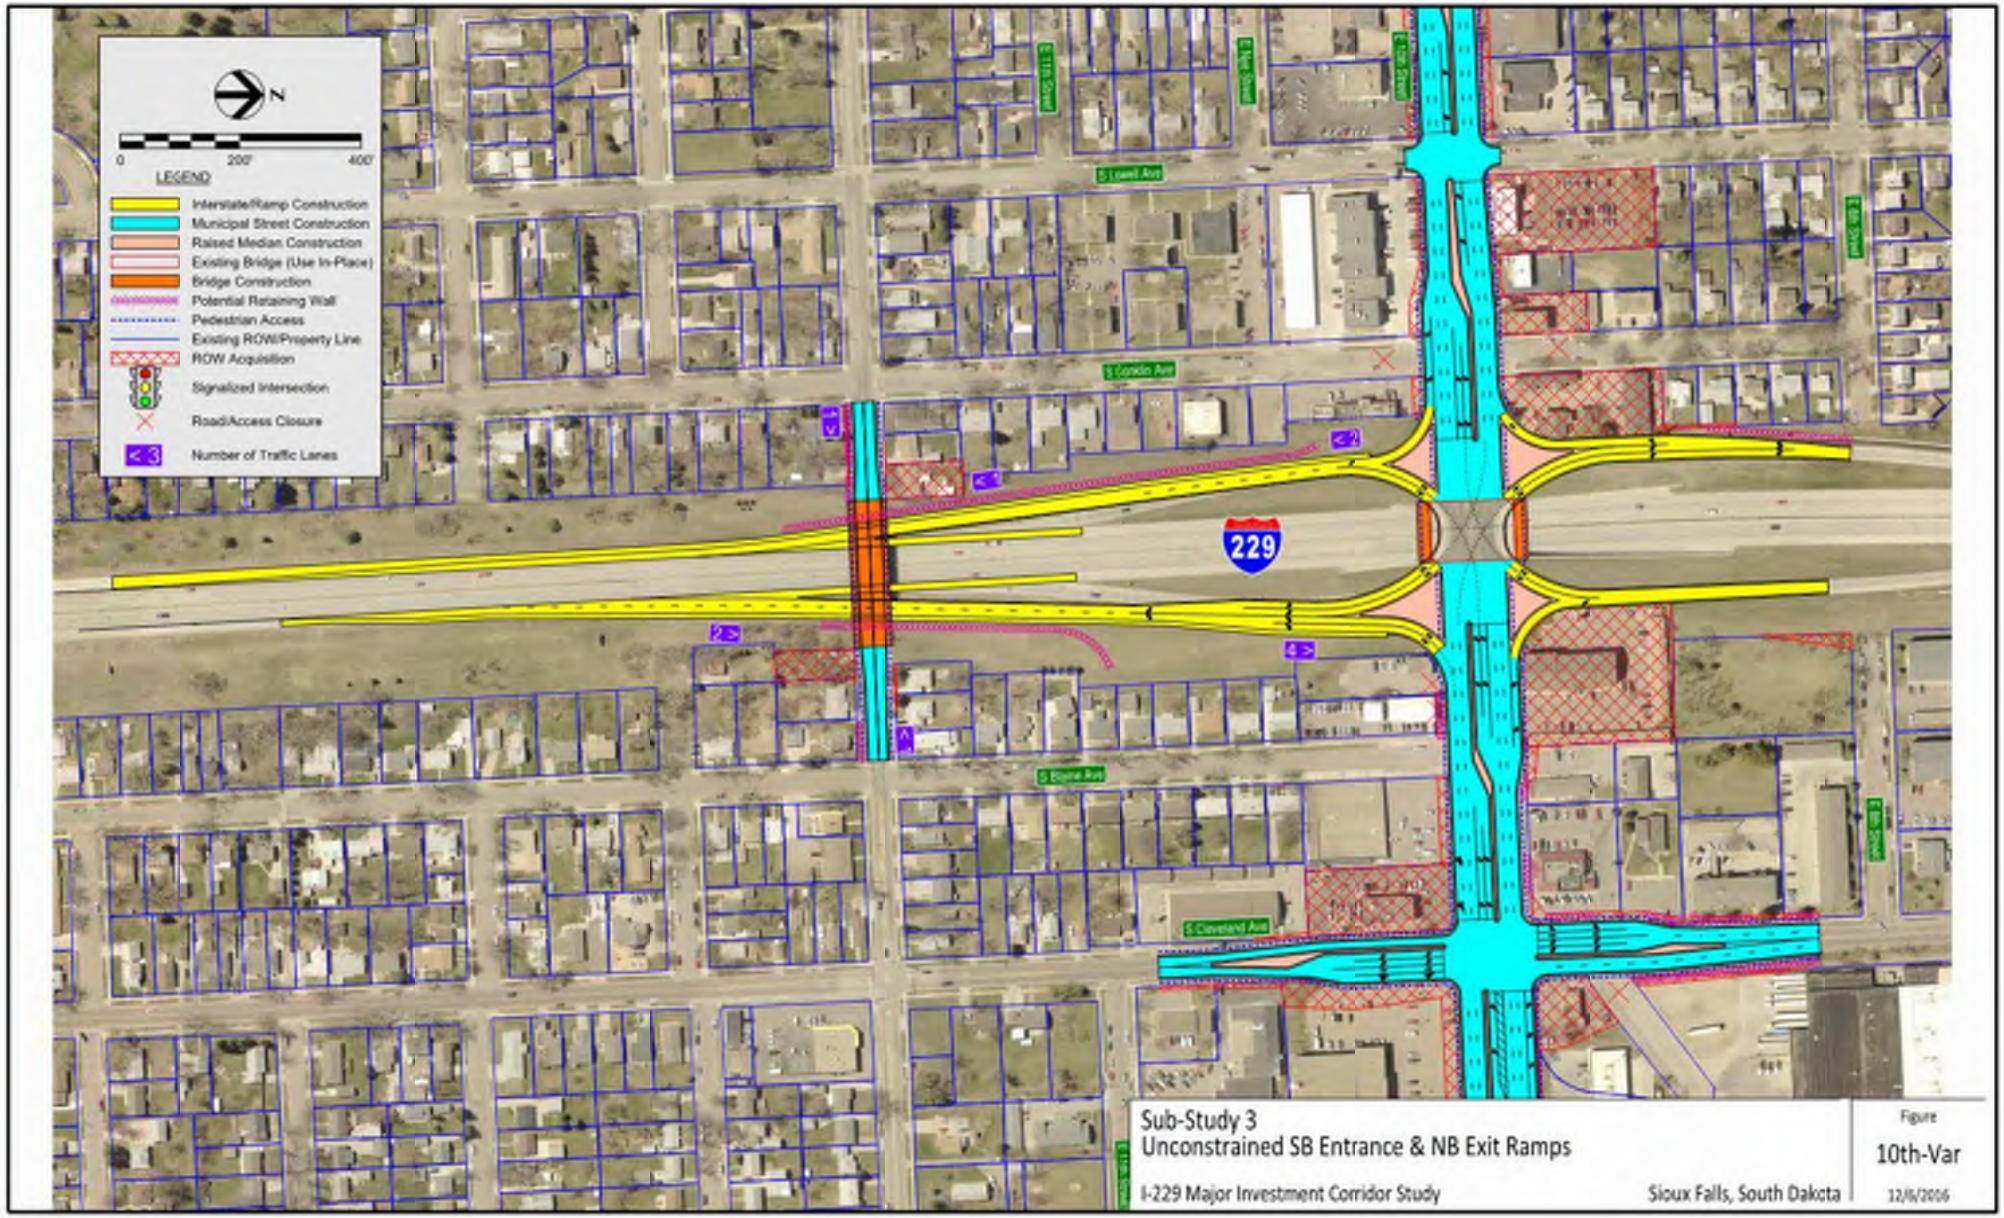


4-Lane Divided Corridor

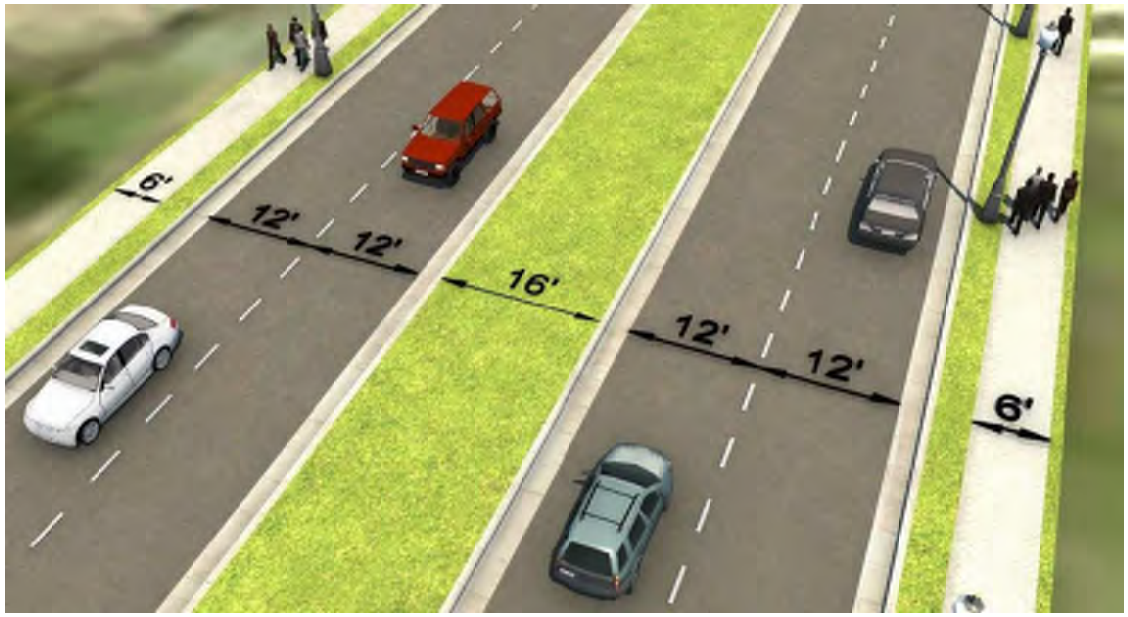

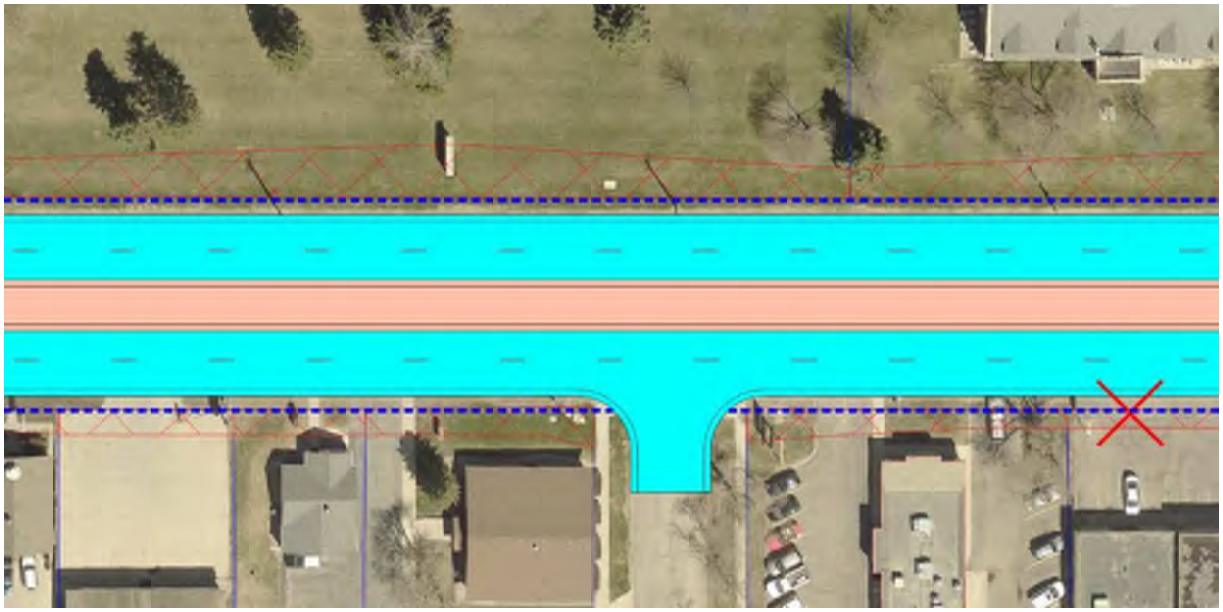

5-Lane Undivided Corridor

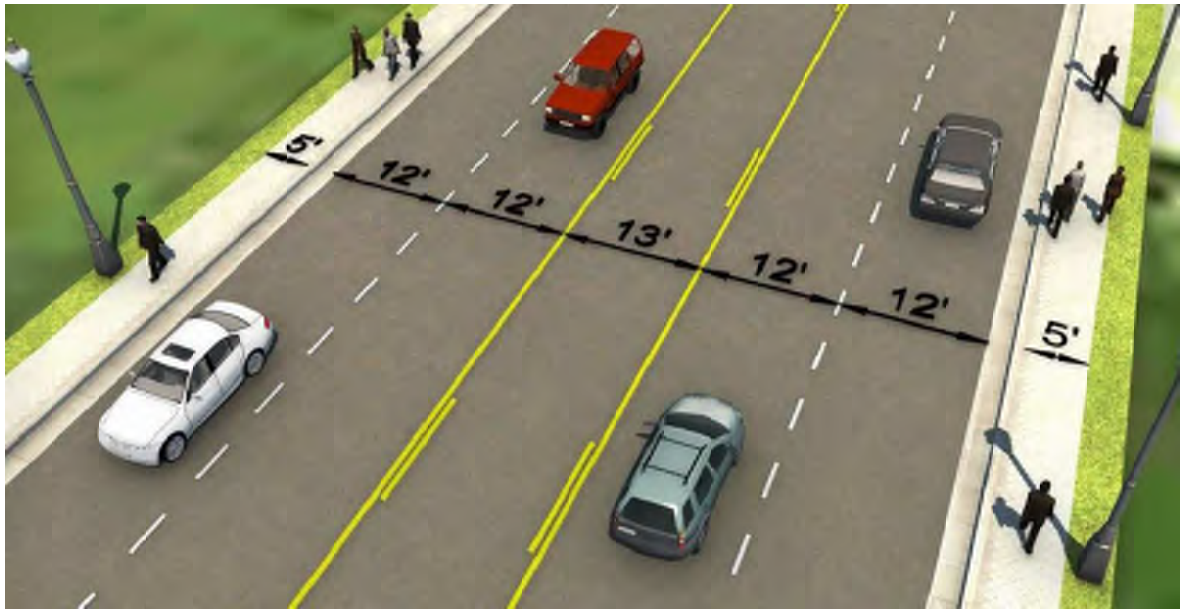



10TH STREET
PRELIMINARY PROJECT PRIORITY

- Priority recommendation based on existing and anticipated need and level of improvement and impacts associated with remaining concept options
- 10th Street Interchange = High Priority
- 10th Street Corridor improvements = Low Priority
- See exhibit board for additional information

NEXT STEPS

- Assemble Stakeholder and Public Comments
- Complete Study Report
- Project Development Process = 5-6 year timeline when initiated by SDDOT & City
  - Prepare Interchange Modification Justification Report and Environmental Document
  - Develop Project Design
  - Acquire Right of Way
  - Construction

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Chris Malmberg – HDR Engineering, Inc.
402-399-4959 or chris.malmberg@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 6 – 10th Street Sub-Study

Thanks for attending!

CLIFF AVENUE

DECEMBER 5TH, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES
- COMMENTS (SEE PUBLIC MEETING #3 APPENDIX)

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 6 – Cliff Avenue Exit 4
Date:	Monday, December 05, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 10 Participants

Stakeholder comments and questions noted:

1. Are the crashes recorded within the Minnesota Ave study limits car crashes only? Response: A range of types of crashes involving a variety of vehicle types has been recorded in the Minnesota corridor.

2. Does the environmental impact assessment process consider loss of affordable housing? Development is taking affordable houses in the central city and the lost housing is replaced with higher cost housing on the metropolitan area periphery.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Cliff Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Monday, December 5th, 2016 6:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	JAMES NORD	904 E 38th	605 254 2480	jnorde@sio.midco.net
2	Shannon Ausen	224 W. 9th St SFSD 57104	605-367-8607	Sausen@~~sfsd.net~~ siouxfallsscs
3	Marlys Roskens	3105 S. 9th Ave	605-336-6226	marlys@sio.midco.net
4	PAUL HARTMAN	1201 OTONICA	605-929-9768	HART 2 HART @ SIO. MIDCO. NET
5	JEFF KOSITER			
6	Eric Napier	1109 E. Pam Rd	605-373-0377	napier10@sio.midco.net
7	Jeff Roskens	2105 S. 9th Ave	605 553 2762	JRoskens@sio.midco.net
8	Barbara Richards	1112 East 38th St.	605-338-2387	brichards@siomidco.net
9	Lois Merritt	3004 S. 10th Ave.	(605)334-9498	
10	Wendy Butler Bayer	1104 E. Pam Rd.	605-906-1203	wbutlerbayer@gmail.com
11	Jason Kjerstad	6300 S. Old Village Pl Suite 100 SF SD 57108	605-977-7741	jason.kjerstad@hdrinc.com
12				
13				
14				
15				
16				
17				
18				
19				
20				







INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 4 – Cliff Avenue Sub-Study

Stakeholder Meeting

December 5th, 2016
6:00 pm to 7:00 pm

HDR


STUDY AREA MAP

I-229 Corridor Study

Solberg Avenue Overpass to 60th Street N Overpass

Meeting will focus on:

Exit 4 – Cliff Avenue

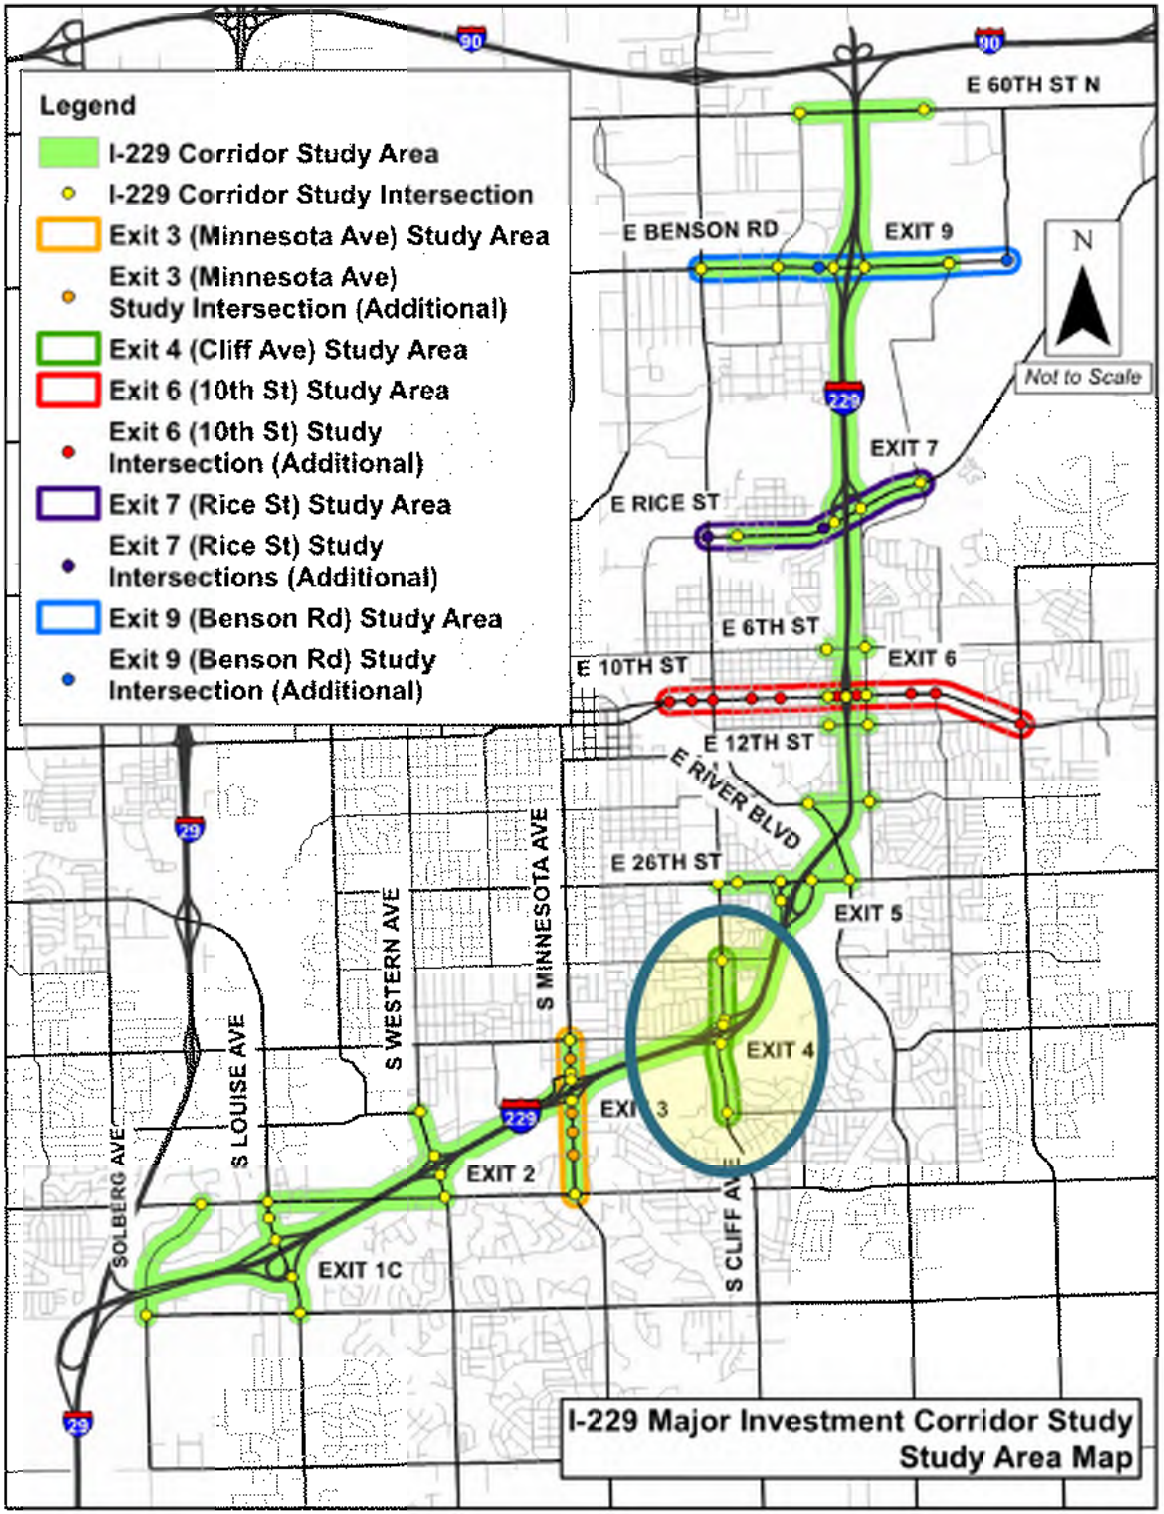

STUDY ADVISORY PARTNERS

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

PRESENTATION AGENDA

- Concept Evaluation Process
- Concept Evaluation Results
- Concepts Recommended for Further Consideration in Future Phases (Interchange & Corridor Improvements)
- Next Steps

CONCEPT EVALUATION PROCESS


- Evaluation Factors:

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Concept ID	Interchange and Corridor Type	•Traffic Delay •Level of Service •Interchange Year of Failure	Predicted Crash Reduction during 2012-2035	Potential impact to wetlands, historical resources, threatened and endangered species, public lands, and floodplains	Total Right of Way (ROW) Required and Acquisitions	Total Constuction Cost (including ROW)	**Advance or Eliminate**

- Evaluation Matrix to Compare Concepts
- Recommended Action


CONCEPTS FOR FURTHER CONSIDERATION

CLIFF-1

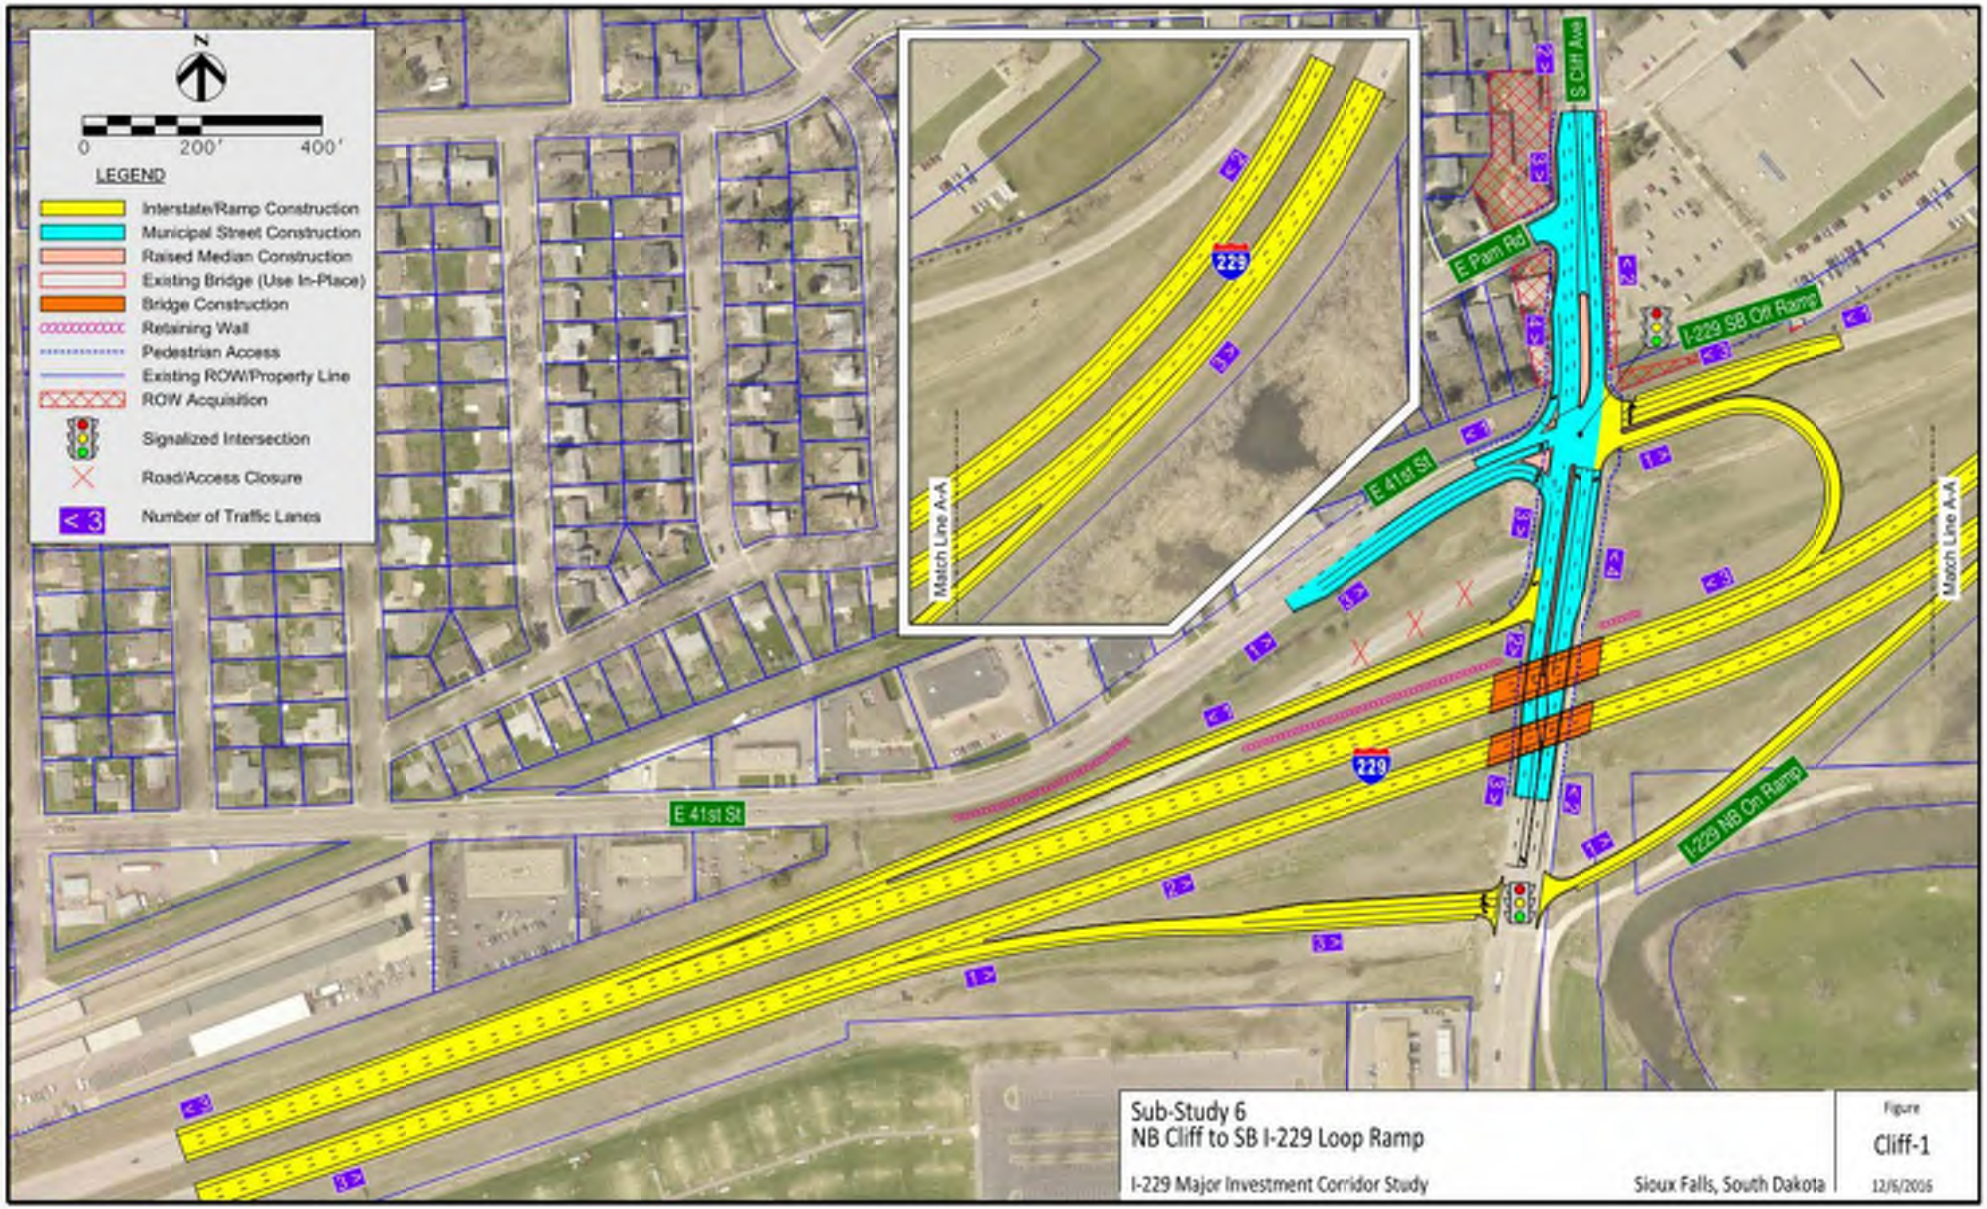


CONCEPTS FOR FURTHER CONSIDERATION

CLIFF- 6




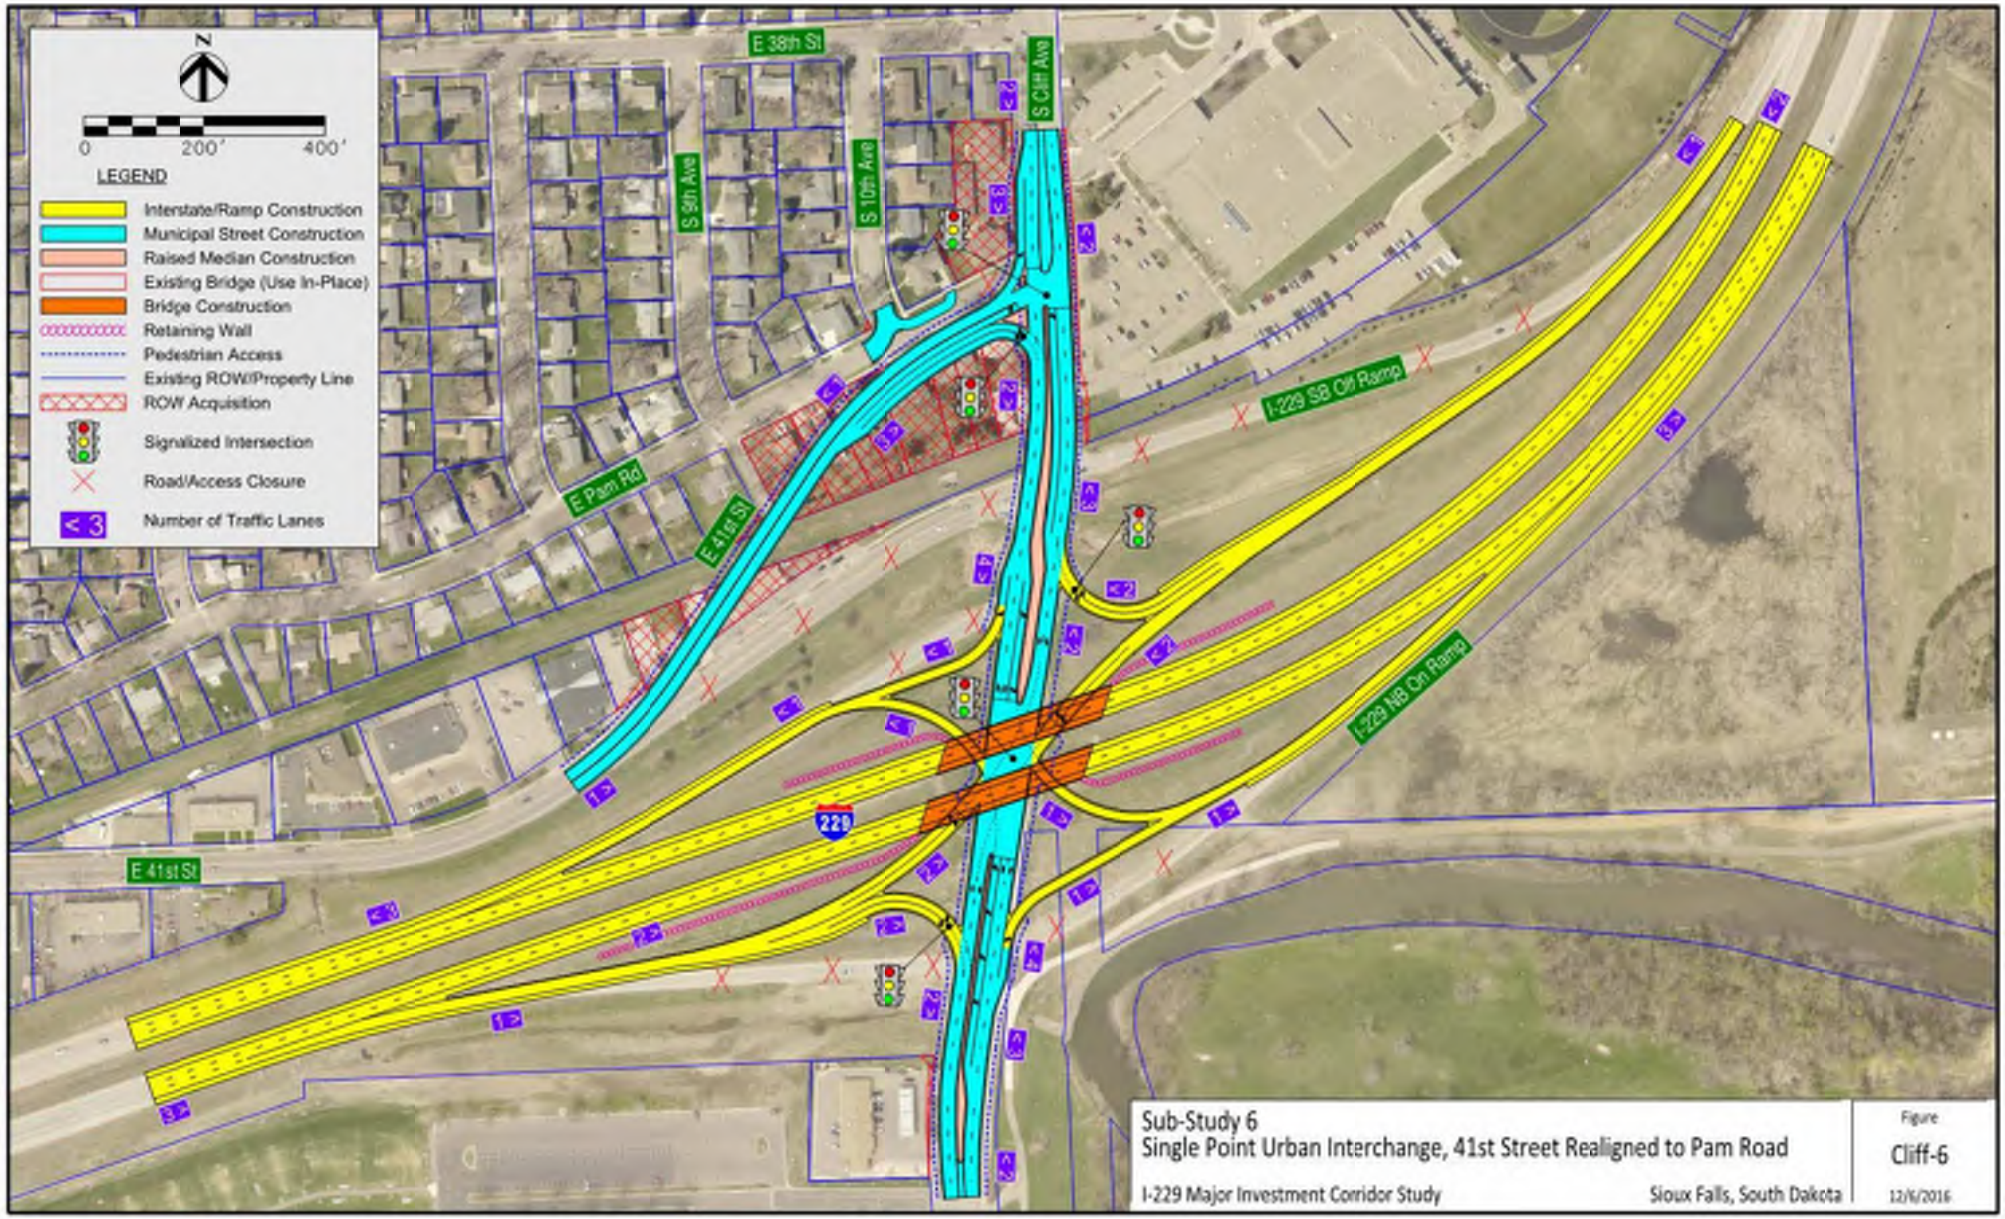


CONCEPTS FOR FURTHER CONSIDERATION

CLIFF - 7

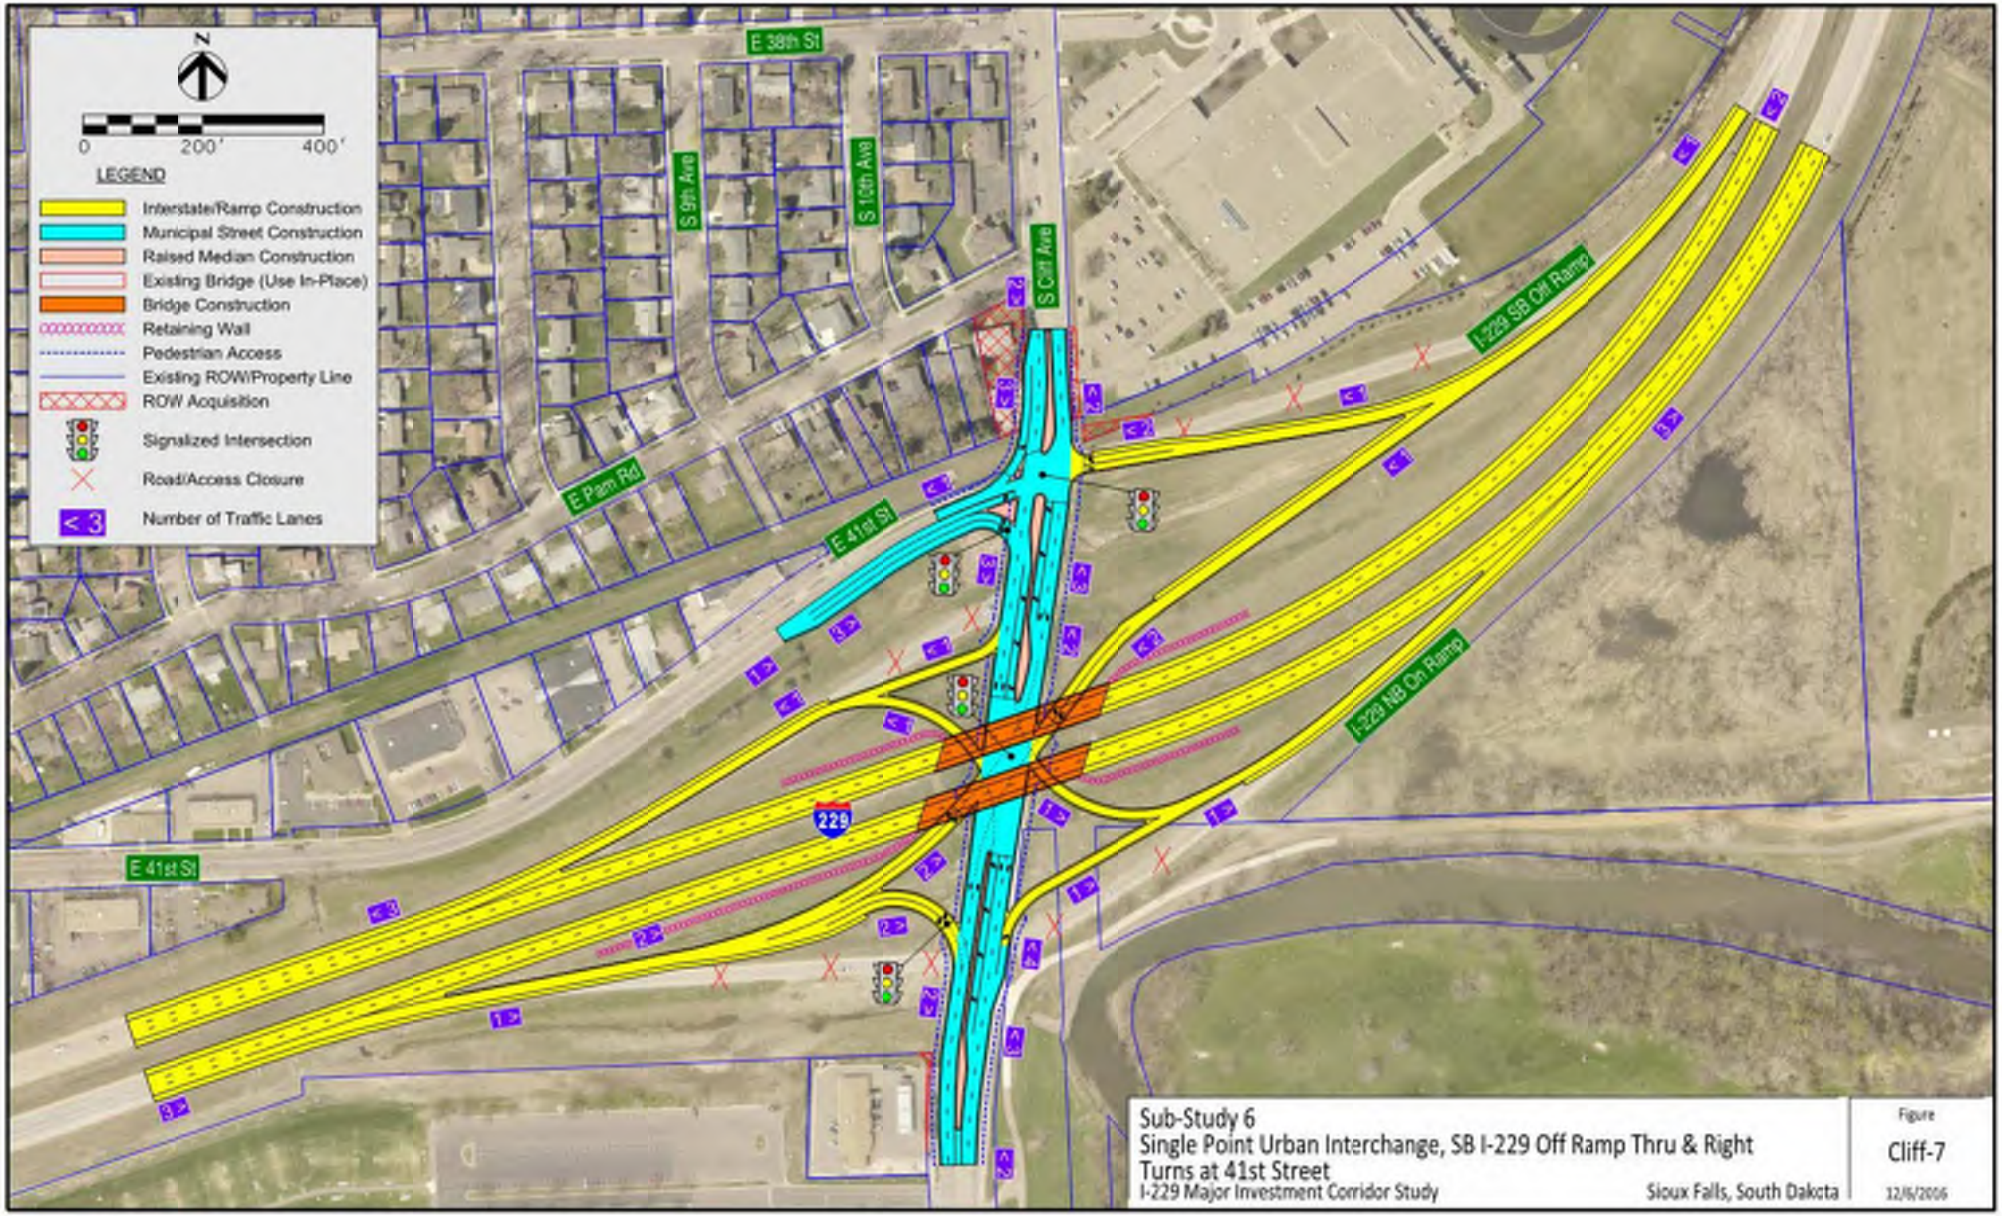

CONCEPT EVALUATION RESULTS

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Cliff-1	NB Cliff to SB I-229 Loop Ramp						Advance
Cliff-6	Single Point Urban Interchange, 41st St Realigned to Pam Rd						Advance
Cliff-7	Single Point Urban Interchange, SB I-229 Off-Ramp Thru & Right Turns at 41st St						Advance

CLIFF AVENUE
PRELIMINARY PROJECT PRIORITY

- Priority recommendation based on existing and anticipated need and level of improvement and impacts associated with remaining concept options
- Cliff Avenue Interchange = Medium Priority
- See exhibit board for additional information

NEXT STEPS

- Assemble Stakeholder and Public Comments
- Complete Study Report
- Project Development Process = 5-6 year timeline when initiated by SDDOT & City
  - Prepare Interchange Modification Justification Report and Environmental Document
  - Develop Project Design
  - Acquire Right of Way
  - Construction

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Brian Ray– HDR Engineering, Inc.
402-548-5066 or Brian.Ray@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 4 – Cliff Avenue

Thanks for attending!

RICE STREET

DECEMBER 6TH, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES
- COMMENTS (SEE PUBLIC MEETING #3 APPENDIX)

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 5 – Rice Street Exit 7
Date:	Tuesday, December 06, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 21 Participants

Stakeholder comments and questions noted:

1. Railroad spur crossing ties up traffic on Rice Street to the east. Response (City): There are 3 to 5 unit trains per day using the spur line, with no projected increase indicated by BNSF Railroad. Growth is anticipated in the number of daily local trains, however.

2. The amount of additional right of way acquired from businesses along the north side of Rice St to avoid the need for an easement from BNSF along the south side of Rice St could create problems for those businesses in complying with City code requirements for customer and employee parking.

3. How would the residential property east of Eastgate Towing get access from Rice St? Response: Access to each of the properties on the north side of Rice St and between the I-229 interchange and N Glenwood Cir would be via the proposed back access road on the north side of the properties.

4. Public access along the proposed back access road poses a security concern for properties on the north side of Rice St. Response: The back access road would be lighted as a City street, but would not be designated an emergency snow route.

5. The contract that Eastgate Towing has with the City Police Dept requires towing operation in all weather. Eastgate Towing would need to use the back access road during and immediately after snow events.

6. Do the Rice St concepts assume that the proposed SD-100 project will be constructed? Response: Yes.

7. City – Would like to begin environmental impact assessment process sooner, if it is believed that Concept Rice-3C is the locally preferred option.

8. Will Concept Rice-3C slow down traffic on Cleveland Ave compared to existing conditions?

9. On Concept Rice-3C, how would access to the recycling pit be provided from realigned Cleveland Ave? There is no other access street shown.

10. Would storm sewers along Rice St be constructed as part of the proposed improvements? Response: Yes, storm sewers would be part of the Rice St improvements.

11. Will sidewalks along Rice St be constructed as part of the proposed improvements? Response: Yes, sidewalks on both sides of Rice St are proposed as part of the Rice St improvements. However, first time sidewalk construction costs will be assessed to adjacent property owners.

12. Will the proposed Rice St improvements with pedestrian or trail access along Rice St result in elimination of the existing trail along the Big Sioux River? Response: No. The river trail would not be impacted by proposed improvements along Rice St.

13. Is the Bahnson Ave extension to Benson Rd included in the proposed Rice St improvements? Response: No, construction of the Bahnson Ave extension would be tied to development need.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Rice Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3615P, PCN 044K **Project No.:** 207030

Meeting Date Monday, December 5th, 2016 2:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Pete Longman	SDDOT - Pierre	773-6488	pete.longman@state.sd.us
2	Steve Gramm	700 E. Broadway Ave.	773-6641	Steve.gramm@state.sd.us
3	[illegible]	2904 E Rice St SF, SD	334-3960	[illegible]
4	Kim Meester	1811 W Cornell Ave	367-9871	Archeryoutfitters@live.com
5	Murl Reys Paving Chad Hartman	1300 N Bahnson	334-3204	Chad.h@marpaving.com
6	Murl Reys Paving Luke Klein	" "	334-3201	luke.k@marpaving.com
7	DAN KEARNEY	41CYB 259 ST SF	351-5705	DKS15489@Aol.com
8	Jason Ignatius	6808 S. Old Village Place Suite 100 SF SD	977-7740	jason.ignatius@kbrinc.com
9	[illegible]	1500 N Sweetman Pl. SF, SD	605-728-2966	bschmidt@emcsd.com
10	Clark Meyer	1500 " "	605-336-5763	cmeyer@cmcsd.com
11	Shawn Aussen	224 W. 9TH ST SF SD	605-367-8607	saussen@siouxfalls.org
12	[illegible]	2908 E. Rice SFSD	605-728-2457	
13	Patty Nosbr	1300 N. Bahnson Ave	334-3204	Patty.n@marpaving.com
14	Stu Horsted	4009 E. Rice St	231-1763	shorsted@emcsd.com
15	Eva Sadat	1410 E Rice St	605-271-1099	gsmoke sales@midconetwork.com
16	Omar Sadat	"	"	"
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Rice Street Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Monday, December 5th, 2016 2:00 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Rodney Hartman	2908 E. Rice St	605-728-1667	RMS011@Net2000.net
2	Greg Rubin	2200 N. Johnson	605-940-8501	GAIRUBIN@YAHOO.COM
3	Tammy Meland	1205 N. Caleb Ave	605-408-6763	
4	Hank Docken	3501 River BLUFF RD	605 366 2179	
5	Cory Hart	3408 Sycamore A	376 7328	
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 7 – Rice Street Sub-Study

Stakeholder Meeting

December 6th, 2016
2:00 pm to 3:00 pm

HDR


STUDY AREA MAP

I-229 Corridor Study

Solberg Avenue Overpass to 60th Street N Overpass

Meeting will focus on:

Exit 7 – Rice Street

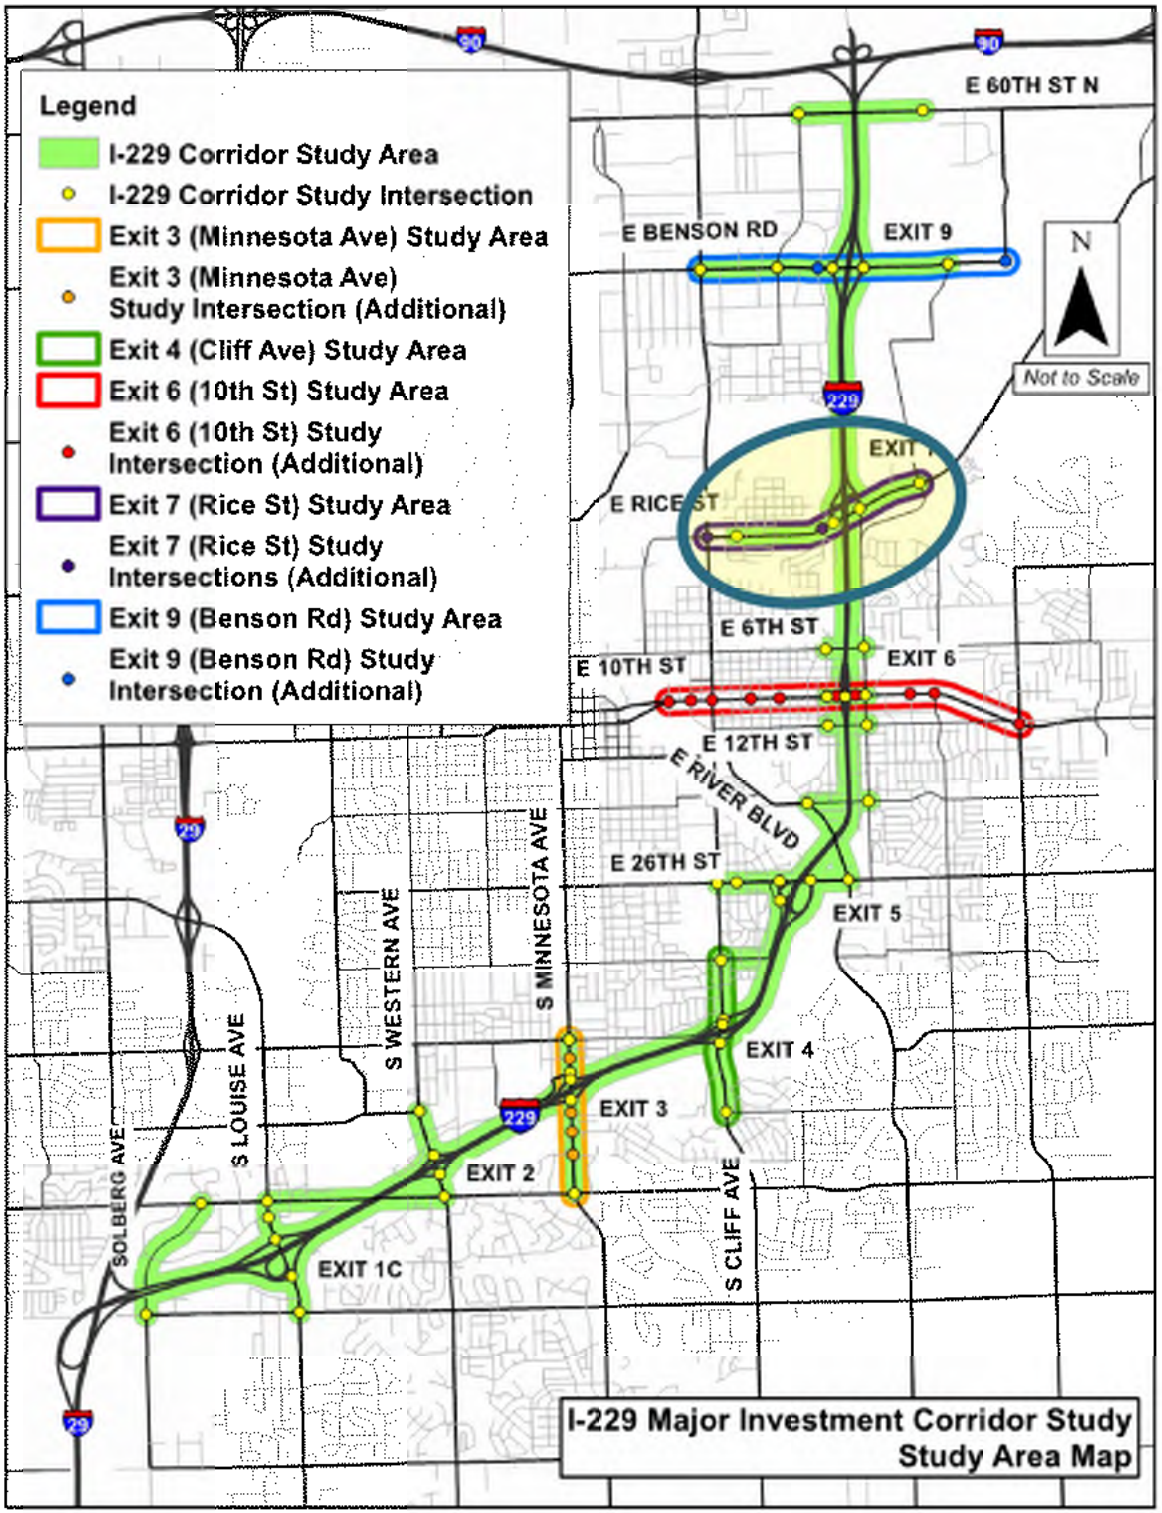

STUDY ADVISORY PARTNERS

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

PRESENTATION AGENDA

- Concept Evaluation Process
- Concept Evaluation Results
- Concepts Recommended for Further Consideration in Future Phases (Interchange & Corridor Improvements)
- Next Steps

CONCEPT EVALUATION PROCESS


- Evaluation Factors:

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Concept ID	Interchange and Corridor Type	•Traffic Delay •Level of Service •Interchange Year of Failure	Predicted Crash Reduction during 2012-2035	Potential impact to wetlands, historical resources, threatened and endangered species, public lands, and floodplains	Total Right of Way (ROW) Required and Acquisitions	Total Constuction Cost (including ROW)	**Advance or Eliminate**

- Evaluation Matrix to Compare Concepts
- Recommended Action


CONCEPTS FOR FURTHER CONSIDERATION

RICE-2A

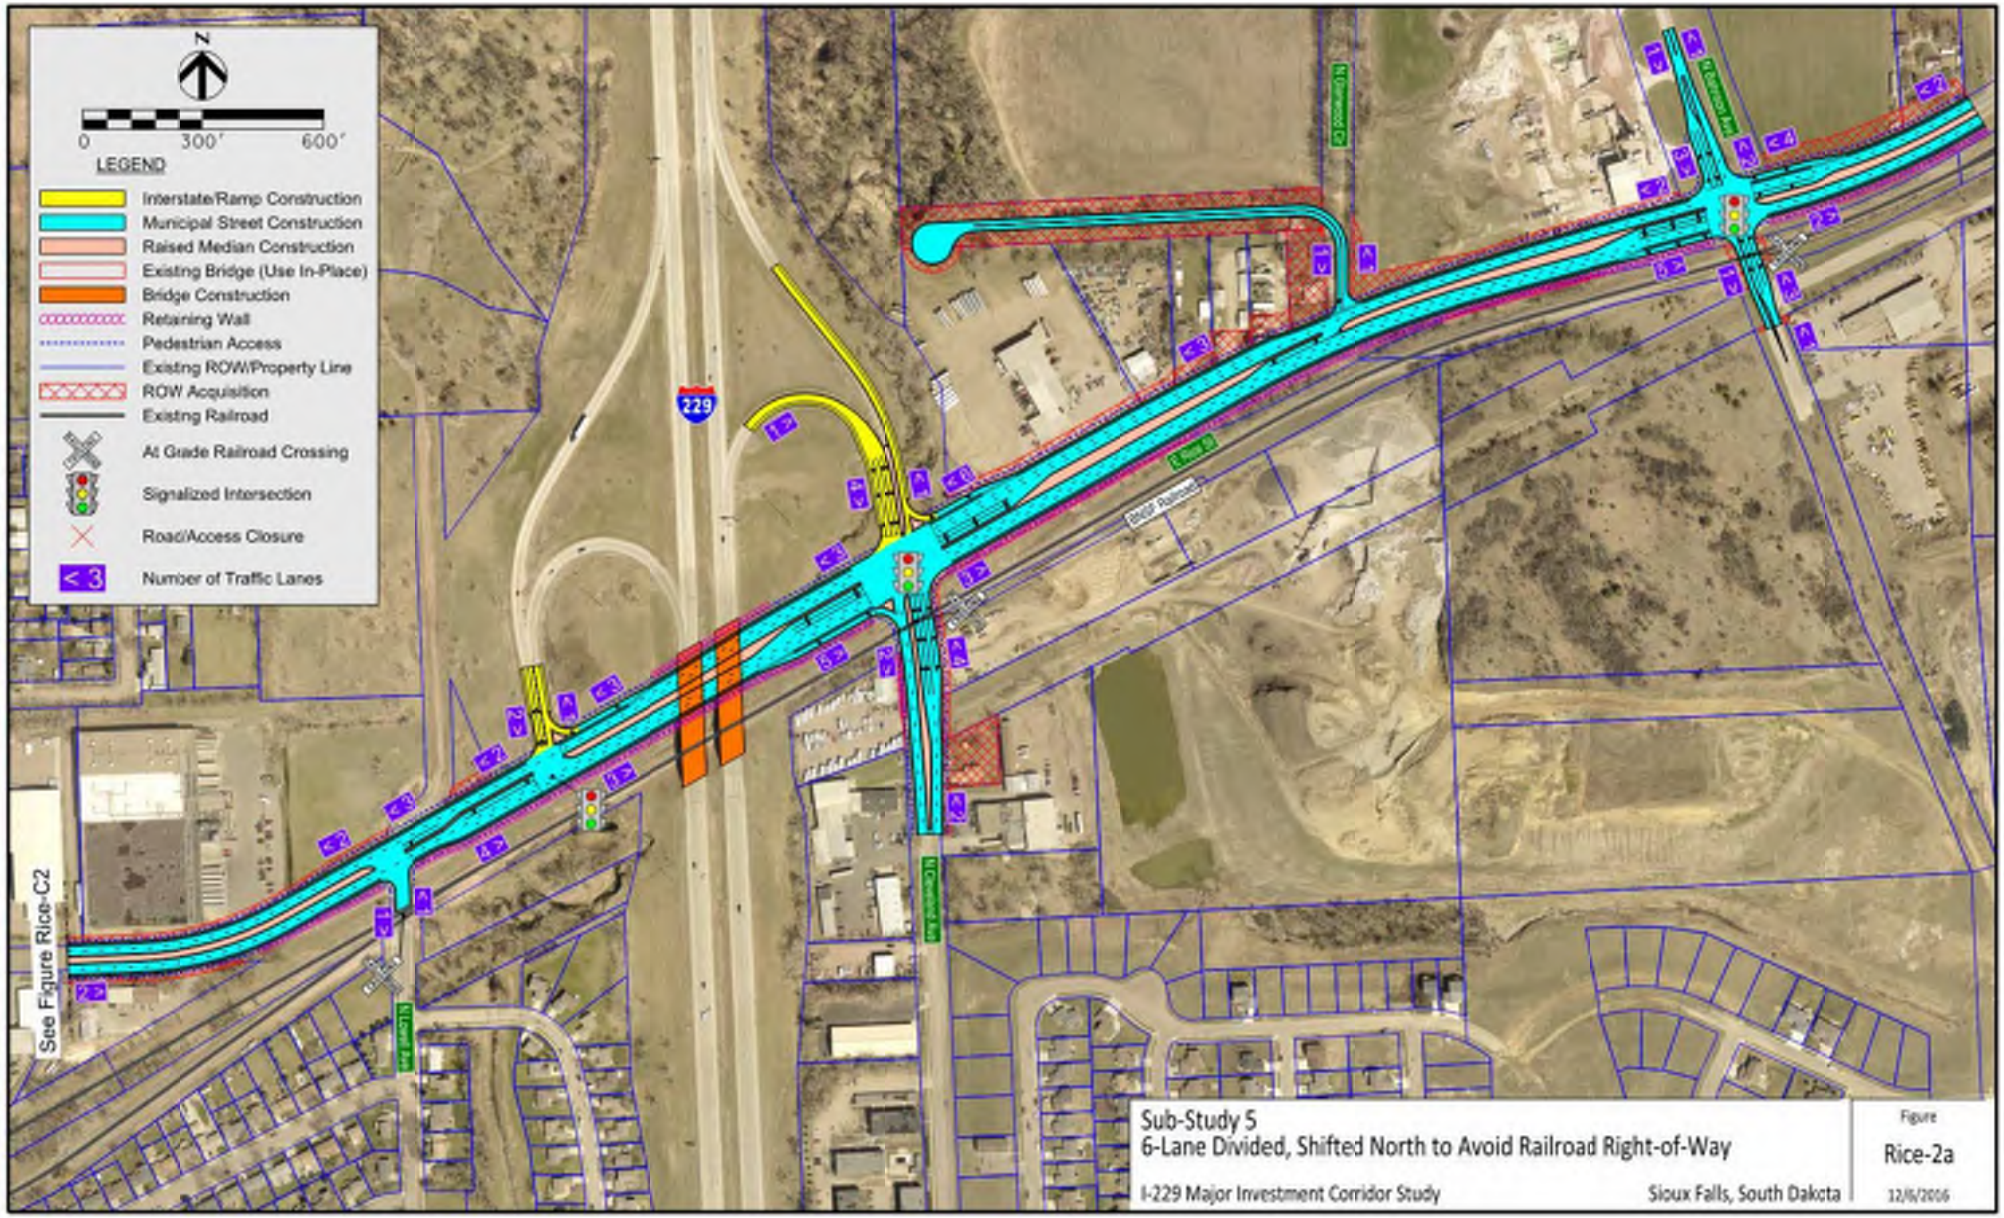


CONCEPTS FOR FURTHER CONSIDERATION

RICE-3C





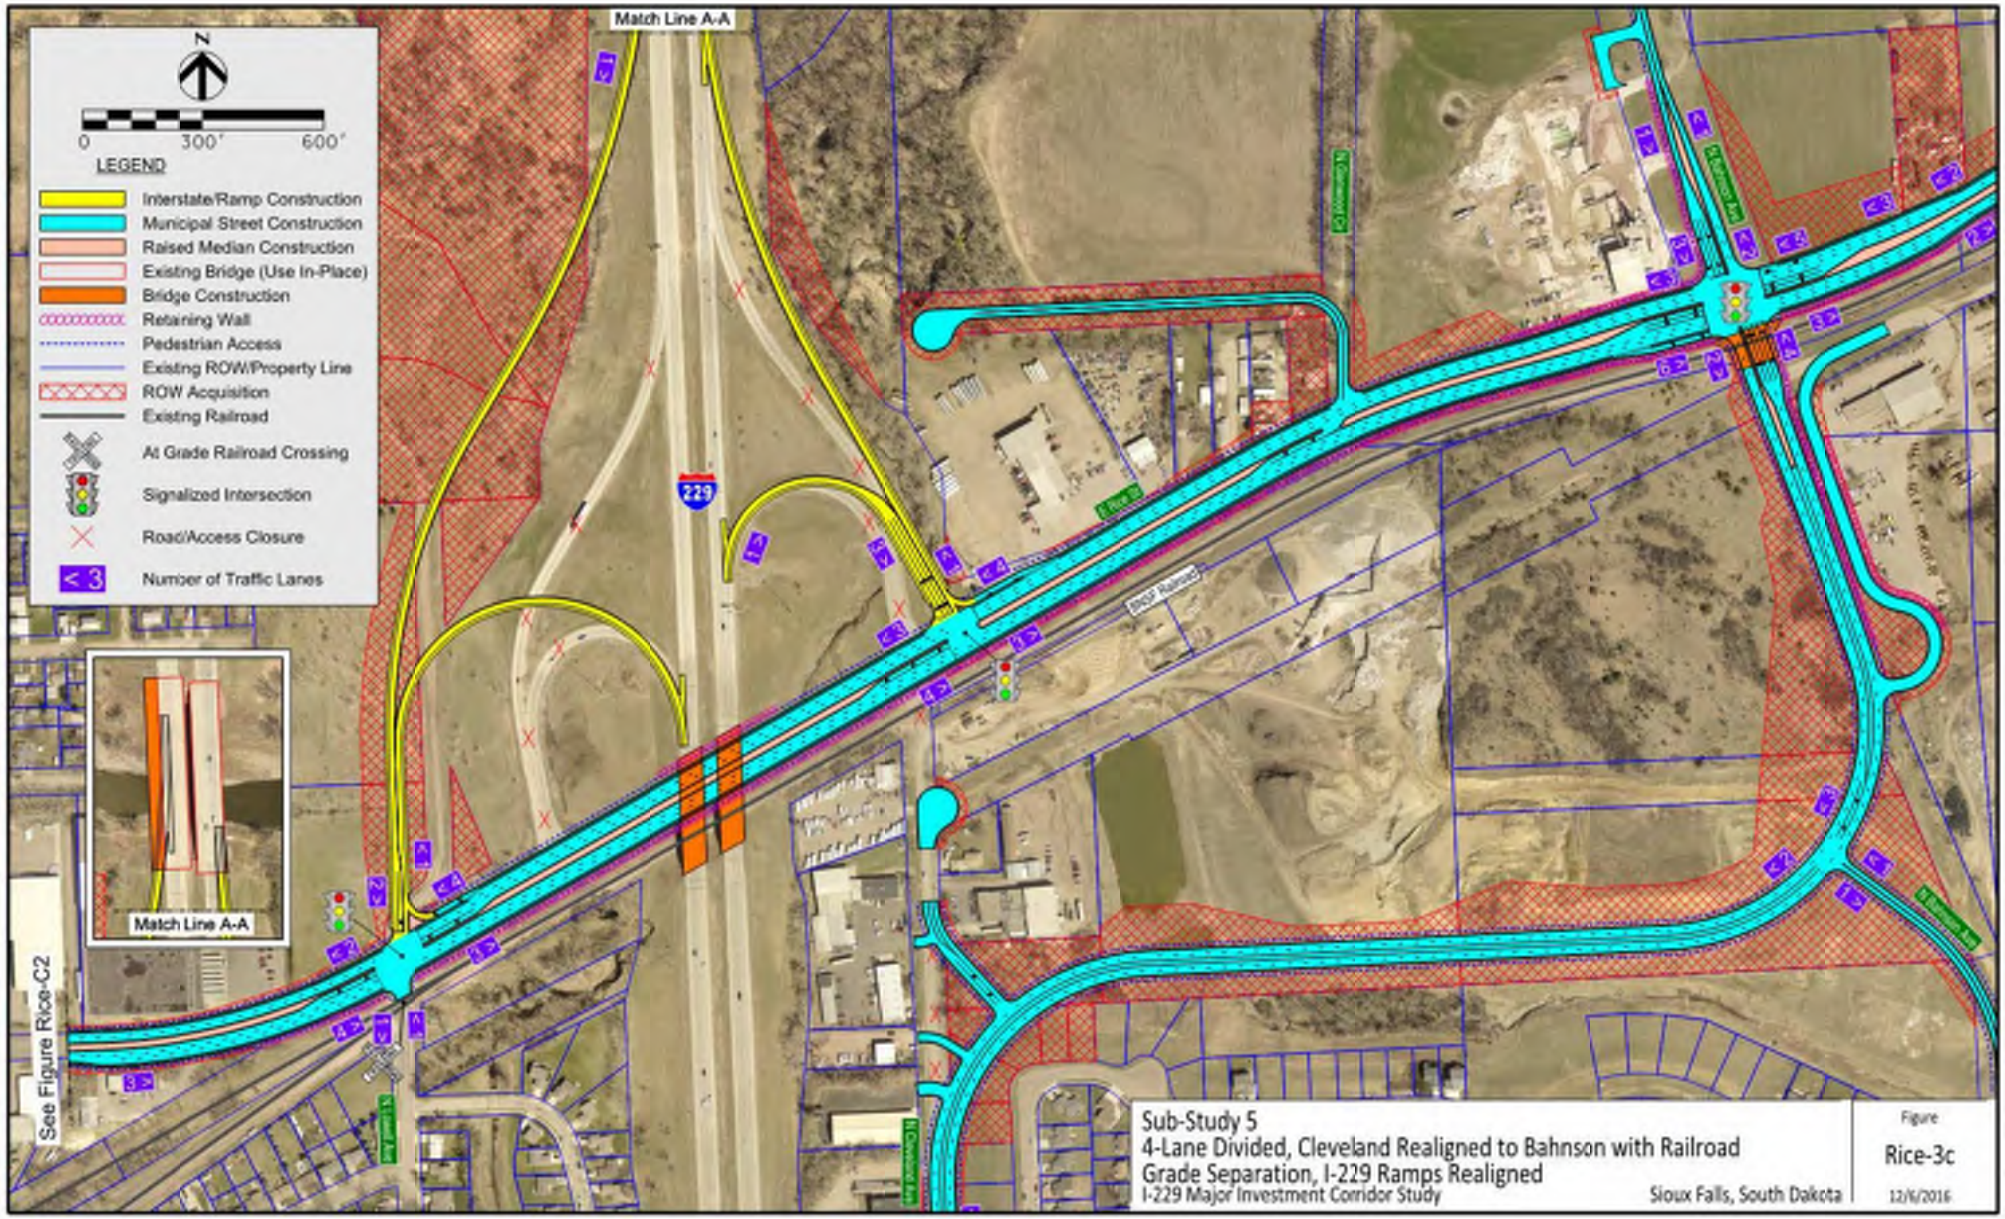


CONCEPTS FOR FURTHER CONSIDERATION

RICE-C2

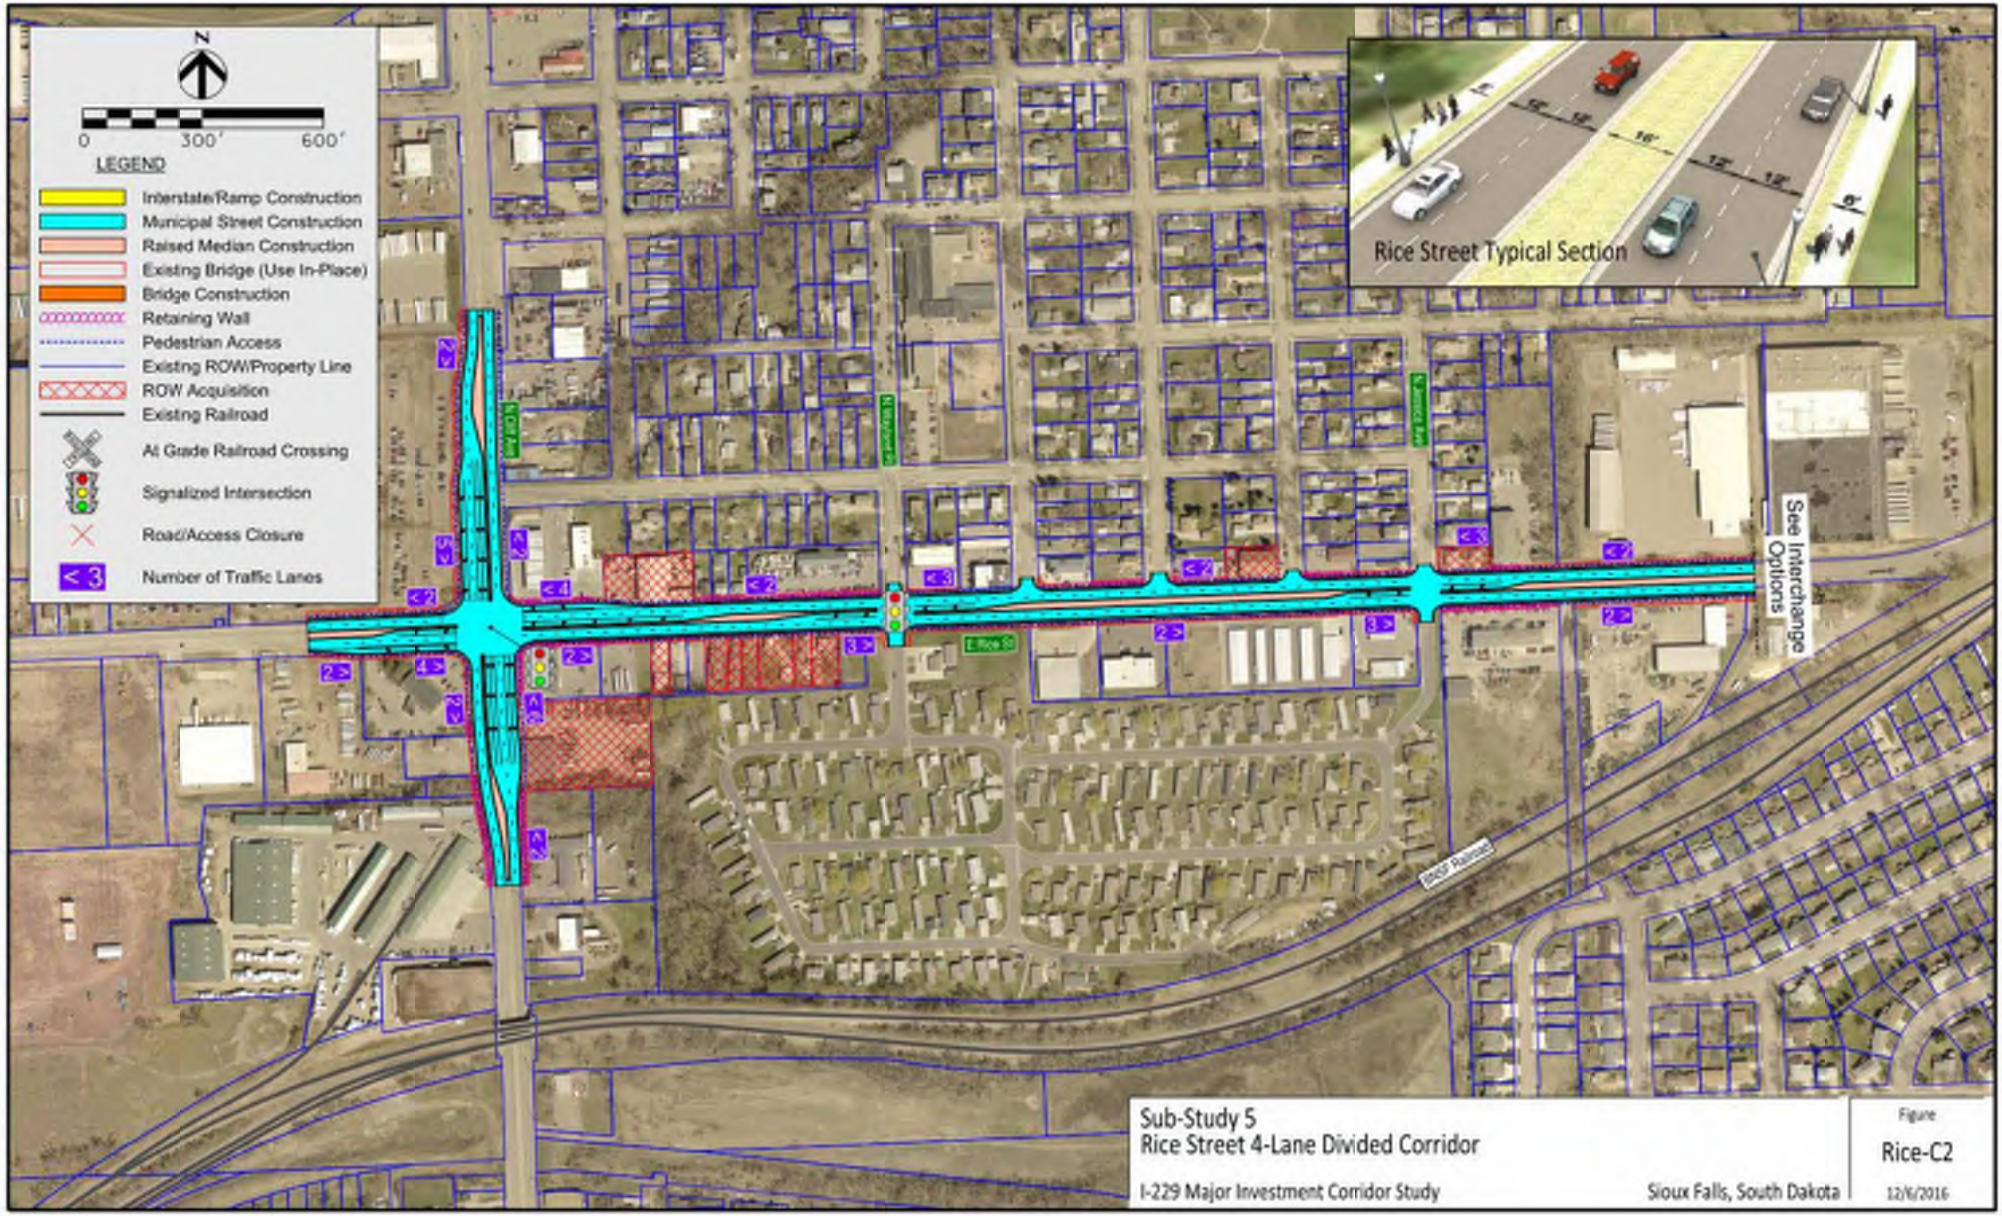

CONCEPT EVALUATION RESULTS

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						Advance
Rice-2	6-Lane Divided						Advance
Rice-2A	6-Lane Divided, Shifted North to Avoid Railroad Right-of-Way						Advance
Rice-3C	4-Lane Divided, Cleveland Realigned to Bahnson with Railroad Grade Separation, I-229 Ramps Realigned						Advance

RICE STREET
PRELIMINARY PROJECT PRIORITY

- Priority recommendation based on existing and anticipated need and level of improvement and impacts associated with remaining concept options
- Rice Street (Cleveland Avenue Realignment) = Medium Priority
- Rice Street Interchange = Low Priority
- See exhibit board for additional information

NEXT STEPS

- Assemble Stakeholder and Public Comments
- Complete Study Report
- Project Development Process = 5-6 year timeline when initiated by SDDOT & City
  - Prepare Interchange Modification Justification Report and Environmental Document
  - Develop Project Design
  - Acquire Right of Way
  - Construction

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Theo Weseman – HDR Engineering, Inc.
402-399-4801 or Theo.Weseman@hdrinc.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 7 – Rice Street Sub-Study

Thanks for attending!

MINNESOTA AVENUE

DECEMBER 6TH, 2016

- MEETING NOTES
- SIGN-IN SHEETS
- POWERPOINT SLIDES
- COMMENTS (SEE PUBLIC MEETING #3 APPENDIX)

Meeting Minutes

Project:	I-229 Major Investment Corridor Study, PL 0100(87) 3616P, PCN 044K
Subject:	Stakeholder Meeting – Sub-study 2 – Minnesota Avenue Exit 3
Date:	Tuesday, December 06, 2016
Location:	Sioux Falls Convention Center Conference Room 6
Attendees:	See Attached Sign In Sheet – 19 Participants

Stakeholder comments and questions noted:

1. When might proposed improvements on Minnesota Ave and at the I-229 interchange be constructed? Response: At least 12 to 15 years in the future.

2. What is the status of proposed improvements along 49th St to the west? Response: Not all of the right of way for widening 49th St to the west has been acquired. The widening is not currently programmed. When construction begins, it will start at the west end.

3. Access to businesses along Minnesota Ave from the back would kill the businesses.

4. Is a right turn in/out a possibility where driveway closures are shown on the concepts? Response: Yes.

5. Eliminate the proposed medians and build service roads.

6. If the southbound I-229 exist ramp terminal is shifted north to 49th St as shown on Concept Minn-9D, traffic queues on Minnesota Ave would be pushed northward to 41st St. Response: Proposed added lanes on Minnesota Ave would manage traffic queues.

7. There are no concept options that do not include a proposed median.

8. Do the I-229 bridges over Minnesota Ave need replacement? Response: The replacement of the bridges is driven by a need to widen Minnesota Ave.

9. Minnesota Ave should be widened to a six-lane section with a two-way left turn lane.

10. Existing speed on Minnesota Ave is a problem between 41st and 57th St.

11. Owner of vacant property at I-229 and Minnesota Ave (east side) – Delay in implementing proposed project discourages property improvements.

12. Property owner commented that his property has already been held hostage for ten years or more due to uncertainty about improvements and impacts along Minnesota Ave.

13. Estimated costs of implementing the proposed concepts should be made available to the public.

14. Concern about ruining businesses due to poor access or very limited access.

15. Can the proposed median be eliminated? Also discussion regarding impacts due to corridor width.

16. Can the green light be extended at 41st and Minnesota? Comments regarding timing at the interchange ramp signals and how frequently are those updated.

17. Issues turning left from Lotta St onto Minnesota Ave. Support expressed for proposed traffic signal.

18. A lot of focus on the properties east of 49th Street intersection (on either side of abandoned railroad line). Impacts from access closures/restrictions, alternate routes, changes to traffic patterns, U-turns, and control of access were all topics of discussion.

19. In favor of improved pedestrian and bike crossings of I-229. Glad this was looked at in the study.

20. Was a diverging diamond type interchange considered for Minnesota Ave? Response: Yes.

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Tuesday, December 6th, 2016 3:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Pete Longman	SDDOT – Pierre SD	773-6488	pete.longmanestate.sd.us
2	Brad Remmich	SDDOT - PIERRE	773-3093	brady.remmich@state.sd.u
3	Andy Vandel	SDDOT - Pierre	773-4421	andy.vandel@state.sd.us
4	Pat Walz	4230 S Minn	6053343815	bpwale@s.io.Midco.Net
5	Mary Stone		605-376-6954	mstone@g.com
6	Shelly Roger	48374 258St Brandon SD 57005	321-3806	drogm3061@aol.com
7	Brian Frisbee	4101 S. Minnesota	338-6321	info@frisbeeinc.com
8	Lee Lewis	309 W 49TH St Ste 105	335-8805	LAL2966@basec.net
9	Mike Van Beckum	5800 S Remington Pl #100	361 8211	Mike@VBClink.com
10	Kevin K Nyberg	330 W. 41st, SF	336-6474	knyberg@nybergsace.com
11	Heather Taylor	3301 S Minn. Ave.	201-2841	heather@gsfw.com
12	Grant Galle	405 Chapel Dr.	321-5606	grant@galleweidenaar.com
13	Mary Montoya		332-0147	mary.montoya@sio.midcont
14	Jason Kjerstad	6300 S. Old Village Suite 100 SF SD	977-7740	jason.kjerstad@kfrinc.com
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Tuesday, December 6th, 2016 3:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Frank Howe	Brandon	5538484	franke prairiesons.com
2	Carol Twedt	4802 S Minnesota Ave SF SD 57105	940-0756	carotwedt@sio.midco.net
3	Alex Connelly	1510 W. 51st SF, SD 57105	336-2165	alex.connelly@stantec.com
4	Dave McElroy	3310 S Minn Ave SF SD 57105	338-9519	mcelroy.dave@gmail.com
5	Erik Nyberg	320 W 41st Street	728-5553	erik@cutlerlawfirm.com
6	Pam Taylor	3600 S. Minn	332-6509	
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				

Sign In Sheet

Subject I-229 Major Investment Corridor Study – Stakeholder Meeting for Minnesota Avenue Sub-Study

Client City of Sioux Falls/South Dakota Department of Transportation

Project PL 0100(87) 3616P, PCN 044K **Project No.:** 207030

Meeting Date Tuesday, December 6th, 2016 3:30 PM **Meeting Location:** Sioux Falls Convention Center

Please print clearly. Thank you.

	Name	Address	Best Contact Phone	Email
1	Erickson, Inc Barry Howe	4101 S. Minnesota Ave.	605-338-6321	barry.howe@ericksonmail.com
2	Diane Veith	4204 S. Western Ave Sioux Falls	605-339-2864	veithd@sio.midco.net
3	Kevin Koerzt	Bonn & Associates 309 W. 4th St 57104	605-336-0435	KevinK@BonnAssociates.com
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				







INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 3 – Minnesota Avenue Sub-Study

Stakeholder Meeting

December 6th, 2016
3:30 pm to 4:30 pm

HDR HRGreen


STUDY AREA MAP

I-229 Corridor Study

Solberg Avenue Overpass to 60th Street N Overpass

Meeting will focus on:

Exit 3 – Minnesota Avenue

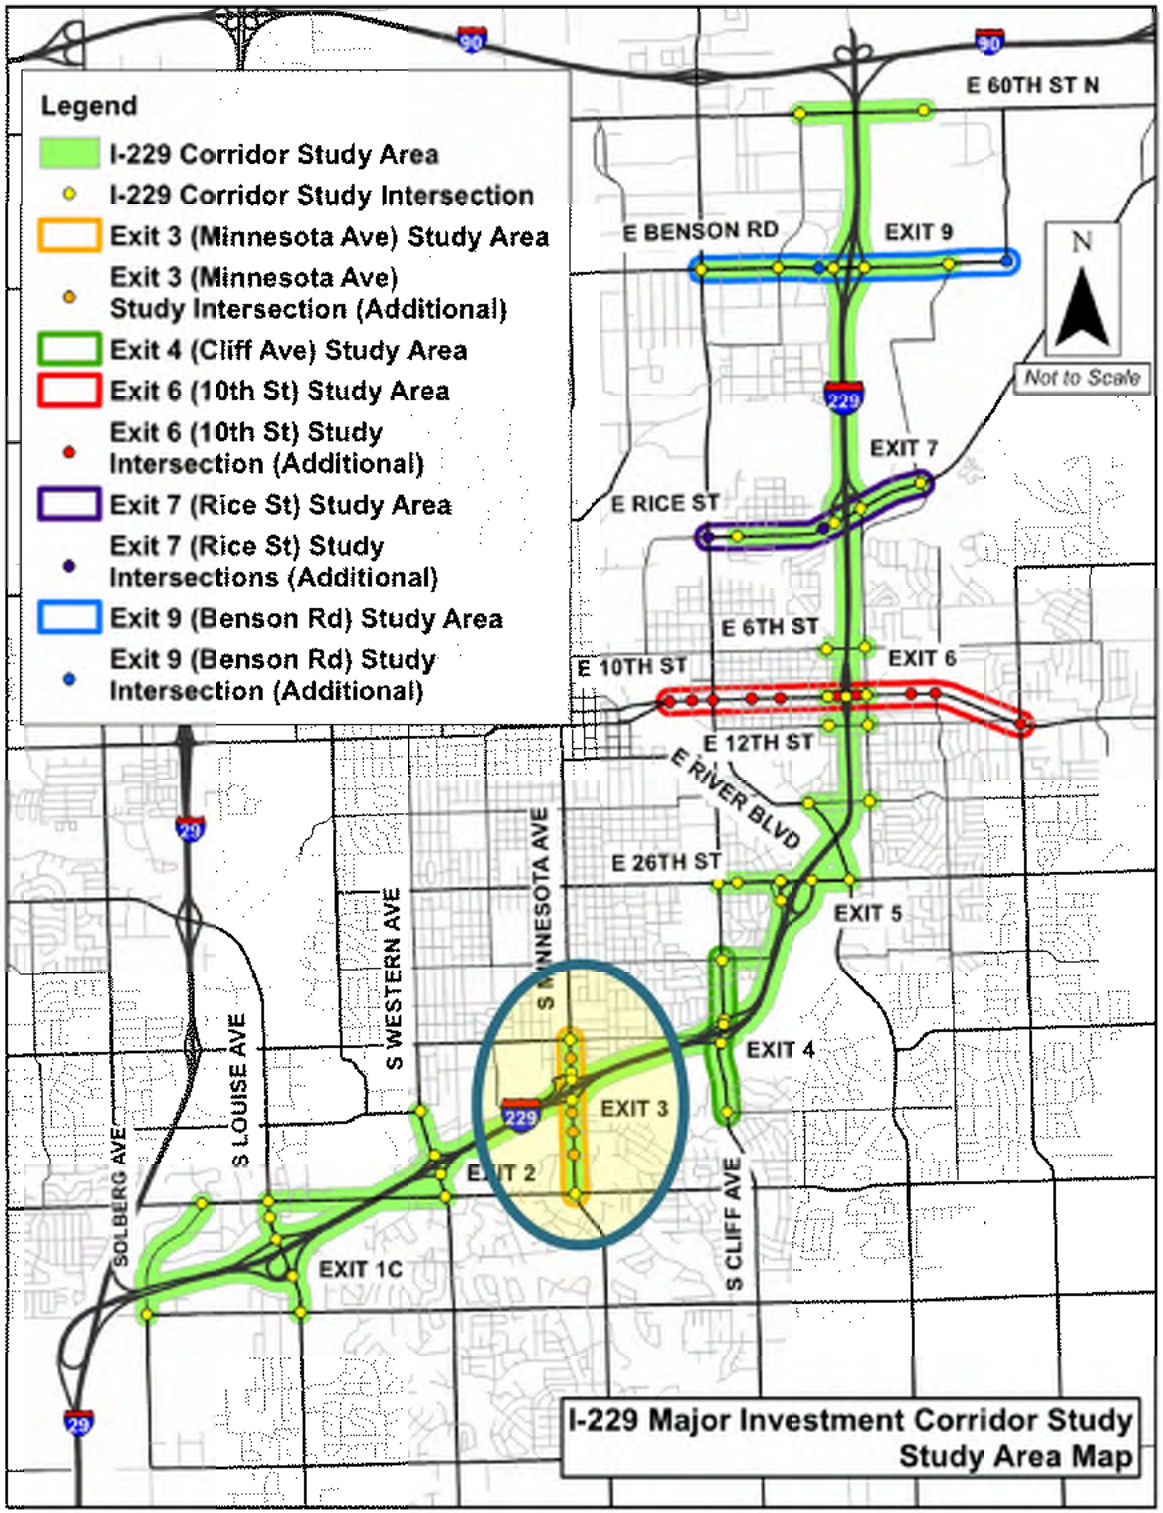

STUDY ADVISORY PARTNERS

South Dakota Department of Transportation (SDDOT)

South Dakota Highway Patrol

City of Sioux Falls

Sioux Falls Metropolitan Planning Organization (MPO)

Federal Highway Administration (FHWA)

PRESENTATION AGENDA

- Concept Evaluation Process
- Concept Evaluation Results
- Concepts Recommended for Further Consideration in Future Phases (Interchange & Corridor Improvements)
- Next Steps

CONCEPT EVALUATION PROCESS


- Evaluation Factors:

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Concept ID	Interchange and Corridor Type	•Traffic Delay •Level of Service •Interchange Year of Failure	Predicted Crash Reduction during 2012-2035	Potential impact to wetlands, historical resources, threatened and endangered species, public lands, and floodplains	Total Right of Way (ROW) Required and Acquisitions	Total Constuction Cost (including ROW)	**Advance or Eliminate**

- Evaluation Matrix to Compare Concepts
- Recommended Action


CONCEPTS FOR FURTHER CONSIDERATION

MINN-2C


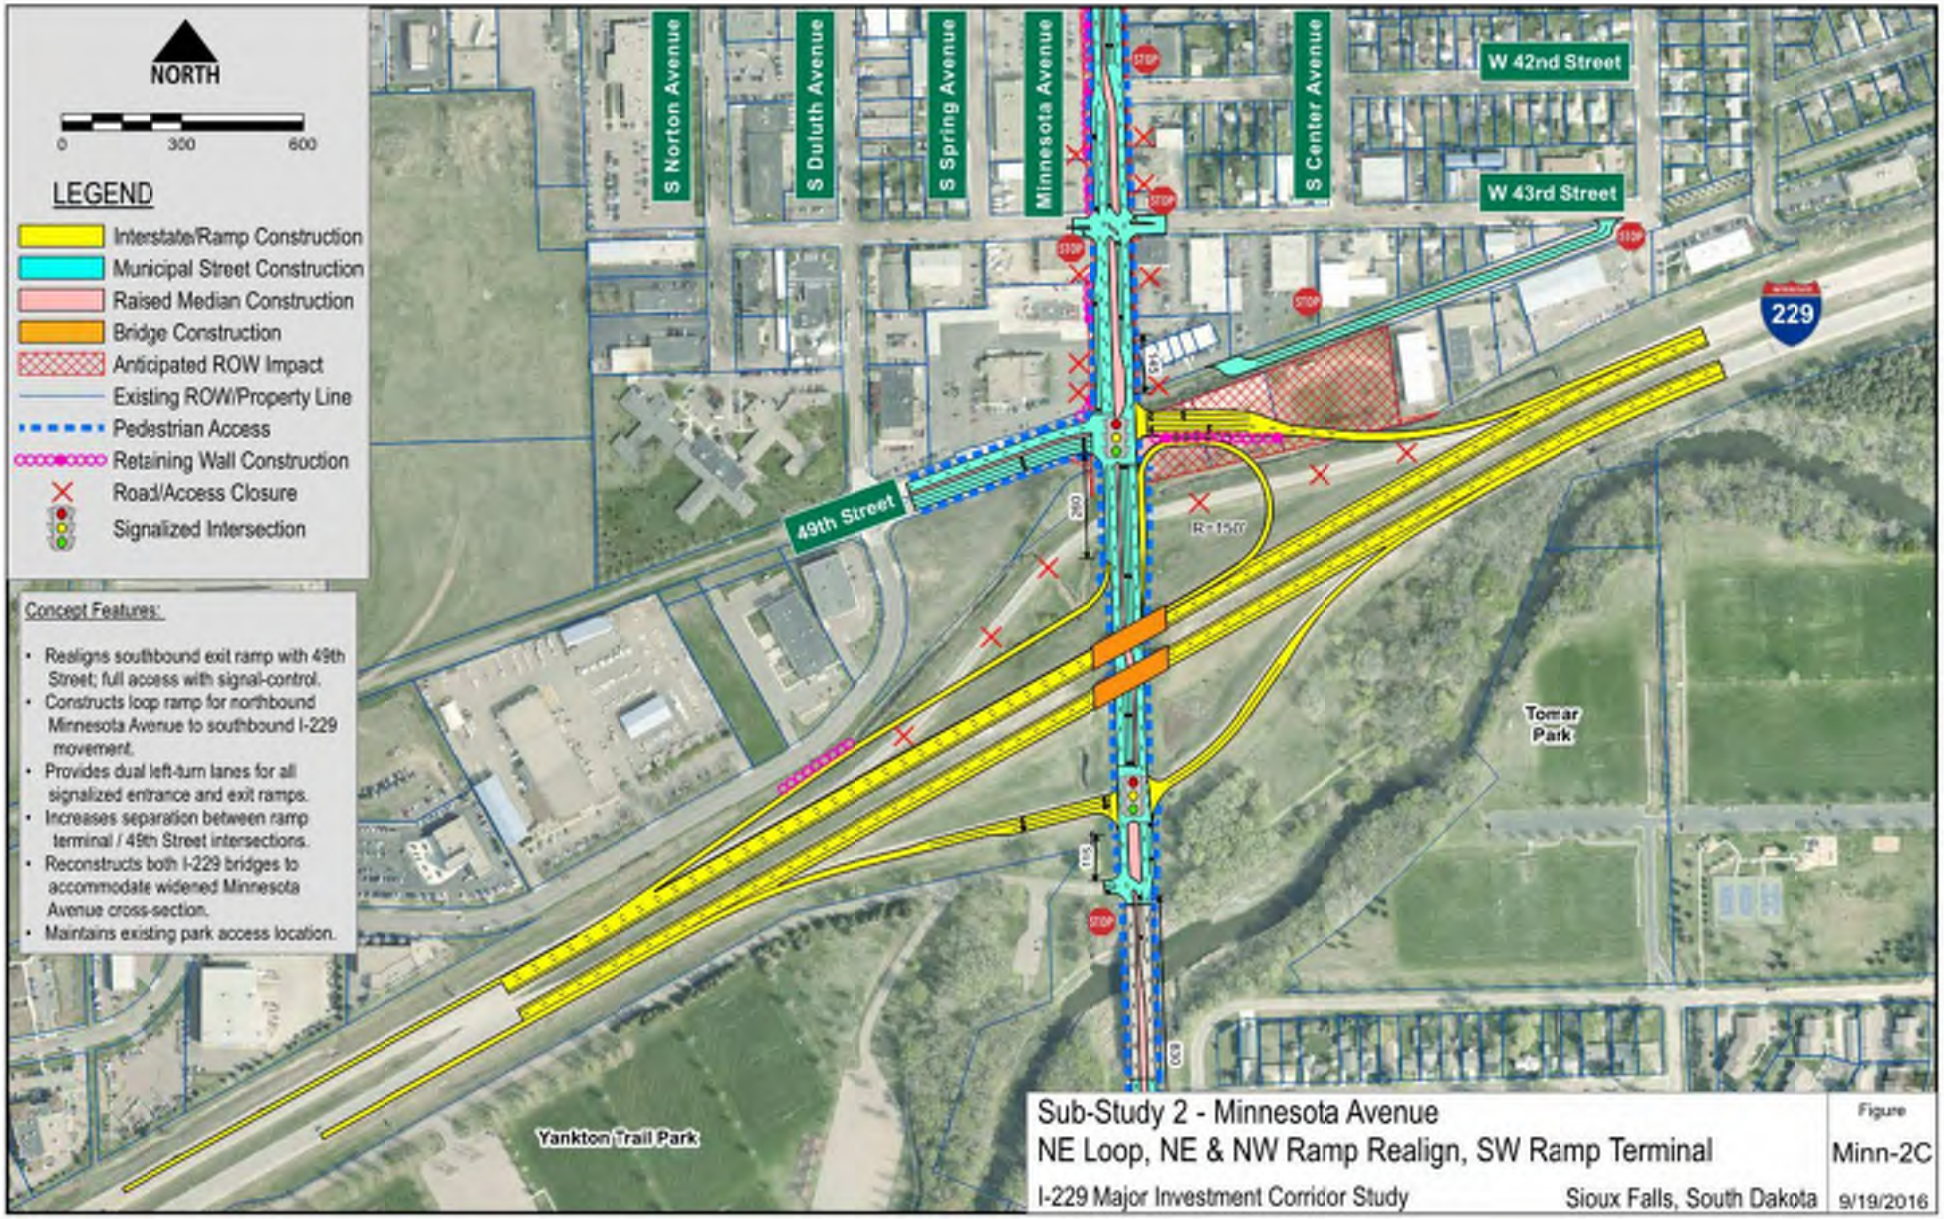


CONCEPTS FOR FURTHER CONSIDERATION

MINN-2D

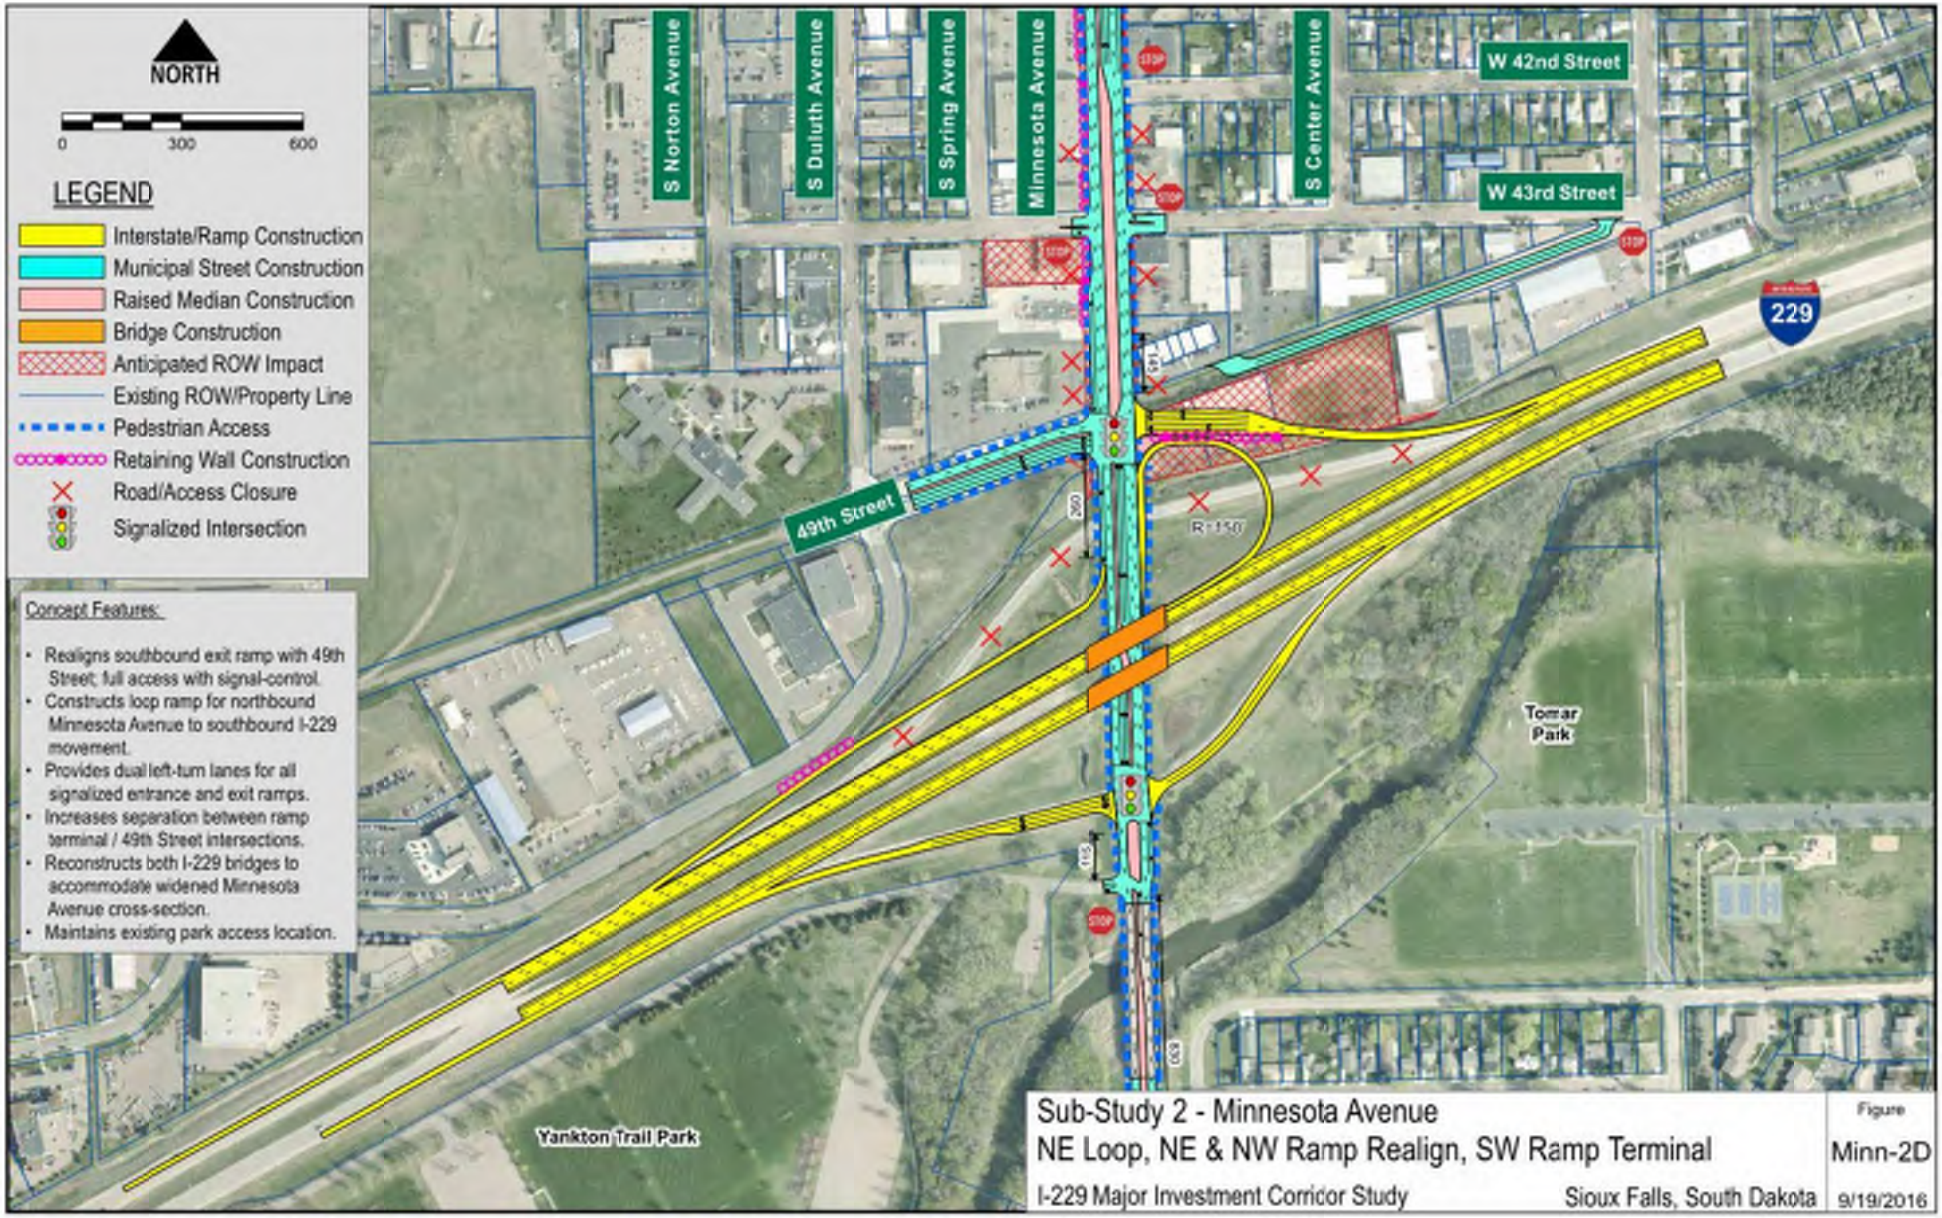


CONCEPT EVALUATION RESULTS

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
No-Build	No-Build						**Advance**
Minn-2C	Diamond with Loop, Direct Connect to 49th St, 5-Lane Big Sioux River to 41st St						**Advance**
Minn-2D	Diamond with Loop, Direct Connect to 49th St, 6-Lane Big Sioux River to 41st St						**Advance**
Minn-5D	Diverging Diamond Interchange, 6-Lane Big Sioux River to 41st St, 49th St Right-In Right-Out						**Eliminate** Closure of 49th Street Access


CONCEPTS FOR FURTHER CONSIDERATION

MINN-8C

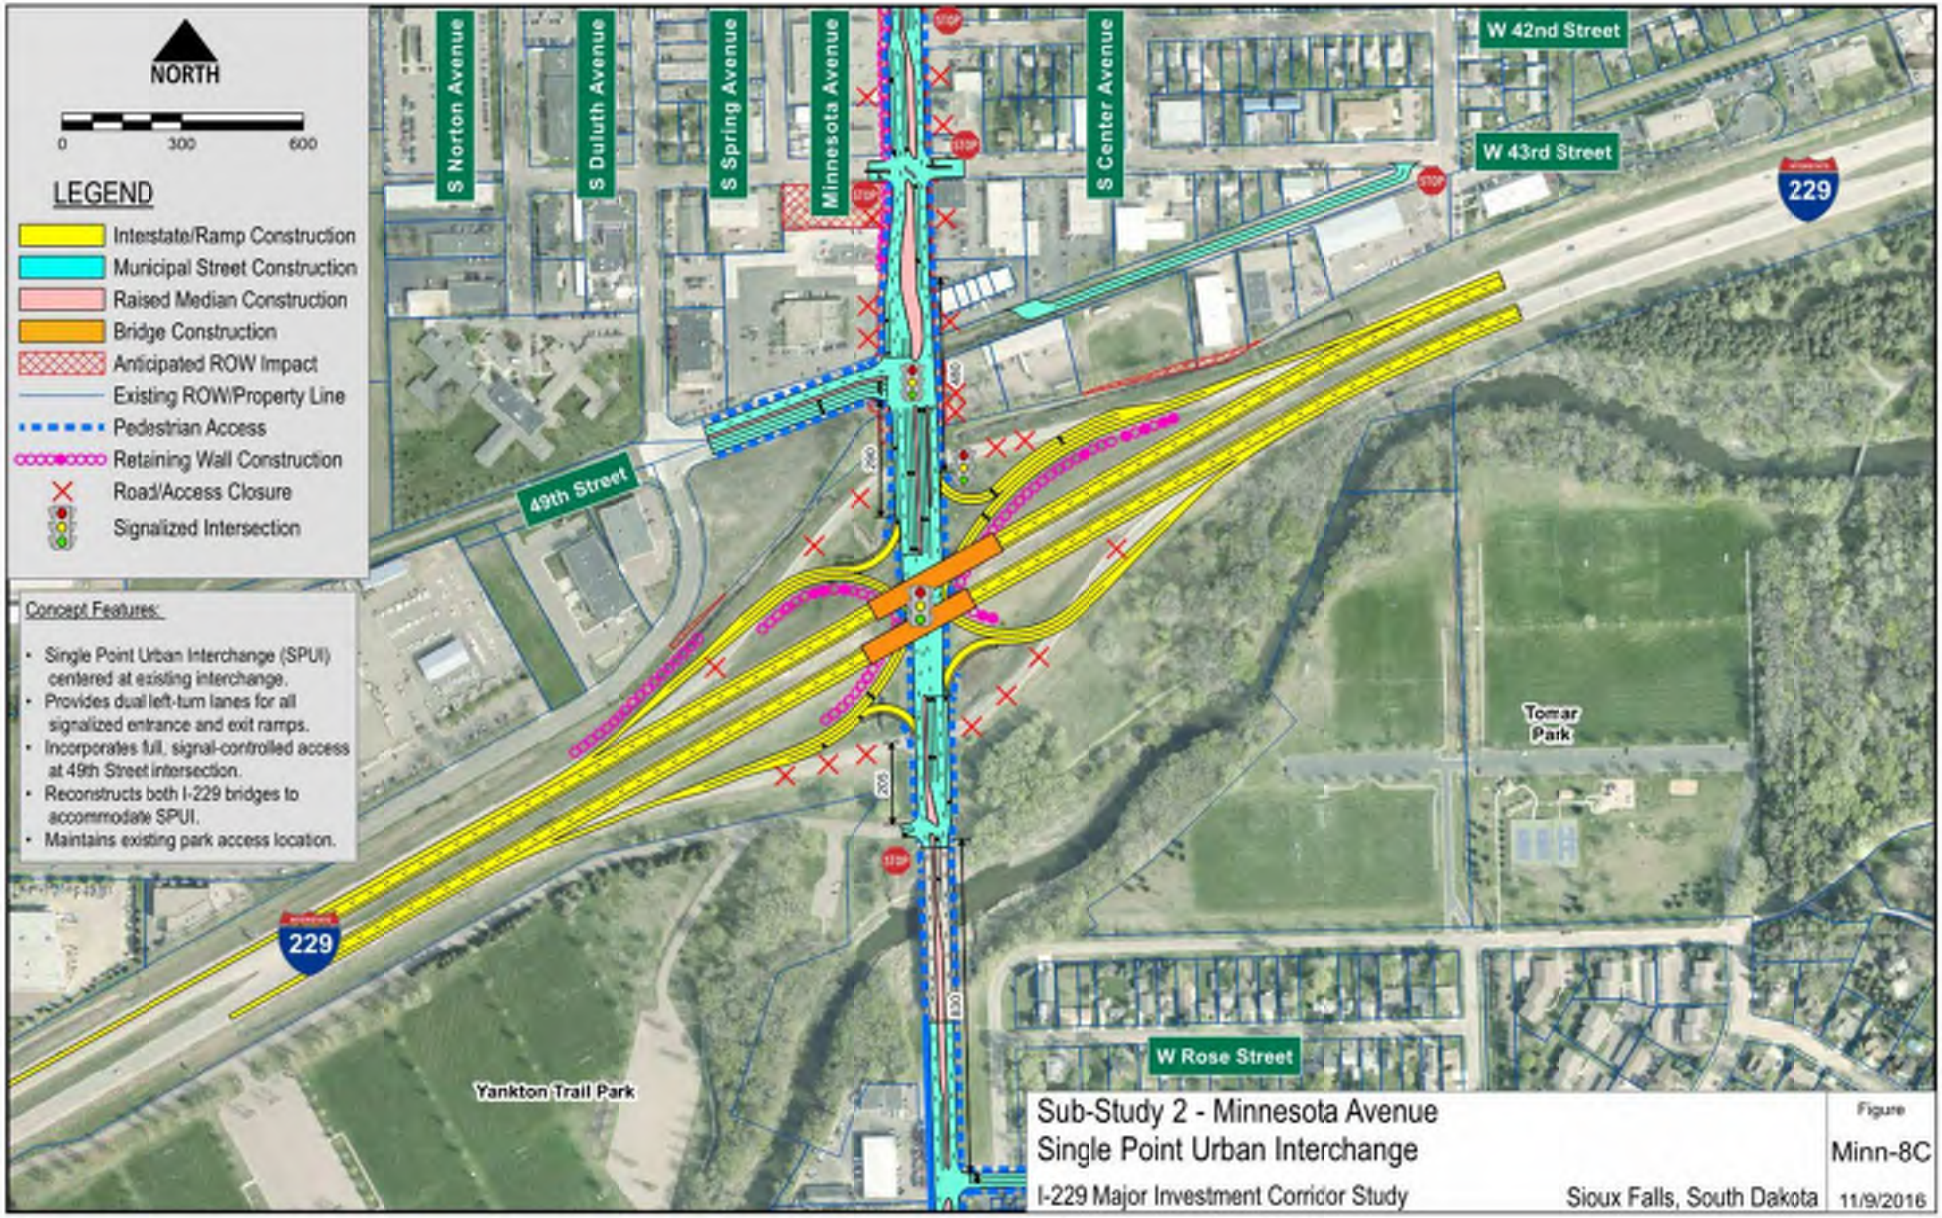


CONCEPTS FOR FURTHER CONSIDERATION

MINN-8D






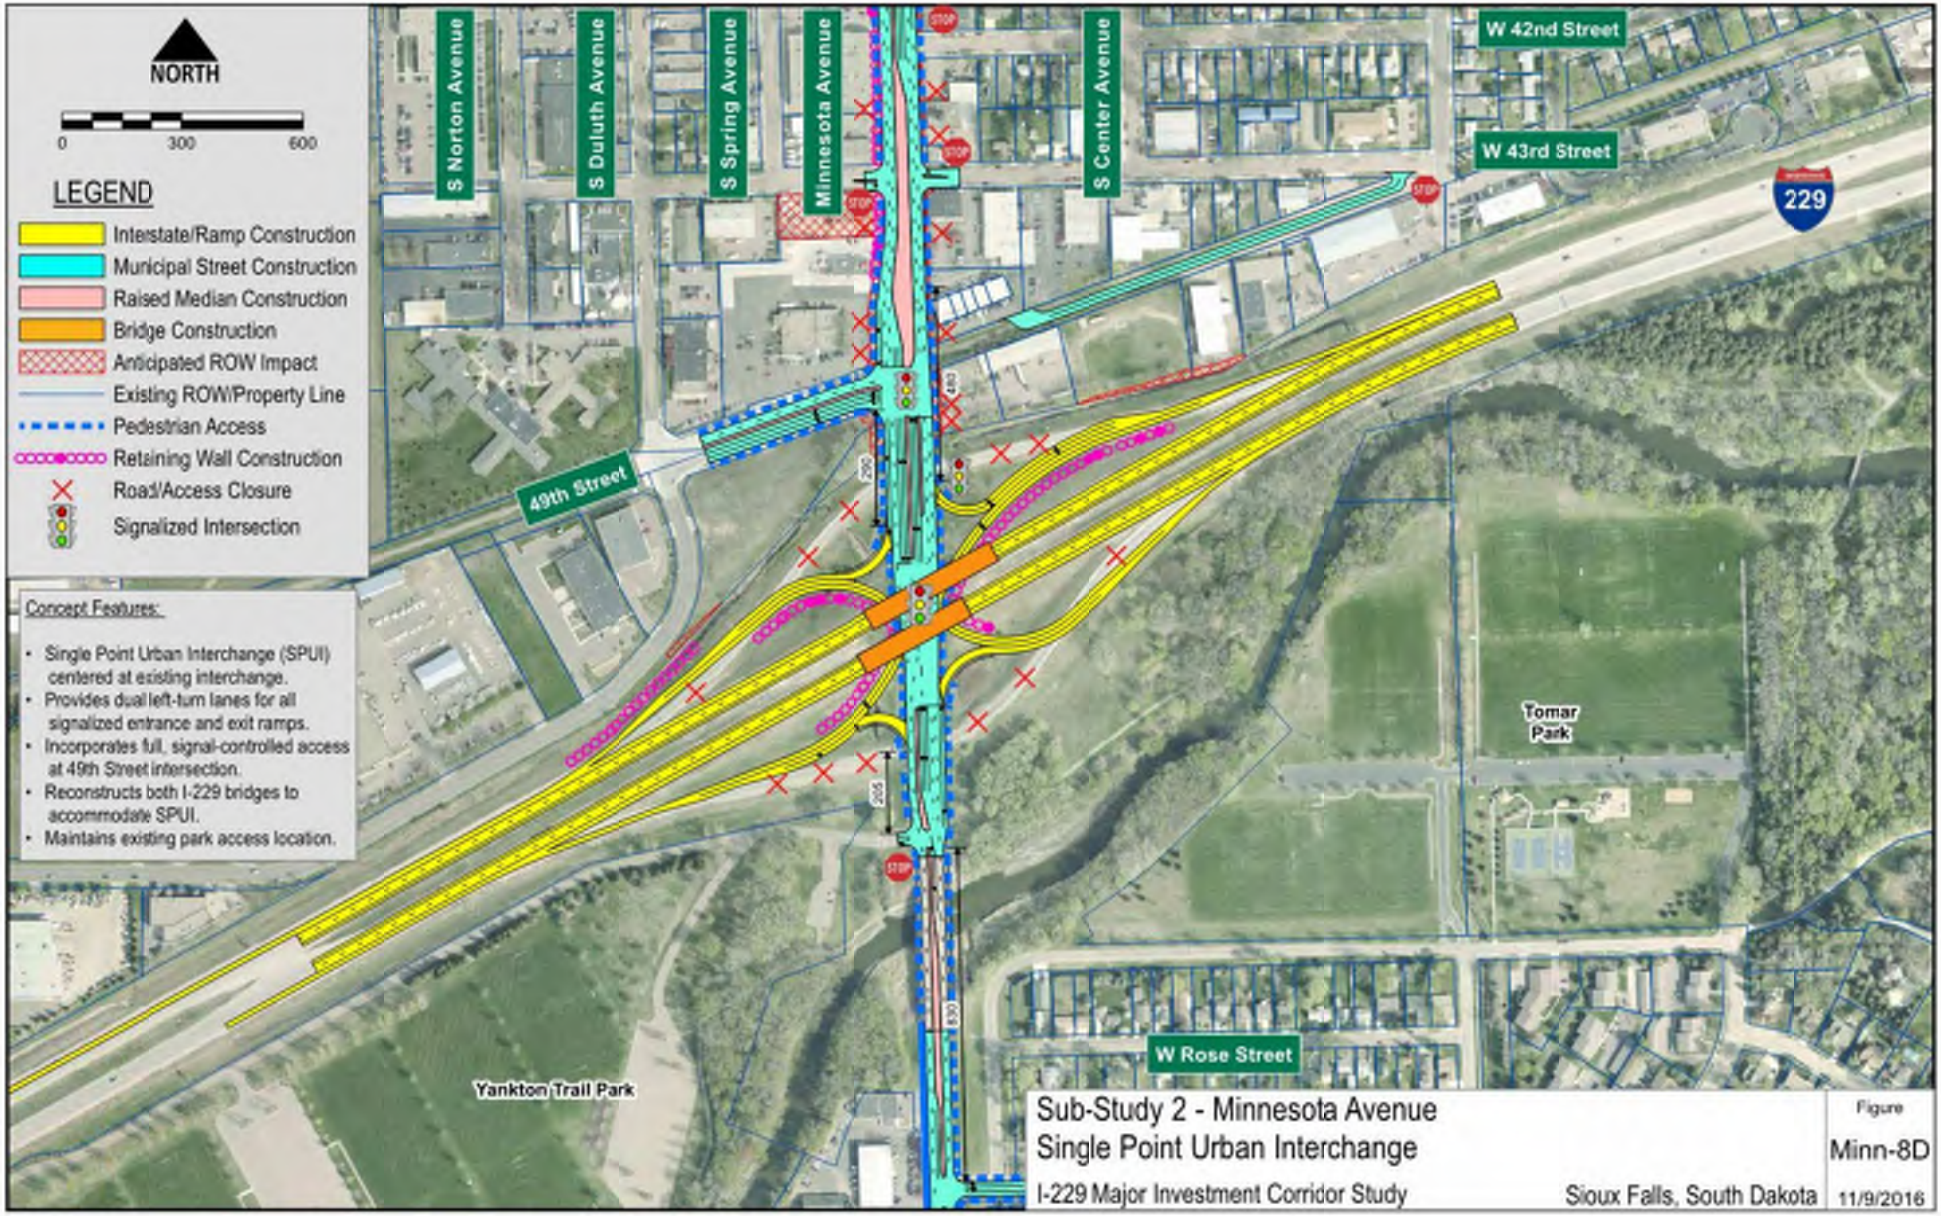


CONCEPTS FOR FURTHER CONSIDERATION

MINN-9D

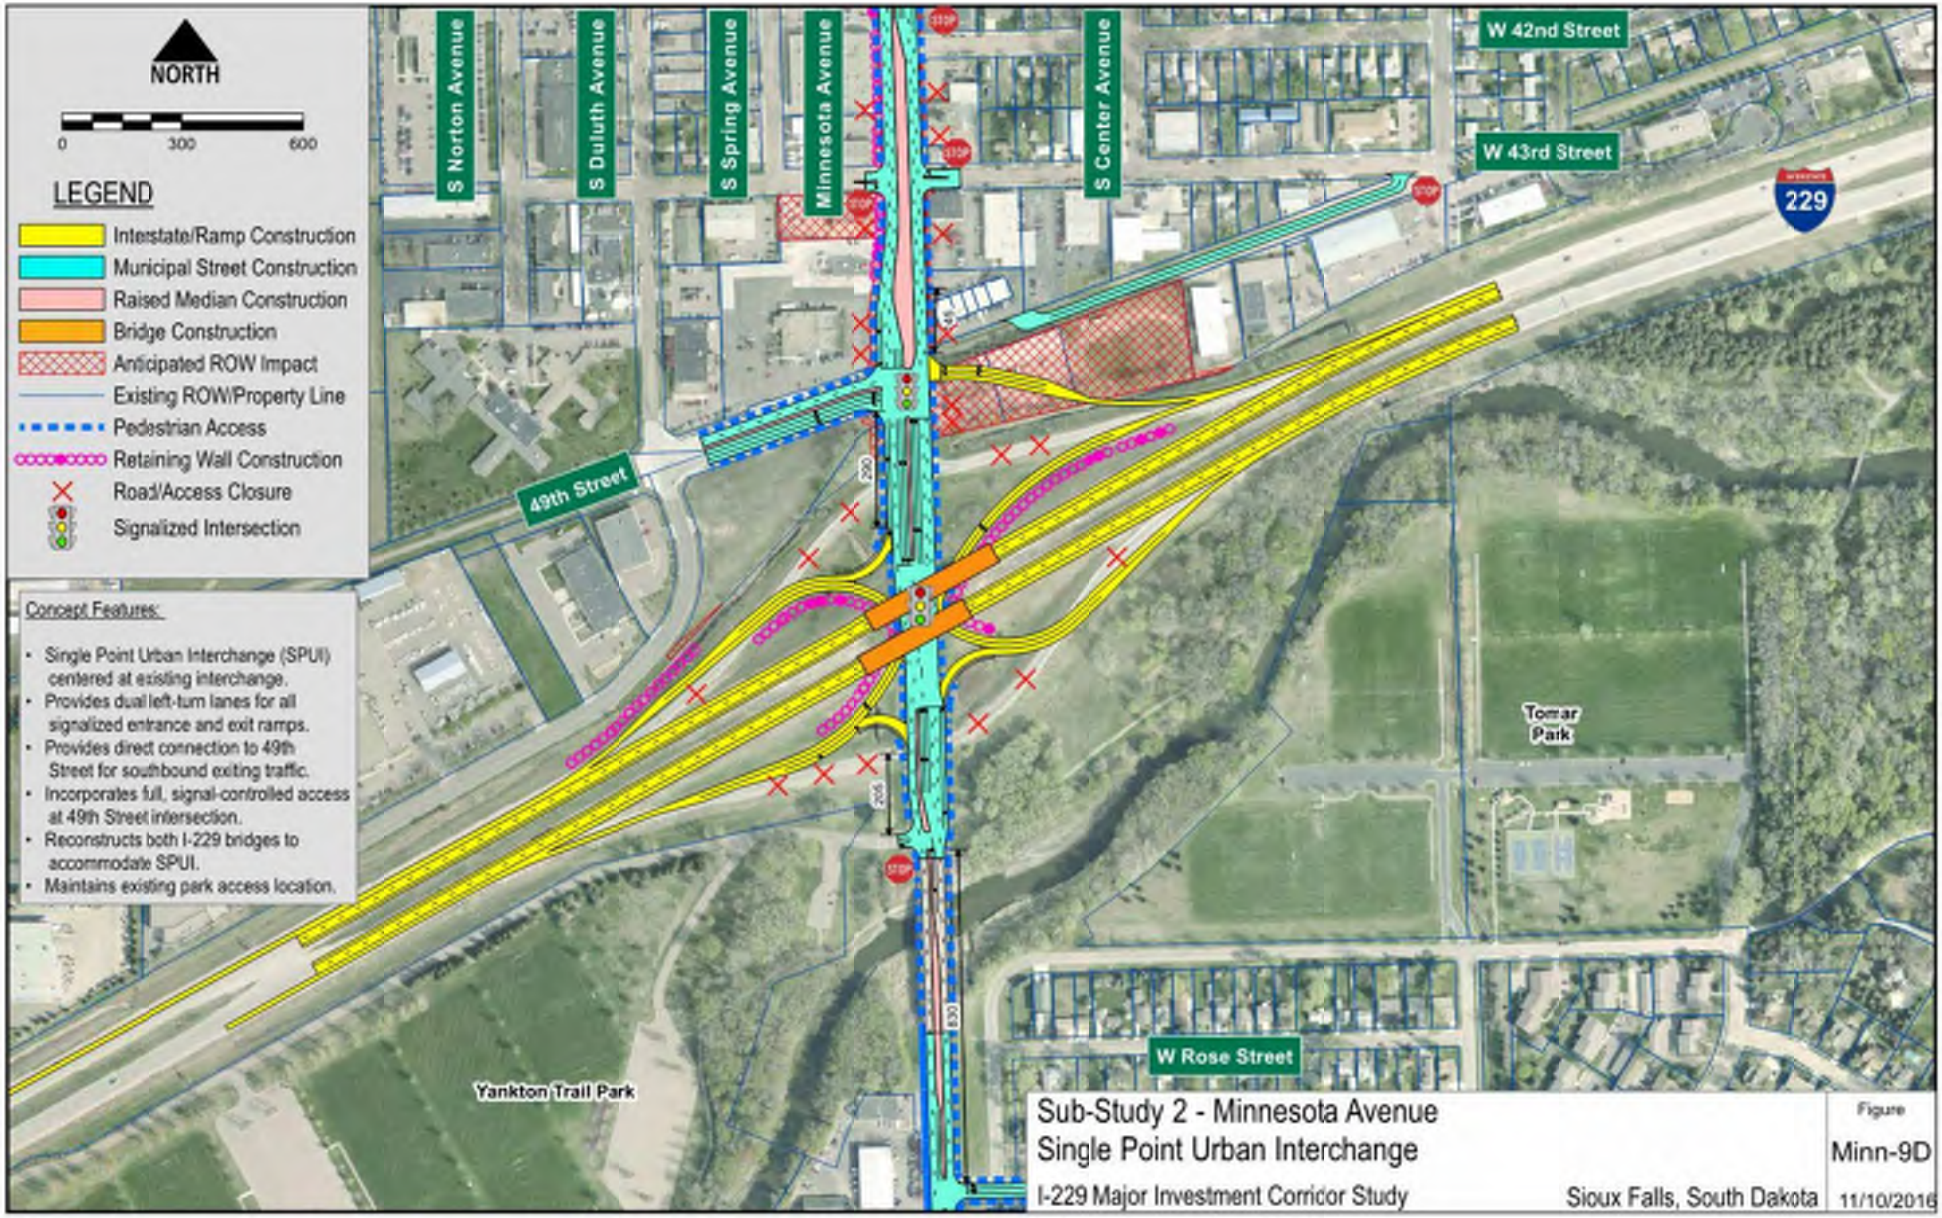

CONCEPT EVALUATION RESULTS (cont.)

Option	Description	Traffic Operations	Safety	Environmental	Property Impacts	Construction & ROW Cost	DRAFT Recommendation
Minn-8C	Single Point Urban Interchange, 5-Lane Big Sioux River to 41st St, 49th St Full Access						Advance
Minn-8D	Single Point Urban Interchange, 6-Lane Big Sioux River to 41st St, 49th St Full Access						Advance
Minn-9D	Single Point Urban Interchange, Exit Ramp Connection to 49th St, 5-Lane Big Sioux River to 41st St						Advance

MINNESOTA AVENUE
PRELIMINARY PROJECT PRIORITY

- Priority recommendation based on existing and anticipated need and level of improvement and impacts associated with remaining concept options
- Minnesota Avenue Interchange and Corridor improvements = High Priority
- See exhibit board for additional information

NEXT STEPS

- Assemble Stakeholder and Public Comments
- Complete Study Report
- Project Development Process = 5-6 year timeline when initiated by SDDOT & City
  - Prepare Interchange Modification Justification Report and Environmental Document
  - Develop Project Design
  - Acquire Right of Way
  - Construction

PROJECT CONTACTS:

Jason Kjenstad – HDR Engineering, Inc.
605-977-7740 or jason.kjenstad@hdrinc.com

Jon Wiegand– HR Green, Inc.
605-221-2656 or jwiegand@hrgreen.com

Shannon Ausen – City of Sioux Falls
605-367-8607 or sausen@siouxfalls.org

Steve Gramm – SDDOT Project Development
605-773-6641 or steve.gramm@state.sd.us





INTERSTATE 229 MAJOR INVESTMENT STUDY

Exit 3 – Minnesota Avenue Sub-Study

Thanks for attending!

HDR

HRGreen

APPENDIX I -

EXISTING ACCESS CONTROL FIGURES

N

0 200′ 400′

LEGEND

Existing Control of Access

Existing R.O.W. / Property Lines

W. 49th Street

S. Grange Avenue

INTERSTATE 229

INTERSTATE 229

Big Sioux River

S. Minnesota Avenue

W. Twin Oaks Road

Existing Control of Access
S. Minnesota Avenue Interchange

I-229 Major Investment Corridor Study — Sioux Falls, South Dakota

Figure 1

June 2017

N

0 200′ 400′

LEGEND

Existing Control of Access

Existing R.O.W. / Property Lines

E. Pam Road

E. 41st Street

S. Cliff Avenue

Big Sioux River

INTERSTATE 229

INTERSTATE 229

Existing Control of Access
S. Cliff Avenue Interchange

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure 2

June 2017

N

0 200′ 400′

LEGEND

Existing Control of Access

Existing R.O.W. / Property Lines

S. Lowell Avenue

S. Conklin Avenue

229

229

S. Blaine Avenue

E. 12th Street

S. Cleveland Avenue

E. 10th Street

E. 8th Street

E. 6th Street


Existing Control of Access
E. 10th Street Interchange

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure 3

June 2017

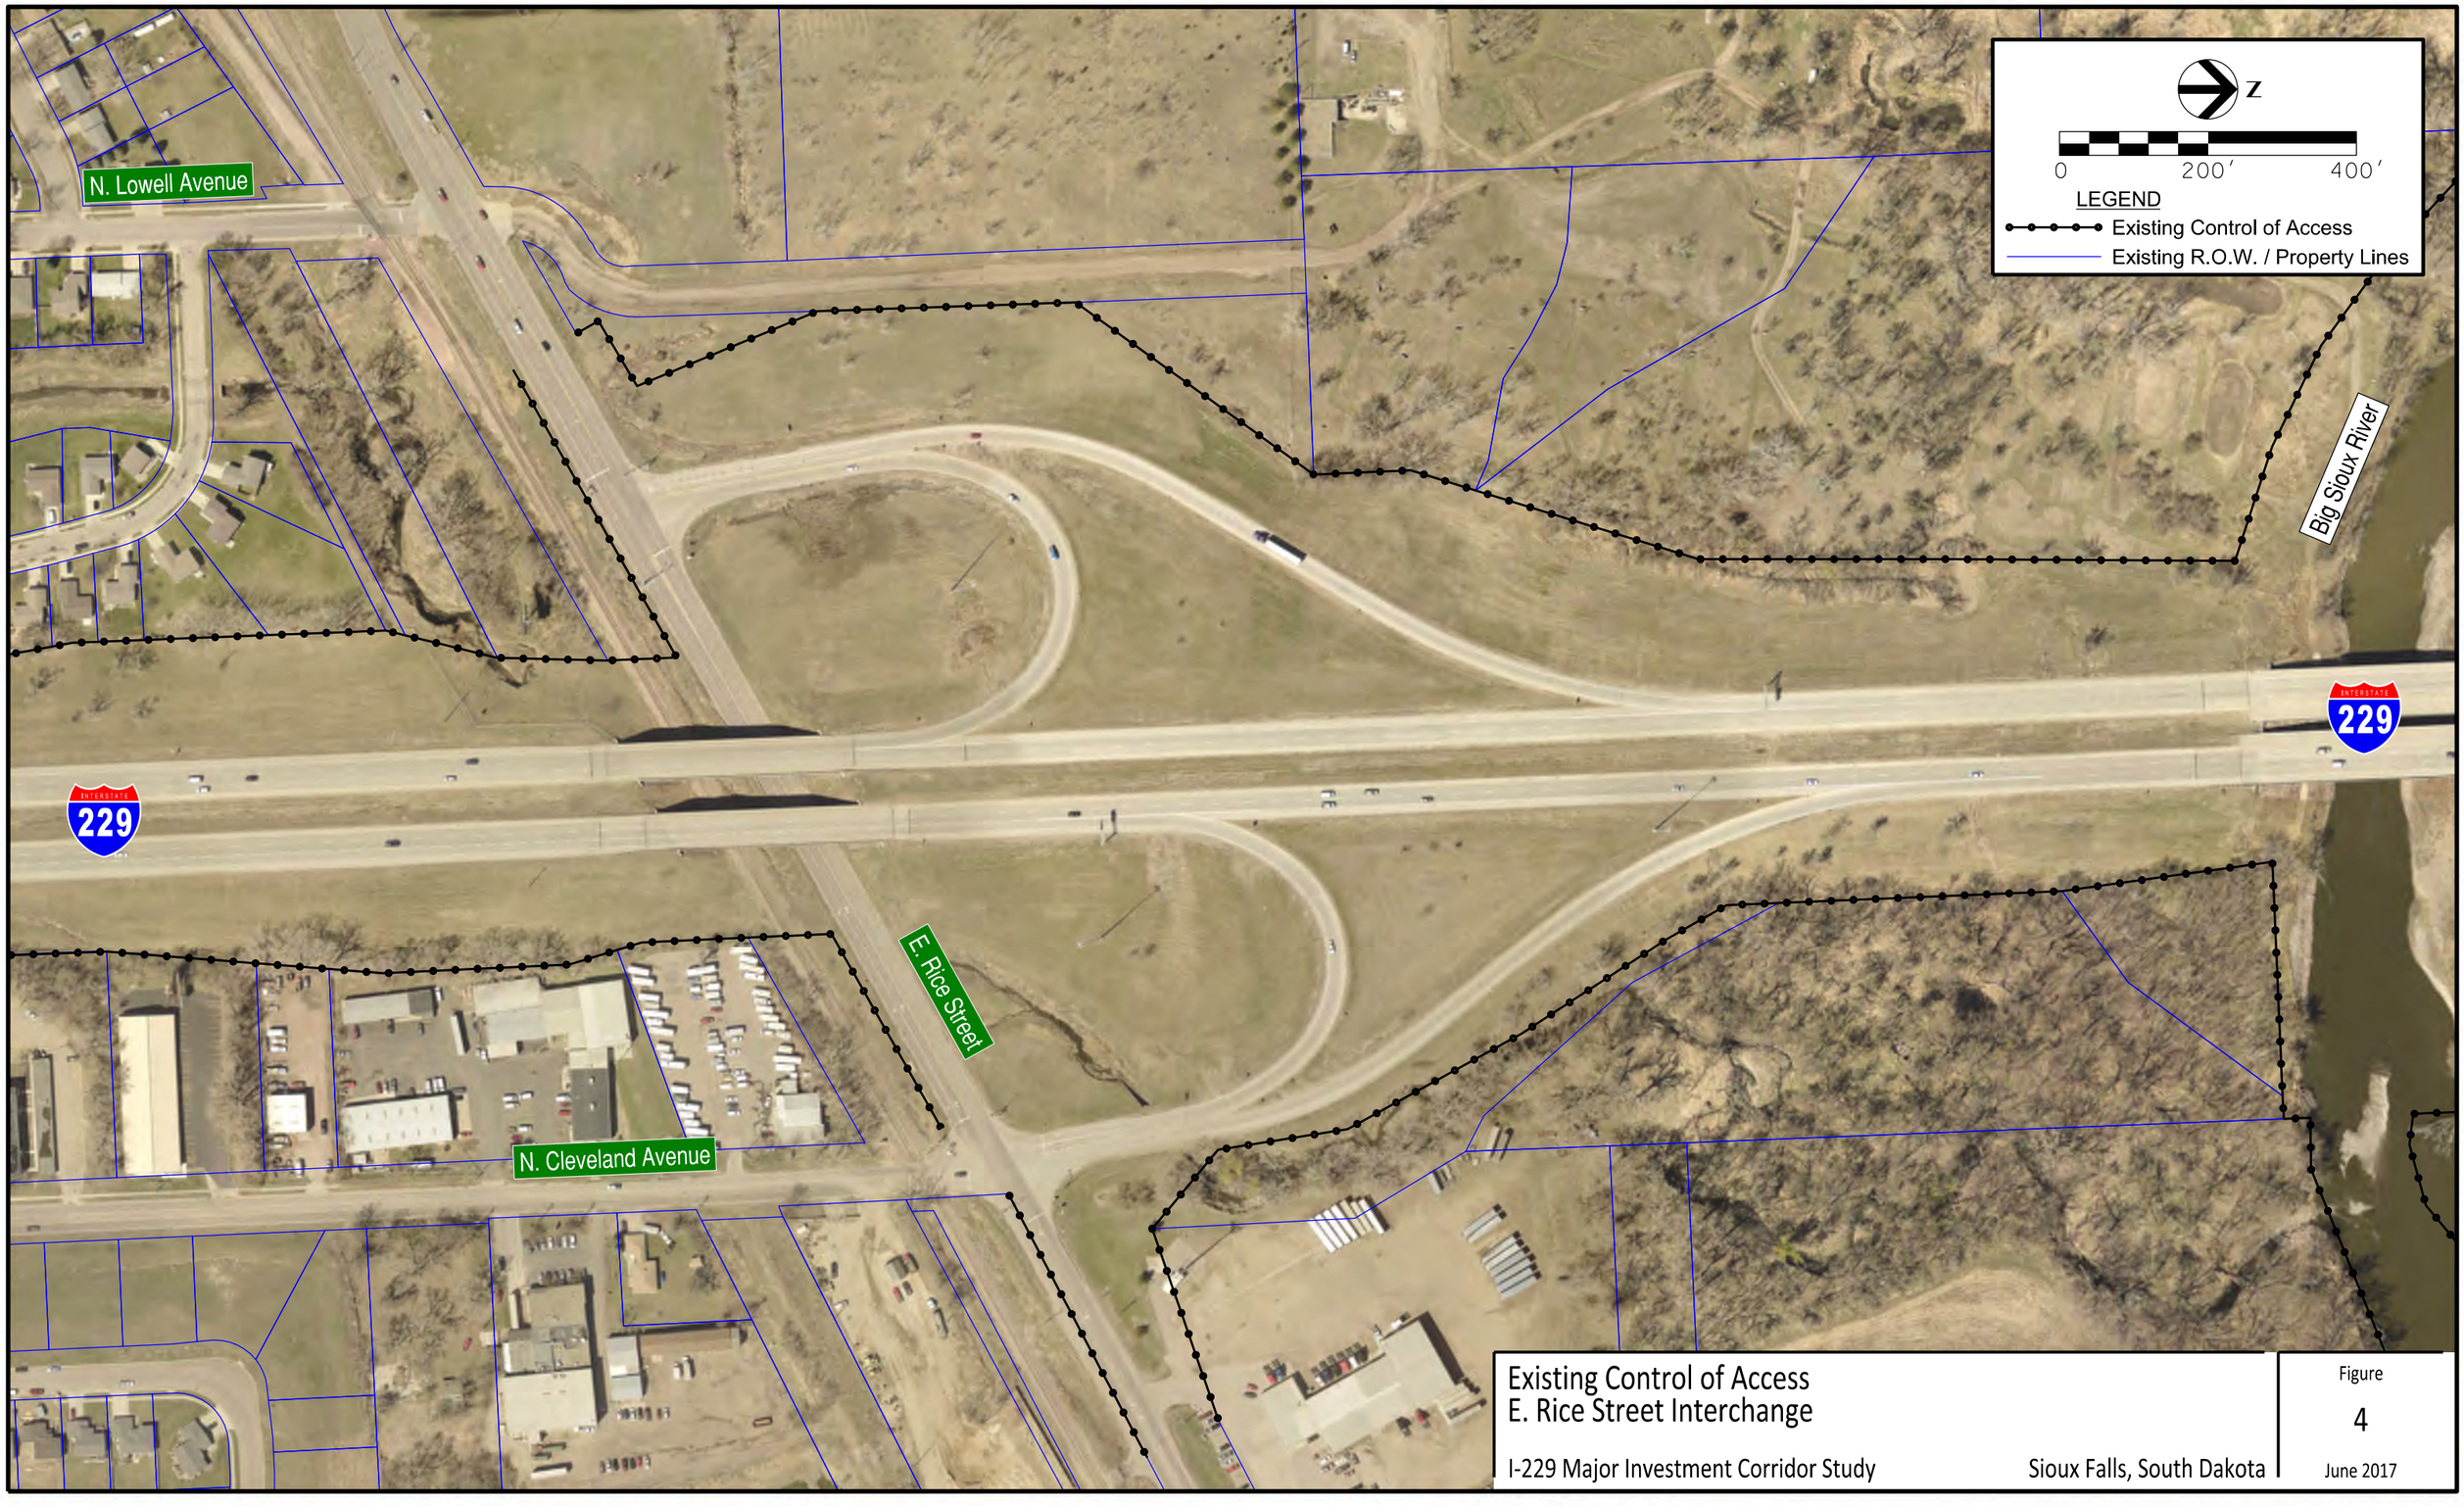

Existing Control of Access
E. Rice Street Interchange

I-229 Major Investment Corridor Study — Sioux Falls, South Dakota

Figure 4

June 2017

N

0 200′ 400′

LEGEND

Existing Control of Access

Existing R.O.W. / Property Lines

N. Potsdam Avenue

N. Potsdam Avenue

N. Hairnie Avenue

INTERSTATE 229

E. Benson Road

INTERSTATE 229

Existing Control of Access
E. Benson Road Interchange

I-229 Major Investment Corridor Study

Sioux Falls, South Dakota

Figure 5

June 2017